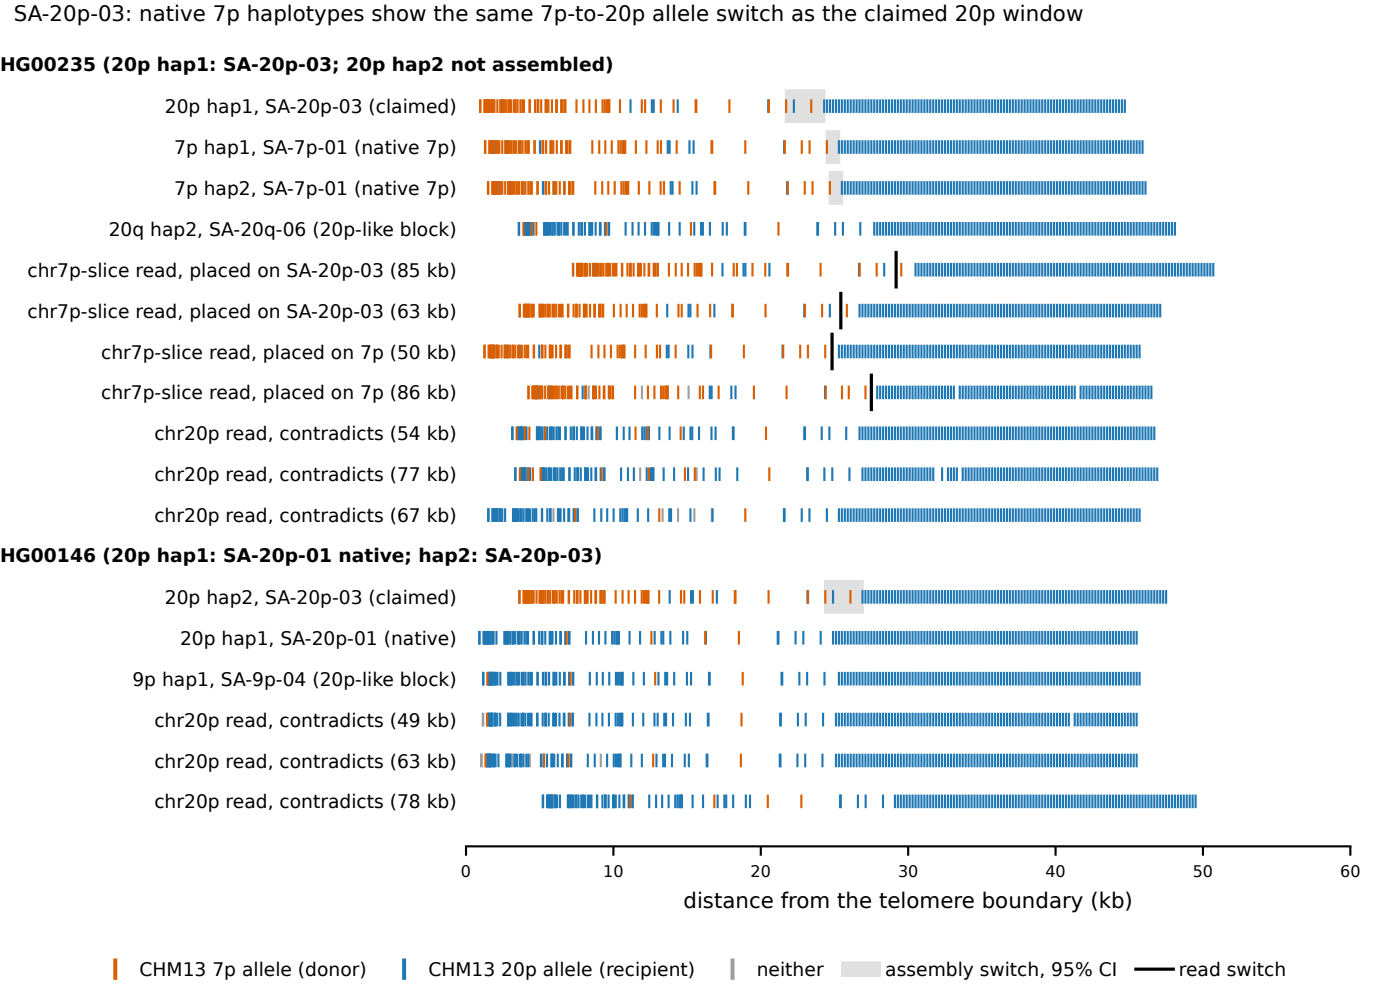
SA-20p-03: native 7p haplotypes show the same 7p-to-20p allele switch as the claimed 20p window
HG00235 (20p hap1: SA-20p-03; 20p hap2 not assembled)
20p hap1, SA-20p-03 (claimed)
7p hap1, SA-7p-01 (native 7p)
7p hap2, SA-7p-01 (native 7p)
20q hap2, SA-20q-06 (20p-like block)
chr7p-slice read, placed on SA-20p-03 (85 kb)
chr7p-slice read, placed on SA-20p-03 (63 kb)
chr7p-slice read, placed on 7p (50 kb)
chr7p-slice read, placed on 7p (86 kb)
chr20p read, contradicts (54 kb)
chr20p read, contradicts (77 kb)
chr20p read, contradicts (67 kb)
HG00146 (20p hap1: SA-20p-01 native; hap2: SA-20p-03)
20p hap2, SA-20p-03 (claimed)
20p hap1, SA-20p-01 (native)
9p hap1, SA-9p-04 (20p-like block)
chr20p read, contradicts (49 kb)
chr20p read, contradicts (63 kb)
chr20p read, contradicts (78 kb)
0
10
20
30
40
50
60
distance from the telomere boundary (kb)
CHM13 7p allele (donor)
CHM13 20p allele (recipient)
neither
assembly switch, 95% CI
read switch