System architecture

Client, API, data service, offline persistence and realtime paths.

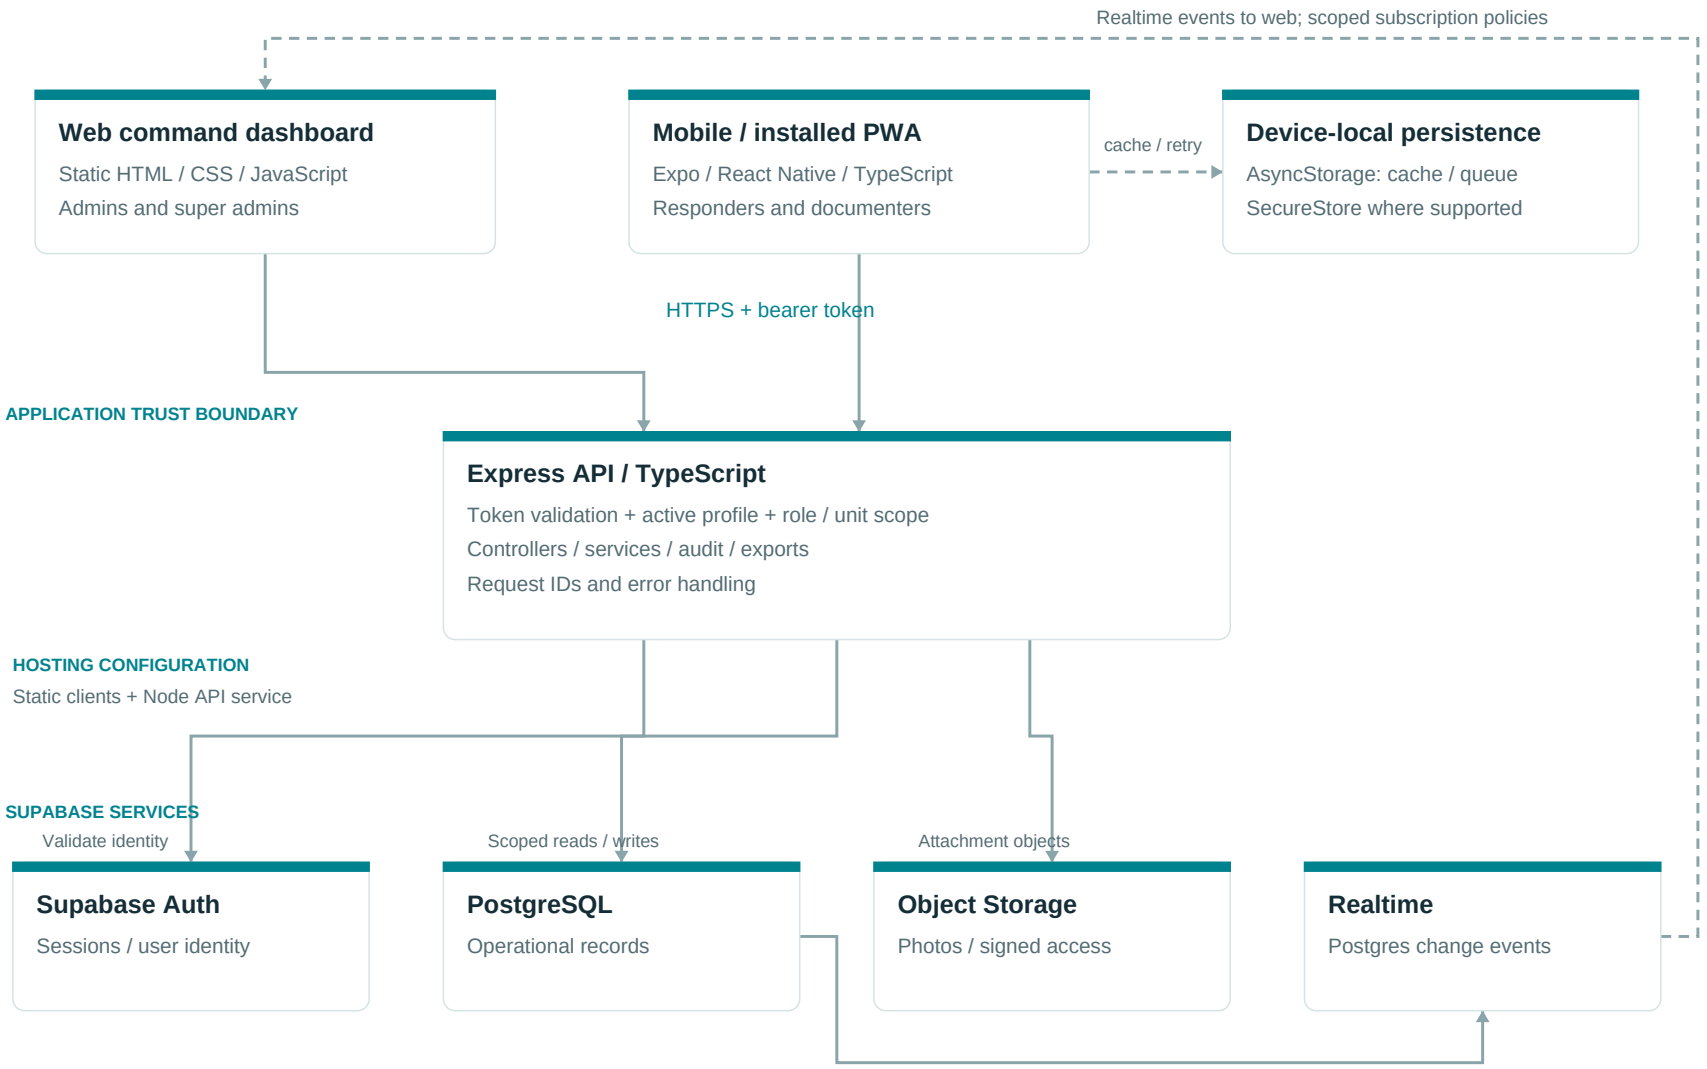

Solid: request / data path. Dashed: client-side cache or event channel. No direct client database CRUD is shown.

Core database relationships

Selected keys and relationships from the reviewed source schema.

PK = primary key; FK = foreign key; UQ = unique. Every report belongs to one incident, one casualty, and one encoder.

Relationship view is selective. Full field declarations and all source tables are in the searchable schema catalog.

Extended database schema

Care history, incident operations and supporting entities.

casualty_incidents / report extensions

FK casualty_incident_id -> casualty_incidents.id

casualty_status_history
0..N status transitions

casualty_treatments
0..N treatment entries

clinical_procedures
0..N procedures; optional facility_id

icu_encounters
0..N ICU episodes; optional facility_id

casualty_outcomes
0..1 final outcome; UNIQUE report FK

casualty_case_links
0..1 link per report; case_id is a UUID group

incidents / operational extensions

FK incident_id -> incidents.id

incident_response_timelines
0..1 timeline; UNIQUE incident FK

dmmp_staff_call_downs
0..N call-down / staffing entries

medical_coordination_assessments
0..1 evaluation; UNIQUE incident FK

continuity_of_care_assessments
0..1 assessment; UNIQUE incident FK

facility_resource_snapshots
0..N snapshots; optional facility_id

sitreps / ems_vehicle_arrivals
0..N situation reports / vehicle arrivals

User-linked support tables

form_drafts, notifications, audit_logs, call_down_staff

Additional incident / user links

responder_safety_reports, responder_safety_responses
incident_ic_backups, incident_ic_delegations

Reference groups summarize declared FK links; they do not imply that every optional extension is deployed or used by every workflow.