

Lab03.SantAnna

```
library(readr)
library(dplyr)
```

Anexando pacote: 'dplyr'

Os seguintes objetos são mascarados por 'package:stats':

filter, lag

Os seguintes objetos são mascarados por 'package:base':

intersect, setdiff, setequal, union

```
library(leaflet)
library(tidyr)
```

```
airlines <- read.csv("C:\\Users\\José\\OneDrive\\Desktop\\ME315\\airlines.csv")
airports <- read_csv( "C:\\Users\\José\\OneDrive\\Desktop\\ME315\\airports.csv", col_select = c("IATA_CODE", "CITY"
```

Rows: 322 Columns: 5

— Column specification —————

Delimiter: ","

chr (3): IATA_CODE, CITY, STATE

dbl (2): LATITUDE, LONGITUDE

i Use `spec()` to retrieve the full column specification for this data.

i Specify the column types or set `show\_col\_types = FALSE` to quiet this message.

```
flights <- read.csv("C:\\Users\\José\\OneDrive\\Desktop\\ME315\\flights.csv")
```

```
arquivo_voo <- function(df,pos){
  df %>% select(DESTINATION_AIRPORT, ARRIVAL_DELAY) %>%
    filter(!grepl("^1",DESTINATION_AIRPORT)) %>% drop_na() %>% group_by(DESTINATION_AIRPORT) %>% summarise(soma_a
}
estat_blocos <- read_csv_chunked("C:\\Users\\José\\OneDrive\\Desktop\\ME315\\flights.csv",callback = DataFrameCal
```

— Column specification —

```
cols(
  .default = col_double(),
  AIRLINE = col_character(),
  TAIL_NUMBER = col_character(),
  ORIGIN_AIRPORT = col_character(),
  DESTINATION_AIRPORT = col_character(),
  SCHEDULED_DEPARTURE = col_character(),
  DEPARTURE_TIME = col_character(),
  WHEELS_OFF = col_character(),
  WHEELS_ON = col_character(),
  SCHEDULED_ARRIVAL = col_character(),
  ARRIVAL_TIME = col_character(),
  CANCELLATION_REASON = col_character()
)
i Use `spec()` for the full column specifications.
```


```
flights <- estat_blocos %>% group_by(DESTINATION_AIRPORT) %>% summarise(atraso_medio = sum(soma_atraso/ sum(n_voc
```

```
aero_ausente <- flights %>% anti_join(airports, by = c("DESTINATION_AIRPORT" = "IATA_CODE"))
flights <- flights %>%
  left_join(airports, by = c("DESTINATION_AIRPORT" = "IATA_CODE"))
```

```
aero_por_estado <- flights %>% filter(!is.na(STATE)) %>% count(STATE, name = "Number of airports", sort = TRUE)
View(aero_por_estado)
```

```
this <- leaflet(data = flights) %>%  
  addTiles() %>%  
  addMarkers(  
    lng = ~LONGITUDE,  
    lat = ~LATITUDE,  
    popup = ~paste("Airport:", DESTINATION_AIRPORT, "<br>Atraso médio:", round(atraso_medio, 2), "min")  
  )
```

this

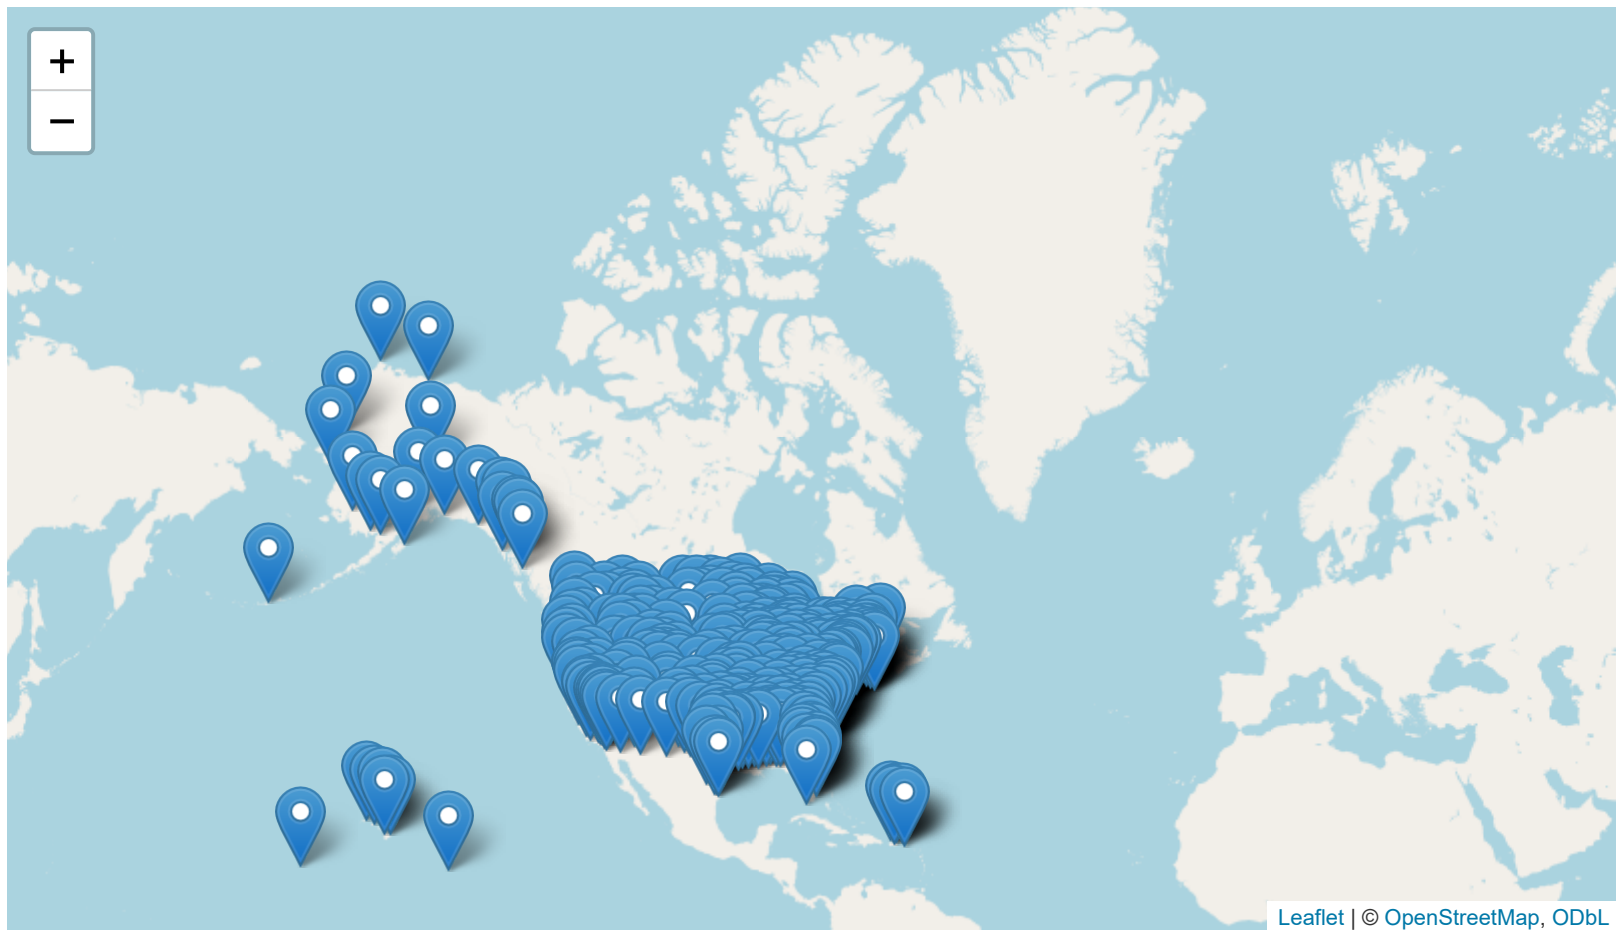

```
Sys.setenv(TZ = "America/Sao_Paulo")  
Sys.time()
```

```
[1] "2026-08-31 20:53:38 -03"
```