

SNAPSHOT PROPERTY MATCHERS



PASS ./kanye.one.spec.js

✓ full user object (5ms)

Test Suites: 1 passed, 1 total

Tests: 1 passed, 1 total

Snapshots: 1 passed, 1 total

Time: 0.603s, estimated 1s

Ran all test suites related to changed files.


Watch Usage

- > Press **a** to run all tests.
- > Press **f** to run only failed tests.
- > Press **p** to filter by a filename regex pattern.
- > Press **t** to filter by a test name regex pattern.
- > Press **q** to quit watch mode.
- > Press **Enter** to trigger a test run.

—

AFTER

SNAPSHOT PROPERTY MATCHERS

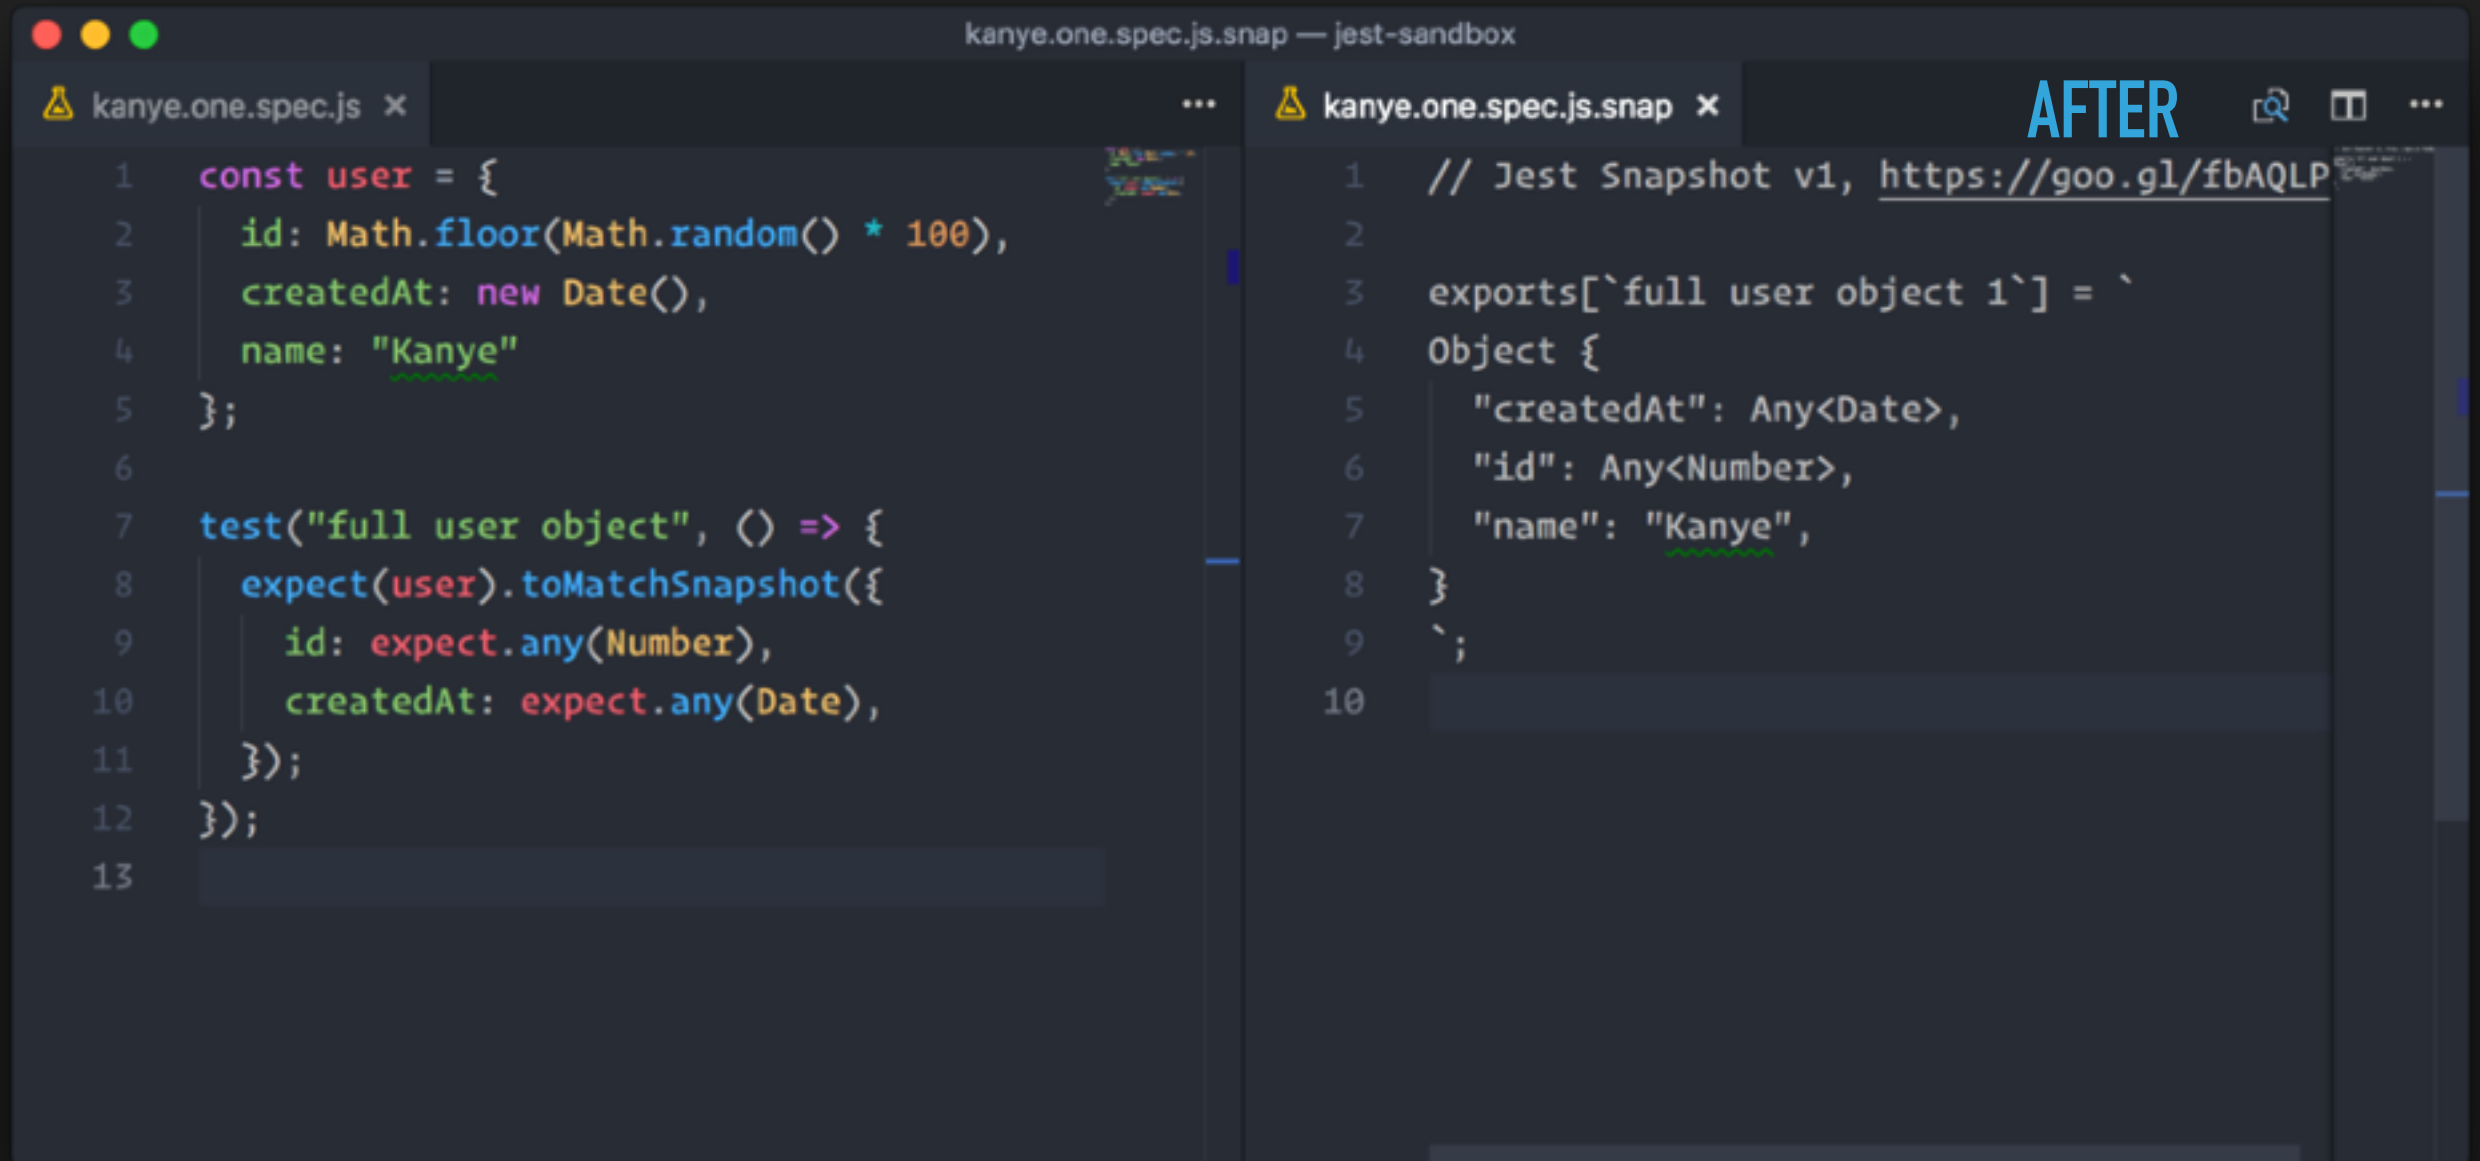

The image shows a code editor with two panes. The left pane is titled 'kanye.one.spec.js' and contains the following code:

```
1  const user = {
2    id: Math.floor(Math.random() * 100),
3    createdAt: new Date(),
4    name: "Kanye"
5  };
6
7  test("full user object", () => {
8    expect(user).toMatchSnapshot({
9      id: expect.any(Number),
10     createdAt: expect.any(Date),
11   });
12 });
13
```

The right pane is titled 'kanye.one.spec.js.snap' and is labeled 'AFTER' in blue text. It contains the following code:

```
1  // Jest Snapshot v1, https://goo.gl/fbAQLP
2
3  exports[`full user object 1`] = `
4    Object {
5      "createdAt": Any<Date>,
6      "id": Any<Number>,
7      "name": "Kanye",
8    }
9  `;
10
```

SNAPSHOT PROPERTY MATCHERS



PASS ./kanye.one.spec.js

✓ full user object (5ms)

Test Suites: 1 passed, 1 total

Tests: 1 passed, 1 total

Snapshots: 1 passed, 1 total

Time: 0.603s, estimated 1s

Ran all test suites related to changed files.

Match Usage

- > Press **a** to run all tests.
- > Press **f** to run only failed tests.
- > Press **p** to filter by a filename regex pattern.
- > Press **t** to filter by a test name regex pattern.
- > Press **q** to quit watch mode.
- > Press **Enter** to trigger a test run.

—

AFTER