

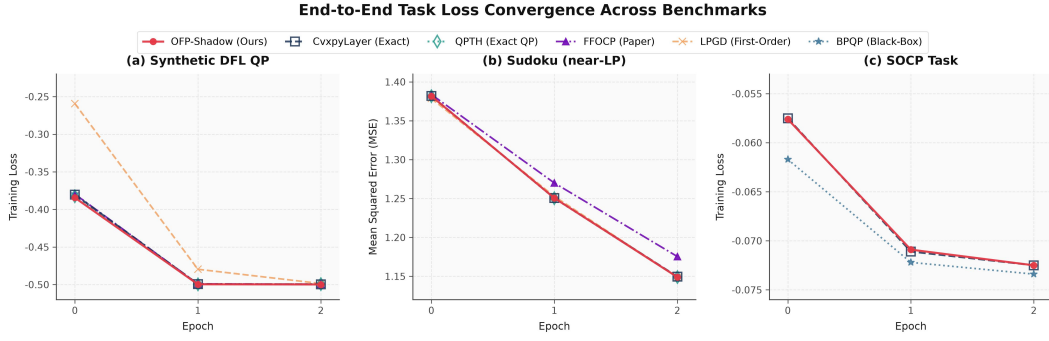


Figure 3: End-to-end training-loss convergence on the three benchmarks. OFP-SHADOW (red) closely matches the trajectories and final loss of exact KKT differentiation, showing that matrix-free, dual-free hypergradients preserve full optimization performance.

Table 2: End-to-end training-loss convergence (mean $\pm$ std over 3 seeds). Final-epoch gaps between OFP-SHADOW and exact solvers are ≤ 0.0006 . “—” marks solvers not applicable to the conic layer.

Task / Epoch	OFP-Shadow (Ours)	CvxpyLayer	QPTH	FFOCP	LPGD	BPQP
<i>Synthetic DFL QP</i> (train loss = $\text{mean}(y \cdot y^*)$, lower is better)						
Epoch 0	-0.3844	-0.3803	-0.3824	-0.3797	-0.2592	-0.3796
Epoch 1	-0.4996	-0.4992	-0.4995	-0.4990	-0.4796	-0.4995
Final	-0.4998 $\pm$ 0.0006	-0.4995 $\pm$ 0.0006	-0.4993 $\pm$ 0.0007	-0.4994 $\pm$ 0.0004	-0.4986 $\pm$ 0.0008	-0.4998 $\pm$ 0.0006
<i>Sudoku near-LP</i> (train MSE, lower is better)						
Epoch 0	1.3817	1.3820	1.3816	1.3838	1.3786	1.3816
Epoch 1	1.2506	1.2506	1.2503	1.2700	1.2528	1.2503
Final	1.1490 $\pm$ 0.0048	1.1496 $\pm$ 0.0044	1.1490 $\pm$ 0.0047	1.1754 $\pm$ 0.0011	1.1488 $\pm$ 0.0060	1.1490 $\pm$ 0.0046
<i>SOCP</i> (train loss = $\text{mean}(y \cdot y^*)$, lower is better)						
Epoch 0	-0.0576	-0.0575	—	—	—	-0.0617
Epoch 1	-0.0709	-0.0711	—	—	—	-0.0722
Final	-0.0725 $\pm$ 0.0002	-0.0725 $\pm$ 0.0003	—	—	—	-0.0734 $\pm$ 0.0000

Table 3: Forward / backward / total execution time per iteration (s/iter). Best in each column in **bold**.

Method	Synthetic DFL QP			Sudoku (near-LP)		
	Forward	Backward	Total	Forward	Backward	Total
OFP-Shadow (Ours)	0.0346	0.1195	0.1541	0.0263	0.0073	0.0336
CvxpyLayer (exact)	0.7773	0.1752	0.9524	0.0577	0.0222	0.0800
QPTH (exact QP)	0.4656	0.0296	0.4952	0.0673	0.0034	0.0706
FFOCP (paper)	0.2798	0.4124	0.6922	0.0271	0.0484	0.0755
LPGD (first-order)	0.7577	0.1868	0.9446	0.0330	0.0291	0.0621
BPQP (black-box)	0.1749	1.1569	1.3319	0.0201	0.0201	0.0402

Latency. By removing secondary solves and KKT factorizations, OFP-SHADOW cuts backward time over first-order FFOCP by $3.5\times$ on QP (0.1195s vs. 0.4124s) and $6.6\times$ on Sudoku (0.0073s vs. 0.0484s), while matching or beating exact solvers on total time (Table 3).

4.2 SCALABILITY IN TIME AND MEMORY

We scale $d_y \in \{100, 200, 400, 800, 1600\}$ on the QP benchmark (batch 8), where the matrix-free Neumann adjoint is used. Figure 4 and Table 4 show OFP-SHADOW scales sub-cubically ($O(d_y^{0.64})$) versus CvxpyLayer’s $O(d_y^{1.67})$: at $d_y=800$ it is $5.9\times$ faster in the backward pass, and at $d_y=1600$ it finishes in 0.35s where CvxpyLayer times out (> 450 s). Memory is decisive: CvxpyLayer’s dense KKT factorization consumes 29.3 GB at $d_y=800$ ($39\times$ OFP-SHADOW), while OFP-SHADOW stays flat at 721–899 MB.

4.3 COMPARISON TO OPEN-SOURCE IMPLICIT-DIFFERENTIATION LAYERS

We further benchmark OFP-SHADOW against two open-source layers that avoid dense KKT factorization: **dQP** (Magoon et al., 2024) (OSQP forward, sparse QDLDL/SciPy backward) and **JaxOpt**