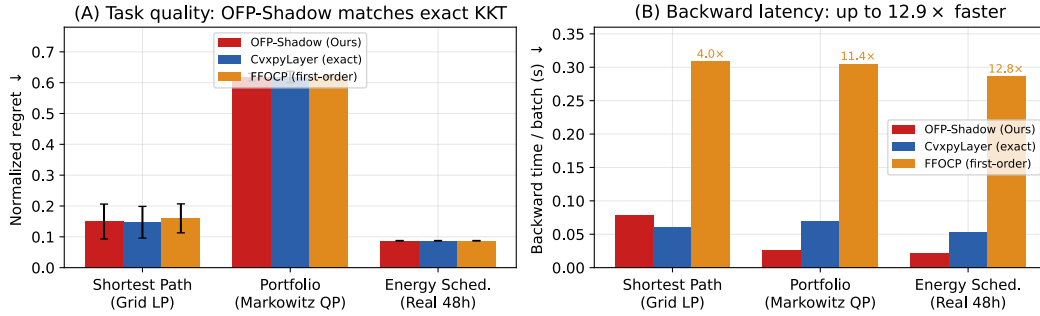


Table 5: QP scaling versus open-source baselines dQP and JaxOpt (batch 8, 16 CPU threads). Empirical time exponent p fits $t \propto d_y^p$. Best per column in **bold**.

Metric	Method	$d_y=100$	$d_y=400$	$d_y=800$	$d_y=1600$	Exponent p
Backward (s) ↓	OFP-Shadow (Ours)	0.0594	0.0975	0.1445	0.3511	0.60
	dQP (OSQP, open-source)	0.0053	0.0561	0.2339	1.1399	1.92
	JaxOpt (implicit_diff)	0.2963	5.9966	29.2311	Timeout (>600s)	2.20
Total (s) ↓	OFP-Shadow (Ours)	0.0774	0.1309	0.1964	0.4418	—
	dQP (OSQP, open-source)	0.0270	0.1793	0.6887	3.2997	—
	JaxOpt (implicit_diff)	0.4222	9.5374	52.7790	Timeout (>600s)	—
Peak RSS (MB) ↓	OFP-Shadow (Ours)	950.8	952.9	985.7	1098.4	Flat
	dQP (OSQP, open-source)	954.1	1037.7	1305.8	2041.9	Scaling
	JaxOpt (implicit_diff)	1200.2	1383.1	1899.2	Timeout	Scaling

**Figure 6:** Real-world PREDOPT benchmarks (3 seeds, batch 32). (A) Normalized regret: OFP-SHADOW matches exact CvpxpyLayer and beats first-order FFOCP. (B) Backward time per batch: OFP-SHADOW is up to 12.9× faster than FFOCP and 2.6× faster than exact CvpxpyLayer.**Table 6:** Real-world PREDOPT benchmark results (mean $\pm$ std over 3 seeds, batch 32). OFP-SHADOW matches exact CvpxpyLayer regret with cosine similarity 1.0000 while being markedly faster and lighter. Best per row group in **bold**.

Benchmark task	Metric	OFP-Shadow (Ours)	CvpxpyLayer (exact)	FFOCP (first-order)
Shortest Path (5×5 grid LP)	Normalized regret ↓	0.1496 $\pm$ 0.0566	0.1473 $\pm$ 0.0514	0.1599 $\pm$ 0.0470
	Backward / batch (s) ↓	0.0779	0.0608	0.3088 (4.0×)
	Peak memory (MB) ↓	880	1047	874
Portfolio Opt. (Markowitz QP)	Normalized regret ↓	0.6176 $\pm$ 0.0124	0.6185 $\pm$ 0.0187	0.6217 $\pm$ 0.0033
	Backward / batch (s) ↓	0.0267	0.0697 (2.6×)	0.3051 (11.4×)
	Peak memory (MB) ↓	870	2370 (2.7×)	863
Energy Sched. (real 48h prices)	Normalized regret ↓	0.0874 $\pm$ 0.0006	0.0874 $\pm$ 0.0006	0.0874 $\pm$ 0.0006
	Backward / batch (s) ↓	0.0223	0.0533 (2.4×)	0.2865 (12.9×)
	Peak memory (MB) ↓	948	1202	947

4.4 REAL-WORLD DECISION-FOCUSED BENCHMARKS (PREDOPT)

To move beyond synthetic problems, we evaluate on three standard real-world tasks from the public **PREDOPT** decision-focused-learning suite: **Shortest Path** (5×5 grid LP, $d_y=40$), **Portfolio Optimization** (Markowitz QP, $d_y=50$), and **Energy-Cost Scheduling** (real 48-hour electricity prices, $d_y=48$). Table 6 and Figure 6 show OFP-SHADOW matches the exact CvpxpyLayer normalized regret on all three tasks (cosine 1.0000 vs. exact hypergradients) while being up to 2.6× faster than CvpxpyLayer and 12.9× faster than FFOCP in the backward pass, at a flat memory footprint (≤ 948 MB)—so the efficiency gains transfer to real-world DFL pipelines without loss in decision quality.

4.5 ABLATION STUDIES AND STABILITY DIAGNOSTICS

Figure 7 summarizes the three most decisive ablations; full tables for all six ablations (temperature τ , damping θ , step size γ) are in App. B.