

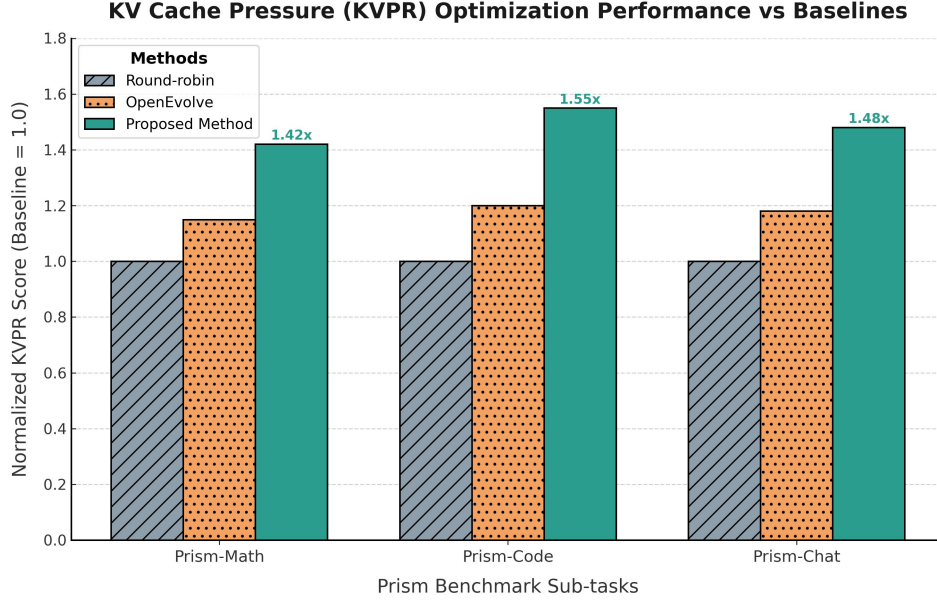


Figure 3: Comparison of normalized KV Cache Pressure (KVPR) scores for the proposed method against Round-robin and OpenEvolve baselines across three Prism benchmark sub-tasks. The proposed method consistently achieves state-of-the-art performance, demonstrating up to a 1.55x improvement over the standard Round-robin baseline.

Table 2: Ablation study of algorithmic components and alternative optimization formulations. The delta represents the score difference compared to our final best solution.

Variant	Score	Delta vs Best
Final Solution (Linearized Bisection + Local Search)	26.2560	
Parametric Bisection for Linearized KVPR Packing	26.2332	-0.0228
Iterative Dinkelbach-style Reassignment	26.1906	-0.0654
Fractional Optimization via Dinkelbach’s Linearization	26.0157	-0.2403
Lloyd-Max Iterative Reassignment	25.9551	-0.3008
Complementary Workload-Aware Model Pairing	25.8152	-0.4408

systematically evaluates $O(1)$ model moves and swaps from the bottleneck GPU. By incrementally updating precomputed state arrays, this refinement irons out residual heuristic imperfections without inflating execution time, proving to be a critical "finisher" for the algorithm.

Linearization vs. Iterative Reassignment We also explored alternative mathematical approaches to handle the fractional KVPR objective. An Iterative Dinkelbach-style Reassignment approach achieved a score of 26.1906, while a pure Fractional Optimization via Dinkelbach’s Iterative Linearization scored 26.0157. Both approaches underperformed compared to our target bisection method. The fractional nature of the objective $W/(M - S) \leq K$ transforms perfectly into the linear constraint $W + K \cdot S \leq K \cdot M$. Bisection over the target K allows the solver to leverage robust, globally-aware bin-packing heuristics rather than relying on iterative, gradient-like reassignments that are prone to local optima in heavily constrained spaces.

Failure of Clustering-Based Heuristics Finally, we tested clustering-inspired heuristics, including Lloyd-Max Iterative Reassignment (score: 25.9551) and Complementary Workload-Aware Model Pairing (score: 25.8152). These methods attempt to balance the mean KVPR or pair complementary models prior to placement. However, they consistently failed to tightly pack the 80GB bins compared to capacity-linearized bisection. The strictness of the memory constraint dictates that optimizing for capacity utilization is a prerequisite for optimizing the fractional objective; clustering methods