

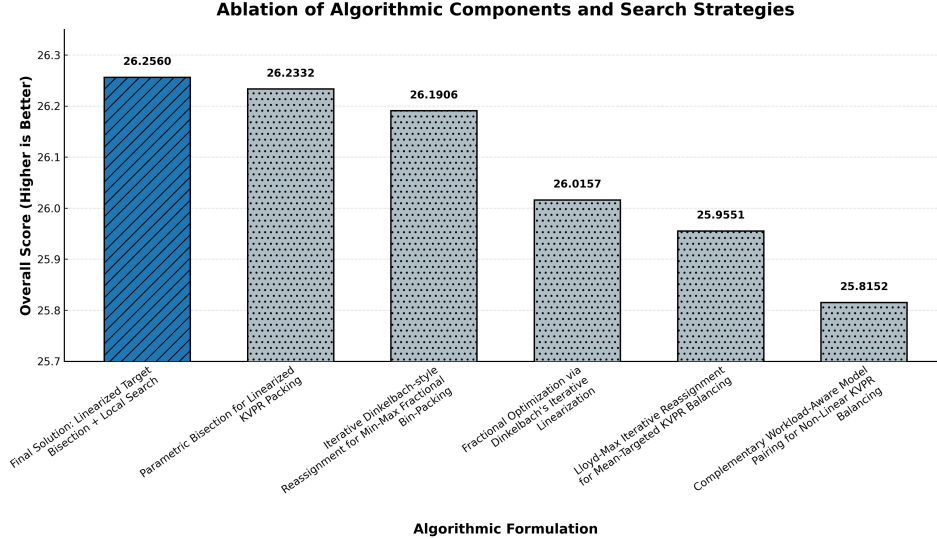


Figure 4: Ablation study of algorithmic components and search strategies comparing the overall objective scores of various optimization formulations. The final proposed method, Linearized Target Bisection with Local Search Refinement, achieves the highest score of 26.2560, demonstrating its superiority over alternative mathematical relaxations such as Dinkelbach-style and Lloyd-Max reassignment. The y-axis is truncated to highlight the fine-grained performance differences between the highly optimized variants.

inherently struggle to guarantee tight bin packings, leading to premature memory exhaustion and sub-optimal maximum KVPR bounds.

5 Discussion and Conclusion

In this work, we addressed the critical challenge of minimizing Key-Value Cache Pressure (KVPR) in multi-tenant Large Language Model (LLM) serving environments. By formulating the model placement task as a strict non-linear fractional bin-packing problem, we introduced a deterministic, three-phase algorithmic pipeline comprising greedy initialization, multi-heuristic linearized target bisection, and local search refinement. Our approach effectively transforms the non-linear KVPR objective into a solvable 1D capacity constraint. Experimental results demonstrate that our method achieves a highly competitive KVPR score of 26.2560, outperforming sophisticated meta-evolutionary frameworks such as OpenEvolve [Brown et al., 2025] and AdaEvolve [Cemri et al., 2026] while maintaining a negligible computational overhead of approximately 0.021 seconds.

Despite these strong empirical results, our approach has several limitations. First, our solver assumes a static, upfront placement of models based on profiled request rates and Service Level Objectives (SLOs). In highly dynamic production environments where workload patterns fluctuate unpredictably, static placement may eventually lead to suboptimal resource utilization. Unlike systems that employ dynamic execution-level chunking [Agrawal et al., 2023] or live migration of KV cache states [He et al., 2025], our method does not currently adapt to real-time traffic shifts after the initial placement. Second, our formulation assumes a uniform 80GB memory constraint across all GPUs. While this reflects standard high-end accelerator deployments, it does not account for heterogeneous clusters with mixed memory capacities or complex network topologies, which have been explored in recent systems like Helix [Mei et al., 2024] and DisHelix [Zhang et al., 2026]. Finally, our model abstracts GPU memory as a contiguous pool, relying on the assumption that underlying systems handle memory fragmentation effectively through techniques like virtual memory stitching or dynamic paging [Prabhu et al., 2024].

Future research should explore extending our linearized bisection framework to online, dynamic serving scenarios. Integrating our placement algorithm with proactive live migration mechanisms could allow the system to continuously rebalance KVPR as request rates deviate from initial estimates