

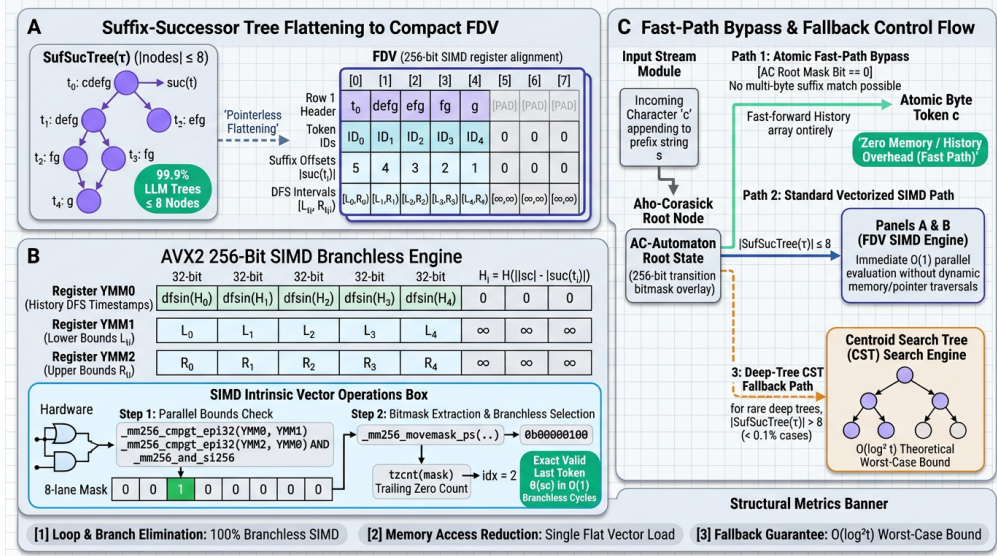


Figure 1: Systematic architecture and execution pipeline of VD-STrans. Panel A illustrates the pointerless flattening of small Suffix-Successor Trees (size up to 8 nodes, representing 99.9% of cases in LLM vocabularies) into 256-bit aligned Compact Flat Decision Vectors (FDVs). Panel B details the AVX2 256-bit SIMD branchless engine, which loads history DFS timestamps and interval bounds into vector registers to evaluate candidate validity in parallel, selecting the valid last token in $O(1)$ time using bitmask extraction and trailing-zero counting. Panel C depicts the overall control flow, featuring an atomic fast-path bypass for immediate single-byte token output, the default vectorized SIMD path, and a Centroid Search Tree search fallback for deep trees (> 8 nodes) to preserve the theoretical $O(\log^2 t)$ worst-case time complexity.

where s_{pre} is the string prefix obtained by removing the suffix corresponding to token $\theta(s)$, and $\oplus$ denotes token list concatenation. When appending a character c to an existing string s to form $s' = sc$, incremental tokenization reduces to identifying the new last token $\theta(sc) \in V$.

Vocabulary Normalization and Successor Forest. To eliminate non-canonical redundancies, we normalize V such that every token $t \in V$ satisfies $T_D(t) = [t]$. For non-atomic t , determinism yields a unique canonical rule $(x, y) \rightarrow t$, establishing predecessor $\text{pre}(t) = x$ and successor $\text{suc}(t) = y$. The *Successor Forest* $F_{\text{suc}} = (V, E)$ is a directed acyclic graph with edges $E = \{(u, \text{suc}(u)) \mid u \in V, |u| > 1\}$ directed toward successors. Because length strictly decreases ($|\text{suc}(u)| < |u|$), F_{suc} forms a set of trees rooted at atomic character tokens.

Suffix-Successor Tree. For any canonical token $\tau \in V$, the *Suffix-Successor Tree*, denoted as $\text{SufSucTree}(\tau)$, is the subgraph of F_{suc} induced by all canonical tokens that form suffixes of τ . Because all candidate suffix tokens of sc share the same final character c , $\text{SufSucTree}(\tau(sc))$ forms a unified tree structure rooted at atomic token c , where $\tau(sc)$ is the longest canonical suffix token recognized by an Aho–Corasick automaton maintained over V .

Prefix Last-Token Condition and Monotonic Path Property. To determine whether a node $t \in \text{SufSucTree}(\tau(sc))$ represents the exact last token $\theta(sc)$, t must satisfy structural reachability and priority dominance constraints.

Definition 1 (Prefix Last-Token Condition). *For string s and suffix token $t \in V$, t satisfies the Prefix Last-Token Condition if t is atomic, or if t is non-atomic and for prefix state $k = \theta(s - \text{suc}(t))$:*

1. **Reachability:** k lies within the subtree of F_{suc} rooted at $\text{pre}(t)$ (including $k = \text{pre}(t)$).
2. **Priority Dominance:** If $k \neq \text{pre}(t)$, let u be the child of $\text{pre}(t)$ on the ancestor path to k . The canonical rule of t has strictly higher priority rank than u .

Theorem 1 (Monotonic Path Property (Jiang & Gong 2026)). *Let $k = \tau(sc)$ be the longest canonical suffix token of string sc . The set of nodes in $\text{SufSucTree}(k)$ satisfying the Prefix Last-Token Condition forms a unique contiguous path P starting from the atomic root c to $\theta(sc)$.*