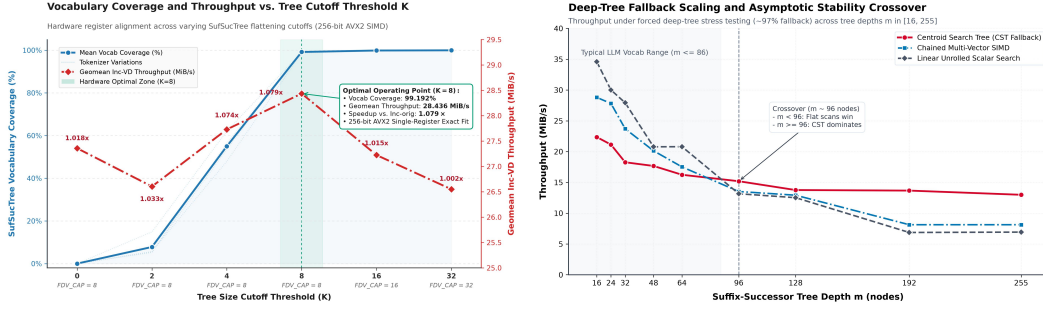


(a) Cutoff threshold K : coverage vs. throughput.

(b) Deep-tree fallback scaling crossover.

Figure 3: Sensitivity analyses. **(a)** SufSucTree vocabulary coverage and geomean throughput across tree cutoff thresholds K ; throughput peaks at $K=8$ (28.44 MiB/s, $1.079\times$ over Inc-orig), aligning exactly with the 8-lane 256-bit AVX2 register while covering 99.19% of trees; larger K pays multi-register scanning cost for marginal coverage. **(b)** Throughput of deep-tree fallback strategies under a forced 97% fallback rate: linear/chained scans win for shallow trees ($m \leq 86$, the typical LLM range) but degrade linearly, while the CST fallback retains $O(\log^2 m)$ stability and crosses over at $m \approx 96$ nodes, justifying it for pathological inputs.

Table 3: Component-wise ablation: geometric-mean speedup of each variant over the Inc-orig CST baseline, averaged over 6 tokenizers $\times$ 3 datasets $\times$ 2 regimes. Each row adds one component.

Variant	FDV flatten	SIMD	Atomic bypass	Speedup vs. Inc-orig
Inc-orig (CST)	—	—	—	1.000 $\times$
Flat-Scalar	✓	—	—	1.128 $\times$
Flat-SIMD	✓	✓	—	1.138 $\times$
VD-STrans (Full)	✓	✓	✓	1.197 $\times$

4.4 ABLATION STUDIES AND SENSITIVITY ANALYSIS

Ablation 1: Impact of Cutoff Threshold K and 128-bit SIMD Portability. We systematically varied the tree flattening cutoff threshold $K \in \{0, 2, 4, 8, 16, 32\}$ across representative tokenizers. As shown in Fig. 3a, vocabulary coverage increases rapidly from 0% at $K = 0$ to 99.192% at $K = 8$. Geomean throughput peaks sharply at $K = 8$ (28.436 MiB/s, yielding a $1.079\times$ speedup over Inc-orig). At $K = 16$ and $K = 32$, despite marginal coverage gains (99.88% and 99.97%), throughput degrades to 27.22 and 26.55 MiB/s due to the multi-register vector scanning overhead incurred on every search pass. Evaluating $K = 4$ probes a single-register 128-bit SIMD layout (matching ARM Neon capacity): single-pass coverage reaches 55.0% across tokenizers, achieving a $1.074\times$ geomean speedup, while dual 128-bit passes cover 99.2%—strong evidence for cross-platform portability to ARM Neon targets (e.g., AWS Graviton and mobile processors).

Ablation 2: Component-Wise Deconstruction. To quantify individual design contributions, we deconstructed VD-STrans into four incremental modular variants (Table 3). Flattening the tree into a pointerless flat layout contributes the largest single gain ($1.128\times$) by eliminating cache-unfriendly pointer chasing; branchless AVX2 vectorization adds $1.009\times$; and the Atomic Fast-Path Bypass adds $1.051\times$, stacking to a combined $1.197\times$ over Inc-orig ($1.238\times$ in per-doc, where document starts emit many atomic tokens).

Ablation 3: Decision Kernel Comparison & Working-Set Sweep. We evaluated four candidate decision kernels—Branchy Scalar, Branchless Scalar, AVX2, and AVX-512—across memory working-set regimes (L1, L2, LLC, DRAM) under both realistic (predictable) and adversarial (unpredictable) workloads, as illustrated in Fig. 4.

In L1 cache (32 KiB), AVX2 achieves the lowest search latency (2.41 ns/search, 5.31 cycles) on realistic text. Under adversarial branch-unpredictable workloads in L2 cache (1040 KiB), Branchy Scalar latency degrades by 68% (from 5.82 ns to 9.76 ns) due to branch misprediction penalties. In contrast, AVX2 remains completely immune (5.23 ns vs 5.25 ns), demonstrating branchless vector