

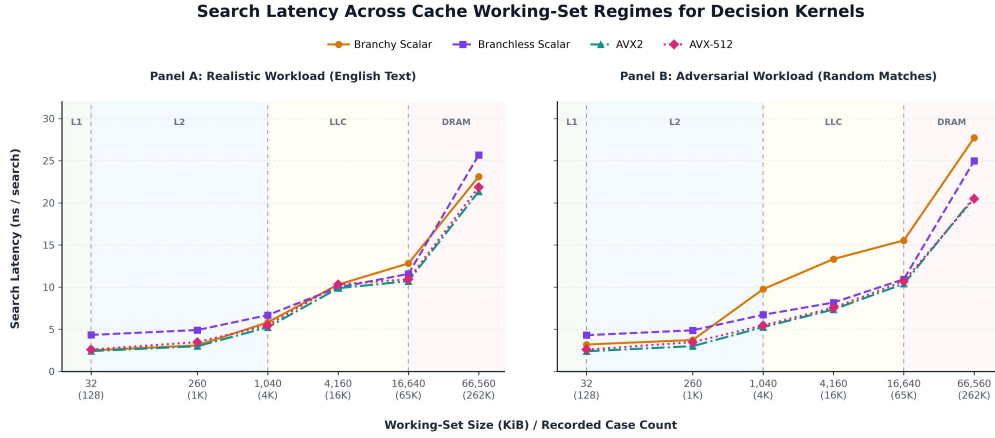


Figure 4: Search latency (ns / search) of decision kernels across hardware cache residency regimes (L1, L2, LLC, and DRAM) for predictable English text (Panel A) and branch-unpredictable adversarial workloads (Panel B). On predictable text, the branchy scalar kernel achieves low latency in L1 due to accurate branch prediction. Under adversarial conditions, branchy scalar latency degrades sharply in the L2 and LLC regimes owing to branch misprediction penalties. Vectorized SIMD kernels (AVX2 and AVX-512) eliminate branch mispredictions and consistently maintain minimal latency across compute-bound cache regimes, converging with other implementations as memory bandwidth limits performance in DRAM.

robustness. AVX-512 offers no advantage over AVX2 (2.58 ns) because tree sizes rarely exceed 8 lanes.

Ablation 4: Atomic Fast-Path Bypass Across Text Domains. We evaluated the Atomic Fast-Path Bypass across text domains with varying character entropy. Fast-path hit rates (percentage of character transitions bypassing history lookups) were measured at 19.6%–23.3% on English, 19.7%–28.4% on Code, and **35.1%–98.0%** on Chinese text.

On Chinese text with CodeLlama (98.0% fast-path hit rate), the atomic bypass yields a peak throughput gain of **1.192×** (geomean $1.103\times$ across Chinese). Fast-path throughput gain exhibits a strong positive correlation with hit rate (Pearson $r = 0.811$).

Ablation 5: Deep-Tree Fallback Strategy Analysis. To evaluate fallback mechanisms for trees exceeding 8 nodes, we stress-tested Centroid Search Tree (CST), Chained Multi-Vector SIMD, and Linear Unrolled Scalar Search on synthetic trees with a forced 97% fallback rate across depths $m \in [16, 255]$ (Fig. 3b). Linear scans achieve higher throughput for shallow trees ($m \leq 64$) but degrade linearly with depth, whereas CST maintains logarithmic stability ($O(\log^2 m)$) and crosses over at $m \approx 96$ nodes. This confirms CST as the optimal fallback for preserving the $O(\log^2 t)$ worst-case bound on pathological inputs (e.g., a^{2^k}).

5 CONCLUSION

We introduced **Vectorized Direct-Interval Suffix Transducer (VD-STrans)**, an ultra-low-latency incremental BPE framework. Exploiting the structural observation that $> 99.1\%$ of Suffix-Successor Trees in real-world LLM vocabularies contain ≤ 8 nodes, VD-STrans flattens dynamic tree topologies into 256-bit aligned Compact Flat Decision Vectors and resolves last-token selection through a branchless AVX2 SIMD range kernel, an Atomic Fast-Path Bypass, and a CST fallback for deep trees—eliminating pointer dereferences, branch mispredictions, and search-loop overheads. Across 12 tokenizers and 3 text domains, VD-STrans attains a geometric-mean speedup of **1.123×** (up to **1.271×**) over the state-of-the-art incremental algorithm and up to **23.64×** over heap baselines, with 100% exact fidelity. **Limitations and future work.** VD-STrans is tuned for 256-bit AVX2, but our $K=4$ topology analysis shows strong potential for 128-bit ARM Neon; porting the vectorized primitives to ARM Neon and RISC-V Vector for edge deployment, and extending direct-interval transduction to hardware-accelerated FPGA/GPU preprocessing, are promising directions.