

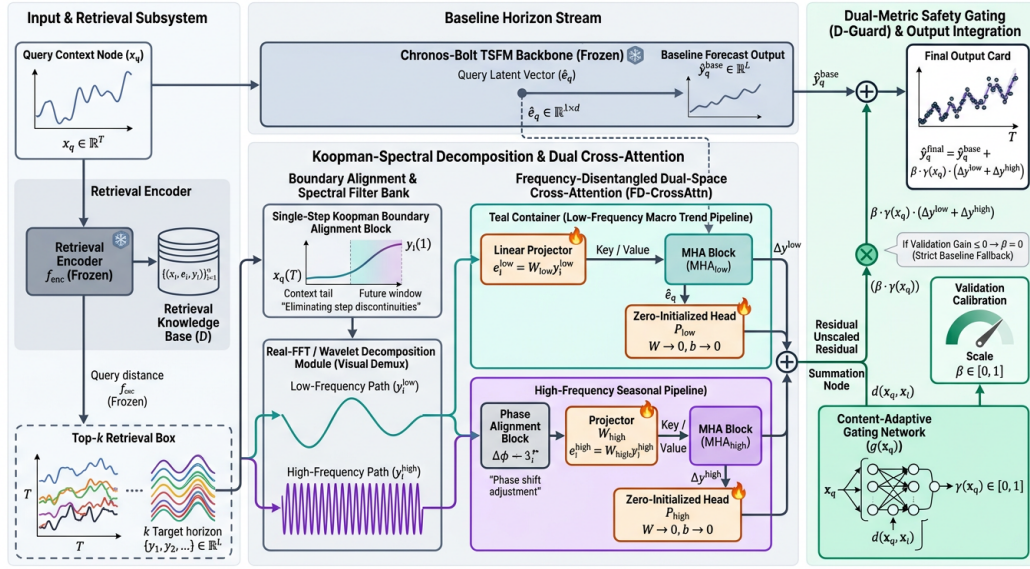


Figure 1: Overall architecture of the DynaSpec-RAG framework for zero-shot time series forecasting. Top- k target horizons are retrieved via a frozen retrieval encoder, boundary-aligned using a single-step continuation operator, and decomposed into low- and high-frequency spectral components. A frequency-disentangled dual cross-attention module integrates these components with latent embeddings from the frozen TSFM backbone to generate spectral residuals. The dual-metric safety gating mechanism dynamically scales these residual refinements using a content-adaptive gating network and a validation calibration parameter β before combining them with the baseline forecast.

3 METHODOLOGY

3.1 SYSTEM OVERVIEW & PROBLEM FORMULATION

We formalize zero-shot forecasting under a retrieval-augmented setup. Given a query context sequence $x_q = [x_q(1), \dots, x_q(T)] \in \mathbb{R}^T$ of lookback length $T = 512$, the objective is to predict the future target horizon $y_q = [y_q(1), \dots, y_q(L)] \in \mathbb{R}^L$ of length $L = 64$. We assume access to a frozen TSFM backbone (e.g., Chronos-Bolt) that generates a baseline zero-shot forecast $\hat{y}_q^{base} \in \mathbb{R}^L$ along with a contextual query latent vector $\hat{e}_q \in \mathbb{R}^{1 \times d}$.

To augment the backbone forecast, a pretrained retrieval encoder $f_{enc}(\cdot)$ maps x_q into a dense vector $e_q = f_{enc}(x_q) \in \mathbb{R}^d$. A multi-domain retrieval knowledge base $\mathcal{D} = \{(x_i, e_i, y_i)\}_{i=1}^n$ stores n historical context-forecast pairs. The retriever searches $\mathcal{D}$ using Euclidean embedding distance $d(e_q, e_i) = \|e_q - e_i\|_2$ to identify the set $\mathcal{C} = \text{TopK}_{\min}(\mathcal{D}, k)$ of top- k nearest context-horizon analogue pairs $\{(x_i, y_i)\}_{i=1}^k$ ($k = 10$).

As illustrated in Figure 1, DynaSpec-RAG refines the frozen baseline forecast $\hat{y}_q^{base}$ in output space by injecting frequency-disentangled residual adjustments derived from the retrieved horizons $\{y_i\}_{i=1}^k$. The complete formulation is:

$$\hat{y}_q^{final} = \hat{y}_q^{base} + \beta \cdot \text{scale}_q \cdot (g_{low}(x_q) \odot r_{low} + g_{high}(x_q) \odot r_{high}), \quad (1)$$

where scale_q is the query instance standard deviation, $r_{low}, r_{high} \in \mathbb{R}^L$ are the low- and high-frequency spectral analogue residuals, $g_{low}(x_q), g_{high}(x_q) \in [0, 1]^L$ are content-adaptive temporal gating vectors, $\odot$ denotes element-wise multiplication, and $\beta \in [0, 1]$ is a post-hoc validation-calibrated safety scale.