

Table 2: Direct comparison against retrieval-augmented foundation models (MSE / MAE, lower is better) under an identical frozen backbone, context ($T = 512$), and horizon ($L = 64$). Best per row in **bold**.

Dataset	Chronos-Bolt Base	RAF (Top-1)	RAEF (Top- k)	TS-RAG (ARM)	DynaSpec-RAG (Ours)
ETTh1	0.3615 / 0.3650	0.3598 / 0.3645	0.3684 / 0.3674	0.3556 / 0.3623	0.3447 / 0.3624
ETTh2	0.2516 / 0.2992	0.2575 / 0.3015	0.2564 / 0.3019	0.2451 / 0.2981	0.2404 / 0.2970
ETTm1	0.3107 / 0.3183	0.3007 / 0.3221	0.2953 / 0.3227	0.2904 / 0.3113	0.2806 / 0.3091
ETTm2	0.1486 / 0.2235	0.1452 / 0.2224	0.1455 / 0.2233	0.1465 / 0.2230	0.1427 / 0.2217
Weather	0.1524 / 0.1823	0.1452 / 0.1752	0.1446 / 0.1768	0.1453 / 0.1769	0.1398 / 0.1747
Electricity	0.1134 / 0.2005	0.1169 / 0.2059	0.1187 / 0.2073	0.1123 / 0.2004	0.1124 / 0.2029
Exchange	0.0671 / 0.1778	0.0646 / 0.1742	0.0629 / 0.1725	0.0624 / 0.1716	0.0611 / 0.1700
Average	0.2007 / 0.2524	0.1985 / 0.2523	0.1988 / 0.2531	0.1939 / 0.2491	0.1888 / 0.2483

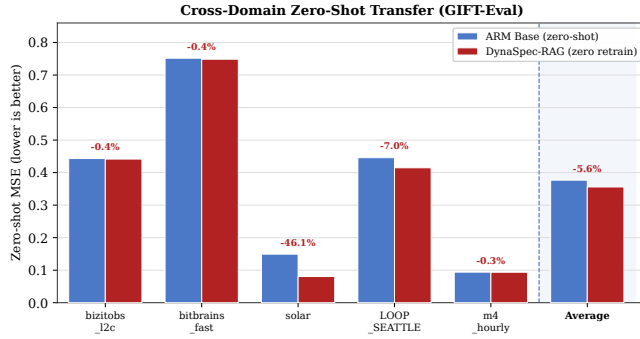


Figure 3: Zero-shot cross-domain transfer on GIFT-Eval: the 0.27M-parameter residual module, trained on the legacy benchmarks and applied with *zero* retraining, improves MSE on all 5 held-out datasets (-5.6% average).

all seven datasets): **RAF** (Tire et al. 2024), which prepends the single nearest raw analogue sequence in-context, and **RAEF**, its multi-neighbour top- k aggregated extension. As shown in Table 2, RAF/RAEF concatenate raw analogues in the *input* space; operating on undisentangled sequences, they cannot separate reliable macro-trend structure from volatile seasonal detail, so noisy high-frequency content induces destructive interference inside the backbone self-attention, yielding only marginal average gains (0.1985 / 0.1988 vs. 0.2007 MSE). DynaSpec-RAG’s output-space frequency-disentangled residual fusion, coupled with per-timestep trust gating, reduces average MSE to **0.1888**, outperforming both RAF (-4.9%) and RAEF (-5.0%) and winning on 6 of 7 datasets. Timer-XL is excluded as it requires custom backbone modifications rather than a model-agnostic frozen-output residual.

4.4 CROSS-DOMAIN ZERO-SHOT TRANSFER

Cross-Domain Zero-Shot Transfer (GIFT-Eval). To test generalizability beyond the legacy benchmarks, we apply the DynaSpec-RAG residual module—trained only on the original datasets—*strictly zero-shot* (no retraining) to five held-out GIFT-Eval (İbrahim Aksu et al. 2024) datasets spanning four domain categories. In-domain retrieval pools are built from disjoint context-horizon series (zero temporal leakage) with top- $k = 10$ retrieval via the frozen encoder. As reported in Table 10 and Figure 3, DynaSpec-RAG improves accuracy on **5/5** datasets, lowering average MSE from 0.3768 to **0.3558** (-5.6%) with the largest gains on strongly periodic domains (solar -46.1% , LOOP_SEATTLE -7.0% ; full per-dataset numbers in Appendix B Table 10). The per-dataset safety scale β^* adapts automatically—rising to 0.975 on strongly periodic solar and shrinking toward 0 on low-affinity Web/CloudOps series—so that gains outside the legacy suite *exceed* the in-suite gains, confirming genuine cross-domain transfer without negative transfer.