

MariaDB für Entwickler

Agenda

1. Technical Background

- [Technical Structure](#)
- [Process of Queries](#)

2. Beispieldaten / Testserver

- [Sakila](#)
- [Spendenliste](#)
- [Server Vagrant](#)

3. JOINS

- [Basics of Joins](#)
- [Working with LEFT JOIN](#)
- [Join examples](#)

4. GROUP BY

- [Simple Group By Example](#)
- [Join and group - example](#)

5. CONSTRAINTS

- [Foreign Key Constraints - Example](#)
- [Check constraint with example](#)

6. UPDATE

- [Sophisticated Update](#)

7. DELETE

- [Delete mit Transaktion](#)

8. TRIGGERS

- [Triggers](#)

9. CONSTRAINTS

- [Constrains with Example Walkthrough](#)

10. INDEX HINTS

- [Force use of an Index](#)
- [Do not use an index if indexes are present](#)

11. PREPARED STATEMENTS

- [Prepared Statements with examples](#)

12. Formatierung Ausgaben / Funktionen

- [Datumsausgabe formatieren](#)
- [Strings zusammenfügen](#)

13. Performance

- [* vs. specific field in field list - select](#)
- [Möglichst keine Funktion in where \(spalte\) verwenden](#)
- [SQL-Rewrite Pager- Subselect](#)

14. Analyzing Slow Queries / Indexes

- [Create unique index](#)
- [Find indexes](#)
- [Create Index/Delete/Drop Index](#)
- [Indices](#)
- [Explain](#)
- [profiling-get-time-for-execution-of.query](#)
- [Kein function in where verwenden](#)
- [Optimizer-hints \(and why you should not use them\)](#)
- [Query-Plans aka Explains](#)
- [Query Pläne und die Key-Länge](#)
- [Index und Likes](#)
- [Index und Joins](#)
- [Find out cardinality without index](#)
- [Index and Functions](#)
- [Index neu aufbauen ?](#)
- [Index Stats](#)

15. Tools

- [Percona Toolkit](#)
- [pt-query-digest - analyze slow logs](#)
- [pt-online-schema-change howto](#)
- [Example sys-schema and Reference](#)
- [Profiling](#)

16. Tipps & Tricks

- [Dummy table DUAL](#)
- [Wie kann ich verwendete Storage Engine rausfinden - Table](#)
- [SHOW VARIABLES WITH WHERE](#)
- [Schnellster Import von Daten mit csv](#)
- [Queries in Datenbank \(mysql\) loggen, die keine Indizes verwenden](#)

17. Storage Engines

- [MyISAM Key Buffer](#)

18. References/Documentation

- [MySQL/MariaDB Performance Document](#)
- [MariaDB - Changes in 10.6](#)
- [MySQL/MariaDB - Performance - pdf](#)
- [JDBC-Treiber](#)

19. Oracle

- [Activating Oracle Sql-Mode](#)
- [Overview Oracle Mode](#)
- [When Others-Clause](#)
- [Demo Oracle sql_mode from MariaDB](#)
- [What is implemented in Oracle sql-mode - fromdual](#)

- [Simple oracle examples pl/sql in mariadb](#)

Backlog

1. Working with database objects

- [Working with databases](#)
- [Working with tables](#)
- [Teststellung - Feld verkleinern](#)

2. SELECT

- [Select Beispiele](#)
- [Select Beispiele mit Like](#)
- [SELECT ORDER BY](#)
- [Unterschiede einfache und doppelte Hochkommas bei Oracle/MySQL](#)

3. INSERT/UPDATE

- [Praktisches Beispiel und erweitertes insert - INSERT](#)
- [Praktisches Beispiel - Update](#)

4. DELETE

- [Einfaches Delete Beispiel](#)

1. Datentypen

- [Integer - INT - Datentypen](#)

2. Basics

- [Connection to DB + exit](#)
- [mysql-client](#)
- [Charset-Collations](#)
- [server system variablen abfragen](#)

3. Storage Engines

- [Which engine is used](#)

4. Working with the data modelling language (DML's)

- [Working with INSERT](#)

5. Tipps & Tricks / Do Not

- [Dump/SQL-File einspielen auf der Kommandozeile - Windows](#)

6. Tools

- [HeidiSQL Portable - works for windows](#)

7. Tipps & Tricks

- [Best Practice DBAL - Kochrezept](#)

8. References

- [Examples Left Join](#)
- [Notes on Specific MySQL Knowledge](#)
- [Many Sakila Example Queries](#)

- [Helpful Examples](#)


9. Extra (Optional)

10. Übungen


- [Übung_Update/Insert](#)

Technical Background

Technical Structure

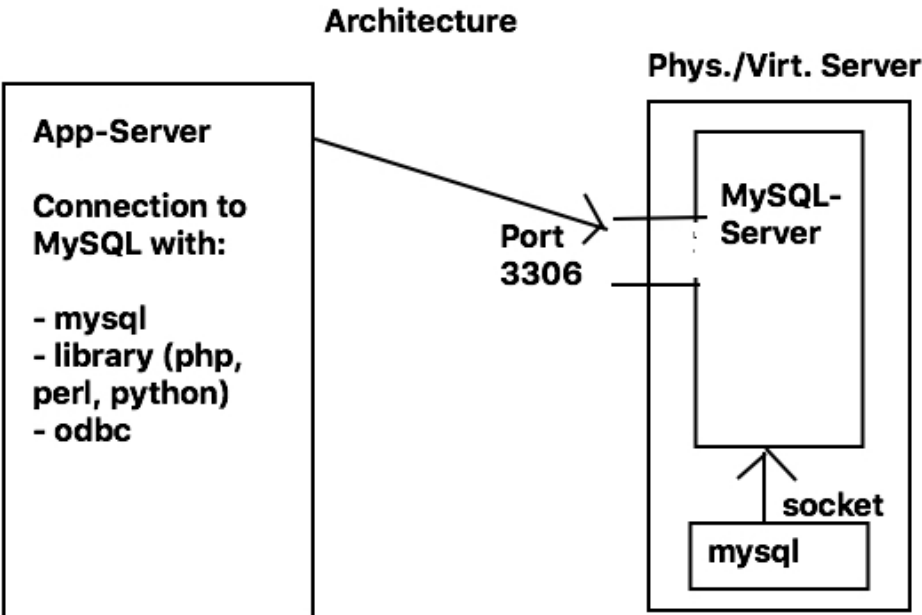

Process of Queries

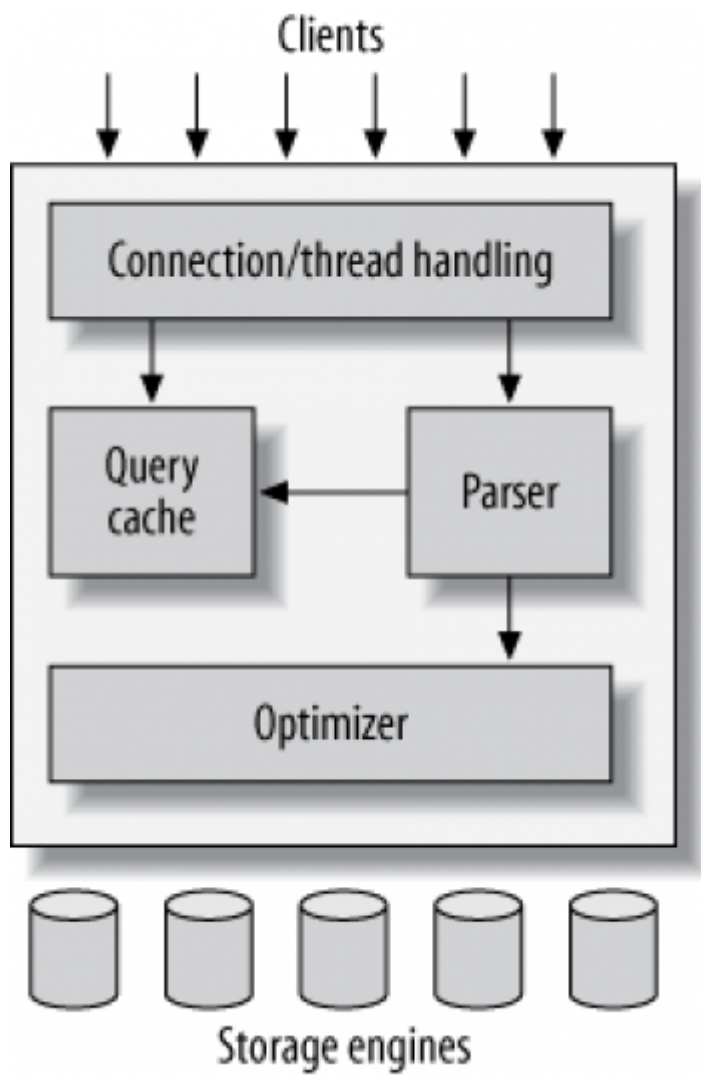

Beispieldaten / Testserver

Sakila

```
cd /usr/src
wget https://downloads.mysql.com/docs/sakila-db.tar.gz
tar xzvf sakila-db.tar.gz

cd sakila-db
mysql < sakila-schema.sql
mysql < sakila-data.sql
```

Spendenliste

Walkthrough (Debian/Ubuntu 18.04. with mysql 5.7.)

- Complete process takes about 10 minutes

```
cd /usr/src;
apt update; apt install git;
git clone https://github.com/jmetzger/dedupe-examples.git;
cd dedupe-examples;
cd mysql_example;
## Eventually you need to enter (in mysql_example/mysql.cnf)
## Only necessary if you cannot connect to db by entering "mysql"
## password=<your_root_pw>
./setup.sh
```

Walkthrough (Debian/Ubuntu 20.04. with mysql 8)

- Complete process takes about 10 minutes

```
cd /usr/src;
apt update; apt install git;
git clone https://github.com/jmetzger/dedupe-examples.git;
cd dedupe-examples;
cd mysql_example;
## otherwise script does not work
echo "set local_infile=1" | mysql
## Eventually you need to enter (in mysql_example/mysql.cnf)
## Only necessary if you cannot connect to db by entering "mysql"
## password=<your_root_pw>
./setup.sh
```


Server Vagrant

```
## Put this in a Vagrantfile
## 1. mkdir project; cd project
## 2. Put this in a Vagrantfile
## 3. vagrant up
## 4. vagrant ssh

Vagrant.configure("2") do |config|

  config.vm.box = "ubuntu/focal64"
  config.vm.provision "shell", inline: <<-SHELL

    apt-get update
    apt-get install -y mysql-server-8.0 wget
    cd /usr/src
    wget https://downloads.mysql.com/docs/sakila-db.tar.gz
    tar xzvf sakila-db.tar.gz
    cd sakila-db
    mysql < sakila-schema.sql
    mysql < sakila-data.sql

    echo "-- Setting up external user"
    echo "CREATE USER ext@%' identified by 'student'" | mysql
    echo "GRANT ALL PRIVILEGES ON *.* TO ext@%'" | mysql

    echo "-- Setting mysql up for external access"
    echo "bind-address = 0.0.0.0" >> /etc/mysql/mysql.conf.d/mysqld.cnf
    systemctl restart mysql

    echo "-- Setting up contributions database - big data"
    cd /usr/src;
    apt-get install -y git
    git clone https://github.com/jmetzger/dedupe-examples.git;
    cd dedupe-examples;
    cd mysql_example;
    echo "set global local_infile = 1" | mysql
    echo "# Eventually you need to enter (in mysql_example/mysql.cnf)"
    echo '# Only necessary if you cannot connect to db by entering "mysql"'
    echo '# password=<your_root_pw>'
    ./setup.sh
    date
    echo "-- Done - Setting up contributions database - big data"
  SHELL
end
```


JOINS

Basics of Joins

What is a JOIN for ?

- combines rows from two or more tables
- based on a related column between them.


MySQL (Inner) Join

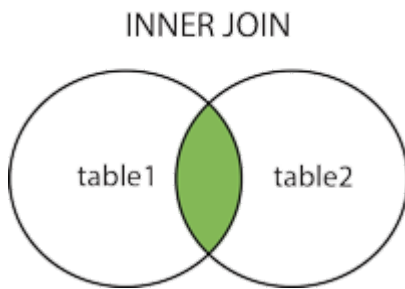

MySQL (Inner) Join (explained)

- Inner Join and Join are the same
- Returns records that have matching values in both tables
- Inner Join, Cross Join and Join
 - are the same in MySQL


MySQL Left Join

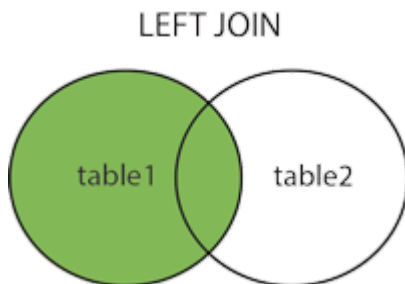

MySQL Left (outer) Join (explained)

- Return all records from the left table
- *AND* the matched records from the right table
- The result is NULL on the right side
 - if there are no matched columns on the right
- Left Join and Left Outer Join are the same

MySQL Right Join

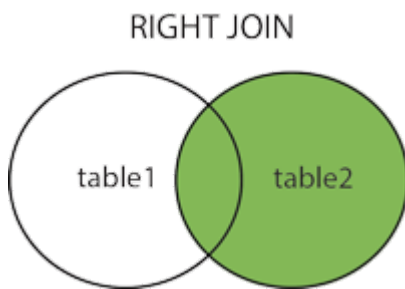

MySQL Right Join (explained)

- Return all records from the right table
 - *AND* the matched records from the left table
- Right Join and Right Outer Join are the same

MySQL Straight Join

- MySQL (inner) Join and Straight Join are the same
- **Difference:**
 - The left column is always read first
- **Downside:**
 - Bad optimization through mysql (query optimizer)
- **Recommendation:**
 - Avoid straight join if possible
 - use join instead

Type of Joins

- [inner] join
 - **inner join** and **join** are the same
- left [outer] join
- right [outer] join
- full [outer] join
- straight join < equals > join
- cross join = join (in mysql)
- natural join <= equals => join (but syntax is different)

In Detail: [INNER] JOIN

- Return rows when there
 - is a match in both tables
- Example

```
SELECT actor.first_name, actor.last_name, film.title
FROM film_actor
INNER JOIN actor ON film_actor.actor_id = actor.actor_id
INNER JOIN film ON film_actor.film_id = film.film_id;
```

In Detail: Joining without JOIN - Keyword ===

- Explanation: Will have the same query execution plan as [INNER] JOIN

```
SELECT actor.first_name, actor.last_name, film.title
FROM film_actor, actor, film
where film_actor.actor_id = actor.actor_id
and film_actor.film_id = film.film_id;
```

In Detail: Left Join

- Return all rows from the left side
 - even if there is not result on the right side
- Example

```
SELECT
c.customer_id,
c.first_name,
c.last_name,
a.actor_id,
a.first_name,
a.last_name
FROM customer c
LEFT JOIN actor a
ON c.last_name = a.last_name
ORDER BY c.last_name;
```

In Detail: Right Join

- Return all rows from the right side
 - even if there are no results on the left side
- Example

```
SELECT
c.customer_id,
c.first_name,
c.last_name,
a.actor_id,
a.first_name,
a.last_name
FROM customer c
RIGHT JOIN actor a
ON c.last_name = a.last_name
ORDER BY a.last_name;
```

In Detail: Having

- Simple: WHERE for GroupBy (because where does not work here)
- Example

```
SELECT last_name, COUNT(*)
FROM sakila.actor
GROUP BY last_name
HAVING count(last_name) > 2
```

Internal (type of joins) - NLJ

- NLJ - (Nested Loop Join)

```
for each row in t1 matching range {
  for each row in t2 matching reference key {
    for each row in t3 {
      if row satisfies join conditions, send to client
    }
  }
}
```

Internal (type of joins) - BNL

- BNL - (Block Nested Loop)
 - in explain: -> using join buffer
 - columns of interest to a join are stored in join buffer
 - --> not whole rows.
 - join_buffer_size system variable
 - -> determines the size of each join buffer used to process a query.
- <https://dev.mysql.com/doc/refman/5.7/en/nested-loop-joins.html>

BNL - Who can I see, if it is used ?

- Can be seen in explain

```
1 | PRIMARY | SE | ALL | PRIMARY | NULL | NULL | NULL | 5 | Using where; Using join buffer (Block Nested Loop)
```

```
explain SELECT a.* FROM actor a INNER JOIN actor b where a.actor_id > 20 and
b.actor_id < 20
```

When using a Block Nested-Loop Join, MySQL will, instead of automatically joining t2, insert as many rows from t1 that it can into a join buffer and then scan the appropriate range of t2 once, matching each record in t2 to the join buffer. From here, each matched row is then sent to the next join, which, as previously discussed, may be another table, t3, or, if t2 is the last table in the query, the rows may be sent to the network.

BNL's - Refs:

- <https://www.burnison.ca/notes/fun-mysql-fact-of-the-day-block-nested-loop-joins>

Working with LEFT JOIN

General

- Show all entries from the left table and only from the right if available
- Examples are based on sakila database.

Example - new language / not in language table

```
SELECT @@foreign_key_checks;
SET FOREIGN_KEY_CHECKS=0
UPDATE film SET language_id = 99 WHERE film_id >= 800 and film_id <= 899
SELECT f.film_id,f.title,f.description,l.name FROM film f LEFT JOIN language l ON
f.language_id = l.language_id;
SET FOREIGN_KEY_CHECKS=1
```

Example

```
use sakila
SELECT
    c.customer_id,
    c.first_name,
    c.last_name,
    a.actor_id,
    a.first_name,
    a.last_name
FROM customer c
LEFT JOIN actor a
ON c.last_name = a.last_name
ORDER BY c.last_name;
```

Join examples

```
## Work - step by step.
SELECT * FROM film f;
SELECT f.title FROM film f;
SELECT f.language_id FROM film f JOIN language l ON f.language_id = l.language_id;
-- aus film-tabelle alle felder - f.*
SELECT f.*,l.name FROM film f JOIN language l ON f.language_id = l.language_id;
SELECT f.film_id,f.title,l.name,f.description FROM film f JOIN language l ON
f.language_id = l.language_id;
```

GROUP BY

Simple Group By Example

```
## Variante 1
SELECT last_name,COUNT(last_name) as cnt FROM actor GROUP BY last_name

## Variante 2: ohne Group - akroyd zählen -> geht nur bei einem Namen
SELECT last_name,COUNT(last_name) as cnt FROM actor WHERE last_name = 'AKROYD'

## Das ist falsch - weil mehrere Namen, Ausgabe nur eine Zeile
SELECT last_name,COUNT(last_name) as cnt FROM actor WHERE last_name = 'AKROYD' or
last_name = 'ALLEN'

## Variante 2a (Erst Daten holen - 6 Datensätze, dann aggregieren (group by)
## Für grosse Datenmengen besser !
SELECT last_name,COUNT(last_name) as cnt FROM actor WHERE last_name = 'AKROYD' or
last_name = 'ALLEN' GROUP BY last_name

## Variante 2b (Alle Daten holen - 200 Datensätze, dann alles aggregieren)
SELECT last_name,COUNT(last_name) as cnt FROM actor GROUP BY last_name HAVING
last_name = 'AKROYD' or last_name = 'ALLEN'
```


Join and group - example

CONSTRAINTS

Foreign Key Constraints - Example

Walkthrough

Step 1: Sample Table and data

```
create table gadget_types(  
    type_id int auto_increment,  
    name varchar(100) not null,  
    primary key(type_id)  
);  
  
insert into gadget_types(name)  
values  
    ('Entertainment'),  
    ('Computing'),  
    ('Communication'),  
    ('Lifestyle'),  
    ('Cameras');  
  
create table gadgets(  
    gadget_id int auto_increment,  
    gadget_name varchar(100) not null,  
    type_id int,  
    primary key(gadget_id),  
    constraint fk_type  
    foreign key(type_id)  
        references gadget_types(type_id)  
);
```

Step 2: Insert data to gadgets

```
insert into  
    gadgets(gadget_name,type_id)  
values  
    ('Amazon Kindle',1),  
    ('Apple iPod',1),  
    ('Audio Highway Listen Up',1),  
    ('Apple iPad',2),  
    ('MicroSD',2),  
    ('Apple iPhone',3),  
    ('BlackBerry 6210',3),  
    ('Pager',3),  
    ('Air Taser Model 34000',4),  
    ('Credit Card',4),  
    ('Zippo',4),  
    ('Casio G-Shock DW-5000C',4),
```

```
('Nikon F',5),  
('Canon EOS 5D Mark II',5);
```

Step 3 - Try to delete

```
delete from gadget_types  
where type_id = 1;
```

SQL Error (1451): Cannot delete or update a parent row: a foreign key constraint fails
(`nation`.`gadgets`, CONSTRAINT `fk_type` FOREIGN KEY (`type_id`) REFERENCES
`gadget_types` (`type_id`))
--> To delete a row from the gadget_types table, you need to remove all the
referencing rows from the gadgets table first.

Step 4 - Drop Contrains and set NULL Reference

```
alter table gadgets  
drop constraint fk_type;  
  
alter table gadgets  
add constraint fk_type  
foreign key(type_id)  
references gadget_types(type_id)  
on delete set null  
on update set null;
```

```
delete from gadget_types  
where type_id = 1;
```

```
select * from gadgets;  
--> As shown clearly from the output, the values in the type_id column of rows with  
type_id 1 from the gadgets table were set to null because of the on delete set null  
option.
```

Step 5 - change id in gadget_types

```
update gadget_types  
set type_id = 20  
where type_id = 2;
```

```
select * from gadgets;
```

--> The values in the type_id column of rows with type_id 2 from the gadgets table
were set to null because of the on update set null option.

Step 6 - remove orphans

```
delete from gadgets  
where type_id is null;
```

Step 7 - cascade reference option

```
-- Drop constraint
alter table gadgets
drop constraint fk_type;

alter table gadgets
add constraint fk_type
foreign key(type_id)
    references gadget_types(type_id)
    on delete cascade
    on update cascade;

delete from gadget_types
where type_id = 3;
--> MariaDB automatically deleted rows from the gadgets table whose type_id is 3
because of the on delete cascade action.

select * from gadgets;
```

Step 8 - Update gadget_type id 4 to 40:

```
update gadget_types
set type_id = 40
where type_id = 4

--> MariaDB automatically updated rows from the gadgets table whose type_id is 4 to 40
because of the on update cascade action:

select * from gadgets;
--> Updated all references
```

Ref:

- <https://www.mariadbtutorial.com/mariadb-basics/mariadb-foreign-key/>

Check constraint with example

Column constraints

```
create table classes(  
    class_id int auto_increment,  
    class_name varchar(255) not null,  
    student_count int  
        constraint positive_student_count  
        check(student_count >0),  
    primary key(class_id)  
);
```

Table Check Constraint

```
create table classes(  
    class_id int auto_increment,  
    class_name varchar(255) not null,  
    student_count int,  
    constraint positive_student_count  
        check(student_count >0),  
    primary key(class_id)  
);
```

```
insert into classes(class_name, student_count)  
values('MariaDB for Developers',0);
```

SQL Error (4025): CONSTRAINT `positive_student_count` failed for `nation`.`classes`

```
insert into classes(class_name, student_count)  
values('MariaDB for Developers',100);
```

Multi Column Constraint

```
create table classes(  
    class_id int auto_increment,  
    class_name varchar(100) not null,  
    begin_date date not null,  
    end_date date not null,  
    student_count int,  
    constraint positive_student_count  
        check(student_count >0),  
    constraint valid_date  
        check(end_date >= begin_date),  
    primary key(class_id)  
);
```

-- Change structure like so

```
ALTER TABLE classes ADD (begin_date date NOT NULL, end_date date NOT NULL,  
CONSTRAINT valid_date CHECK (end_date > begin_date))
```

--

Ref:

- <https://www.mariadbtutorial.com/mariadb-basics/mariadb-check-constraint/>

UPDATE

Sophisticated Update

Aufgabe

Erhöhe bei allen Datensätzen in film die rental_rate um 1 Euro,
für die Schauspieler "actor", deren Nachname mit D anfängt

Lösung

```
SELECT DISTINCT fc.film_id FROM filmcopy fc JOIN film_actor fa ON fc.film_id =  
fa.film_id JOIN actor a ON fa.actor_id = a.actor_id where a.last_name like 'D%';  
  
UPDATE filmcopy fc JOIN film_actor fa ON fc.film_id = fa.film_id JOIN actor a ON  
fa.actor_id = a.actor_id SET rental_rate = rental_rate + 1  
Query OK, 432 rows affected (0.02 sec)  
Rows matched: 432  Changed: 432  Warnings: 0
```

DELETE

Delete mit Transaktion

Beispiel

Variante 1: Andere sehen es erst nach commit (andere Sessions/Verbindungen)

```
BEGIN;  
DELETE FROM actor where actor_id = 200;  
COMMIT;
```

Variante 2: Aktion mir nicht, ich rolle sie zurück, mache sie rückgängig

```
BEGIN;  
DELETE FROM actor where actor_id = 200;  
ROLLBACK;
```

TRIGGERS

Triggers

Create the structure

```
create table countries (  
    country_id int auto_increment,  
    name varchar(50) not null,  
    primary key(country_id)  
);  
  
INSERT INTO countries (name) values ('Germany'), ('Austria');  
  
create table country_stats(  
    country_id int,  
    year int,  
    population int,  
    primary key (country_id, year),  
    foreign key(country_id)  
    references countries(country_id)  
);  
  
INSERT INTO country_stats (country_id, year, population) values (1,2020,100000)  
  
create table population_logs(  
    log_id int auto_increment,  
    country_id int not null,  
    year int not null,  
    old_population int not null,  
    new_population int not null,  
    updated_at timestamp default current_timestamp,  
    primary key(log_id)  
);
```

Create the trigger

```
create trigger before_country_stats_update  
before update on country_stats  
for each row  
insert into population_logs(  
    country_id,  
    year,  
    old_population,  
    new_population  
)  
values(  
    old.country_id,  
    old.year,  
    old.population,
```



```
        new.population  
    );
```

Run a test

```
update  
    country_reports  
set  
    population = 1352617399  
where  
    country_id = 1 and  
    year = 2020;  
  
-- what's the new result  
  
select * from population_logs;
```

Ref:

- <https://mariadb.com/kb/en/trigger-overview/>

CONSTRAINTS

Constrains with Example Walkthrough

INDEX HINTS

Force use of an Index

```
EXPLAIN SELECT Name,CountryCode FROM City FORCE INDEX (Name)
WHERE name>="A" and CountryCode >="A";
```

```
EXPLAIN SELECT Name,CountryCode FROM City USE INDEX (Name)
WHERE name>="A" and CountryCode >="A";
```

Do not use an index if indexes are present

```
SELECT * FROM actor USE INDEX() WHERE last_name LIKE 'D%';  
-- Identify if really no index is used  
EXPLAIN SELECT * FROM actor USE INDEX() WHERE last_name LIKE 'D%';
```

PREPARED STATEMENTS

Prepared Statements with examples

Setup

```
CREATE TABLE test (id int auto_increment, data varchar(40) NOT NULL DEFAULT '',  
PRIMARY KEY(id))
```

Single Line (Insert)

```
USE sakila;  
PREPARE stl FROM 'INSERT INTO actor (first_name,last_name) VALUES (?,?)';  
SET @first_name = 'Johan';  
SET @last_name = 'Muster';  
EXECUTE stl USING @first_name,@last_name;  
DEALLOCATE PREPARE stl;  
  
SELECT * FROM actor ORDER BY order_id DESC;
```

Multiline Prepared Statement (Insert)

```
-- Statement vorbereiten  
PREPARE stmt1 FROM 'INSERT INTO test (data) VALUES (?, (?:), (?:)';  
SET @d1 = 'Line1';  
SET @d2 = 'Line2';  
SET @d3 = 'Line3';  
EXECUTE stmt1 USING @d1, @d2, @d3;  
  
-- If you do not want to use it anymore DEALLOCATE IT  
DEALLOCATE PREPARE stmt1;  
  
SELECT * from test;
```

Using it with select

```
create table t1 (a int,b char(10));  
insert into t1 values (1,"one"),(2, "two"),(3,"three");  
prepare test from "select * from t1 where a=?";  
set @param=2;  
execute test using @param;  
+-----+-----+  
| a      | b      |  
+-----+-----+  
|      2 | two    |  
+-----+-----+  
set @param=3;  
execute test using @param;  
+-----+-----+  
| a      | b      |
```

```
+-----+-----+
|      3 | three |
+-----+-----+
deallocate prepare test;
```

Finding out number of rows

If this function is executed immediately after execute.

Formatierung Ausgaben / Funktionen

Datumsausgabe formatieren

- https://mariadb.com/kb/en/date_format/

Strings zusammenfügen

- <https://mariadb.com/kb/en/concat/>

Performance

* vs. specific field in field list - select

```
## You need to set up contributions database to test that
use contributions

## Variant 1: ALL Fields

mysql> select * from contributions limit 0,100000
100000 rows in set (0.25 sec)

## Variant 2: Specific field
## Try this multiple times, because the first time it is not
## in the innodb buffer (cache)

mysql> select vendor_last_name from contributions limit 0,100000;
100000 rows in set (0.04 sec)

## Result: Variant 2 wins over Variant 1
## The difference between these 2 is factor 5x in my case
```

Möglichst keine Funktion in where (spalte) verwenden

```
## Bad for performance
```

```
## Bad
```

```
## Good
```

SQL-Rewrite Pager- Subselect

```
explain SELECT film_id, description FROM sakila.film ORDER BY title LIMIT 50, 5;
```

```
+-----+-----+-----+-----+-----+-----+-----+-----+-----+
+-----+-----+-----+
| id | select_type | table | partitions | type | possible_keys | key | key_len | ref |
| rows | filtered | Extra |
+-----+-----+-----+-----+-----+-----+-----+-----+-----+
+-----+-----+-----+
| 1 | SIMPLE | film | NULL | ALL | NULL | NULL | NULL | NULL |
| 1000 | 100.00 | Using filesort |
+-----+-----+-----+-----+-----+-----+-----+-----+-----+
+-----+-----+-----+
1 row in set, 1 warning (0.00 sec)
```

Achtung auf title ist ein index sonst geht es nicht

```
SELECT film.film_id, film.description
FROM sakila.film
INNER JOIN (
    SELECT film_id FROM sakila.film
    ORDER BY title LIMIT 50, 5
) AS lim USING(film_id);
```

```
SELECT film.film_id, film.description FROM sakila.film INNER JOIN (
    SELECT film_id
FROM sakila.film ORDER BY title
LIMIT 50, 5 ) AS lim USING(film_id);
```

```
explain SELECT film.film_id, film.description FROM sakila.film INNER JOIN (
    SELECT film_id FROM sakila.film ORDER BY title LIMIT 50, 5 ) AS lim USING(film_id);
```

```
explain SELECT film.film_id, film.description FROM sakila.film INNER JOIN (
    SELECT film_id FROM sakila.film ORDER BY title LIMIT 50, 5 ) AS lim USING(film_id);
+-----+-----+-----+-----+-----+-----+-----+-----+-----+
+-----+-----+-----+
| id | select_type | table | partitions | type | possible_keys | key | key_len | ref |
| rows | filtered | Extra |
+-----+-----+-----+-----+-----+-----+-----+-----+-----+
+-----+-----+-----+
| 1 | PRIMARY | <derived2> | NULL | ALL | NULL | NULL | NULL | NULL |
| NULL | NULL | 55 | 100.00 | NULL |
| 1 | PRIMARY | film | NULL | eq_ref | PRIMARY | PRIMARY | 2 |
| lim.film_id | 1 | 100.00 | NULL |
| 2 | DERIVED | film | NULL | index | NULL | idx_title |
514 | NULL | 55 | 100.00 | Using index |
+-----+-----+-----+-----+-----+-----+-----+-----+-----+
+-----+-----+-----+
3 rows in set, 1 warning (0.00 sec)
```


Analyzing Slow Queries / Indexes

Create unique index

```
CREATE UNIQUE INDEX HomePhone ON Employees (Home_Phone);
```

Find indexes

Show index from table

```
create database showindex;
use showindex;
CREATE TABLE `people` (
  `id` int(10) unsigned NOT NULL AUTO_INCREMENT,
  `first_name` varchar(25) DEFAULT NULL,
  `last_name` varchar(25) DEFAULT NULL,
  `passcode` mediumint(8) unsigned DEFAULT NULL,
  PRIMARY KEY (`id`),
  UNIQUE KEY `idx_passcode` (`passcode`),
  KEY `idx_first_name_last_name` (`first_name`,`last_name`)
) ENGINE=InnoDB DEFAULT CHARSET=latin1
show index from people
```

Show create table

```
show create table peple
```

show index from

```
show index from contributions
```

Create Index/Delete/Drop Index

```
create index idx_vendor_state on contributions (vendor_state);
```

Drop/Delete Index

```
drop index idx_last_name_first_name on customer;
```

Indizes

Avoid ALL

- is the worst type : TABLE SCAN (Need to go through all rows)

```
mysql> create table actor4 as select * from actor;
mysql> explain select * from actor4 where actor_id > 10;
+----+-----+-----+-----+-----+-----+-----+-----+-----+
--+-----+-----+-----+-----+
| id | select_type | table | partitions | type | possible_keys | key | key_len | ref |
| rows | filtered | Extra |
+----+-----+-----+-----+-----+-----+-----+-----+-----+
--+-----+-----+-----+-----+
| 1 | SIMPLE | actor4 | NULL | ALL | NULL | NULL | NULL | NULL |
NULL | 200 | 33.33 | Using where |
+----+-----+-----+-----+-----+-----+-----+-----+-----+
--+-----+-----+-----+-----+
1 row in set, 1 warning (0.00 sec)
```

Cover Index.

- We can get all the necessary information from the index (no acces of filesystem necessary)

```
drop table if exists actor2;
create table actor2 as select * from actor;
create index idx_actor2_last_name on actor2 (last_name);

## using index
## <- indicates that a cover index is used

mysql> explain select last_name from actor2 where last_name like 'B%';
+----+-----+-----+-----+-----+-----+-----+-----+-----+
-----+-----+-----+-----+-----+-----+-----+
| id | select_type | table | partitions | type | possible_keys | key |
| key_len | ref | rows | filtered | Extra |
+----+-----+-----+-----+-----+-----+-----+-----+-----+
-----+-----+-----+-----+-----+-----+-----+
| 1 | SIMPLE | actor2 | NULL | range | idx_actor2_last_name |
idx_actor2_last_name | 182 | NULL | 22 | 100.00 | Using where; Using index |
+----+-----+-----+-----+-----+-----+-----+-----+-----+
-----+-----+-----+-----+-----+-----+-----+
1 row in set, 1 warning (0.00 sec)
```

Creating a primary index

```
create index primary key on actor2 (actor_id)
explain select actor_id from actor2 where actor_id > 2
```

Using an index for last_name

```

drop table if exists actor2;
create table actor2 as select * from actor;
create index idx_actor2_last_name on actor2 (last_name);
explain select * from actor2 where last_name like 'B%';
+----+-----+-----+-----+-----+-----+-----+-----+
| id | select_type | table | partitions | type | possible_keys | key |
| key_len | ref | rows | filtered | Extra |
+----+-----+-----+-----+-----+-----+-----+
| 1 | SIMPLE | actor2 | NULL | range | idx_actor2_last_name |
idx_actor2_last_name | 182 | NULL | 22 | 100.00 | Using index condition |
+----+-----+-----+-----+-----+-----+-----+
1 row in set, 1 warning (0.00 sec)

```

Never use a function in where

Why ?

```

Step 1: MySQL needs to retrieve every row
Step 2: run function
--> so, no index can be used

```

Example

```

drop table if exists actor2;
create table actor2 as select * from actor;
create index idx_actor2_last_name on actor2 (last_name);
explain select * from actor2 where last_name like
concat(substring(first_name,1,1),'%');

```

Index is always read from left to right

```

## so the index cannot be used if we ask for last_name
drop table if exists actor2;
create table actor2 as select * from actor;
create index idx_actor2_first_name_last_name on actor2 (first_name,last_name);
explain select * from actor2 where last_name like 'B%';
##
explain select * from actor2 where first_name like 'B%';

```

Explain

Einfacher Fall

```
explain select * from actor
```

Erweiterter Fall

```
explain extended select * from user  
show warnings
```

Anzeigen der Partitions

```
explain partitions select * from actor
```

Ausgabe im JSON-Format

```
## Hier gibt es noch zusätzliche Informationen  
explain format=json select * from actor
```

```
explain format=json SELECT a.first_name, a.last_name, fa.film_id FROM film_actor2 fa  
INNER JOIN actor2 a ON fa.actor_id = a.actor_id
```

What does type say ?

- <https://mariadb.com/kb/en/explain/>

profiling-get-time-for-execution-of.query

- Get better values, how long queries take

Example

```
set profiling = 1
-- Step 2 - Execute query
select last_name as gross from donors where last_name like lower('WILLI%')

## Step 3 - Show profiles
show profiles;
+-----+-----+-----+
+-----+
| Query_ID | Duration | Query
|
+-----+-----+-----+
+-----+
|          1 | 0.01993525 | select last_name as gross from donors where last_name like
lower('WILLI%')
|
4 rows in set, 1 warning (0.00 sec)

## Step 4 - Show profile for a specific query
mysql> show profile for query 1;
+-----+-----+
+-----+-----+
| Status | Duration |
+-----+-----+
| starting | 0.000062 |
| checking permissions | 0.000006 |
| Opening tables | 0.000021 |
| init | 0.000017 |
| System lock | 0.000007 |
| optimizing | 0.000007 |
| statistics | 0.000083 |
| preparing | 0.000012 |
| executing | 0.000004 |
| Sending data | 0.022251 |
| end | 0.000005 |
| query end | 0.000008 |
| closing tables | 0.000007 |
| freeing items | 0.001792 |
| cleaning up | 0.000016 |
+-----+-----+
15 rows in set, 1 warning (0.00 sec)
```

Kein function in where verwenden

1. No function in where (column_name)

```
## Never use a function for the column name in where
## e.g.
select * from donors where upper(last_name) like 'Willia%'
```

Why ?

- Not index can be used

```
## Not filtering possible by indx -> possible_keys -> NULL
explain select last_name from donors where upper(last_name) like 'WILLI%';
+----+-----+-----+-----+-----+-----+-----+-----+
+-----+-----+-----+-----+-----+-----+-----+
| id | select_type | table | partitions | type | possible_keys | key |
key_len | ref | rows | filtered | Extra |
+----+-----+-----+-----+-----+-----+-----+
+-----+-----+-----+-----+-----+-----+-----+
| 1 | SIMPLE | donors | NULL | index | NULL | donors_donor_info |
687 | NULL | 701948 | 100.00 | Using where; Using index |
+----+-----+-----+-----+-----+-----+-----+
+-----+-----+-----+-----+-----+-----+-----+
1 row in set, 1 warning (0.00 sec)
```


Optimizer-hints (and why you should not use them)

Tell the optimizer what to do and what not to do

- <https://dev.mysql.com/doc/refman/5.7/en/optimizer-hints.html#optimizer-hints-syntax>

This one is good for debugging / do not use index at all

```
explain select vendor_city from contributions use index() where vendor_city like 'S%'
```

Query-Plans aka Explains

- Query Plans are the same as Query Execution Plans (QEP's)
- You will see the Query Plan's with explain

Example

```
mysql> explain select * from recipients where recipient_id > 1 and recipient_id < 5;
+----+-----+-----+-----+-----+-----+-----+-----+
---+-----+-----+-----+-----+
| id | select_type | table      | partitions | type  | possible_keys | key      |
key_len | ref  | rows | filtered | Extra          |
+----+-----+-----+-----+-----+-----+-----+-----+
---+-----+-----+-----+-----+
| 1 | SIMPLE      | recipients | NULL       | range | PRIMARY       | PRIMARY | 4
| NULL | 1 | 100.00 | Using where |
+----+-----+-----+-----+-----+-----+-----+
---+-----+-----+-----+-----+
1 row in set, 1 warning (0.01 sec)
```

Output-Format json

```
-- includes costs
EXPLAIN format=json SELECT * from audit_log WHERE yr in (2011,2012);
```

Select_Type

- simple = one table

Types (in order of performance

system

```
Only one row in table is present (only one insert)
```

Query Pläne und die Key-Länge

Example

```
select table_schema,table_name,character_set_name,column_name from
information_schema.columns where table_name = 'donors'
and column_name = 'city';
+-----+-----+-----+-----+
| table_schema | table_name | character_set_name | column_name |
+-----+-----+-----+-----+
| contributions | donors      | utf8                | city        |
+-----+-----+-----+-----+
1 row in set (0.00 sec)
```

```
mysql> describe donors;
```

```
+-----+-----+-----+-----+-----+-----+
| Field          | Type          | Null | Key | Default | Extra          |
+-----+-----+-----+-----+-----+-----+
| donor_id       | int(11)       | NO   | PRI | NULL    | auto_increment |
| last_name      | varchar(70)   | YES  | MUL | NULL    |                |
| first_name     | varchar(35)   | YES  |     | NULL    |                |
| address_1      | varchar(35)   | YES  |     | NULL    |                |
| address_2      | varchar(36)   | YES  |     | NULL    |                |
| city           | varchar(20)   | YES  | MUL | NULL    |                |
| state          | varchar(15)   | YES  |     | NULL    |                |
| zip            | varchar(11)   | YES  |     | NULL    |                |
| employer       | varchar(70)   | YES  |     | NULL    |                |
| occupation     | varchar(40)   | YES  |     | NULL    |                |
| last_name_reversed | varchar(70) | YES  | MUL | NULL    |                |
+-----+-----+-----+-----+-----+-----+
11 rows in set (0.00 sec)
```

```
## only the first part of the combined index is used, because 213 bytes is a
varchar(70) for utf8 - characters in index
```

```
## utf8 takes up to 3 bytes per character.
```

```
mysql> explain select first_name,last_name from donors where last_name like 'Wi%';
```

```
+-----+-----+-----+-----+-----+-----+
---+-----+-----+-----+-----+-----+
| id | select_type | table | partitions | type | possible_keys | key |
| key_len | ref | rows | filtered | Extra          |
+-----+-----+-----+-----+-----+-----+
---+-----+-----+-----+-----+-----+
| 1 | SIMPLE      | donors | NULL        | range | donors_donor_info |
donors_donor_info | 213      | NULL | 18722 | 100.00 | Using where; Using index |
+-----+-----+-----+-----+-----+-----+
---+-----+-----+-----+-----+-----+
1 row in set, 1 warning (0.00 sec)
```

```
## both last_name and first_name are used to filter
```

```
## 3 bytes + 70x3 (varchar(70)) + 3Bytes + 35x3 (varchar(35)) = 321
```

```
mysql> explain select first_name,last_name from donors where last_name like 'Williams'
and first_name like 'A%';
```

```

+---+-----+-----+-----+-----+-----+-----+
---+-----+-----+-----+-----+-----+-----+
| id | select_type | table | partitions | type | possible_keys | key
| key_len | ref | rows | filtered | Extra |
+---+-----+-----+-----+-----+-----+-----+
---+-----+-----+-----+-----+-----+-----+
| 1 | SIMPLE | donors | NULL | range | donors_donor_info |
donors_donor_info | 321 | NULL | 46 | 100.00 | Using where; Using index |
+---+-----+-----+-----+-----+-----+-----+
---+-----+-----+-----+-----+-----+-----+
1 row in set, 1 warning (0.00 sec)

mysql>

```

Index und Likes

1. like 'Will%' - Index works

explain select last_name from donors where last_name like 'Will%';

2. like '%iams' - Index does not work

```
-- because like starts with a wildcard
explain select last_name from donors where last_name like '%iams';
```

3. How to fix 3, if you are using this often ?

```
## Walkthrough
## Step 1: modify table
alter table donors add last_name_reversed varchar(70) GENERATED ALWAYS AS
(reverse(last_name));
create index idx_last_name_reversed on donors (last_name_reversed);

## besser - Variante 2 - untested
alter table donors add last_name_reversed varchar(70) GENERATED ALWAYS AS
(reverse(last_name)), add index idx_last_name_reversed on donors (last_name_reversed);

## Step 2: update table - this take a while
update donors set last_name_reversed = reversed(last_name)
## Step 3: work with it
select last_name,last_name_reversed from donor where last_name_reversed like
reverse('%iams');
```

```
## Version 2 with pt-online-schema-change
```

Index und Joins

Take a look which order the optimizer uses

With date

```
-- Using a date which has no index
-- Needs to do a table scan
explain select c.* from contributions c join donors d using (donor_id) join recipients
r using (recipient_id) where c.date_recieved > '1999-12-01' and c.date_recieved <
'2000-07-01';
```

id	select_type	table	partitions	type	possible_keys	key	key_len	ref	rows	filtered	Extra
1	SIMPLE	c	NULL	ALL	donor_idx,recipient_idx	NULL	NULL	NULL	2028240	11.11	Using where
1	SIMPLE	r	NULL	eq_ref	PRIMARY	PRIMARY	4	contributions.c.recipient_id	1	100.00	Using index
1	SIMPLE	d	NULL	eq_ref	PRIMARY	PRIMARY	4	contributions.c.donor_id	1	100.00	Using index

3 rows in set, 1 warning (0.00 sec)

60626 rows in set (7.22 sec)

With date and filter on donor

```
explain select c.*,d.last_name from contributions c join donors d using (donor_id)
join recipients r using (recipient_id)
where c.date_recieved > '1999-12-01' and c.date_recieved < '2000-07-01' and
d.last_name like 'A%';
```

id	select_type	table	partitions	type	possible_keys	key	key_len	ref	rows	filtered	Extra
1	SIMPLE	d	NULL	range	PRIMARY,donors_donor_info				213	65894	Using where; Using index
1	SIMPLE	c	NULL	ref	donor_idx,recipient_idx			donor_idx	5	11.11	Using where
1	SIMPLE	r	NULL	eq_ref	PRIMARY	PRIMARY	4	contributions.c.recipient_id	1	100.00	Using index

```
|
+---+-----+-----+-----+-----+-----+-----+
-----+-----+-----+-----+-----+-----+
-----+
3 rows in set, 1 warning (0.00 sec)
```

With date and filter on donor, less specific

```
select c.*,d.* from contributions c join donors d using (donor_id) join recipients r
using (recipient_id) where c.date_recieved > '1999-12-01' and c.date_recieved < '2000-
07-01' and d.last_name like 'A%';
explain select c.*,d.* from contributions c join donors d using (donor_id) join
recipients r using (recipient_id) where c.date_recieved > '1999-12-01' and
c.date_recieved < '2000-07-01' and d.last_name like 'A%';
+---+-----+-----+-----+-----+-----+-----+
-----+-----+-----+-----+-----+-----+
-----+
| id | select_type | table | partitions | type  | possible_keys          | key
| key_len | ref          |      |             | rows  | filtered | Extra          |
+---+-----+-----+-----+-----+-----+-----+
-----+-----+-----+-----+-----+-----+
-----+
| 1 | SIMPLE      | d     | NULL        | range | PRIMARY,donors_donor_info |
donors_donor_info | 213      | NULL        | 65894 | 100.00 | Using
index condition |
| 1 | SIMPLE      | c     | NULL        | ref   | donor_idx,recipient_idx |
donor_idx          | 5        | contributions.d.donor_id | 2 | 11.11 | Using
where          |
| 1 | SIMPLE      | r     | NULL        | eq_ref | PRIMARY                | PRIMARY
| 4      | contributions.c.recipient_id | 1 | 100.00 | Using index          |
+---+-----+-----+-----+-----+-----+
-----+-----+-----+-----+-----+-----+
-----+
3 rows in set, 1 warning (0.00 sec)
```

With date and filter on donor and filter on recipient

```
mysql> explain select c.*,d.last_name,r.* from contributions c join donors d using
(donor_id) join recipients r using (recipient_
id) where c.date_recieved > '1999-12-01' and c.date_recieved < '2000-07-01' and
d.last_name like 'A%' and r.name like 'Cit%';
+---+-----+-----+-----+-----+-----+-----+
-----+-----+-----+-----+-----+-----+
-----+
| id | select_type | table | partitions | type  | possible_keys          | key
| key_len | ref          |      |             | rows  | filtered | Extra          |
+---+-----+-----+-----+-----+-----+-----+
-----+-----+-----+-----+-----+-----+
-----+
| 1 | SIMPLE      | r     | NULL        | ALL   | PRIMARY                | NULL
| NULL    | NULL        |      |             | 6063 | 11.11 | Using where |
| 1 | SIMPLE      | c     | NULL        | ref   | donor_idx,recipient_idx |
recipient_idx | 5        | contributions.r.recipient_id | 305 | 11.11 | Using where
```

```
|
| 1 | SIMPLE      | d      | NULL      | eq_ref | PRIMARY,donors_donor_info | PRIMARY
| 4      | contributions.c.donor_id      | 1 | 9.39 | Using where |
+---+-----+-----+-----+-----+-----+-----+
-----+-----+-----+-----+-----+-----+
3 rows in set, 1 warning (0.00 sec)
```


Find out cardinality without index

Find out cardinality without creating index

```
select count(distinct donor_id) from contributions;
```

```
select count(distinct vendor_city) from contributions;
```

```
+-----+
```

```
| count(distinct vendor_city) |
```

```
+-----+
```

```
|                               1772 |
```

```
+-----+
```

```
1 row in set (4.97 sec)
```

Index and Functions

No index can be used on an index:

```
explain select * from actor where upper(last_name) like 'A%';
+----+-----+-----+-----+-----+-----+-----+-----+-----+
| id | select_type | table | partitions | type | possible_keys | key | key_len | ref |
| rows | filtered | Extra | | | | | | |
+----+-----+-----+-----+-----+-----+-----+-----+-----+
| 1 | SIMPLE | actor | NULL | ALL | NULL | NULL | NULL | NULL |
| 200 | 100.00 | Using where | | | | | | |
+----+-----+-----+-----+-----+-----+-----+-----+-----+
+-----+-----+-----+-----+-----+-----+-----+-----+-----+
```

Workaround with virtual columns (possible since mysql 5.7)

```
## 1. Create Virtual Column with upper
alter table sakila add idx_last_name_upper varchar(45) GENERATED ALWAYS AS
upper(last_name);
## 2. Create an index on that column
create index idx_last_name_upper on actor (last_name_upper);
```

Workaround with persistent/virtual columns (MariaDB)

```
mysql> alter table actor add column last_name_upper varchar(45) as (upper(last_name))
PERSISTENT ;
mysql> insert into actor (first_name,last_name,last_name_upper) values
('Max','Mustermann','MUSTERMANN');
mysql> select * from actor order by actor_id desc limit 1;
mysql> -- setting index
mysql> create index idx_last_name_upper on actor (last_name_upper);
Query OK, 0 rows affected (0.007 sec)
Records: 0 Duplicates: 0 Warnings: 0
mysql> -- to use index we need to avoid the function in where
mysql> explain select * from actor where last_name_upper like 'WI%' \G
```

Index neu aufbauen ?

Aus meiner Sicht sollte das auch so für die aktuelle MariaDB Version 10.6 gelten

For basic cleanup and re-analyzing you can run "OPTIMIZE TABLE ...", it will compact out the overhead in the indexes and run ANALYZE TABLE too, but it's not going to re-sort them and make them as small & efficient as they could be.

<https://dev.mysql.com/doc/refman/8.0/en/optimize-table.html>

However, if you want the indexes completely rebuilt for best performance, you can:

drop / re-add indexes (obviously)

dump / reload the table

ALTER TABLE and "change" using the same storage engine

REPAIR TABLE (only works for MyISAM, ARCHIVE, and CSV)

<https://dev.mysql.com/doc/refman/8.0/en/rebuilding-tables.html>

If you do an ALTER TABLE on a field (that is part of an index) and change its type, then it will also fully rebuild the related index(es).

Index Stats

General

Index stats were introduced in MariaDB 10.4
(These can be used by the query optimizer)

Before that only indexes were used,
now it is also possible to take these stats into account

The stats are saved in the mysql-database
mysql.column_stats
mysql.table_stats
mysql.index_stats

These are histogram stats,
they are used automatically from 10.4.1 on,
but they are not created automatically.

You have to perform an operation which is
cost intensive to create them, because a full
table scan is done.

These stats are
Engine-independent Statistics

Notes

- Stats are currently used (MariaDB 10.6) by default because of setting
 - show variables like 'use_stat_tables'
 - -> preferably_for_queries
- But: They are not created automatically (see Howto how to do that)
- Also: They are not deleted automatically

Howto

```
use mysql;
select * from column_stats;
select * from index_stats;
select * from table_stats;
use contributions;
ANALYZE TABLE contributions PERSISTENT FOR ALL;

use mysql;
select * from column_stats;
select * from index_stats;
select * from table_stats;
```

When will it be used ?

2021-08-11: Looks like it is currently used for range-scan for the optimizer,
which table to start with

An excessive example can be found here:

Refs:

- <https://mariadb.com/kb/en/histogram-based-statistics/>
- https://mariadb.com/kb/en/server-system-variables/#use_stat_tables
- Includes Example for how to index specific columns and indexes or exclude them
 - <https://mariadb.com/kb/en/engine-independent-table-statistics/>

Tools

Percona Toolkit

Walkthrough (Ubuntu 20.04)

```
## Howto
## https://www.percona.com/doc/percona-toolkit/LATEST/installation.html

## Step 1: repo installieren mit deb -paket
wget https://repo.percona.com/apt/percona-release_latest.focal_all.deb
apt update
apt install -y curl
dpkg -i percona-release_latest.focal_all.deb
apt update
apt install -y percona-toolkit
```

Walkthrough (Debian 10)

```
sudo apt update
sudo apt install -y wget gnupg2 lsb-release curl
cd /usr/src
wget https://repo.percona.com/apt/percona-release_latest.generic_all.deb
dpkg -i percona-release_latest.generic_all.deb
apt update
apt install -y percona-toolkit
```

```
sudo apt update; sudo apt install -y wget gnupg2 lsb-release curl; cd /usr/src; wget
https://repo.percona.com/apt/percona-release_latest.generic_all.deb; dpkg -i percona-
release_latest.generic_all.deb; apt update; apt install -y percona-toolkit
```

pt-query-digest - analyze slow logs

Requires

- Install percona-toolkit

Usage

```
## first enable slow_query_log
set global slow_query_log = on
set global long_query_time = 0.2
## to avoid, that i have to reconnect with new session
set session long_query_time = 0.2

## produce slow query - for testing
select * from contributions where vendor_last_name like 'W%';
mysql > quit

##
cd /var/lib/mysql
## look for awhile with -slow.log - suffix
pt-query-digest mysql-slow.log > /usr/src/report-slow.txt
less report-slow.txt
```

pt-online-schema-change howto

Requirements

- Install percona-toolkit

Documentation

- <https://www.percona.com/doc/percona-toolkit/3.0/pt-online-schema-change.html>

What does it do ?

```
## Altering table without blocking them
## Do a dry-run beforehand
pt-online-schema-change --alter "ADD INDEX idx_city (city)" --dry-run
D=contributions,t=donors
##
pt-online-schema-change --alter "ADD INDEX idx_city (city)" --execute
D=contributions,t=donors
```

With foreign - keys

```
# first try
pt-online-schema-change --alter "add column remark varchar(150)" D=sakila,t=actor --
alter-foreign-keys-method=auto --dry-run
# then run
pt-online-schema-change --alter "add column remark varchar(150)" D=sakila,t=actor --
alter-foreign-keys-method=auto --execute
```


Example sys-schema and Reference

```
mysql> select * from sys.host_summary\G
***** 1. row *****
      host: localhost
      statements: 1347
      statement_latency: 7.55 m
      statement_avg_latency: 336.50 ms
      table_scans: 15
      file_ios: 612857
      file_io_latency: 1.66 m
      current_connections: 1
      total_connections: 7
      unique_users: 1
      current_memory: 0 bytes
      total_memory_allocated: 0 bytes
1 row in set (0.01 sec)
```

Ref:

- <https://github.com/mysql/mysql-sys/blob/master/README.md>

Profiling

Example

```
MariaDB [(none)]> SET profiling = 1;
Query OK, 0 rows affected (0.000 sec)

MariaDB [(none)]> select * from actor where last_name like 'D%';
ERROR 1046 (3D000): No database selected
MariaDB [(none)]> use sakila;
Reading table information for completion of table and column names
You can turn off this feature to get a quicker startup with -A

Database changed
MariaDB [sakila]> select * from actor where last_name like 'D%';
+-----+-----+-----+-----+
| actor_id | first_name | last_name | last_update          |
+-----+-----+-----+-----+
|      4  | JENNIFER  | DAVIS    | 2006-02-15 04:34:33 |
|     35  | JUDY      | DEAN     | 2006-02-15 04:34:33 |
|     36  | BURT      | DUKAKIS  | 2006-02-15 04:34:33 |
|     41  | JODIE     | DEGENERES | 2006-02-15 04:34:33 |
|     48  | FRANCES   | DAY-LEWIS | 2006-02-15 04:34:33 |
|     81  | SCARLETT  | DAMON    | 2006-02-15 04:34:33 |
|     89  | CHARLIZE  | DENCH    | 2006-02-15 04:34:33 |
|    100  | SPENCER   | DEPP     | 2006-02-15 04:34:33 |
|    101  | SUSAN     | DAVIS    | 2006-02-15 04:34:33 |
|    106  | GROUCHO   | DUNST    | 2006-02-15 04:34:33 |
|    107  | GINA      | DEGENERES | 2006-02-15 04:34:33 |
|    109  | SYLVESTER | DERN     | 2006-02-15 04:34:33 |
|    110  | SUSAN     | DAVIS    | 2006-02-15 04:34:33 |
|    123  | JULIANNE  | DENCH    | 2006-02-15 04:34:33 |
|    138  | LUCILLE   | DEE      | 2006-02-15 04:34:33 |
|    143  | RIVER     | DEAN     | 2006-02-15 04:34:33 |
|    148  | EMILY     | DEE      | 2006-02-15 04:34:33 |
|    160  | CHRIS     | DEPP     | 2006-02-15 04:34:33 |
|    166  | NICK      | DEGENERES | 2006-02-15 04:34:33 |
|    173  | ALAN      | DREYFUSS | 2006-02-15 04:34:33 |
|    188  | ROCK      | DUKAKIS  | 2006-02-15 04:34:33 |
+-----+-----+-----+-----+
21 rows in set (0.001 sec)

MariaDB [sakila]> show profiles;
+-----+-----+-----+-----+
| Query_ID | Duration   | Query                                     |
+-----+-----+-----+-----+
|      1  | 0.00078507 | select * from actor where last_name like 'D%' |
|      2  | 0.00073284 | SELECT DATABASE()                          |
|      3  | 0.00074666 | show databases                            |
|      4  | 0.00117272 | show tables                              |
|      5  | 0.00190385 | select * from actor where last_name like 'D%' |
+-----+-----+-----+-----+
```

5 rows in set (0.000 sec)

MariaDB [sakila]> show profile all for query 5 \G

***** 1. row *****

Status: Starting
Duration: 0.000239
CPU_user: 0.000000
CPU_system: 0.000238
Context_voluntary: 0
Context_involuntary: 0
Block_ops_in: 0
Block_ops_out: 0
Messages_sent: 0
Messages_received: 0
Page_faults_major: 0
Page_faults_minor: 0
Swaps: 0
Source_function: NULL
Source_file: NULL
Source_line: NULL

***** 2. row *****

Status: checking permissions
Duration: 0.000185
CPU_user: 0.000000
CPU_system: 0.000185
Context_voluntary: 0
Context_involuntary: 0
Block_ops_in: 0
Block_ops_out: 0
Messages_sent: 0
Messages_received: 0
Page_faults_major: 0
Page_faults_minor: 0
Swaps: 0
Source_function: <unknown>
Source_file: sql_parse.cc
Source_line: 6703

***** 3. row *****

Status: Opening tables
Duration: 0.000039
CPU_user: 0.000000
CPU_system: 0.000038
Context_voluntary: 0
Context_involuntary: 0
Block_ops_in: 0
Block_ops_out: 0
Messages_sent: 0
Messages_received: 0
Page_faults_major: 0
Page_faults_minor: 0
Swaps: 0
Source_function: <unknown>

```
Source_file: sql_base.cc
Source_line: 4222
***** 4. row *****
      Status: After opening tables
      Duration: 0.000012
      CPU_user: 0.000000
      CPU_system: 0.000012
Context_voluntary: 0
Context_involuntary: 0
      Block_ops_in: 0
      Block_ops_out: 0
      Messages_sent: 0
      Messages_received: 0
      Page_faults_major: 0
      Page_faults_minor: 0
      Swaps: 0
      Source_function: <unknown>
      Source_file: sql_base.cc
      Source_line: 4505
***** 5. row *****
      Status: System lock
      Duration: 0.000009
      CPU_user: 0.000000
      CPU_system: 0.000009
Context_voluntary: 0
Context_involuntary: 0
      Block_ops_in: 0
      Block_ops_out: 0
      Messages_sent: 0
      Messages_received: 0
      Page_faults_major: 0
      Page_faults_minor: 0
      Swaps: 0
      Source_function: <unknown>
      Source_file: lock.cc
      Source_line: 337
***** 6. row *****
      Status: table lock
      Duration: 0.000016
      CPU_user: 0.000000
      CPU_system: 0.000016
Context_voluntary: 0
Context_involuntary: 0
      Block_ops_in: 0
      Block_ops_out: 0
      Messages_sent: 0
      Messages_received: 0
      Page_faults_major: 0
      Page_faults_minor: 0
      Swaps: 0
      Source_function: <unknown>
      Source_file: lock.cc
```

```

Source_line: 342
***** 7. row *****
    Status: init
    Duration: 0.000050
    CPU_user: 0.000000
    CPU_system: 0.000050
    Context_voluntary: 0
    Context_involuntary: 0
    Block_ops_in: 0
    Block_ops_out: 0
    Messages_sent: 0
    Messages_received: 0
    Page_faults_major: 0
    Page_faults_minor: 0
    Swaps: 0
    Source_function: <unknown>
    Source_file: sql_select.cc
    Source_line: 4967
***** 8. row *****
    Status: Optimizing
    Duration: 0.000022
    CPU_user: 0.000000
    CPU_system: 0.000022
    Context_voluntary: 0
    Context_involuntary: 0
    Block_ops_in: 0
    Block_ops_out: 0
    Messages_sent: 0
    Messages_received: 0
    Page_faults_major: 0
    Page_faults_minor: 0
    Swaps: 0
    Source_function: <unknown>
    Source_file: sql_select.cc
    Source_line: 1973
***** 9. row *****
    Status: Statistics
    Duration: 0.000088
    CPU_user: 0.000000
    CPU_system: 0.000090
    Context_voluntary: 0
    Context_involuntary: 0
    Block_ops_in: 0
    Block_ops_out: 0
    Messages_sent: 0
    Messages_received: 0
    Page_faults_major: 0
    Page_faults_minor: 0
    Swaps: 0
    Source_function: <unknown>
    Source_file: sql_select.cc
    Source_line: 2451

```

```

***** 10. row *****
      Status: Preparing
      Duration: 0.000038
      CPU_user: 0.000000
      CPU_system: 0.000037
Context_voluntary: 0
Context_involuntary: 0
      Block_ops_in: 0
      Block_ops_out: 0
      Messages_sent: 0
      Messages_received: 0
      Page_faults_major: 0
      Page_faults_minor: 0
      Swaps: 0
      Source_function: <unknown>
      Source_file: sql_select.cc
      Source_line: 2526
***** 11. row *****
      Status: Executing
      Duration: 0.000009
      CPU_user: 0.000000
      CPU_system: 0.000009
Context_voluntary: 0
Context_involuntary: 0
      Block_ops_in: 0
      Block_ops_out: 0
      Messages_sent: 0
      Messages_received: 0
      Page_faults_major: 0
      Page_faults_minor: 0
      Swaps: 0
      Source_function: <unknown>
      Source_file: sql_select.cc
      Source_line: 4533
***** 12. row *****
      Status: Sending data
      Duration: 0.000299
      CPU_user: 0.000000
      CPU_system: 0.000301
Context_voluntary: 0
Context_involuntary: 0
      Block_ops_in: 0
      Block_ops_out: 0
      Messages_sent: 0
      Messages_received: 0
      Page_faults_major: 0
      Page_faults_minor: 0
      Swaps: 0
      Source_function: <unknown>
      Source_file: sql_select.cc
      Source_line: 4731
***** 13. row *****

```

```

        Status: End of update loop
        Duration: 0.000016
        CPU_user: 0.000000
        CPU_system: 0.000013
Context_voluntary: 0
Context_involuntary: 0
        Block_ops_in: 0
        Block_ops_out: 0
        Messages_sent: 0
        Messages_received: 0
        Page_faults_major: 0
        Page_faults_minor: 0
        Swaps: 0
        Source_function: <unknown>
        Source_file: sql_select.cc
        Source_line: 5011
***** 14. row *****
        Status: Query end
        Duration: 0.000007
        CPU_user: 0.000000
        CPU_system: 0.000008
Context_voluntary: 0
Context_involuntary: 0
        Block_ops_in: 0
        Block_ops_out: 0
        Messages_sent: 0
        Messages_received: 0
        Page_faults_major: 0
        Page_faults_minor: 0
        Swaps: 0
        Source_function: <unknown>
        Source_file: sql_parse.cc
        Source_line: 6009
***** 15. row *****
        Status: Commit
        Duration: 0.000010
        CPU_user: 0.000000
        CPU_system: 0.000010
Context_voluntary: 0
Context_involuntary: 0
        Block_ops_in: 0
        Block_ops_out: 0
        Messages_sent: 0
        Messages_received: 0
        Page_faults_major: 0
        Page_faults_minor: 0
        Swaps: 0
        Source_function: <unknown>
        Source_file: sql_parse.cc
        Source_line: 6055
***** 16. row *****
        Status: closing tables

```

```

        Duration: 0.000008
        CPU_user: 0.000000
        CPU_system: 0.000008
Context_voluntary: 0
Context_involuntary: 0
        Block_ops_in: 0
        Block_ops_out: 0
        Messages_sent: 0
Messages_received: 0
Page_faults_major: 0
Page_faults_minor: 0
        Swaps: 0
Source_function: <unknown>
Source_file: sql_base.cc
Source_line: 786
***** 17. row *****
        Status: Unlocking tables
        Duration: 0.000006
        CPU_user: 0.000000
        CPU_system: 0.000006
Context_voluntary: 0
Context_involuntary: 0
        Block_ops_in: 0
        Block_ops_out: 0
        Messages_sent: 0
Messages_received: 0
Page_faults_major: 0
Page_faults_minor: 0
        Swaps: 0
Source_function: <unknown>
Source_file: lock.cc
Source_line: 429
***** 18. row *****
        Status: closing tables
        Duration: 0.000015
        CPU_user: 0.000000
        CPU_system: 0.000016
Context_voluntary: 0
Context_involuntary: 0
        Block_ops_in: 0
        Block_ops_out: 0
        Messages_sent: 0
Messages_received: 0
Page_faults_major: 0
Page_faults_minor: 0
        Swaps: 0
Source_function: <unknown>
Source_file: lock.cc
Source_line: 442
***** 19. row *****
        Status: Starting cleanup
        Duration: 0.000007

```



```

        CPU_user: 0.000000
        CPU_system: 0.000007
Context_voluntary: 0
Context_involuntary: 0
        Block_ops_in: 0
        Block_ops_out: 0
        Messages_sent: 0
Messages_received: 0
Page_faults_major: 0
Page_faults_minor: 0
        Swaps: 0
Source_function: <unknown>
        Source_file: sql_parse.cc
        Source_line: 6121
***** 20. row *****
        Status: Freeing items
        Duration: 0.000011
        CPU_user: 0.000000
        CPU_system: 0.000011
Context_voluntary: 0
Context_involuntary: 0
        Block_ops_in: 0
        Block_ops_out: 0
        Messages_sent: 0
Messages_received: 0
Page_faults_major: 0
Page_faults_minor: 0
        Swaps: 0
Source_function: <unknown>
        Source_file: sql_parse.cc
        Source_line: 8047
***** 21. row *****
        Status: Updating status
        Duration: 0.000803
        CPU_user: 0.000000
        CPU_system: 0.000040
Context_voluntary: 0
Context_involuntary: 1
        Block_ops_in: 0
        Block_ops_out: 0
        Messages_sent: 0
Messages_received: 0
Page_faults_major: 0
Page_faults_minor: 0
        Swaps: 0
Source_function: <unknown>
        Source_file: sql_parse.cc
        Source_line: 2400
***** 22. row *****
        Status: Reset for next command
        Duration: 0.000012
        CPU_user: 0.000000

```

```
      CPU_system: 0.000011
Context_voluntary: 0
Context_involuntary: 0
      Block_ops_in: 0
      Block_ops_out: 0
      Messages_sent: 0
      Messages_received: 0
      Page_faults_major: 0
      Page_faults_minor: 0
      Swaps: 0
      Source_function: <unknown>
      Source_file: sql_parse.cc
      Source_line: 2432
22 rows in set (0.001 sec)

MariaDB [sakila]>
```

Tipps & Tricks

Dummy table DUAL

- <https://mariadb.com/kb/en/dual/>

Wie kann ich verwendete Storage Engine rausfinden - Table

```
use sakila;  
show create table actor;
```

SHOW VARIABLES WITH WHERE

```
SHOW VARIABLES WHERE VARIABLE_NAME like '%slow%' OR VARIABLE_NAME LIKE '%long%'
```

Schnellster Import von Daten mit csv

Example

```
LOAD DATA INFILE '/tmp/test.txt' INTO TABLE test
  FIELDS TERMINATED BY ',' LINES STARTING BY 'xxx';

LOAD DATA INFILE 'data.txt' INTO TABLE tbl_name
  FIELDS TERMINATED BY ',' ENCLOSED BY '"'
  LINES TERMINATED BY '\r\n'
  IGNORE 1 LINES;
```

General/Ref

- Is the quickest way
- Performance Ref: <https://jynus.com/dbahire/testing-the-fastest-way-to-import-a-table-into-mysql-and-some-interesting-5-7-performance-results/>

Queries in Datenbank (mysql) loggen, die keine Indizes verwenden

```
-- long_query_time can auf 10 sec bleiben  
SET GLOBAL log_queries_not_using_indexes = 1;  
SET GLOBAL log_output = 'TABLE';  
-- last setting  
SET slow_query_log = 1;
```

Storage Engines

MyISAM Key Buffer

- <http://www.mysqlab.net/knowledge/kb/detail/topic/myisam/id/7200>

References/Documentation

MySQL/MariaDB Performance Document

- <https://schulung.t3isp.de/documents/pdfs/mysql/mysql-performance.pdf>

MariaDB - Changes in 10.6

- https://mariadb.com/kb/en/changes-improvements-in-mariadb-106/#comment_5088

MySQL/MariaDB - Performance - pdf

- <https://schulung.t3isp.de/documents/pdfs/mysql/mysql-performance.pdf>

JDBC-Treiber

- <https://mariadb.com/kb/en/about-mariadb-connector-j/>

Oracle

Activating Oracle Sql-Mode

```
## ACTIVATE GLOBALLY (for complete server) - not persistent
## if you want to activate it globally
## this will not be available in the current session though
mysql>SET GLOBAL sql_mode='ORACLE'
mysql> SELECT @@GLOBAL.sql_mode -- available globally
mysql> SELECT @@sql_mode -- in session. not present yet.

## FOR THE session to be active, either reconnect or set it explicitly
mysql>SET sql_mode='ORACLE'
mysql>SELECT @@sql_mode
```

Overview Oracle Mode

- https://mariadb.com/kb/en/sql_modeoracle/

When Others-Clause

- https://www.techonthenet.com/oracle/exceptions/when_others.php

Demo Oracle sql_mode from MariaDB

- <https://www.youtube.com/watch?v=ntO2x4XHfUE>

What is implemented in Oracle sql-mode - fromdual

- <https://fromdual.com/mariadb-sql-mode-oracle>

Simple oracle examples pl/sql in mariadb

- <https://fromdual.com/select-hello-world-fromdual-with-mariadb-pl-sql>

Working with database objects

Working with databases

Explanations

```
## open a connection to the mysql-server by entering
mysql
## then you will get
mysql>
```

```
## Comments within mysql-client
## three - in a row
---
```

Create database

```
create database training
create schema training2
```

Show databases

```
mysql
mysql>
;; from here i leave out mysql>
;; so you can easily copy & paste the lines hereafter
show databases

--
-- or
--

show schemas

--
```



```
-- or by using information_schema
--
select * from information_schema.schemata;
```

Working with tables

Show tables

```
## within mysql>
## so on the command-line enter:
## mysql (as root)
USE sakila
SHOW TABLES

-- or --

select * from information_schema.TABLES
```

Create table

```
-- only if you want to create table in a completely new database
create schema training;
USE training
CREATE TABLE people (id INT NOT NULL AUTO_INCREMENT, name VARCHAR(20), PRIMARY
KEY(id));
```

Find out the structure of the table

```
## you have to connect to db first with
## mysql
## within mysql>
DESCRIBE people
SHOW CREATE TABLE people
-- or : if you want to know more --
SELECT * from INFORMATION_SCHEMA.COLUMNS WHERE TABLE_NAME='people' AND
TABLE_SCHEMA='training' \G
```

Show indexes

```
SHOW INDEX FROM actor
SHOW INDEXES FROM ACTOR
```

Change table (Add field)

```
--- We want to add a field before name
--- IMPORTANT: BEFORE does not exist
ALTER TABLE people ADD first_name VARCHAR(10) AFTER id;

ALTER TABLE schulungen ADD seats TINYINT unsigned DEFAULT 1, ADD price DECIMAL(6,2);
ALTER TABLE schulungen ADD (room TINYINT unsigned DEFAULT 1, discount DECIMAL(6,2));
```

Modify a field in table (Change property)

```
ALTER TABLE people
MODIFY COLUMN first_name VARCHAR(20);
```

Drop a field from the table

```
ALTER TABLE people ADD middle_name VARCHAR(25) BEFORE name;
DESCRIBE people;
ALTER TABLE people DROP COLUMN middle_name;
```

```
## More Examples
--
ALTER TABLE actor ADD in_rente BOOLEAN default true
INSERT INTO actor (first_name,last_name,in_rente) values ('Jochen','Metzger',false)
-- Wieder loswerden
ALTER TABLE actor DROP in_rente;
## add and drop in once command
ALTER TABLE actor ADD in_rente2 BOOLEAN default true, DROP in_rente;
```

Deleting table data (truncate)

```
USE sakila
-- Create table based on other table
CREATE TABLE actorcopy as SELECT * FROM actor;
-- Fields ?
SELECT * FROM actorcopy;
-- Empty it
TRUNCATE TABLE actorcopy;
-- Emptry ?
SELECT COUNT(*) FROM actorcopy;
```

Delete table data (with delete)

Explanation

- Do not use delete when you want to use data of complete table
 - truncate is quicker in this case.
- DELETE FROM ... WHERE ... does a SELECT first

Example

```
USE sakila
CREATE TABLE actorbackup AS SELECT * FROM actor;
SELECT COUNT(*) FROM actorbackup;
DELETE FROM actorbackup WHERE actor_id > 100;
SELECT COUNT(*) FROM actorbackup;
```

Delete complete table

```
USE sakila
DROP TABLE actorbackup;
```

Teststellung - Feld verkleinern

```
ALTER TABLE actor ADD filme tinyint unsigned default 255;
-- Does not work
-- UPDATE actor SET filme = 256 WHERE actor_id = 1;
-- ALTER TABLE actor MODIFY filme smallint unsigned default 256;
INSERT INTO actor (first_name,last_name) values ('Gaucho','Poncho');
INSERT INTO actor (first_name,last_name,filme) values ('Gauchina','Ponchina',32000);

-- Does not work
ALTER TABLE actor MODIFY filme tinyint unsigned;
```

SELECT

Select Beispiele

Einfaches Beispiel (bestimmte Felder)

```
## Zeige alle diese felder aus dieser Tabelle
SELECT <welche_feld_mit_komma_getrennt> FROM <welche_tabelle>

-- bitte datenbank sakila verwenden
use sakila
-- zeige actor_id, last_name
SELECT actor_id, last_name FROM actor
```

Einfaches Beispiel (alle Felder)

```
-- bitte datenbank sakila verwenden
use sakila
-- zeige actor_id, last_name
SELECT * FROM actor
```

Einfaches Beispiel mit Bedingung

```
-- SYNTAX
use sakila;
-- SELECT <welche_felder> FROM <welche_tabelle> WHERE
<wo_welches_feld_welchen_wert_hat>
-- Beispiel 1
SELECT actor_id, last_name FROM actor where actor_id = 5;
-- Beispiel 2
SELECT * FROM actor where actor_id = 5;
```

Einfache Bedingung mit Bereich(en)

```
-- SYNTAX
use sakila;
-- SELECT <welche_felder> FROM <welche_tabelle> WHERE
<wo_welches_feld_welchen_wert_hat>
-- Beispiel 1
SELECT actor_id, last_name FROM actor where actor_id > 8;
-- Beispiel 2
SELECT * FROM actor where actor_id > 8;
-- Beispiel 3
SELECT * FROM actor where actor_id > 8 and actor_id < 50;
```

Zwei Bereiche abfragen

```
## Brackets are not necessary, works the same
select * from actor where (actor_id >= 8 and actor_id <=50) or (actor_id >= 100 and
```

```
actor_id <= 150)
```

Select Beispiele mit Like

Hintergrund Platzhalter '%' und '_'

- https://elearn.inf.tu-dresden.de/sqlkurs/lektion01/01_07_03_einschr_like.html

Name fängt mit J an

```
## Alle Datensätze, die mit J anfangen
select first_name,last_name from actor where last_name like 'j%'
## mit ausgabe zusätzlichem String
select first_name,last_name,' ist der/die Beste' as bewertung from actor where
last_name like 'j%'
```

Name hört mit n auf

```
select first_name,last_name from actor where last_name like '%n'
```

Name beinhaltet 'q'

```
select first_name,last_name from actor where last_name like '%q%'
```

Platzhalter für genau ein Zeichen (Linux/Windows -> ?)

```
## Alle Zeilen mit Last name McQ, dann genau einem beliebigen Zeichen und dann 'een'
SELECT * FROM sakila.actor where last_name like 'McQ_een'
```

SELECT ORDER BY

Syntax

```
-- Variante 1: (ohne where)
-- SELECT * FROM <welche_tabelle> ORDER BY <welches_feld>

-- Variante 2: (mit where)
-- SELECT * FROM <welche_tabelle> WHERE <welche_bedingung> ORDER BY <welches_feld>
```

Beispiel ohne where

```
## feld aufsteigend
SELECT last_name,first_name,actor_id FROM sakila.actor ORDER BY last_name

## feld absteigend
SELECT last_name,first_name,actor_id FROM sakila.actor ORDER BY last_name desc

## erstes feld aufsteigend, zweites feld absteigend
SELECT last_name,first_name,actor_id FROM sakila.actor ORDER BY last_name,first_name
DESC
```

Beispiel mit where

```
SELECT last_name,first_name,actor_id FROM sakila.actor WHERE last_name like 'J%' ORDER
BY last_name ASC,first_name DESC
```


Unterschiede einfache und doppelte Hochkommas bei Oracle/MySQL

MySQL

Hochkommas werden nur bei der Abfrage des Wertes verwendet, z.B

```
select * from actor where last_name like 'A%'
## das ist das gleiche wie:
select * from actor where last_name like "A%"
```

MySQL - Wann nehme ich einfache, wann doppelte ?

```
## z.B. wenn ich ein Hochkomma in der Abfrage brauche, z.B
## damit besser lesbar für Admin/Entwickler
select * from actor where last_name like "O'Connor"
## Alternativ geht auch:
## Verfahren: Escapen
select * from actor where last_name like 'O\'Connor'
```

Oracle:

```
## Für Feldname und Ausgabe Feldname (Alias) Doppelte hochkommas.
## z.B
## Hier immer das doppelte Hochkomma, weil es um den Identifier/Bezeichner geht
SELECT  'Hello, world!'    AS "My Greeting"

### Für String und Date - Werte einfache Hochkommas
select * from actor where last_name like 'A%'
```

INSERT/UPDATE

Praktisches Beispiel und erweitertes insert - INSERT

Beispiel

```
INSERT INTO actor (first_name,last_name) values ('Joe','Manchos');
```

Erweitertes Insert

```
## Mehrere Wertepaare einfügen - geht schneller als einzelne Inserts  
INSERT INTO actor (first_name,last_name) values ('Joe','Metzgeros'),  
('Hans','Mustermann');
```

Referenz

- https://www.w3schools.com/sql/sql_insert.asp

Praktisches Beispiel - Update

Einfaches Beispiel ein Datensatz ändern

```
## Variante 1
UPDATE actor SET last_name = 'GUINESSA' WHERE actor_id = 1
## Variante 2 - 2 Felder ändern
UPDATE actor SET first_name='PENELOPEZ',last_name = 'GUINESS' WHERE actor_id = 1
```

Referenz

- https://www.w3schools.com/sql/sql_update.asp

DELETE

Einfaches Delete Beispiel

Example

```
DELETE FROM actor WHERE id = 200
```

Reference

- <https://www.mysqltutorial.org/mysql-delete-statement.aspx>

Datentypen

Integer - INT - Datentypen

Reference

- <https://dev.mysql.com/doc/refman/8.0/en/integer-types.html>

Basics

Connection to DB + exit

General Explanation

- Step 1: connection to db
- Step 2: using specific database
- 1. ■ 2. can be done in one step

Connection as Root (without using -u/--user and db)

```
## If you are root and are connecting locally (socket), you do not need to enter a
password on root
## Why ?
mysql> use mysql
mysql> select user,host,plugin from user where user = 'root' and host = 'localhost';
```

```
root@mysql-server:~#whoami
root
## this work, because we are connecting locally
## by default mysql uses the user we are logged in with
mysql
```

Connection with credentials

```
mysql -uroot -p
## passwort auf der Kommandozeile eingeben
```

Connection to remote mysql - server

```
mysql -u root -p -h 10.10.9.117
```

mysql-client

Basics

```
mysql
mysql>

## Wie kommen wie raus ?
exit;
```

Delimiter

```
Normalerweise ";"

Ist zum Trennen von Befehlen
```

Use user and password automatically

```
nano /root/.my.cnf
## BE CAREFUL EVERYBODY CAN LOGIN AS ROOT TO MYSQL NOW
## in there
[mysql]
user=root
password=root-password-on-your-system
```

Charset-Collations

server system variablen abfragen

```
mysql> show session variables like '%hostname%';
```

```
+-----+-----+  
| Variable_name | Value |  
+-----+-----+  
| hostname      | trn01 |  
+-----+-----+  
1 row in set (0.00 sec)
```

```
mysql> select @@hostname;
```

```
+-----+  
| @@hostname |  
+-----+  
| trn01      |  
+-----+  
1 row in set (0.00 sec)
```


Storage Engines

Which engine is used

```
show variables like '%default%';
```

Working with the data modelling language (DML's)

Working with INSERT

```
## Always use the field-names
INSERT INTO actor (first_name,last_name) values ('John','Smith');

## Extended inserts are quick (better than single inserts)
INSERT INTO actor (first_name,last_name) values ('John','Peters'),
('Mandy','Johnsson');
```

Tipps & Tricks / Do Not

Dump/SQL-File einspielen auf der Kommandozeile - Windows

```
mysql -u root -p < C:\Users\Admin\Downloads\test.sql
```

Tools

HeidiSQL Portable - works for windows

- <https://www.heidisql.com/download.php?download=portable-64>

Tipps & Tricks

Best Practice DBAL - Kochrezept

Ausgangssituation

```
DBAL erstellt query
Query ist langsam
Was tun ?
```

Steps 1+2

```
### An das SQL-Statement rankommen.

### 1. Analyse, warum ist Query langsam (kann ich von aussen etwas tun, um die Query
zu beeinflussen ohne sie zu ändern
explain <sql-statement>

### Sichtprüfung, fehlen Keys ??
##
##explain select vendor_city,vendor_state from contributions where vendor_first_name
like 'D%';
##+---+-----+-----+-----+-----+-----+-----+-----+
---+-----+-----+-----+-----+
##| id | select_type | table          | partitions | type | possible_keys | key  |
key_len | ref  | rows    | filtered | Extra          |
##+---+-----+-----+-----+-----+-----+-----+-----+
---+-----+-----+-----+-----+
##|  1 | SIMPLE      | contributions | NULL       | ALL  | NULL          | NULL | NULL
| NULL | 2028402 |    11.11 | Using where |
##+---+-----+-----+-----+-----+-----+-----+-----+
---+-----+-----+-----+
## Gibt es bei dem type einen Eintrag ALL.

### Oder da ist ein key drin, aber der wird garnicht verändert.

### Index setzen
```

Step 3.

```
Query analysieren -> Schritt debuggen.
1) Links -> Rechts: Entweder von Links (sprich: was sind die ersten Daten, die ich
brauche, welche dann, welche dann usw.)
```

2) Rechts -> Links -> immer mehr wegnehmen und gucken, ob es schneller wird.

Step 4:

index hint.

Step 5: Customized Query

References

Examples Left Join

- https://www.quackit.com/mysql/examples/mysql_left_join.cfm

Notes on Specific MySQL Knowledge

- <https://www.burnison.ca/notes>

Many Sakila Example Queries

- <https://github.com/ashok-bidani/MySQL-Sakila-queries-and-joins>

Helpful Examples

- https://www.quackit.com/mysql/examples/mysql_group_by_clause.cfm

Extra (Optional)

Übungen

Übung Update/Insert

1. In einer Anweisung alle Datensätze ändern in denen der erste Name JUDY und der Nachname DEAN ist -> dort Vorname in JAMES ändern.

```
UPDATE actor SET first_name = 'JAMES' where last_name='DEAN' and first_name='JUDY';
```

2. In einem SQL-Statement 2 neue Datensätze einfügen. 1. Mann, Josef 2. Mannheim, Martha

```
INSERT INTO actor (first_name, last_name) values ('Mann','Josef'),  
('Mannheim','Martha');
```