A figure from a code cell

A code cell makes a figure when it has a `fig-` label and a `fig-cap`. The class goes in `#| classes:`, and the width in `#| out-width:`. This page shows the cell with its options:

Result

````
```{r}
#| label: fig-cars
#| fig-cap: "Stopping distance by speed."
#| classes: wrap-right
#| out-width: "40%"
plot(cars, pch = 19, col = "#3b6ea8",
     xlab = "Speed (mph)", ylab = "Stopping distance (ft)")
```
````

Figure 1 comes from the R code above. The cell's code stays above the figure, and the figure floats to the right of the paragraphs after the cell.

The data are the `cars` data set that ships with R: the speed of each car and the distance that it took to stop. Faster cars took longer to stop.

The site renders this page from results that Quarto saved when the cell last ran, so the site does not need R to build it.

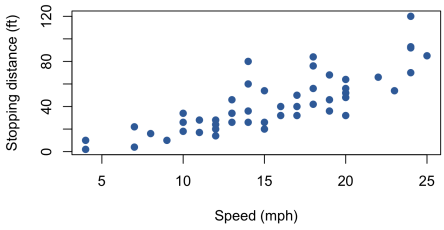


Figure 1: Stopping distance by speed.

Next

A heading is not a paragraph, so wrapping stops before it.