


目标：多人协作，可推送代码

### 1. 创建仓库

### 2. 创建public key & private key

打开git-bash.exe，输入Puttygen，点击generate

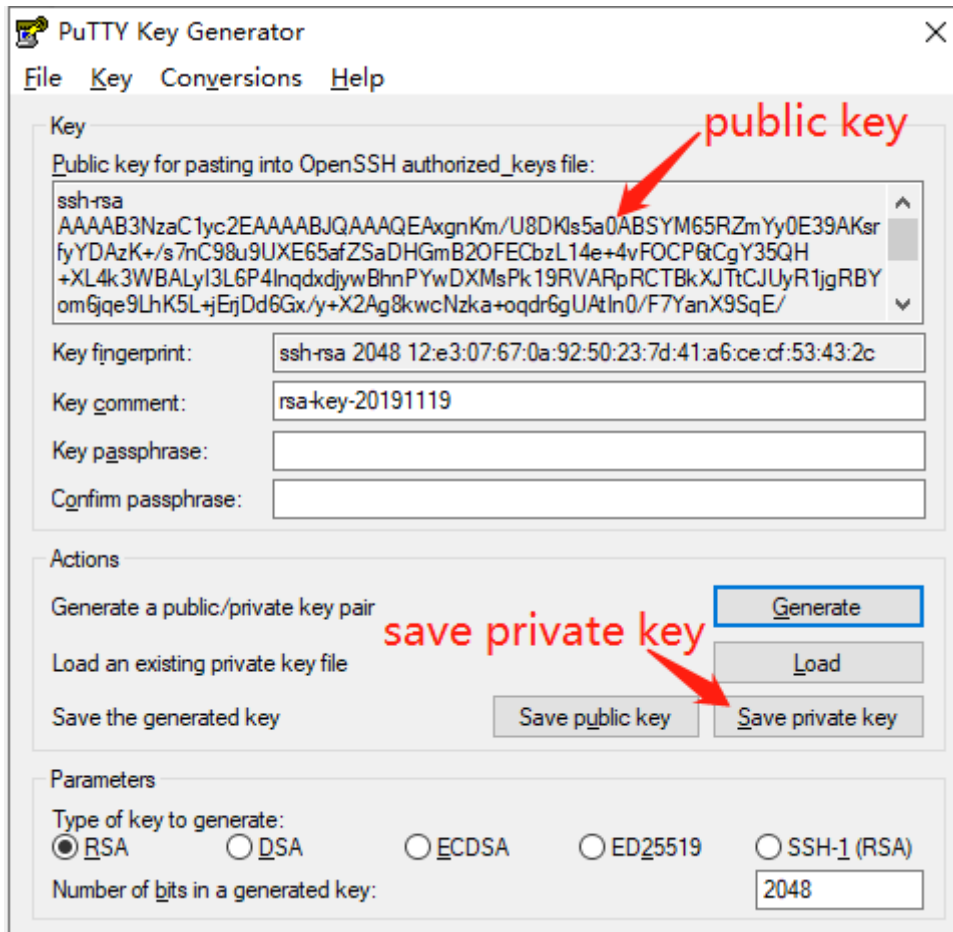

### 3. 仓库添加deploy key

Code

Issues 0

Pull requests 0

Actions

Projects 0

Wiki

Security

Insights

Settings

Options

Collaborators

Branches

Webhooks

Notifications

Integrations & services

Deploy keys

Secrets

Actions

Moderation

Interaction limits

Deploy keys / Add new

Title

public 任意名称

Key

public key  
Begin with 'ssh-rsa', 'ssh-dss', 'ssh-ed25519', 'ecdsa-sha2-nistp256', 'ecdsa-sha2-nistp384', or 'ecdsa-sha2-nistp521'

☒ Allow write access 允许推送

Can this key be used to push to this repository? Deploy keys always have pull access.

Add key

4. 以tortoisegit为例，设置刚刚保存的private key即可

Git克隆 - TortoiseGit

克隆现存的版本库

URL:

git@github.com:jmilktea/jmilktea.git

浏览(B)...

目录(D)

F:\vb-bk\jmilktea

浏览(W)...

☐ 深度 1

☐ 递归

☐ 克隆成纯版本库

☐ 不检出

☐ 分支

☐ 原名称

☐ LFS

☒ 加载Putty密钥(K)

program Files (x86)\TortoiseGit\jmilktea-privatekey.ppk

...

从SVN版本库

private key

☐ 从SVN版本库(S)

☐ 主干(I): trunk

☐ 标签(G): tags

☐ 分支(H): branches

☐ 从(E): 0

☐ 用户名(N):

确定

取消

帮助