

Chapter 4

Computation

Bjarne Stroustrup

www.stroustrup.com/Programming

Abstract

- Today, I'll present the basics of computation. In particular, we'll discuss expressions, how to iterate over a series of values ("iteration"), and select between two alternative actions ("selection"). I'll also show how a particular sub-computation can be named and specified separately as a function. To be able to perform more realistic computations, I will introduce the **vector** type to hold sequences of values.
- Selection, Iteration, Function, Vector


Overview

- Computation
 - What is computable? How best to compute it?
 - Abstractions, algorithms, heuristics, data structures
- Language constructs and ideas
 - Sequential order of execution
 - Expressions and Statements
 - Selection
 - Iteration
 - Functions
 - Vectors

You already know most of this

- Note:
 - You know how to do arithmetic
 - $d = a + b * c$
 - You know how to select
 - “if this is true, do that; otherwise do something else ”
 - You know how to “iterate”
 - “do this until you are finished”
 - “do that 100 times”
 - You know how to do functions
 - “go ask Joe and bring back the answer”
 - “hey Joe, calculate this for me and send me the answer”
- What I will show you today is mostly just vocabulary and syntax for what you already know

Computation

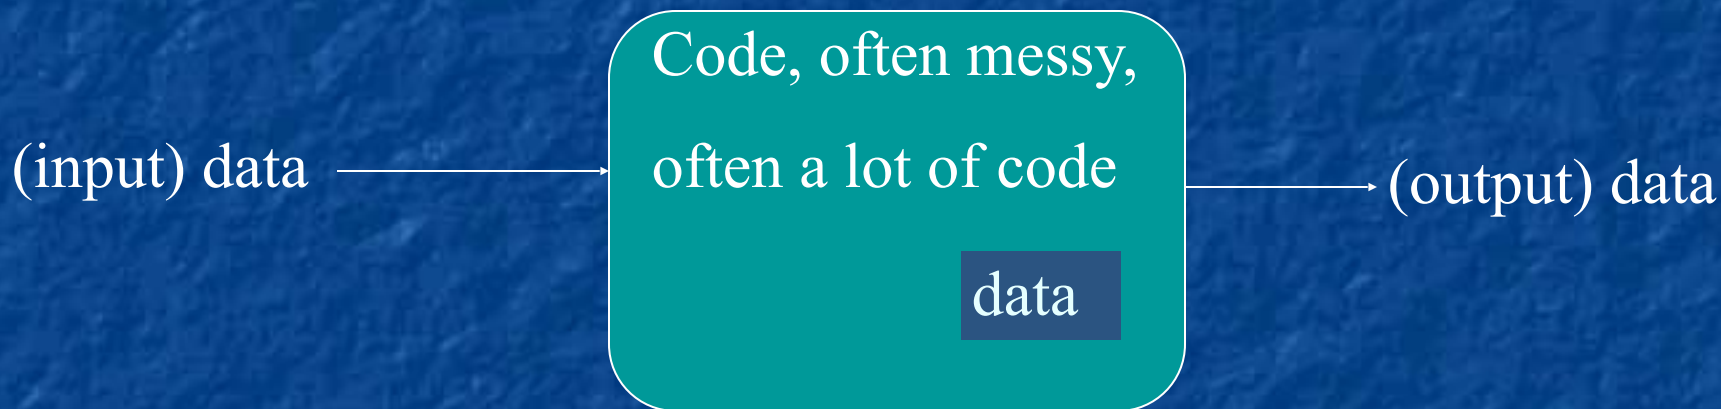

- Input: from keyboard, files, other input devices, other programs, other parts of a program
- Computation – what our program will do with the input to produce the output.
- Output: to screen, files, other output devices, other programs, other parts of a program

Computation

- Our job is to express computations
 - Correctly
 - Simply
 - Efficiently
- One tool is called Divide and Conquer
 - to break up big computations into many little ones
- Another tool is Abstraction
 - Provide a higher-level concept that hides detail
- Organization of data is often the key to good code
 - Input/output formats
 - Protocols
 - Data structures
- Note the emphasis on structure and organization
 - You don't get good code just by writing a lot of statements

Language features

- Each programming language feature exists to express a fundamental idea
 - For example
 - + : addition
 - * : multiplication
 - *if (expression) statement else statement ;* selection
 - *while (expression) statement ;* iteration
 - *f(x);* function/operation
 - ...
- We combine language features to create programs

Expressions

// compute area:

int length = 20;

// the simplest expression: a literal (here, 20)

// (here used to initialize a variable)

int width = 40;

int area = length*width;

// a multiplication

int average = (length+width)/2;

// addition and division

The usual rules of precedence apply:

a*b+c/d means **(a*b)+(c/d)** and not **a*(b+c)/d**.

If in doubt, parenthesize. If complicated, parenthesize.

Don't write "absurdly complicated" expressions:

a*b+c/d*(e-f/g)/h+7

// too complicated

Choose meaningful names.

Expressions

- Expressions are made out of operators and operands
 - Operators specify what is to be done
 - Operands specify the data for the operators to work with
- Boolean type: **bool** (**true** and **false**)
 - Equality operators: **==** (equal), **!=** (not equal)
 - Logical operators: **&&** (and), **||** (or), **!** (not)
 - Relational operators: **<** (less than), **>** (greater than), **<=**, **>=**
- Character type: **char** (e.g., **'a'**, **'7'**, and **'@'**)
- Integer types: **short**, **int**, **long**
 - arithmetic operators: **+**, **-**, *****, **/**, **%** (remainder)
- Floating-point types: e.g., **float**, **double** (e.g., **12.45** and **1.234e3**)
 - arithmetic operators: **+**, **-**, *****, **/**

Concise Operators

- For many binary operators, there are (roughly) equivalent more concise operators
 - For example
 - **a += c** means **a = a+c**
 - **a *= scale** means **a = a*scale**
 - **++a** means **a += 1**
or **a = a+1**
- “Concise operators” are generally better to use (clearer, express an idea more directly)

Statements

- A statement is
 - an expression followed by a semicolon, or
 - a declaration, or
 - a “control statement” that determines the flow of control
- For example
 - **a = b;**
 - **double d2 = 2.5;**
 - **if (x == 2) y = 4;**
 - **while (cin >> number) numbers.push_back(number);**
 - **int average = (length+width)/2;**
 - **return x;**
- You may not understand all of these just now, but you will ...

Selection

- Sometimes we must select between alternatives
- For example, suppose we want to identify the larger of two values. We can do this with an **if** statement

```
if (a<b)           // Note: No semicolon here
    max = b;
else               // Note: No semicolon here
    max = a;
```

- The syntax is

```
if (condition)
    statement-1    // if the condition is true, do statement-1
else
    statement-2    // if not, do statement-2
```

Iteration (while loop)

- The world's first “real program” running on a stored-program computer (David Wheeler, Cambridge, May 6, 1949)

// calculate and print a table of squares 0-99:

```
int main()  
{  
    int i = 0;  
    while (i<100) {  
        cout << i << '\t' << square(i) << '\n';  
        ++i ;    // increment i  
    }  
}
```

// (No, it wasn't actually written in C++ 😊.)

Iteration (while loop)

- What it takes

- A loop variable (control variable); here: `i`
- Initialize the control variable; here: `int i = 0`
- A termination criterion; here: if `i < 100` is false, terminate
- Increment the control variable; here: `++i`
- Something to do for each iteration; here: `cout << ...`

```
int i = 0;
while (i < 100) {
    cout << i << '\t' << square(i) << '\n';
    ++i;    // increment i
}
```


Iteration (for loop)

- Another iteration form: the **for** loop
- You can collect all the control information in one place, at the top, where it's easy to see

```
for (int i = 0; i<100; ++i) {  
    cout << i << '\t' << square(i) << '\n';  
}
```

That is,

```
for (initialize; condition ; increment )  
    controlled statement
```

Note: what is **square(i)**?

Functions

- But what was **square(i)**?
 - A call of the function **square()**

```
int square(int x)
{
    return x*x;
}
```
 - We define a function when we want to separate a computation because it
 - is logically separate
 - makes the program text clearer (by naming the computation)
 - is useful in more than one place in our program
 - eases testing, distribution of labor, and maintenance

Control Flow

```
int main()
```

```
{
```

```
    i=0;
```

```
    while (i<100)
```

```
    {
```

```
        square(i);
```

```
    }
```

```
}
```

```
int square(int x)
```

```
{
```

```
    // compute square root
```

```
    return x * x;
```

```
}
```

```
    i==100
```


Functions

- Our function

```
int square(int x)
{
    return x*x;
}
```

is an example of

```
Return_type function_name ( Parameter list )
                                     // (type name, etc.)
{
    // use each parameter in code
    return some_value;              // of Return_type
}
```

Another Example

- Earlier we looked at code to find the larger of two values. Here is a function that compares the two values and returns the larger value.

```
int max(int a, int b) // this function takes 2 parameters  
{  
    if (a<b)  
        return b;  
    else  
        return a;  
}
```

```
int x = max(7, 9);           // x becomes 9  
int y = max(19, -27);      // y becomes 19  
int z = max(20, 20);       // z becomes 20
```


Data for Iteration - Vector

- To do just about anything of interest, we need a collection of data to work on. We can store this data in a **vector**. For example:

```
// read some temperatures into a vector:
int main()
{
    vector<double> temps;    // declare a vector of type double to store
                           // temperatures – like 62.4
    double temp;            // a variable for a single temperature value
    while (cin>>temp)       // cin reads a value and stores it in temp
        temps.push_back(temp);    // store the value of temp in the vector
    // ... do something ...
}
// cin>>temp will return true until we reach the end of file or encounter
// something that isn't a double: like the word "end"
```


Vector

- Vector is the most useful standard library data type
 - a **vector<T>** holds an sequence of values of type **T**
 - Think of a vector this way
A vector named **v** contains 5 elements: {1, 4, 2, 3, 5}:

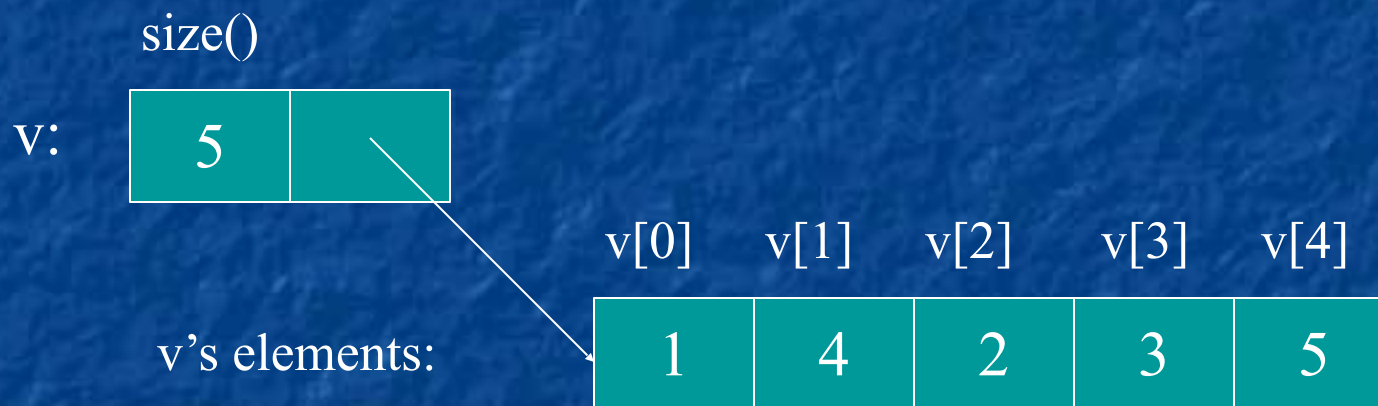


Vectors


```
vector<int> v;    // start off empty
```




```
v.push_back(1);  // add an element with the value 1
```



```
v.push_back(4);  // add an element with the value 4 at end (“the back”)
```



```
v.push_back(3);  // add an element with the value 3 at end (“the back”)
```



Vectors

- Once you get your data into a vector you can easily manipulate it

// compute mean (average) and median temperatures:

```
int main()
```

```
{
```

```
    vector<double> temps;    // temperatures in Fahrenheit, e.g. 64.6
```

```
    double temp;
```

```
    while (cin>>temp) temps.push_back(temp); // read and put into vector
```

```
    double sum = 0;
```

```
    for (int i = 0; i < temps.size(); ++i) sum += temps[i]; // sums temperatures
```

```
    cout << "Mean temperature: " << sum/temps.size() << "\n";
```

```
    sort(temps);    // from std lib facilities.h
```

```
                    // or sort(temps.begin(), temps.end());
```

```
    cout << "Median temperature: " << temps[temps.size()/2] << "\n";
```

```
}
```


Traversing a vector

- Once you get your data into a vector you can easily manipulate it
- Initialize with a list
 - `vector<int> v = { 1, 2, 3, 5, 8, 13 }; // initialize with a list`
- *often we want to look at each element of a vector in turn:*
`for (int i = 0; i < v.size(); ++i) cout << v[i] << '\n'; // list all elements`
// there is a simpler kind of loop for that (a range-for loop):
`for (int i : v) cout << x << '\n'; // list all elements`
// for each x in v ...

Combining Language Features

- You can write many new programs by combining language features, built-in types, and user-defined types in new and interesting ways.
 - So far, we have
 - Variables and literals of types **bool**, **char**, **int**, **double**
 - **vector**, **push_back()**, **[]** (subscripting)
 - **!=**, **==**, **=**, **+**, **-**, **+=**, **<**, **&&**, **||**, **!**
 - **max()**, **sort()**, **cin>>**, **cout<<**
 - **if**, **for**, **while**
 - You can write a lot of different programs with these language features! Let's try to use them in a slightly different way...

Example – Word List

// “boilerplate” left out

```
vector<string> words;  
for (string s; cin>>s && s != "quit"; )           // && means AND  
    words.push_back(s);  
  
sort(words);                                       // sort the words we read  
  
for (string s : words)  
    cout << s << '\n';  
  
/*  
    read a bunch of strings into a vector of strings, sort  
    them into lexicographical order (alphabetical order),  
    and print the strings from the vector to see what we have.  
*/
```


Word list – Eliminate Duplicates

*// Note that duplicate words were printed multiple times. For
// example “the the the”. That’s tedious, let’s eliminate duplicates:*

```
vector<string> words;  
for (string s; cin>>s && s!= "quit"; )  
    words.push_back(s);  
  
sort(words);  
  
for (int i=1; i<words.size(); ++i)  
    if(words[i-1]==words[i])  
        “get rid of words[i]”    // (pseudocode)  
for (string s : words)  
    cout << s << '\n';
```

*// there are many ways to “get rid of words[i]”; many of them are messy
// (that’s typical). Our job as programmers is to choose a simple clean
// solution – given constraints – time, run-time, memory.*

Example (cont.) Eliminate Words!

// Eliminate the duplicate words by copying only unique words:

```
vector<string> words;
for (string s; cin>>s && s!= "quit"; )
    words.push_back(s);
sort(words);
vector<string> w2;
if (0<words.size()) {                                // note style { }
    w2.push_back(words[0]);
    for (int i=1; i<words.size(); ++i) // note: not a range-for
        if(words[i-1]!=words[i])
            w2.push_back(words[i]);
}
cout<< "found " << words.size()-w2.size() << " duplicates\n";
for (string s : w2)
    cout << s << "\n";
```


Algorithm

- We just used a simple algorithm
- An algorithm is (from Google search)
 - “a logical arithmetical or computational procedure that, if correctly applied, ensures the solution of a problem.” – *Harper Collins*
 - “a set of rules for solving a problem in a finite number of steps, as for finding the greatest common divisor.” – *Random House*
 - “a detailed sequence of actions to perform or accomplish some task. Named after an Iranian mathematician, Al-Khawarizmi. Technically, an algorithm must reach a result after a finite number of steps, ... The term is also used loosely for any sequence of actions (which may or may not terminate).” – *Webster's*
- We eliminated the duplicates by first sorting the vector (so that duplicates are adjacent), and then copying only strings that differ from their predecessor into another vector.

Ideal

- Basic language features and libraries should be usable in essentially arbitrary combinations.
 - We are not too far from that ideal.
 - If a combination of features and types make sense, it will probably work.
 - The compiler helps by rejecting some absurdities.

The next lecture

- How to deal with errors