Exercise 4
Joins

Question 01

```
14
15  ---QUESTION 01
16  --Show every user who has a subscription.Match user to subscriptions.
17  SELECT A.id, A.name, A.country, B.subscription_id, B.start_date FROM users A INNER JOIN subscriptions AS B ON A.id = B.user_id;
18
```

Add parameter

Results 5 of 5 | Table

	id	name	country	subscription_id	start_date
1	1	Nomvula	Johannesburg	501	2026-01-15
2	2	Anele	Durban	502	2026-02-01
3	1	Nomvula	Johannesburg	503	2026-03-10
4	3	Kabelo	Pretoria	505	2026-04-05
5	2	David	Cape Town	502	2026-02-01

Question 02

```
12  ---QUESTION 2
13  ---SHOW EVERY SUBSCRIPTION WITH ITS MATCHING PLAN NAME AND MONTHLY PRICE
14  SELECT A.Subscription_id, A.user_id, B.Plan_Name, B.Monthly_Price FROM subscriptions AS A INNER JOIN plans AS  B ON A.Plan_ID =B.Plan_I
15
16
```

Add parameter

Results 6 of 6 | Table

	Subscription_id	user_id	Plan_Name	Monthly_Price
1	501	1	Basic	79
2	502	2	Standard	129
3	503	1	Premium	199
4	504	6	Standard	129
5	505	3	Platinum	299

Question 03

```sql
---Question 3
SELECT session_id, user_id, show_title, genre, watch_minutes FROM Viewing_sessions INNER JOIN shows ON Viewing_sessions.show_id = shows.show_id
```

Add parameter

Results 5 of 5 | Table

	session_id	user_id	show_title	genre	watch_minutes
1	904	7	comedy hour	Comedy	20
2	903	1	crime time	Drama	60
3	902	2	Tech Tales	Documentary	30
4	901	1	comedy hour	Comedy	45

Question 4

```sql
---Question 4
--Show every viewing session with the user who watched it.Only show sessions with a matching user.
SELECT Users.name AS User_name, Country, Session_id, Show_id, Watch_minutes FROM Viewing_sessions INNER JOIN Users ON Viewing_sessions.user_id = Users.id;
```

Add parameter

Results 5 of 5 | Table

	User_name	Country	Session_id	Show_id	Watch_minutes
1	Nomvula	Johannesburg	903	702	60
2	David	Cape Town	902	703	30
3	Anele	Durban	902	703	30
4	Nomvula	Johannesburg	901	701	45

Question 5

```sql
---Question 5
---Show users along with their subscription,the plan name, and the price .Use only who have both a subscription and a valid plan.
SELECT u.name AS user_name, u.country, p.plan_name, p.monthly_price, Start_date FROM users u JOIN subscriptions s ON u.id = s.user_id JOIN plans p ON s.plan_id = p.plan_id;
```

Add parameter

Results 7 of 7 | Table

	user_name	country	plan_name	monthly_price	Start_date
1	Nomvula	Johannesburg	Basic	79	2026-01-15
2	Anele	Durban	Standard	129	2026-02-01
3	Nomvula	Johannesburg	Premium	199	2026-03-10
4	Kabelo	Pretoria	Platinum	299	2026-04-05

Question 6

```
    '2026-04-05');
16  ---Question 6
17  SELECT A.id, A.name, B.subscription_id, B.start_date FROM USERS AS A LEFT JOIN subscriptions AS B ON A.id = B.user_id;
18
19
```

Add parameter

Results 6 of 6 | Table

	id	name	subscription_id	start_date
1	1	Nomvula	503	2026-03-10
2	2	David	502	2026-02-01
3	2	Anele	502	2026-02-01
4	3	Kabelo	505	2026-04-05
5	4	Lerato	null	null

Question 7

```
12  ---QUESTION 7
13  ---Show every plan and the subscriptions on it.Plan with no subscription must still appear.
14  SELECT plans.plan_id, plan_ubscription_id, User_id FROM plans LEFT JOIN subscriptions ON plans.
    plan_id = subscriptions.plan_id;
15
16
17
```

Add parameter

Results 6 of 6 | Table

	plan_id	plan_name	subscription_id	User_id
1	10	Basic	501	1
2	11	Standard	504	6
3	12	Premium	503	1
4	13	Platinum	505	3
5	14	Mobile	null	null

Question 8

```sql
--Question 8
---Show every show and any viewing session on it.Show that were never watch ed must still appear
 select a.show_id, a.show_title, b.session_id, b.watch_minutes
 FROM shows AS a
```

Add parameter

Results 5 of 5 | Table

	show_id	show_title	session_id	watch_minutes
1	701	comedy hour	904	20
2	702	crime time	903	60
3	703	Tech Tales	902	30
4	704	Cooking Lab	null	null
5	706	Wild Earth	null	null

Question 9

```sql
---question 9
---Show every viewing session and the user who watched it.Session referencing userthat do

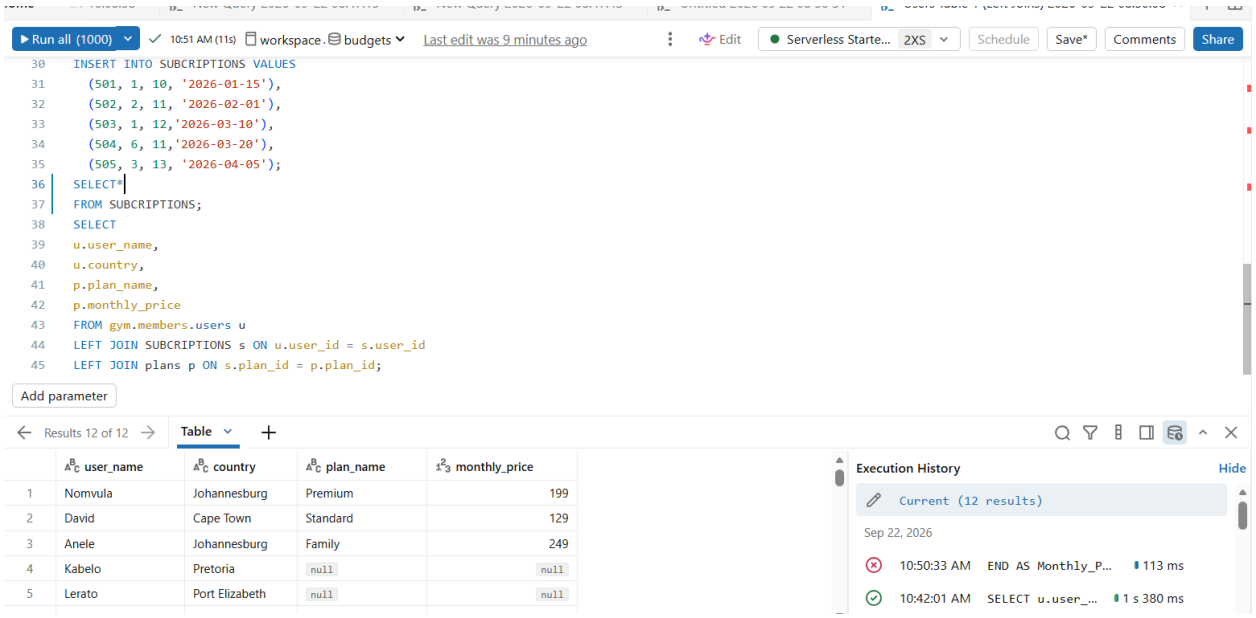
SELECT a.session_id, a.show_id, a.watch_minutes, b.id AS user_id, b.name AS user_name
FROM Viewing_sessions AS a
LEFT JOIN Users b
ON a.user_id = b.id;
```

Add parameter

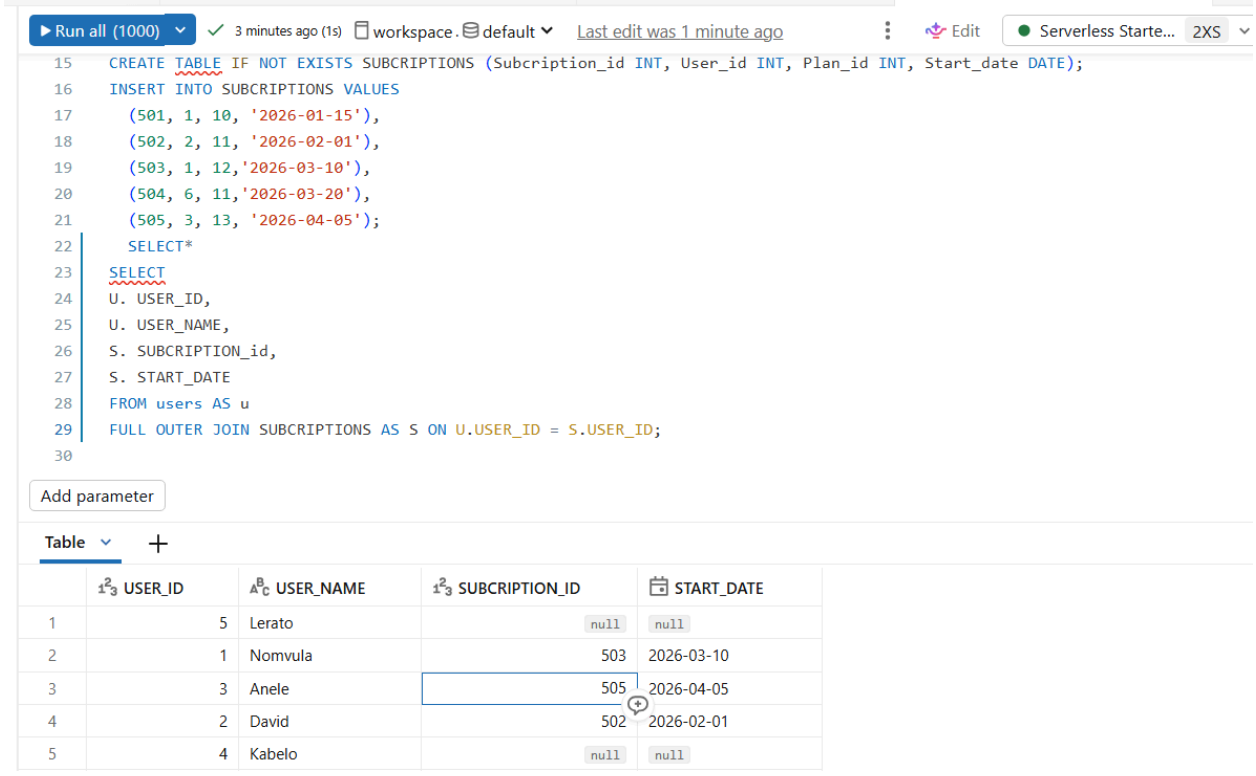
Results 6 of 6 | Table

	session_id	show_id	watch_minutes	user_id	user_name
1	901	701	45	1	Nomvula
2	902	703	30	2	Anele
3	903	702	60	1	Nomvula
4	904	701	20	null	null
5	905	705	90	null	null

Question 10


Run all (1000)
10:51 AM (11s)
workspace . budgets
Last edit was 9 minutes ago
Edit
Serverless Starte... 2XS
Schedule
Save*
Comments
Share
INSERT INTO SUBCRIPTIONS VALUES
(501, 1, 10, '2026-01-15'),
(502, 2, 11, '2026-02-01'),
(503, 1, 12,'2026-03-10'),
(504, 6, 11,'2026-03-20'),
(505, 3, 13, '2026-04-05');
SELECT*
FROM SUBCRIPTIONS;
SELECT
u.user_name,
u.country,
p.plan_name,
p.monthly_price
FROM gym.members.users u
LEFT JOIN SUBCRIPTIONS s ON u.user_id = s.user_id
LEFT JOIN plans p ON s.plan_id = p.plan_id;
Add parameter
Results 12 of 12
Table
user_name
country
plan_name
monthly_price
1 Nomvula Johannesburg Premium 199
2 David Cape Town Standard 129
3 Anele Johannesburg Family 249
4 Kabelo Pretoria null null
5 Lerato Port Elizabeth null null
Execution History
Hide
Current (12 results)
Sep 22, 2026
10:50:33 AM END AS Monthly_P... 113 ms
10:42:01 AM SELECT u.user_... 1 s 380 ms

Question 11


Run all (1000)
3 minutes ago (1s)
workspace . default
Last edit was 1 minute ago
Edit
Serverless Starte... 2XS
CREATE TABLE IF NOT EXISTS SUBCRIPTIONS (Subcription_id INT, User_id INT, Plan_id INT, Start_date DATE);
INSERT INTO SUBCRIPTIONS VALUES
(501, 1, 10, '2026-01-15'),
(502, 2, 11, '2026-02-01'),
(503, 1, 12,'2026-03-10'),
(504, 6, 11,'2026-03-20'),
(505, 3, 13, '2026-04-05');
SELECT*
SELECT
U. USER_ID,
U. USER_NAME,
S. SUBCRIPTION_id,
S. START_DATE
FROM users AS u
FULL OUTER JOIN SUBCRIPTIONS AS S ON U.USER_ID = S.USER_ID;
Add parameter
Table
USER_ID
USER_NAME
SUBCRIPTION_ID
START_DATE
1 5 Lerato null null
2 1 Nomvula 503 2026-03-10
3 3 Anele 505 2026-04-05
4 2 David 502 2026-02-01
5 4 Kabelo null null

Question 13

```sql
---Question 13
---show every show and every viewing session,including shows that were never watched and session referencing shows
that do not exist.
SELECT a.show_id, a.show_title, b.session_id, b.watch_minutes
FROM shows AS a
FULL OUTER JOIN Viewing_sessions AS b ON a.show_id = b.show_id;
```

Add parameter

Table

	show_id	show_title	session_id	watch_minutes
1	704	Cooking Lab	null	null
2	703	Tech Tales	902	30
3	701	comedy hour	904	20
4	702	crime time	903	60
5	706	Wild Earth	null	null