



ESCUELA TÉCNICA SUPERIOR DE INGENIEROS  
INFORMÁTICOS

UNIVERSIDAD POLITÉCNICA DE MADRID

---

# TweetSC: Corrector de texto para Twitter

---

TRABAJO FIN DE MÁSTER  
MÁSTER UNIVERSITARIO EN INTELIGENCIA ARTIFICIAL

AUTOR: Javier Moreno Vega  
TUTOR/ES: Óscar Corcho García y  
Víctor Rodríguez Doncel

<https://jmorenov.github.io/TweetSC/>

11 de julio de 2018



This work is licensed under a [Creative Commons Attribution-NonCommercial-NoDerivatives 4.0 International License](https://creativecommons.org/licenses/by-nc-nd/4.0/).





## RESUMEN

Esta memoria describe TweetSC, un corrector de texto para mensajes en español en Twitter. Debido a que los nuevos sistemas de comunicación han generado un uso diferente del idioma, ha surgido un problema en el análisis de textos. Entre todas las redes sociales este trabajo se centra en Twitter debido a las características que tiene. El objetivo principal de este trabajo es la creación de un corrector para tweets en español. El estado del arte sobre este tema no es muy amplio, y en español aún menos; los enfoques que se suelen seguir son los de normalización y adaptación de herramientas, aunque en los últimos años ha surgido un nuevo enfoque basado en redes neuronales y vectores de palabras. Mi solución, a la que he llamado “Tweet Spell Checker” (TweetSC), consiste en un sistema basado en módulos que se ejecutan de forma secuencial, desde que entra el texto sin normalizar se va aplicando módulo a módulo hasta que se devuelve el texto normalizado. Los módulos construidos son: Tokenizador, Reglas de preproceso, Detector de palabras OOV (Out-Of-Vocabulary), generador de candidatos para cada OOV, ranking de candidatos y postproceso; además cada módulo implementa de forma interna varios métodos que se pueden quitar o añadir. La implementación se ha desarrollado en Java y se ha dividido en tres paquetes: tweetscore (núcleo del sistema y que funciona como una biblioteca por sí sola), tweetscexecutable (paquete que genera un ejecutable jar para su uso desde línea de comandos) y tweetscweb (aplicación web <sup>1</sup>). Los resultados se han comparado con los de Tweet-Nor 2013 [3]. He conseguido unos resultados de accuracy en general bajos pero con posibilidades de mejora y líneas futuras.

---

<sup>1</sup> <https://jmorenov.github.io/TweetSC/>



## SUMMARY

This dissertation describes TweetSC, a text corrector for Spanish messages on Twitter. Because the new communication systems have generated a different use of the language, a problem has arisen in the analysis of texts. Among all social networks, this work focuses on Twitter due to the characteristics it has. The main objective of this work is the creation of a corrector for tweets in Spanish. The state of the art on this subject is not very extensive, and in Spanish even less; the approaches that are usually followed are those of standardization and adaptation of tools, although in recent years a new approach based on neural networks and word vectors has emerged. My solution, which I have called “Tweet Spell Checker” (TweetSC), consists of a system based on modules that are executed sequentially, since the text enters without normalizing it is applied module to module until it is returned the normalized text. The built modules are: Tokenizer, Preprocessing rules, OOV (Out-Of-Vocabulary) word detector, generator of candidates for each OOV, ranking of candidates and post-processing; In addition, each module internally implements several methods that can be removed or added. The implementation has been developed in Java and has been divided into three packages: tweetscore (core of the system and that works as a library by itself), tweetscexecutable (package that generates an executable jar for use from the command line) and tweetscweb (web Application <sup>2</sup>). The results have been compared with those of Tweet-Nor 2013 [3]. I have achieved generally low accuracy results but with possibilities for improvement and future lines.

---

<sup>2</sup> <https://jmorenov.github.io/TweetSC/>





## Índice

1.	Introducción . . . . .	1
1.1.	Motivación . . . . .	1
1.2.	Objetivos . . . . .	2
1.3.	Resumen del documento . . . . .	2
2.	Estado del arte . . . . .	5
2.1.	Introducción . . . . .	5
2.2.	Normalización . . . . .	5
2.3.	Adaptación de herramientas . . . . .	6
2.4.	Normalización en español . . . . .	7
2.5.	Word2Vec . . . . .	9
3.	Solución propuesta . . . . .	11
3.1.	Tokenización . . . . .	11
3.2.	Reglas de preprocesado . . . . .	12
3.3.	Detección de OOV . . . . .	12
3.4.	Generación de candidatos OOV . . . . .	12
3.5.	Ranking de candidatos . . . . .	13
3.6.	Postproceso . . . . .	13
4.	Implementación . . . . .	15
4.1.	Diseño de arquitectura . . . . .	15
4.2.	Instrucciones para usar el software . . . . .	17
4.3.	Aplicación web . . . . .	17
5.	Recursos utilizados . . . . .	25
6.	Evaluación . . . . .	27
6.1.	Metodología . . . . .	27
6.2.	Corpus . . . . .	27
6.2.1.	Gold Standard . . . . .	27
6.3.	Experimentos . . . . .	27
7.	Conclusiones y líneas futuras . . . . .	29
8.	TweetSCore Documentación del código (Java Documentation) . . . . .	31
	Class Hierarchy . . . . .	31
8.1.	Package com.jmorenov.tweetsccore.preprocess . . . . .	32
8.1.1.	Class ApplyRules . . . . .	33
8.1.2.	Declaration . . . . .	33
8.1.3.	Constructor summary . . . . .	33
8.1.4.	Method summary . . . . .	33
8.1.5.	Constructors . . . . .	33
8.1.6.	Methods . . . . .	33
8.1.7.	Class ApplyRulesResult . . . . .	34
8.1.8.	Declaration . . . . .	34
8.1.9.	Constructor summary . . . . .	34
8.1.10.	Method summary . . . . .	34
8.1.11.	Constructors . . . . .	35

8.1.12. Methods . . . . .	35
8.1.13. Class Rule . . . . .	36
8.1.14. Declaration . . . . .	36
8.1.15. Constructor summary . . . . .	36
8.1.16. Method summary . . . . .	36
8.1.17. Constructors . . . . .	37
8.1.18. Methods . . . . .	37
8.1.19. Class Rules . . . . .	37
8.1.20. Declaration . . . . .	37
8.1.21. Constructor summary . . . . .	37
8.1.22. Method summary . . . . .	38
8.1.23. Constructors . . . . .	38
8.1.24. Methods . . . . .	38
8.2. Package com.jmorenov.tweetscore.twitter . . . . .	39
8.2.1. Class Tweet . . . . .	39
8.2.2. Declaration . . . . .	39
8.2.3. All known subclasses . . . . .	39
8.2.4. Constructor summary . . . . .	39
8.2.5. Method summary . . . . .	39
8.2.6. Constructors . . . . .	40
8.2.7. Methods . . . . .	41
8.2.8. Class TweetCorrected . . . . .	42
8.2.9. Declaration . . . . .	42
8.2.10. Constructor summary . . . . .	42
8.2.11. Method summary . . . . .	43
8.2.12. Constructors . . . . .	43
8.2.13. Methods . . . . .	44
8.2.14. Members inherited from class Tweet . . . . .	45
8.2.15. Class TwitterConfiguration . . . . .	45
8.2.16. Declaration . . . . .	45
8.2.17. Method summary . . . . .	45
8.2.18. Methods . . . . .	46
8.3. Package com.jmorenov.tweetscore.twitter.api . . . . .	46
8.3.1. Class Search . . . . .	46
8.3.2. Declaration . . . . .	46
8.3.3. Constructor summary . . . . .	46
8.3.4. Method summary . . . . .	46
8.3.5. Constructors . . . . .	47
8.3.6. Methods . . . . .	47
8.4. Package com.jmorenov.tweetscore.ner . . . . .	48
8.4.1. Class NER . . . . .	48
8.4.2. Declaration . . . . .	48
8.4.3. All known subclasses . . . . .	48
8.4.4. Constructor summary . . . . .	48

8.4.5.	Method summary	49
8.4.6.	Constructors	49
8.4.7.	Methods	49
8.4.8.	Class NERELEment	49
8.4.9.	Declaration	49
8.4.10.	Constructor summary	49
8.4.11.	Method summary	49
8.4.12.	Constructors	50
8.4.13.	Methods	50
8.4.14.	Class StanfordNLPNER	50
8.4.15.	Declaration	50
8.4.16.	Constructor summary	50
8.4.17.	Method summary	51
8.4.18.	Constructors	51
8.4.19.	Methods	51
8.4.20.	Members inherited from class <code>NER</code>	51
8.5.	Package <code>com.jmorenov.tweetscore.analyzer</code>	51
8.5.1.	Class <code>AnalysisElement</code>	51
8.5.2.	Declaration	52
8.5.3.	Constructor summary	52
8.5.4.	Method summary	52
8.5.5.	Constructors	52
8.5.6.	Methods	52
8.5.7.	Class <code>Analyzer</code>	54
8.5.8.	Declaration	54
8.5.9.	All known subclasses	54
8.5.10.	Constructor summary	54
8.5.11.	Method summary	54
8.5.12.	Constructors	54
8.5.13.	Methods	54
8.5.14.	Class <code>FreelingAnalyzer</code>	54
8.5.15.	Declaration	55
8.5.16.	Constructor summary	55
8.5.17.	Method summary	55
8.5.18.	Constructors	55
8.5.19.	Methods	55
8.5.20.	Members inherited from class <code>Analyzer</code>	55
8.6.	Package <code>com.jmorenov.tweetscore.candidates</code>	55
8.6.1.	Class <code>Candidate</code>	56
8.6.2.	Declaration	56
8.6.3.	Constructor summary	56
8.6.4.	Method summary	56
8.6.5.	Constructors	56
8.6.6.	Methods	57

8.6.7.	Class CandidatesGenerator . . . . .	58
8.6.8.	Declaration . . . . .	58
8.6.9.	Constructor summary . . . . .	58
8.6.10.	Method summary . . . . .	58
8.6.11.	Constructors . . . . .	58
8.6.12.	Methods . . . . .	59
8.6.13.	Class CandidatesRanking . . . . .	59
8.6.14.	Declaration . . . . .	59
8.6.15.	Constructor summary . . . . .	59
8.6.16.	Method summary . . . . .	59
8.6.17.	Constructors . . . . .	59
8.6.18.	Methods . . . . .	60
8.7.	Package com.jmorenov.tweetscore.candidates.method . . . . .	60
8.7.1.	Class AccentedCandidatesMethod . . . . .	61
8.7.2.	Declaration . . . . .	61
8.7.3.	Constructor summary . . . . .	61
8.7.4.	Method summary . . . . .	61
8.7.5.	Constructors . . . . .	61
8.7.6.	Methods . . . . .	61
8.7.7.	Members inherited from class CandidatesMethod . . . . .	62
8.7.8.	Class CandidatesMethod . . . . .	62
8.7.9.	Declaration . . . . .	62
8.7.10.	All known subclasses . . . . .	62
8.7.11.	Constructor summary . . . . .	62
8.7.12.	Method summary . . . . .	62
8.7.13.	Constructors . . . . .	62
8.7.14.	Methods . . . . .	63
8.7.15.	Class CandidatesMethodCreateInstance . . . . .	63
8.7.16.	Declaration . . . . .	63
8.7.17.	Constructor summary . . . . .	63
8.7.18.	Method summary . . . . .	63
8.7.19.	Constructors . . . . .	63
8.7.20.	Methods . . . . .	64
8.7.21.	Class CandidatesMethodCreator . . . . .	64
8.7.22.	Declaration . . . . .	64
8.7.23.	Constructor summary . . . . .	64
8.7.24.	Method summary . . . . .	64
8.7.25.	Constructors . . . . .	64
8.7.26.	Methods . . . . .	64
8.7.27.	Class CandidatesMethodType . . . . .	65
8.7.28.	Declaration . . . . .	65
8.7.29.	Field summary . . . . .	65
8.7.30.	Method summary . . . . .	65
8.7.31.	Fields . . . . .	65

8.7.32. Methods	65
8.7.33. Members inherited from class Enum	66
8.7.34. Class FastTextCandidatesMethod	66
8.7.35. Declaration	66
8.7.36. Constructor summary	66
8.7.37. Method summary	66
8.7.38. Constructors	66
8.7.39. Methods	67
8.7.40. Members inherited from class CandidatesMethod	67
8.7.41. Class L_LCandidatesMethod	67
8.7.42. Declaration	67
8.7.43. Constructor summary	67
8.7.44. Method summary	68
8.7.45. Constructors	68
8.7.46. Methods	68
8.7.47. Members inherited from class CandidatesMethod	68
8.7.48. Class LevenshteinFSTCandidatesMethod	69
8.7.49. Declaration	69
8.7.50. Constructor summary	69
8.7.51. Method summary	69
8.7.52. Constructors	69
8.7.53. Methods	69
8.7.54. Members inherited from class CandidatesMethod	70
8.7.55. Class MetaphoneCandidatesMethod	70
8.7.56. Declaration	70
8.7.57. Constructor summary	70
8.7.58. Method summary	70
8.7.59. Constructors	70
8.7.60. Methods	71
8.7.61. Members inherited from class CandidatesMethod	71
8.8. Package com.jmorenov.tweetscore.evaluation	71
8.8.1. Class TweetNormEvaluationResult	71
8.8.2. Declaration	72
8.8.3. Constructor summary	72
8.8.4. Method summary	72
8.8.5. Constructors	72
8.8.6. Methods	72
8.8.7. Class TweetNormEvaluator	74
8.8.8. Declaration	74
8.8.9. Constructor summary	74
8.8.10. Method summary	75
8.8.11. Constructors	75
8.8.12. Methods	76
8.9. Package com.jmorenov.tweetscore.postprocess	78

8.9.1. Class PostProcess . . . . .	78
8.9.2. Declaration . . . . .	78
8.9.3. Constructor summary . . . . .	78
8.9.4. Method summary . . . . .	78
8.9.5. Constructors . . . . .	78
8.9.6. Methods . . . . .	78
8.10. Package com.jmorenov.tweetscore.extra . . . . .	79
8.10.1. Class Annotation . . . . .	79
8.10.2. Declaration . . . . .	79
8.10.3. Field summary . . . . .	79
8.10.4. Method summary . . . . .	80
8.10.5. Fields . . . . .	80
8.10.6. Methods . . . . .	80
8.10.7. Members inherited from class Enum . . . . .	80
8.10.8. Class Dictionaries . . . . .	80
8.10.9. Declaration . . . . .	81
8.10.10.Constructor summary . . . . .	81
8.10.11.Method summary . . . . .	81
8.10.12.Constructors . . . . .	81
8.10.13.Methods . . . . .	81
8.10.14.Class File . . . . .	82
8.10.15.Declaration . . . . .	83
8.10.16.Constructor summary . . . . .	83
8.10.17.Method summary . . . . .	83
8.10.18.Constructors . . . . .	83
8.10.19.Methods . . . . .	83
8.10.20.Class FreelingInitializer . . . . .	85
8.10.21.Declaration . . . . .	85
8.10.22.Constructor summary . . . . .	85
8.10.23.Method summary . . . . .	85
8.10.24.Constructors . . . . .	85
8.10.25.Methods . . . . .	86
8.10.26.Class OOV . . . . .	86
8.10.27.Declaration . . . . .	86
8.10.28.Constructor summary . . . . .	86
8.10.29.Method summary . . . . .	86
8.10.30.Constructors . . . . .	86
8.10.31.Methods . . . . .	87
8.10.32.Class OOVDetector . . . . .	89
8.10.33.Declaration . . . . .	90
8.10.34.Constructor summary . . . . .	90
8.10.35.Method summary . . . . .	90
8.10.36.Constructors . . . . .	90
8.10.37.Methods . . . . .	90

8.10.38.Class Parser	90
8.10.39.Declaration	90
8.10.40.Constructor summary	90
8.10.41.Method summary	91
8.10.42.Constructors	91
8.10.43.Methods	91
8.10.44.Class Token	94
8.10.45.Declaration	94
8.10.46.Constructor summary	94
8.10.47.Method summary	94
8.10.48.Constructors	94
8.10.49.Methods	95
8.11. Package com.jmorenov.tweetscore.method	95
8.11.1. Class DictionaryMethod	96
8.11.2. Declaration	96
8.11.3. Constructor summary	96
8.11.4. Method summary	96
8.11.5. Constructors	96
8.11.6. Methods	96
8.11.7. Members inherited from class Method	97
8.11.8. Class Method	97
8.11.9. Declaration	97
8.11.10.All known subclasses	97
8.11.11.Constructor summary	97
8.11.12.Method summary	97
8.11.13.Constructors	97
8.11.14.Methods	98
8.11.15.Class TweetSCMethod	98
8.11.16.Declaration	98
8.11.17.Constructor summary	98
8.11.18.Method summary	98
8.11.19.Constructors	99
8.11.20.Methods	99
8.11.21.Members inherited from class Method	99
8.12. Package com.jmorenov.tweetscore.post	100
8.12.1. Class FreeLingPOST	100
8.12.2. Declaration	100
8.12.3. Constructor summary	100
8.12.4. Constructors	100
8.12.5. Class OpenNLPPPOST	100
8.12.6. Declaration	100
8.12.7. Constructor summary	100
8.12.8. Constructors	101
8.12.9. Class POST	101

8.12.10.Declaration	101
8.12.11.All known subclasses	101
8.12.12.Constructor summary	101
8.12.13.Method summary	101
8.12.14.Constructors	101
8.12.15.Methods	101
8.12.16.Class StanfordNLPPOST	101
8.12.17.Declaration	101
8.12.18.Constructor summary	101
8.12.19.Method summary	102
8.12.20.Constructors	102
8.12.21.Methods	102
8.12.22.Members inherited from class POST	102
8.13. Package com.jmorenov.tweetscore.spellchecker	102
8.13.1. Class SpellChecker	102
8.13.2. Declaration	102
8.13.3. Constructor summary	102
8.13.4. Method summary	103
8.13.5. Constructors	103
8.13.6. Methods	103
8.14. Package com.jmorenov.tweetscore.tokenizer	104
8.14.1. Class FreelingTokenizer	105
8.14.2. Declaration	105
8.14.3. Constructor summary	105
8.14.4. Method summary	105
8.14.5. Constructors	105
8.14.6. Methods	105
8.14.7. Members inherited from class Tokenizer	105
8.14.8. Class OpenNLPTokenizer	106
8.14.9. Declaration	106
8.14.10.Constructor summary	106
8.14.11.Method summary	106
8.14.12.Constructors	106
8.14.13.Methods	106
8.14.14.Members inherited from class Tokenizer	106
8.14.15.Class SimpleTokenizer	107
8.14.16.Declaration	107
8.14.17.Constructor summary	107
8.14.18.Method summary	107
8.14.19.Constructors	107
8.14.20.Methods	107
8.14.21.Members inherited from class Tokenizer	107
8.14.22.Class StanfordNLPTokenizer	107
8.14.23.Declaration	108



8.14.24.Constructor summary	108
8.14.25.Method summary	108
8.14.26.Constructors	108
8.14.27.Methods	108
8.14.28.Members inherited from class Tokenizer	108
8.14.29.Class Tokenizer	108
8.14.30.Declaration	109
8.14.31.All known subclasses	109
8.14.32.Constructor summary	109
8.14.33.Method summary	109
8.14.34.Constructors	109
8.14.35.Methods	109
9. TweetSCWeb Documentación del código (Java Documentation)	111
Class Hierarchy	111
9.1. Package com.jmorenov.tweetscweb	111
9.1.1. Class Application	112
9.1.2. Declaration	112
9.1.3. Constructor summary	112
9.1.4. Method summary	112
9.1.5. Constructors	112
9.1.6. Methods	112
9.1.7. Class Response	112
9.1.8. Declaration	113
9.1.9. Constructor summary	113
9.1.10. Method summary	113
9.1.11. Constructors	113
9.1.12. Methods	113
9.1.13. Class ServletInitializer	114
9.1.14. Declaration	114
9.1.15. Constructor summary	114
9.1.16. Method summary	115
9.1.17. Constructors	115
9.1.18. Methods	115
9.1.19. Class TweetCorrectedListModel	115
9.1.20. Declaration	115
9.1.21. Field summary	115
9.1.22. Constructor summary	115
9.1.23. Fields	115
9.1.24. Constructors	115
9.1.25. Class TweetCorrectedModel	116
9.1.26. Declaration	116
9.1.27. Field summary	116
9.1.28. Constructor summary	116
9.1.29. Fields	116

9.1.30. Constructors	116
9.1.31. Members inherited from class <code>TweetModel</code>	116
9.1.32. Class <code>TweetCorrectorApiController</code>	116
9.1.33. Declaration	117
9.1.34. Constructor summary	117
9.1.35. Method summary	117
9.1.36. Constructors	117
9.1.37. Methods	117
9.1.38. Class <code>TweetCorrectorController</code>	118
9.1.39. Declaration	118
9.1.40. Constructor summary	118
9.1.41. Method summary	118
9.1.42. Constructors	118
9.1.43. Methods	119
9.1.44. Class <code>TweetListModel</code>	119
9.1.45. Declaration	119
9.1.46. Field summary	119
9.1.47. Constructor summary	119
9.1.48. Fields	119
9.1.49. Constructors	119
9.1.50. Class <code>TweetModel</code>	120
9.1.51. Declaration	120
9.1.52. All known subclasses	120
9.1.53. Field summary	120
9.1.54. Constructor summary	120
9.1.55. Method summary	120
9.1.56. Fields	120
9.1.57. Constructors	120
9.1.58. Methods	121
9.1.59. Class <code>TweetSearchQuery</code>	121
9.1.60. Declaration	121
9.1.61. Constructor summary	121
9.1.62. Method summary	121
9.1.63. Constructors	121
9.1.64. Methods	122
9.1.65. Class <code>TweetSearchQueryModel</code>	122
9.1.66. Declaration	122
9.1.67. Constructor summary	122
9.1.68. Method summary	122
9.1.69. Constructors	122
9.1.70. Methods	123
10. <code>TweetSCExecutable</code> Documentación del código (Java Documentation)	125
Class Hierarchy	125
10.1. Package <code>com.jmorenov.tweetsceexecutable</code>	125

---

10.1.1. Class SpellCheckerRun . . . . .	125
10.1.2. Declaration . . . . .	125
10.1.3. Constructor summary . . . . .	125
10.1.4. Method summary . . . . .	125
10.1.5. Constructors . . . . .	125
10.1.6. Methods . . . . .	126
10.1.7. Class SpellCheckerRunResult . . . . .	126
10.1.8. Declaration . . . . .	126
10.1.9. Field summary . . . . .	126
10.1.10. Constructor summary . . . . .	126
10.1.11. Fields . . . . .	126
10.1.12. Constructors . . . . .	127
11. ANEXOS . . . . .	129
11.1. Glosario de términos . . . . .	129



## Índice de figuras

1.	Ejemplo de tweet mal escrito. . . . .	1
2.	Diagrama de módulos del sistema . . . . .	16
3.	Inicio de la aplicación web . . . . .	18
4.	Sección para utilizar el corrector . . . . .	18
5.	Ejemplo de texto corregido . . . . .	19
6.	Corrector de tweets uso avanzado . . . . .	19
7.	Ejemplo de búsqueda de tweets . . . . .	20
8.	Ejemplo de tweets encontrados . . . . .	20
9.	Ejemplo de selección de tweets para corregir . . . . .	21
10.	Ejemplo de tweets corregidos . . . . .	21
11.	Sección de características de la aplicación web . . . . .	22
12.	Sección de características de la aplicación web . . . . .	22
13.	Sección de colaboración . . . . .	23
14.	Sección de contacto . . . . .	23



## Índice de cuadros

1. Resultados de ejecución de mi sistema (DictionaryMethod y TweetSC-Method) y comparación con resultados del sistema RAE [22] que obtuvo los mejores resultado en la tarea Tweet Norm 2013[3]. . . . . 27

## 1. Introducción

### 1.1. Motivación

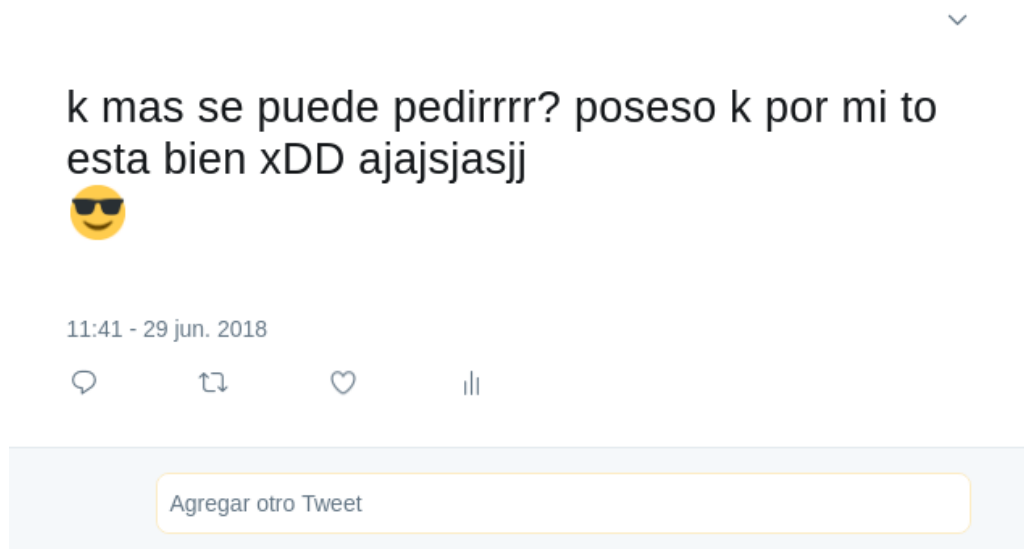


Fig. 1: Ejemplo de tweet mal escrito.

Los nuevos sistemas de comunicación como la mensajería instantánea, los chats, las redes sociales han generado un uso diferente de los idiomas en estos ámbitos, llamado lenguaje tipo chat [46]. Una de estas redes sociales y en la que este trabajo va a centrarse es Twitter. En esta red social predomina el uso de emoticonos, repetición de vocales o eliminación de las mismas, uso abusivo de mayúsculas o su asusencia, siglas de expresiones populares; y otras características que dificulta el análisis de los textos. Las ventajas que ofrece esta red social para investigar sobre ella son la existencia de cantidad de datos en tiempo real y su fácil acceso.

Uno de los principales problemas a la hora de analizar textos procedentes de las redes sociales son los errores ortográficos y gramaticales que suelen contener, así como la presencia de elementos propios de este tipo de foros que requieren de un procesamiento especial, por ejemplo *hashtags*, formas de mencionar a otros usuarios o emoticonos y expresiones habituales en las redes). Además, la limitación en el número de caracteres existente en Twitter la convierte en un caso singular dentro de las redes sociales, ya que los usuarios tienden a adaptar su forma de escribir a dicha limitación, omitiendo palabras y creando abreviaturas que dificultan el uso de herramientas genéricas de procesamiento del lenguaje, especialmente a la hora de realizar tareas como el Análisis de Sentimientos.



Los usuarios en Twitter tienden a cometer errores tipográficos, utilizar abreviaturas (tfno.), abreviaciones (telefon), realizar sustituciones fonéticas y emplear estructuras no gramaticales en los mensajes cortos de texto, dificultando la tarea de las herramientas de análisis.

Esto es lo que se consideran palabras mal formadas. La detección de las palabras mal formadas es difícil debido al contexto ruidoso y limitado de Twitter, y su normalización es el objetivo de este trabajo.

La tarea de normalización también es beneficiosa para un estudio de marcas o personas y sobre lo que las personas opinan sobre ello en las redes social, ya que sin el proceso de normalización y análisis de sentimientos estaríamos ante millones de datos que costarían mucho trabajo analizar de una forma automática.

## 1.2. Objetivos

El objetivo principal de este trabajo es la creación de un corrector que “normalize” tweets en español.

Para cumplir con este objetivo principal se ha dividido en los siguientes subobjetivos.

- Acceso a la API de Twitter para obtener tweets.
- Tokenización de tweets.
- Detección entre los tokens las palabras fuera del vocabulario (*Out-of-Vocabulary*, OOV).
- Anotar el tipo de palabras OOV.
- Corrección de palabras OOV.

Estos subobjetivos se han cumplido con su implementación en un módulo software que además estará disponible en una aplicación web [41].

También he ejecutado este corrector sobre un corpus de tweets <sup>3</sup> y se han comparado los resultados con los que se consiguieron en Tweet-Norm 2013 [3].

## 1.3. Resumen del documento

Esta memoria explica todo el trabajo desarrollado entrando en detalle en el estado del arte y el módulo software desarrollado. Primero se realiza una introducción al tema y se exponen los objetivos a realizar. En segundo lugar se presenta el estado del arte sobre el tema de la corrección de textos, específicamente en Twitter y en español. Posteriormente explicamos la solución propuesta con todas sus fases. A continuación se presenta la implementación desarrollada y la documentación del código,

---

<sup>3</sup> <http://komunitatea.elhuyar.eus/tweet-norm/>

---

además de los recursos utilizados. En siguiente lugar evaluamos los resultados. Y por último se desarrollan las conclusiones y líneas futuras.



## 2. Estado del arte

### 2.1. Introducción

En la actualidad, la normalización lingüística de tweets [28] supone un campo de gran interés y en donde la mayoría de trabajos se han realizado sobre textos en inglés y pocos en español. Además no hay ningún trabajo en donde se incluya, dentro de la normalización de tweets, el estudio de los *hashtag* o etiquetas y los emoticonos, y su contexto.

Una introducción al tema de normalización de tweets es el artículo de Eisenstein [15], donde se revisa el estado del arte en NLP sobre variantes SMS y tweets, y cómo la comunidad científica ha respondido por dos caminos: normalización y adaptación de herramientas.

### 2.2. Normalización

El modelo de canal ruidoso [59] ha sido tradicionalmente la primera aproximación a la normalización de textos. Supone que el texto mal formado es  $T$  y su forma normalizada es  $S$ , por lo que hay que encontrar:  $\arg \max P(S|T)$ , calculando  $\arg \max P(T|S)P(S)$ ,  $P(S)$  es el modelo del lenguaje y  $P(T|S)$  es el modelo de error. Brill y Moore [8] caracterizan el modelo de error calculando el producto de operaciones de probabilidad en partes de cadenas de caracteres. Toutanova y Moore [63] mejoraron el modelo incorporando información de la pronunciación. Choudhury et al. [10] modelan el proceso de generación de texto a nivel de palabra para mensajes SMS considerando las abreviaturas gráficas/fonéticas y los errores tipográficos involuntarios como transiciones de estado ocultas del modelo de Markov (HMM) y emisiones, respectivamente. Cook y Stevenson [11] expandieron el modelo de error introduciendo inferencias de diferentes procesos de formación erróneos, de acuerdo con la distribución de errores muestreada.

Mientras el modelo de canal ruidoso es apropiado para normalización de textos, es difícil aproximar la normalización con exactitud, además estos métodos ignoran el contexto alrededor del OOV, el cual ayuda a resolver ambigüedades. La traducción automática estadística (SMT) se ha propuesto como un medio de normalización de texto sensible al contexto, al tratar el texto mal formado como el idioma de origen, y la forma estándar como el idioma de destino. Por ejemplo Aw et al. [5]. Kobus et al. consideraron la normalización de textos como un problema de reconocimiento de voz [34]. Beaufort et al. [6] métodos de estado finitos combinando las ventajas de SMS y el modelo de canal ruidoso. Kaufmann y Kalita [33] usan un enfoque de traducción automática con un preprocesador para la normalización sintáctica (en lugar de léxica).

El problema de estos trabajos anteriores es que requieren datos de entrenamiento anotados a gran escala, lo que limita su adaptabilidad a nuevos dominios o idiomas, mientras que los trabajos: Whitelaw et al. [67] y Han et al. [28], no. Estos trabajos

son una buena referencia en el campo de la normalización de tweets en inglés de forma no supervisada. En donde para detectar palabras fuera de diccionario (OOV) utilizan la GNU aspell <sup>4</sup>, y los usuarios (@usuario), los *hashtags* y las URLs son excluidas de la normalización. La normalización tiene relación con los correctores de texto [50] pero difiere en que las palabras mal formadas en los mensajes de texto suelen ser intencionadas, para ahorrar caracteres, como identidad social, o debido a la convención en este subgénero de texto. La detección de las palabras mal formadas es difícil debido al contexto ruidoso. El objetivo es normalizar estas palabras mal formadas, además muchas palabras mal formadas son ambiguas y requieren el contexto para poder normalizarlas.

### 2.3. Adaptación de herramientas

En vez de adaptar el texto a herramientas de análisis otro de los caminos a seguir es adaptar las herramientas de análisis al texto. Destacan los trabajos de reconocimiento de voz de Gimpel et al. [24] y Owoputi et al. [49]; reconocimiento de entidades: Finin et al. [17], Ritter et al. [53], Liu et al. [36]; análisis gramatical: Foster et al. [20]; modelización de diálogos: [52] y resumen automático de textos de Sharifi et al. [60].

El reconocimiento de entidades nombradas (NER) es una tarea de extracción de información que busca localizar y clasificar en categorías predefinidas, como personas, organizaciones, lugares, expresiones de tiempo y cantidades, entidades encontradas en un texto. Las soluciones propuestas para NER suelen recaer en tres categorías: *Basado en reglas* [35], *Basada en aprendizaje automático* [19] [61] y *Métodos híbridos* [32]. Con la disponibilidad de datos anotados, Enron [39] y CoNLL03 [57] se han convertidos en los nuevos métodos dominantes. El estudio actual NER se centra principalmente en textos formales, de hecho, el estado del arte actual (CoNLL03) tiene un éxito del 90.8 % en textos formales y 45.8 % en tweets. En el contexto de los textos en tweets, existe una dificultad en el reconocimiento de entidades nombradas debido a la falta de información y datos de entrenamiento.

El trabajo principal de NER sobre tweets es Finin et al. [17], en donde se anotan los tweets y se entrena el modelo con CRF. En cuanto a los trabajos de NER sobre no tweets: Krupka y Hausman [35] utilizan reglas manuales para extraer entidades de tipos predefinidos, Zhou y Su [68] utilizan HMM (Hidden Markov Model) mientras que Finkel et al. [18] usa CRF. El trabajo más importante y actual de NER para tweets es Liu et al. [36] donde replantea el tema de reconocimiento de entidades nombradas en corpus de tweets y combina un clasificador KNN con CRF (Conditional Random Fields) para la detección.

La desambiguación léxica o etiquetado gramatical (POST) es una parte muy importante y útil en la tarea de normalización de textos ya que nos permite definir el

---

<sup>4</sup> <http://aspell.net/>

subconjunto de palabras debido a su categoría gramatical que con una probabilidad pueden ser la normalización de un OOV. Además un gran porcentaje de palabras en un texto son palabras que pueden ser asignadas a más de una clase morfológica, a más de un part-of-speech (PoS). Uno de los trabajos más importantes y probado para español es el de Sánchez-Villamil et al. [62], este trabajo presenta un método de POST de ventana deslizante (SWPoST), asigna el part-of-speech de una palabra basado en la información que dan las palabras en una ventana fija de alrededor. Este algoritmo puede ser implementado como una máquina de estados finitos (Máquina de Mealy).

## 2.4. Normalización en español

Una introducción a la normalización de tweets en español se presentó en la tarea Tweet Norm 2013 [3][2]. Este trabajo propuso en 2013 una tarea o competición en la que los participantes proponían soluciones de normalización de tweets. Los organizadores de la competición ofrecían dos datasets de tweets ya notados uno de desarrollo y otro para test, junto con un tercero que no era público y que era usado para la última evaluación.

Las soluciones ofrecidas por los participantes se pueden dividir en dos categorías, los que utilizan generación de candidatos junto un modelo del lenguaje, y los que utilizan transductores o FSTs (Finite State Transducers). El participante que mejor accuracy consiguió, Sistema RAE [22] con un 0.781, optó por la segunda categoría e implementó un sistema basado en FSTs para la tarea de normalización léxica de mensajes de Twitter en Español. El sistema desarrollado consiste en transductores que se aplican a tokens OOV. Los transductores implementan modelos de variación lingüística que generan conjuntos de candidatos acordes a un léxico. Un modelo estadístico del lenguaje se usa para obtener la secuencia de palabras más probable. El sistema tiene tres componentes principales que se aplican secuencialmente. Un analizador que ejecuta tokenización y análisis léxico sobre palabras en forma estándar y otras expresiones (números, fechas, ...). Un componente que genera palabras candidatas para los tokens OOV. Un modelo estadístico del lenguaje para obtener la mejor secuencia de palabras. Y finalmente un truecaser para capitalizar correctamente las palabras asignadas a los tokens OOV. El conjunto de confusión de un token OOV se genera aplicando el algoritmo de camino mínimo a la expresión:  $W \circ E \circ L$ . Donde  $W$  es el automata que representa el token OOV,  $E$  es un transductor de editado que genera todas las posibles variaciones de un token, y  $L$  es un conjunto de palabras objetivo. Dentro de esta categoría se encuentran los trabajos de la tarea: Ageno et al. [1] que usan una batería de módulos para generar diferentes propuestas de corrección para cada palabra desconocida. La corrección definitiva se elige por votación ponderada según la precisión de cada módulo, Alegria et al. [3] que además utilizan un modelo para el reconocimiento de voz para la generación de candidatos y Hulden y Francom [31] presentan dos estrategias basadas en FSTs una con reglas diseñadas manualmente y la otra automática.

Entre los participantes que optaron por la primera categoría destacan Ruiz et al. [54] con su sistema Vicomtech<sup>5</sup> que usan reglas de preproceso, un modelo de distancias de edición adecuado al dominio y modelos de lengua para seleccionar candidatos de corrección según el contexto. Su arquitectura está formada por: preproceso basado en expresiones regulares y listas customizadas, generación de candidatos mediante una técnica de mínima de distancia de editado, ranking de candidatos mediante una combinación con pesos de la puntuación del modelo del lenguaje y la distancia de editado y la puntuación del modelo de lenguaje es n-grama utilizando la distancia Levenshtein. El sistema obtuvo resultados superiores a la media en la tarea. En una mejora a este trabajo por los mismos autores utilizan un sistema basado en reglas para seleccionar los candidatos [55]. Otros trabajos en esta categoría son: Gamallo et al. [23] que propone un sistema basado en Han et al. [29], Saralegi y Sa Vicente Rocal [65] y Mosquera y Moreda[44] que emplean técnicas de RAH (reconocimiento del habla) mediante la herramienta TENOR presentada en Mosquera et al. [42] junto con un modelo del lenguaje. Otro trabajo basado en la tarea de Tweet-Norm pero que no participó en ella es el de Cerón-Guzmán y León-Guzmán[9], ellos optaron por normalizar los OOV basándose en similaridad entre grafemas y fonemas; generan el conjunto de confusión (de candidatos) usando grafemas y fonemas, seguido de transductores aplicados mediante reglas para las palabras extranjeras y acentos, la selección de candidatos mediante un modelo del lenguaje con la herramienta Kenlm [30].

Fuera de estas dos categorías nos encontramos con los trabajos: Montejo et al. [56] que utilizan conversiones basadas en reglas hasta una forma final normalizada. Después de recibir una lista con las posibles correcciones el sistema selecciona la más común acorde con una lista de palabras ordenada por frecuencia, Vilares et al. [66] utilizan una lista de prioridad para los candidatos obtenidos y una tabla de frecuencias de palabrado para puntuarlos, Han et al. [29] presentan una estrategia basada en búsquedas rápidas mediante una lista de frecuencias aprendida desde un corpus de tweets, Muñoz-García et al. [69] no generan candidatos simplemente seleccionan palabras OOV y las corrigen con un corrector externo y Cotelo et al. [45] generan candidatos y seleccionan el mejor mediante una función de distancia. En una mejora a este último trabajo por parte de los autores se añade un módulo de puntuación para la selección de candidatos [12].

Otros trabajos sobre normalización en español son Mosquera et al. [42] en donde se generan candidatos con indexación fonética y se seleccionan el candidato calculando la similaridad léxica junto con un modelo del lenguaje trigramas y Oliva et al. [48]. Estos trabajos son principalmente sobre mensajes SMS, y no abordan la normalización de tweets en su conjunto. Dentro de la normalización en español existen otras tareas relacionadas como es la tokenización y aquí destaca el trabajo Gomez-Hidalgo et al. [25] que estudia la tokenización de textos SMS.

---

<sup>5</sup> <https://github.com/pruizf/tweet-norm-es>

## 2.5. Word2Vec

Muchos sistemas y técnicas actuales de NLP tratan las palabras como unidades atómicas, no hay noción de similaridad entre palabras y son representadas como índices en un vocabulario, por ejemplo el modelo N-grama, para tratar de resolver este problema aparecen las representaciones continuas de palabras. Las representaciones continuas de palabras entrenadas sobre corpus sin etiquetas son útiles para muchos trabajos de NLP. Muchos tipos diferentes de modelos han sido propuestos para estimar representaciones continuas de palabras, incluyendo Latent Semantic Analysis (LSA) y Latent Dirichlet Allocation (LDA). En este trabajo se centran en las representaciones distribuidas de palabras aprendidas por redes neuronales, ya que se demostró que su eficacia era considerablemente mejor que LSA para preservar regularidades lineales entre palabras, LDA además es computacionalmente caro en datasets grandes. Además se ha demostrado las redes neuronales basadas en modelos del lenguaje mejoran significativamente los modelos N-grama [7] [37] [58].

Los dos modelos de redes neuronales que destacan basados en modelos del lenguaje son: Feedforward Neural Net Language Model (NNLM) [7] y Recurrent Neural Net Language Model (RNNLM) que mejora algunas limitaciones de NNLM. El problema de estos modelos es que con grandes cantidades de datos son muy costosos de obtener. Para resolver este problema en el trabajo de Mikolov et al. [38] desarrollado por Google se presentaron dos nuevos modelos de arquitecturas para calcular representaciones continuas de vectores de palabras a partir de grandes datasets, además crearon un framework de bibliotecas llamado Word2Vec <sup>6</sup>. El principal objetivo de este trabajo es introducir técnicas que puedan ser usadas para aprender vectores de palabras de gran calidad a partir de grandes datasets con millones de palabras y con millones de palabras en el vocabulario. Se trabajó con modelos más simples que aunque no puedan representar los datos de forma tan precisa como las redes neuronales pero pueden ser entrenados con muchos más datos de forma más eficiente. Estos modelos son: Continuous Bag-of-Words model (CBOW) similar a NNLM, la capa oculta no-lineal se elimina y la capa de proyección es compartida por todas las palabras; y Continuous Skip-gram model similar a CBOW pero en vez de predecir la palabra actual basándose en el contexto intenta maximizar la clasificación de la palabra basándose en otra palabra de la misma frase.

La mayoría de las técnicas de representación continua de vectores de palabras representan cada palabra del vocabulario como un vector distinto, sin parámetros compartidos. En particular se ignora la estructura interna de las palabras lo que es una importante limitación en lenguajes ricos morfológicamente. Para intentar resolver este problema en el trabajo Bojanowski et al. [51], desarrollado por Facebook y llamado fastText <sup>7</sup>, se propone un nuevo enfoque basado en el modelo skipgram [38] donde cada palabra se representa como una bolsa de caracteres n-gramas. Una

---

<sup>6</sup> <https://github.com/deeplearning4j/deeplearning4j>

<sup>7</sup> <https://fasttext.cc/>



representación de vector está asociada con cada caracter n-grama, las palabras se representan como la suma de estas representaciones. Al usar una representación de vector distinta para cada palabra, el modelo skipgram ignora la estructura interna de las palabras y en este nuevo trabajo se implementa una función de puntuación diferente para tener en cuenta esta información.

### 3. Solución propuesta

La solución propuesta y a la que he llamado TweetSC (Tweet Spell Checker) [41] se llegó a ella a partir de varios análisis y evaluaciones que se hicieron con diversas bibliotecas y algoritmos, y todos ellos se pueden encontrar en la solución final para su uso.

En la primera versión de mi solución se construyó un corrector de texto sencillo basándonos en el creado por Peter Norvig [47], el cuál utiliza un diccionario para seleccionar las palabras incorrectas y las corrige mediante el teorema de Bayes usando probabilidades. Se usa la fórmula:  $\operatorname{argmax}_{c \in \text{candidates}} P(c|w)$ , que mediante el teorema de Bayes es equivalente a:  $\operatorname{argmax}_{c \in \text{candidates}} P(c)P(w|c)/P(w)$ , y como  $P(w)$  es igual para cada candidato  $c$ :  $\operatorname{argmax}_{c \in \text{candidates}} P(c)P(w|c)$ . Esta fórmula trata de seleccionar el candidato de probabilidad máxima para cada palabra. Para calcular la probabilidad se usan dos diccionarios, uno de palabras en español <sup>8</sup> y otro de nombres propios <sup>9</sup>. Se utilizó esta primera versión como punto de partida para ir creando versiones más avanzadas.

El resultado final y por tanto nuestra versión definitiva consiste en un proceso iterativo sobre el tweet que se puede dividir en 6 fases: Tokenización, reglas de pre-proceso, detección de OOVs, generación de candidatos para cada OOV, ranking de candidatos y postproceso.

Además para convertir el sistema en uno más dinámico se ha desarrollado una aplicación web con acceso a la API de Twitter para obtener los tweets mediante consultas introducidas en un formulario de nuestra aplicación web.

#### 3.1. Tokenización

Cómo realizan los analizadores léxicos en los compiladores, en la primera fase de nuestro proceso se realiza una tokenización del texto o tweet.

Para mejorar la versión inicial se hizo uso de la biblioteca Stanford NLP [27]. Esta biblioteca creada por Stanford NLP Group ofrece tanto etiquetado gramatical (POS Tagging o POST) cómo detección de etiquetas (Named Entity Recognition o NER), yo la he utilizado para esta fase de tokenización. Además de StanfordNLP para la tokenización se ha utilizado Freeling [21], también se ha añadido al sistema el análisis que ofrece freeling.

En esta primera fase se recibe como entrada el texto del tweet y genera una lista de tokens que pasaran a la siguiente fase.

<sup>8</sup> <https://github.com/jmorenov/TweetSC/blob/master/code/tweetscore/src/main/resources/dic.txt>

<sup>9</sup> [https://github.com/jmorenov/TweetSC/blob/master/code/tweetscore/src/main/resources/nombres\\_propios.txt](https://github.com/jmorenov/TweetSC/blob/master/code/tweetscore/src/main/resources/nombres_propios.txt)

### 3.2. Reglas de preprocesado

Una vez que he obtenido todos los tokens de un tweet se aplican unas reglas de preproceso para normalizar palabras típicas de la red social, pictogramas, fonogramas, onomatopeyas, números, acrónimos, etc. Tras aplicar estas reglas a los tokens que las acepten, se crean OOVs con estos token, se anotan como variaciones y se eliminan de la lista de tokens para las fases siguientes. Los OOV generados se añaden a la lista final de OOV.

### 3.3. Detección de OOV

Esta fase tiene como elementos de entrada los tokens restantes de la fase anterior, y se ejecuta token por token el detector de OOV. Para detectarlos se aplican reglas y se van descartando los tokens que son URLs, usuarios de Twitter, *hashtags* de Twitter y fechas; los elementos restantes se comparan con tres diccionarios utilizados como recursos: diccionario de español, diccionario de inglés y diccionario de entidades.

Los token que se detecten dentro del diccionario de español se descartan como OOV, los que se detecten en el diccionario de inglés se anotan como NoEs (No español o ininteligible) y los que se detecten en el diccionario de entidades se anotan como Correct (palabras correspondientes a una entidad o un nuevo préstamo). Para el resto de token que no han sido aceptados en ninguna regla se crea una lista de OOV y son los que pasaran a la siguiente fase pudiendo al final ser anotados como Variation o NoEs.

### 3.4. Generación de candidatos OOV

La generación de candidatos se puede considerar la primera fase de la corrección en sí, ya que sólo se trabaja con OOV a los que se va a buscar una corrección, en ese caso candidatos para ese OOV. Esta fase tiene como entrada la lista de OOV que no han sido etiquetados en la fase anterior, es decir, los que pueden ser Variation o NoEs. Para cada OOV se generarán una lista de candidatos con diferentes métodos. Los métodos que he utilizado con los nombres que he definido son: LevenshteinFST, Metaphone, L-L, FastTest.

- **LevenshteinFST:** Método que utiliza un FST (Finite State Transducers) para generar variaciones en el OOV con un máximo de distancia de editado según la distancia Levenshtein.
- **Metaphone:** Método que utiliza el algoritmo del metáfono en español [43]. Su funcionamiento consiste en generar los fonemas de todos los diccionarios que he utilizado para después comparar el fonema del OOV y seleccionar los de mayor similitud con los fonemas de los diccionarios.

- **L\_L:** Los candidatos generados con este método son las palabras aceptadas por el lenguaje  $L(L)+$ .
- **FastText:** Este método hace uso de la biblioteca fastText [16], a partir de un modelo generado mediante redes neuronales y representando las palabras de forma continua. Los OOV se convierten a vectores de palabras y se comparan con los vectores del modelo generado para obtener los candidatos más parecidos a partir de la similaridad del coseno.
- **Accented:** Método que genera las variaciones acentuadas de una palabra sin acentuar, y convierte estas variaciones en candidatos si existen en los diccionarios de palabras.

Estos métodos se ejecutan sobre todos los OOV y generan una lista de candidatos que pasarán a la siguiente fase.

### 3.5. Ranking de candidatos

El ranking de candidatos es la fase que define la corrección de un OOV, o si no tiene corrección (se anota como NoEs). Para generar este ranking he utilizado dos marcadores, uno un modelo del lenguaje N-Gram (Modelo del lenguaje 11.1) mediante la biblioteca OpenNLP [4] y el otro la distancia de editado Damerau-Levenshtein.

El marcador N-Gram se realiza mediante la comparación de los candidatos de su puntuación en el modelo del lenguaje, es decir, para cada candidato se calcula su puntuación si fuera el elegido. Para el marcador de la distancia Damerau-Levenshtein se calculan la distancia entre el OOV y cada candidato. Finalmente mediante estas dos puntuaciones se calcula se realiza el ranking de candidatos posicionando primero los candidatos con mejor puntuación en el modelo del lenguaje y menor distancia de editado al OOV.

Se ha definido además un umbral mínimo para realizar el ranking, los candidatos que no lo cumplan con los marcadores son eliminados. Al finalizar este proceso para cada OOV se selecciona el mejor candidato del ranking, y se anota como Variation, y si no tuviera candidatos, debido al umbral, se anotan como NoEs.

### 3.6. Postproceso

Esta última fase consiste en poner mayúsculas en las palabras que fueran necesarias, así como signos de exclamación, interrogación y puntuación.



## 4. Implementación

En esta sección se pretende explicar la implementación software que se ha realizado de la solución. Mencionando los lenguajes y recursos externos utilizados, y explicando el funcionamiento de la aplicación web desarrollada. También se puede encontrar toda la documentación generada del proyecto al final de este documento ([sección 9](#), [sección 10](#), [sección 11](#)).

### 4.1. Diseño de arquitectura

La implementación se ha realizado en tres módulos o componentes. Por una parte tenemos la biblioteca con la funcionalidad necesaria para corregir textos de Twitter, acceder a su API y evaluar los resultados sobre un corpus de tweets; después un modulo que implementa aplicación web y por último otro que ofrece funcionalidad para utilizar la biblioteca desde línea de comandos.

El lenguaje principal utilizado en todo el proyecto ha sido Java, con la excepción de Python para los script de evaluación y normalización de archivos de datos, y he hecho uso de Google Cloud Engine [\[26\]](#) para que la aplicación web esté disponible para cualquier usuario [\[40\]](#).

Nuestro sistema software se ha intentado desarrollar de forma que sea un sistema de procesamiento dinámico pudiendo añadir y quitar funcionalidad de manera sencilla, cualquier algoritmo o método implementado funciona a partir de una clase superior para que se puedan añadir nuevos métodos.

El módulo principal del sistema es TweetSCCore que implementa la biblioteca para corregir tweets, acceder a la API de Twitter y evaluar resultados mediante el script ofrecido por Tweet-Norm 2013 [\[3\]](#). Los módulos que funcionan a partir de TweetSCCore son: TweetSCExecutable que implementa la funcionalidad necesaria para ejectar nuestro sistema a partir de línea de comandos, y TweetSCWeb donde se implementa la aplicación web.

Se han implementado dos métodos de corrección o normalización de tweets a los que he llamado DictionaryMethod, método preliminar que hace uso de diccionarios y la regla de Bayes, y TweetSCMethod que es nuestro método final con las fases que han sido explicadas.

Los módulos que forman el sistema son los siguientes:

- Tokenizer: Recibe el texto sin normalizar y lo tokeniza devolviendo una lista de tokens ([sección 3.1](#)).
- ApplyRules: Aplica las reglas de preprocesado a partir del archivo de reglas, recibe una lista de tokens y devuelve dos listas (OOV detectados con las reglas y tokens que no son OOV) ([sección 3.2](#))

- **OOVDetector**: Detecta, a partir de una lista de tokens de entrada, palabras OOV utilizando los diccionarios de palabras en español, palabras en inglés y entidades. Además de detectar palabras OOV, las que son detectadas se anotan como se especifica en la tarea Tweet Norm 2013 [3]. Las palabras OOV que son anotadas como correctas o que no son en español pasan a la lista definitiva de OOV, el resto pasan al siguiente módulo (sección 3.3).
- **Annotator**: Forma parte del módulo OOVDetector y se utiliza para anotar las palabras OOV según la tarea Tweet Norm 2013 [3].
- **CandidatesGenerator**: Genera los candidatos para cada palabra OOV según los métodos que se definan: LevenshteinFST, Metaphone, L(\_L)+, fastText o Accented (sección 3.4).
- **CandidatesRanking**: Aplica un ranking a los candidatos de cada OOV para seleccionar el de mayor puntuación (sección 3.5).
- **PostProceso**: Último módulo en aplicarse del sistema, al texto final normalizado se le aplican reglas de postproceso para añadir signos de puntuación y mayúsculas (sección 3.6).

Todos estos módulos pertenecen al paquete tweetscore <sup>10</sup>.

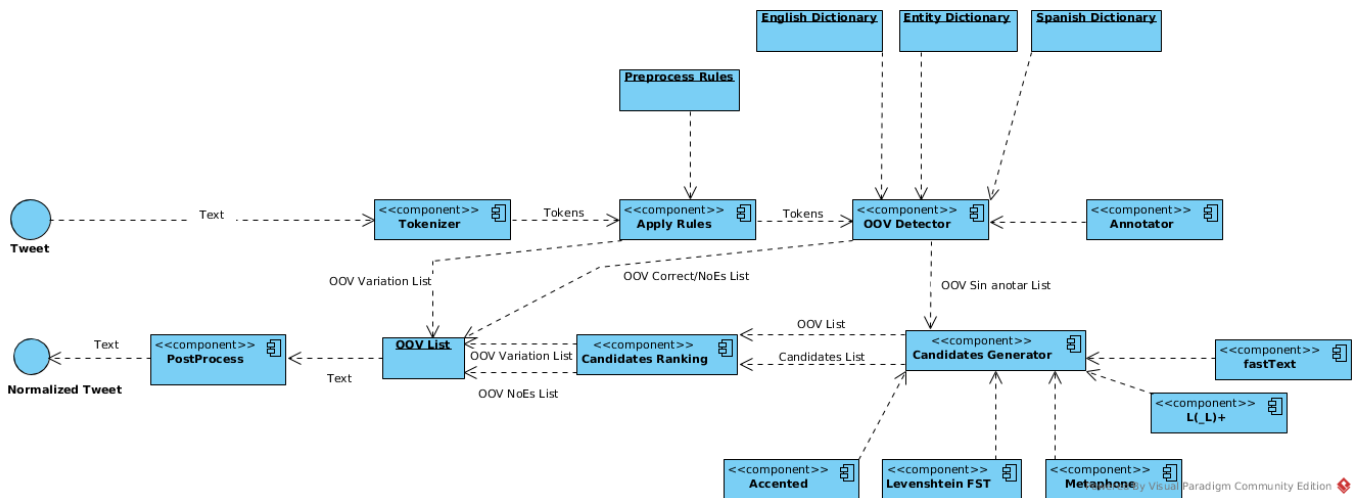


Fig. 2: Diagrama de módulos del sistema

<sup>10</sup> <https://github.com/jmorenov/TweetSC/tree/master/code/tweetscore>

## 4.2. Instrucciones para usar el software

Para utilizar el software desarrollado primero es necesario tener instalado Git y Java 1.8. Después de bajar el código fuente:

```
git clone https://github.com/jmorenov/TweetSC
```

Posteriormente se compila el código:

```
cd TweetSC/code/  
chmod +x build_all.sh  
./build_all.sh
```

Se puede añadir opcionalmente un modelo para el método fastText, primero hay que descargarlo <sup>11</sup>, y moverlo a la carpeta:

```
mv cc.es.300.bin TweetSC/code/models/cc.es.300.bin
```

Para ejecutarlo desde línea de comandos:

```
java -jar tweetscexecutable-all-v0.5.0-alpha.jar -text Texto de prueba
```

La ejecución de la evaluación sobre el corpus de Tweet-Norm 2013 [3]

```
java -jar tweetscexecutable-all-v0.5.0-alpha.jar \  
-workingDirectory evaluation \  
-annotatedFile tweet-norm-dev500_annotated.txt \  
-tweetsFile tweet-norm-dev500.txt \  
-resultFile results-test-dev500.txt \  
-method TweetSCMethod
```

La ejecución de la aplicación web:

```
cd tweetscweb  
./gradlew run
```

## 4.3. Aplicación web

En esta sección se explicará el funcionamiento de la aplicación web desarrollada y se mostrarán capturas de pantalla de la misma en funcionamiento.

La aplicación web se encuentra en nuestro paquete TweetSCWeb y hace uso del framework Spring Boot. Para el backend se utiliza Java y para el frontend Javascript (jQuery). Se ha intentado realizar un diseño sencillo y fluido usando la biblioteca Bootstrap.

---

<sup>11</sup> [https://drive.google.com/file/d/1-1hMVIgDa-ua\\_4iFBzNn7LzvflchoS7z/view](https://drive.google.com/file/d/1-1hMVIgDa-ua_4iFBzNn7LzvflchoS7z/view)



El funcionamiento de la aplicación web es muy sencillo, tiene una sección principal desde la que se accede a las demás secciones mediante una barra de navegación.

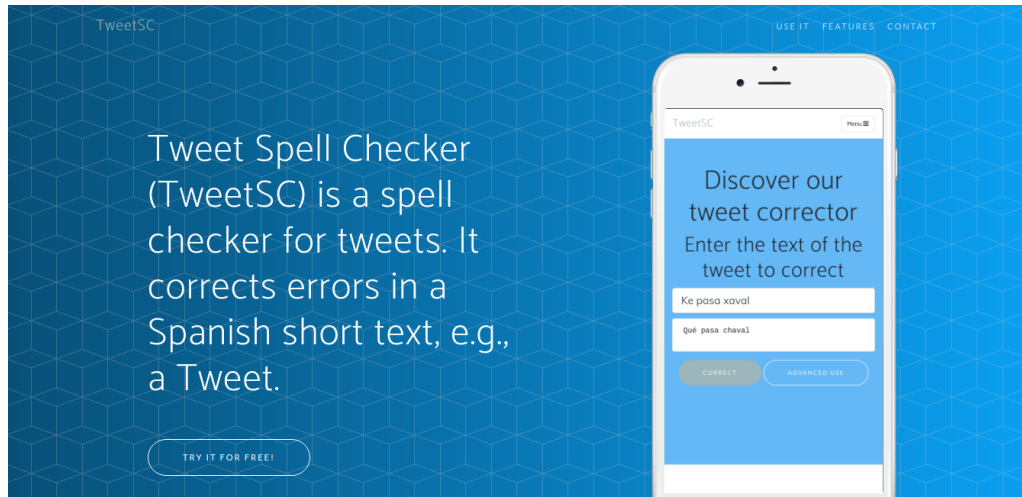


Fig. 3: Inicio de la aplicación web

En la sección siguiente se puede ver un corrector de texto simple.


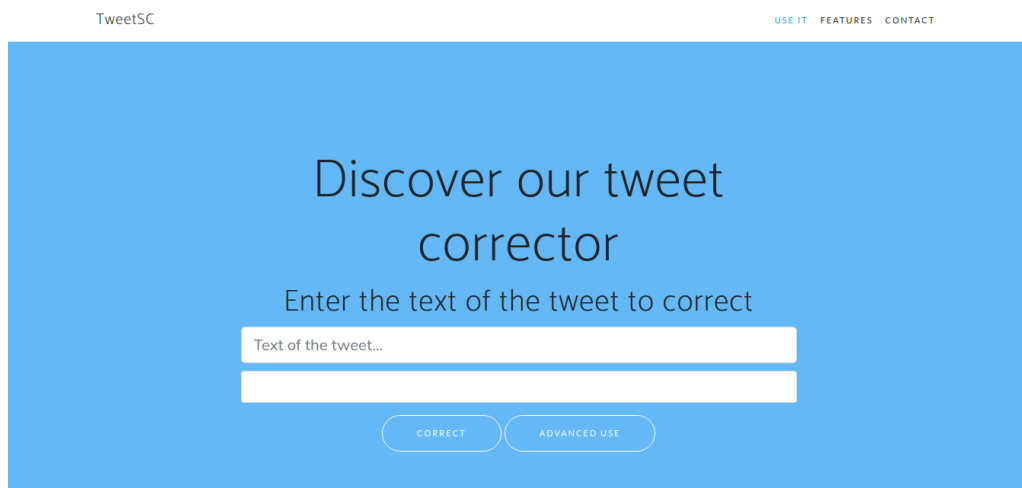



Fig. 4: Sección para utilizar el corrector

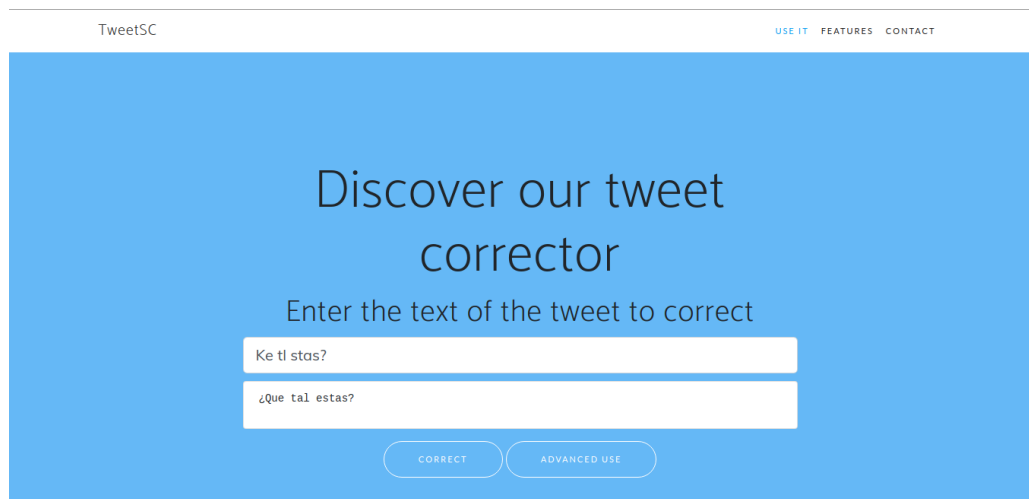

The screenshot shows the main interface of the TweetSC web application. At the top, there is a navigation bar with the logo 'TweetSC' on the left and links 'USE IT', 'FEATURES', and 'CONTACT' on the right. The main content area has a blue background with the heading 'Discover our tweet corrector'. Below the heading, it says 'Enter the text of the tweet to correct'. There are two input fields: the first contains 'Ke tl stas?' and the second contains '¿Que tal estas?'. At the bottom of the input area, there are two buttons: 'CORRECT' and 'ADVANCED USE'.

Fig. 5: Ejemplo de texto corregido

Si accedemos al corrector de uso avanzado podemos buscar tweets mediante texto, usuarios o id del tweet.

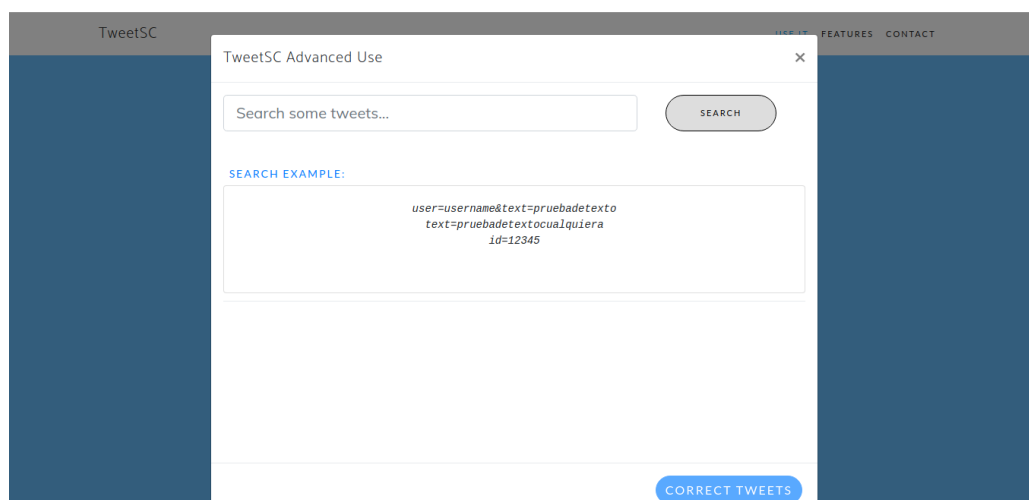

The screenshot shows the 'TweetSC Advanced Use' modal window. It has a search bar with the placeholder text 'Search some tweets...' and a 'SEARCH' button. Below the search bar, there is a 'SEARCH EXAMPLE:' section with a text area containing the following text: `user=username&text=pruebadetexto`, `text=pruebadetextocualquiera`, and `id=12345`. At the bottom right of the modal, there is a blue button labeled 'CORRECT TWEETS'.

Fig. 6: Corrector de tweets uso avanzado

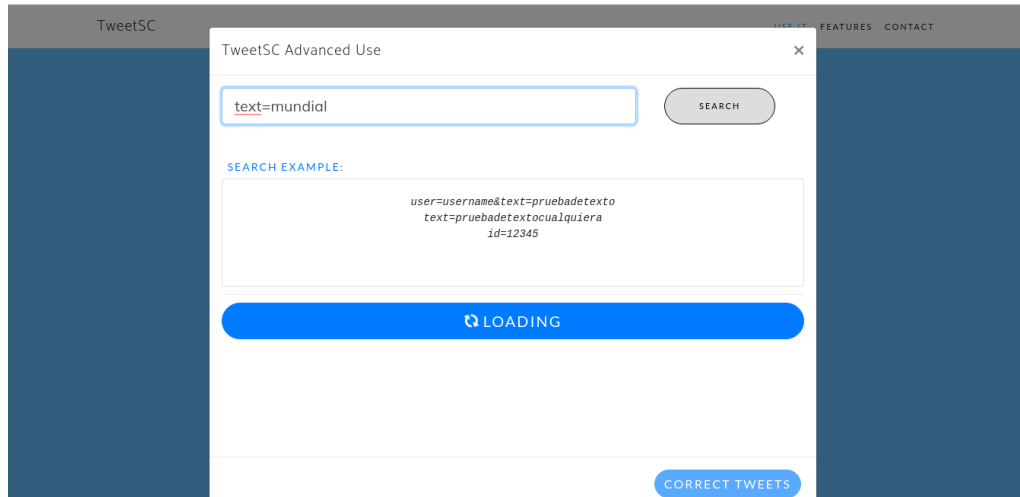


Fig. 7: Ejemplo de búsqueda de tweets

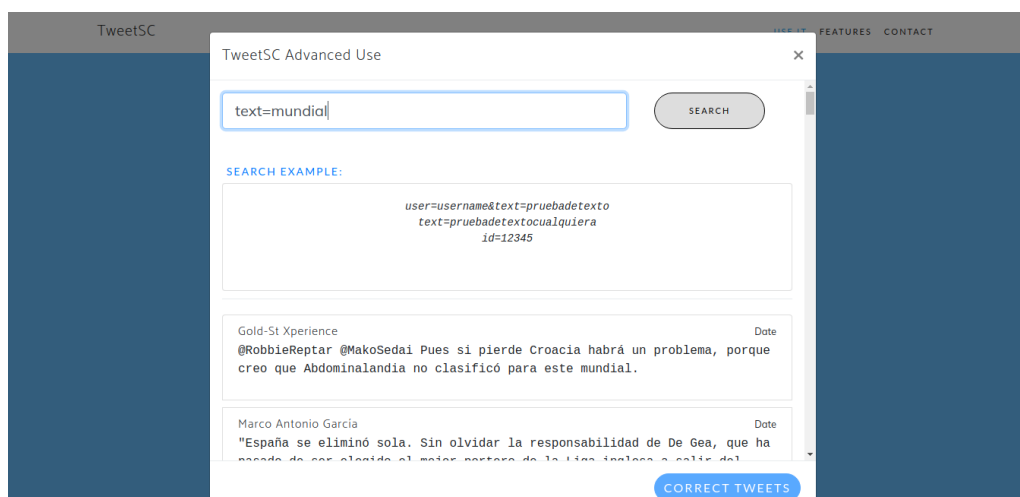


Fig. 8: Ejemplo de tweets encontrados

Los tweets encontrados se pueden seleccionar para corregirlos.

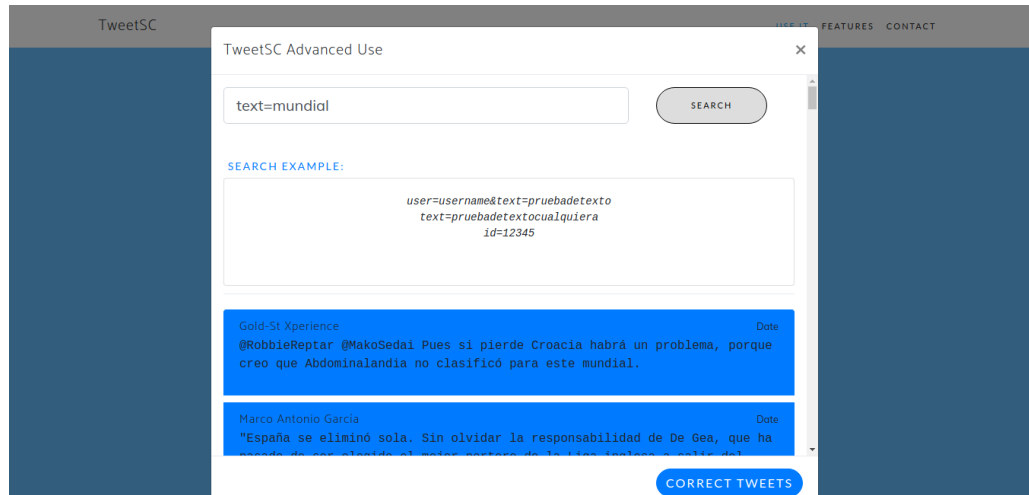


Fig. 9: Ejemplo de selección de tweets para corregir

Cuando los tweets son corregidos se marcan y se muestran ambas versiones, normalizada y la inicial.

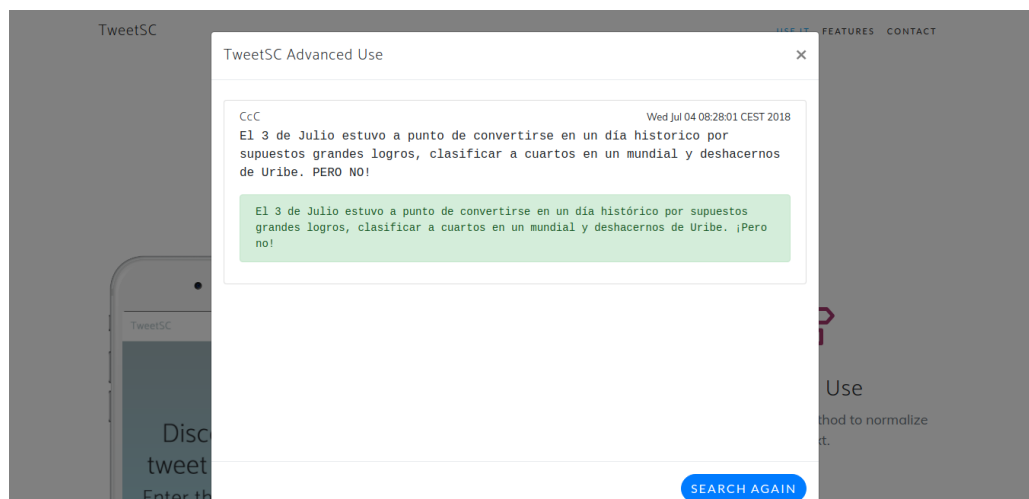


Fig. 10: Ejemplo de tweets corregidos

La siguiente sección es la de características del sistema.

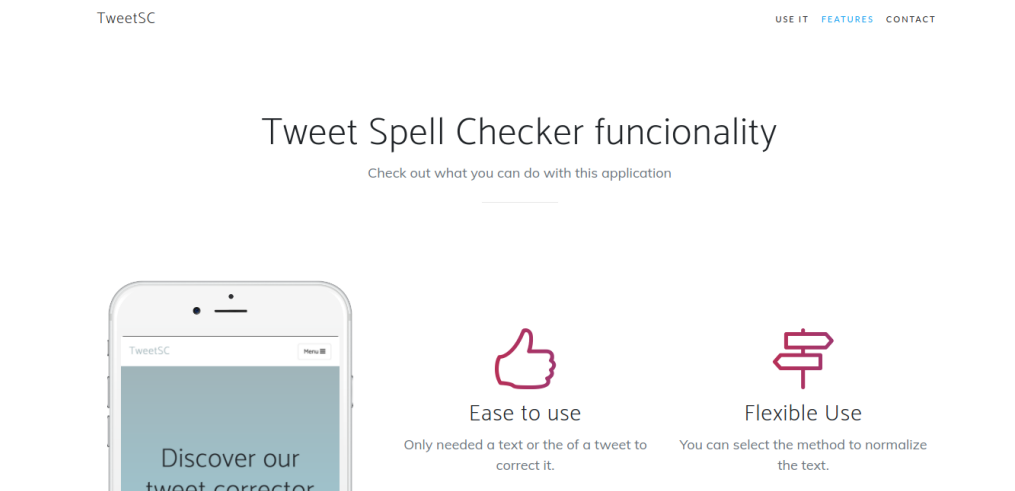


Fig. 11: Sección de características de la aplicación web

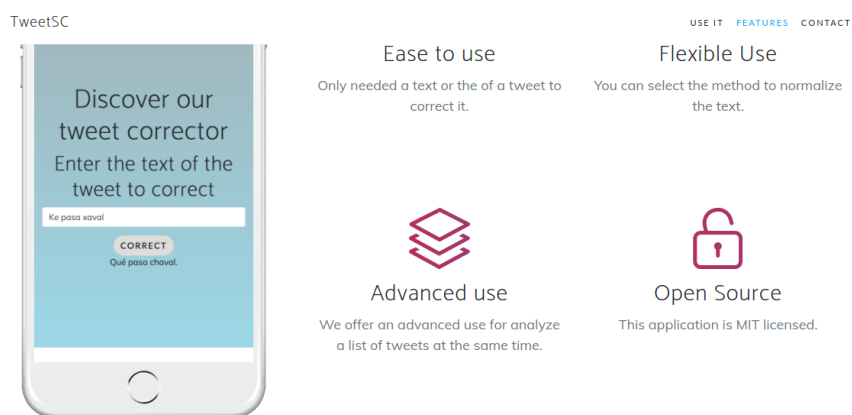


Fig. 12: Sección de características de la aplicación web

Además se ha añadido una sección para colaborar mediante GitHub en el desarrollo.

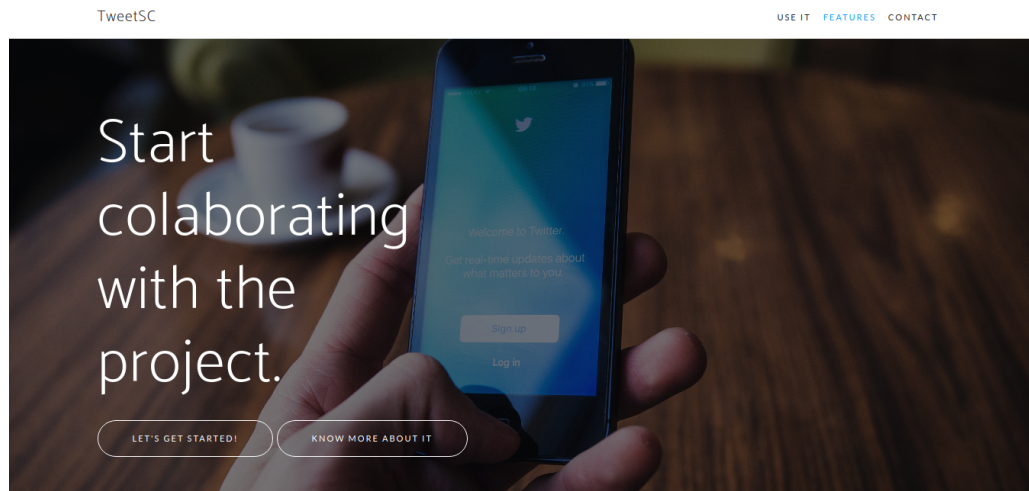


Fig. 13: Sección de colaboración

Por último la sección de contacto.

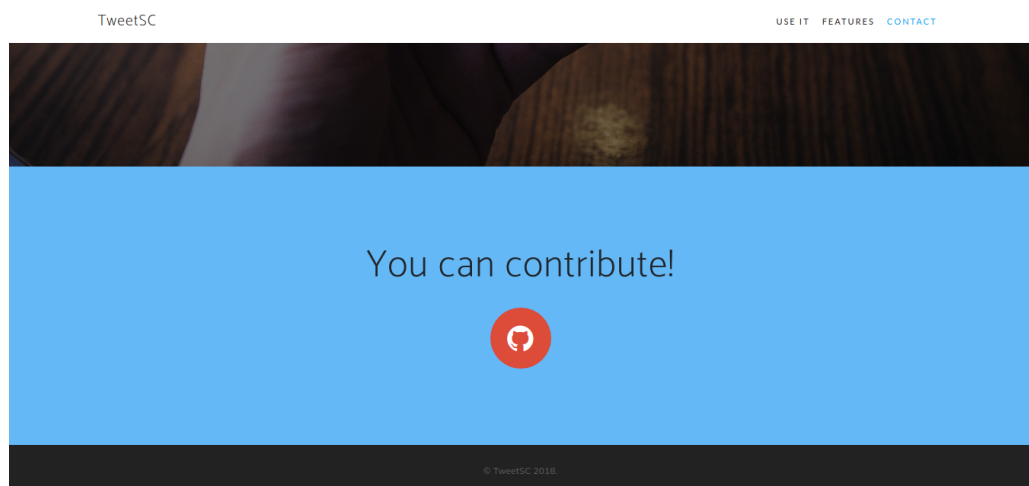


Fig. 14: Sección de contacto



## 5. Recursos utilizados

Los recursos utilizados por nuestro sistema son variados, desde diccionarios hasta bibliotecas para el desarrollo. Empezando desde el paquete TweetSCCore, se ha utilizado la biblioteca StanfordNLP [27] para la tokenización, además está disponible en el paquete la biblioteca Freeling [21]. El acceso a la API de Twitter se realiza mediante la biblioteca para Java Twitter4j. La detección de OOV utiliza tres diccionarios, el diccionario de español proporcionado por la herramienta Aspell, el diccionario de entidades JRC y un diccionario de inglés [13]. Los métodos de la generación de candidatos utilizan los recursos: Algoritmo del metáfono [43], fast-Text [16] y la biblioteca liblevenshtein [14] para el FST. El ranking de candidatos utiliza la biblioteca [4] para el modelo del lenguaje N-Grama y la distancia Damerau-Levenshtein ofrecida por String.Util de java.

Además el corpus de tweets para la evaluación es el que recopiló Tweet-Norm 2013 [3] y su script en Python para los resultados.

En la versión final se han utilizado cuatro diccionarios:

- Diccionario modificado y basado en GNU Aspell <sup>12</sup>.
- Diccionario fonético de las palabras del diccionario anterior <sup>13</sup>.
- Diccionario de palabras en inglés <sup>14</sup>.
- Diccionario de entidades modificado y basado en JRC Entities <sup>15</sup>.

También se ha utilizado un archivo de reglas de preproceso creado específicamente para este sistema <sup>16</sup>.

El paquete TweetSCWeb utiliza el framework Spring Boot para la aplicación web junto con el sdk de Google Cloud para ofrecer la aplicación en la nube.

<sup>12</sup> <https://github.com/jmorenov/TweetSC/blob/master/code/tweetsccore/src/main/resources/aspellNormalized.dict>

<sup>13</sup> <https://github.com/jmorenov/TweetSC/blob/master/code/tweetsccore/src/main/resources/aspellNormalizedPhonetic.dict>

<sup>14</sup> <https://github.com/jmorenov/TweetSC/blob/master/code/tweetsccore/src/main/resources/english.txt>

<sup>15</sup> [https://github.com/jmorenov/TweetSC/blob/master/code/tweetsccore/src/main/resources/jrc\\_entities.txt](https://github.com/jmorenov/TweetSC/blob/master/code/tweetsccore/src/main/resources/jrc_entities.txt)

<sup>16</sup> <https://github.com/jmorenov/TweetSC/blob/master/code/tweetsccore/src/main/resources/preprocess/rules.txt>





## 6. Evaluación

Esta sección describe la evaluación que se ha hecho de la solución propuesta. Primero se define la metodología utilizada para evaluar la solución, en segundo lugar explicamos el corpus utilizado como datos de entrada, posteriormente el gold standard actual y por último los experimentos que he realizada con sus resultados.

### 6.1. Metodología

La metodología que he seguido ha sido la misma que en la tarea compartida Tweet-Norm 2013 [64]. Ellos utilizan como medida de evaluación la corrección de errores, sólo tiene en cuenta si la forma propuesta es correcta en base a los criterios: **correcta** si la forma original era correcta y no se ha realizado ninguna normalización o si la forma original era incorrecta y el candidato seleccionado es el correcto; **errónea** en cualquier otro caso. La evaluación final es el número de decisiones realizadas correctamente sobre el total de palabras OOV.

### 6.2. Corpus

El corpus utilizado es el mismo que en la tarea compartida Tweet-Norm 2013 [64], en donde utilizan dos subconjuntos uno de desarrollo con 500 tweets y otro de evaluación con 600 tweets.

#### 6.2.1. Gold Standard

Nuestro gold standard ha sido el sistema propuesto RAE [22] en Tweet-Norm 2013 [64] donde consiguieron un resultado de 0.781 de precisión. Su sistema se basa en transductores de estados finitos con pesos.

### 6.3. Experimentos

Método	N	Positivos	Negativos	Errores	<i>Accuracy</i> (%)	Tiempo(s)
DictionaryM	10	6	10	4	31.578	1.889
DictionaryM	100	18	82	39	15.652	7.705
DictionaryM	500	131	405	162	21.510	18.926
TweetSCM	10	11	5	4	57.894	4.502
TweetSCM	100	23	77	39	20.0	45.118
TweetSCM	500	122	423	160	20.032	227.438
Sistema RAE	-	-	-	-	78.1	-

Tab. 1: Resultados de ejecución de mi sistema (DictionaryMethod y TweetSCMethod) y comparación con resultados del sistema RAE [22] que obtuvo los mejores resultado en la tarea Tweet Norm 2013[3].

Cómo se puede observar en la tabla [1](#) se muestran los resultados de mis dos métodos desarrollados, siendo DictionaryMethod la primera versión de mi sistema y consiste en un método básico de corrección con diccionarios, explicado en la [sección 3](#). TweetSCMethod es la versión final de mi solución.

La ejecución se realiza sobre tres conjuntos de tweets: 10, 100 y 500. Los resultados que se ven en la tabla son: valores positivos, negativos, errores, *accuracy* y tiempo de ejecución.

## 7. Conclusiones y líneas futuras

Este Trabajo de Fin de Máster ha diseñado e implementado un corrector de textos en español en Twitter. El trabajo ha tenido una componente de investigación, y en algunos aspectos se ha ido más allá del estado arte, implementando las técnicas: Word2Vec (específicamente fastText), una FST con la distancia Levenshtein, el algoritmo del metáfono para realizar similaridad fonética entre palabras y un modelo del lenguaje N-grama. El sistema se ha implementado, es plenamente funcional y su código está accesible en <https://github.com/jmorenov/TweetSC>. Además, es posible verlo en acción en la web <http://jmorenov.github.io/TweetSC/> (la versión disponible en esta url no es la última, para ello es necesario compilarla desde el código).

Se puede concluir que nuestro objetivo era construir un corrector de texto para Twitter (sección 1.2), juntos con los subobjetivos, y se ha conseguido cómo se ha demostrado en las secciones sección 3 y sección 4.

Los resultados en los experimentos han sido más modestos que el sistema RAE con el que se han comparado [22], un x % inferiores en *accuracy* con el conjunto de 500 tweets. Tras observar los errores detalladamente en los resultados he detectado que la mayoría de ellos proviene en la detección de OOV (sobretudo en palabras de habla inglesa o anglicismos) y en el ranking (la función de distancia y el modelo del lenguaje no tiene un funcionamiento óptimo).

Este sistema tiene proyección para mejorar estos resultados debido a que se ha diseñado de forma que sea posible añadir nuevos métodos tanto para generar candidatos cómo para realizar el ranking de los mismos o detectar palabras OOV. La primera mejora a realizar sería sobre el modelo del lenguaje N-grama para conseguir un buen funcionamiento del ranking.

Las líneas futuras son muy amplias ya que estamos en un tema bastante reciente, sobre todo en español cómo se puede ver en el sección 2, y los resultados se pueden mejorar de bastantes formas. Centrándonos en nuestro sistema una mejora futura sería el añadir contexto a los tweets a partir de sus *hashtags*, usuarios, imágenes o emoticonos; de forma que se pudiera reducir el conjunto de candidatos o añadir nuevos a partir de estos datos. También se podría realizar un análisis de sentimientos sobre el tweet después de normalizar por si se pudiera mejorar la corrección de algún OOV.



## 8. TweetSCCore Documentación del código (Java Documentation)

### Class Hierarchy

#### Classes

- `java.lang.Object`
  - `com.jmorenov.tweetsccore.analyzer.AnalysisElement` (in 8.5.1, page 51)
  - `com.jmorenov.tweetsccore.analyzer.Analyzer` (in 8.5.7, page 54)
    - `com.jmorenov.tweetsccore.analyzer.FreelingAnalyzer` (in 8.5.14, page 54)
  - `com.jmorenov.tweetsccore.candidates.Candidate` (in 8.6.1, page 56)
  - `com.jmorenov.tweetsccore.candidates.CandidatesGenerator` (in 8.6.7, page 58)
  - `com.jmorenov.tweetsccore.candidates.CandidatesRanking` (in 8.6.13, page 59)
  - `com.jmorenov.tweetsccore.candidates.method.CandidatesMethod` (in 8.7.8, page 62)
    - `com.jmorenov.tweetsccore.candidates.method.AccentedCandidatesMethod` (in 8.7.1, page 61)
    - `com.jmorenov.tweetsccore.candidates.method.FastTextCandidatesMethod` (in 8.7.34, page 66)
      - `com.jmorenov.tweetsccore.candidates.method.L_LCandidatesMethod` (in 8.7.41, page 67)
      - `com.jmorenov.tweetsccore.candidates.method.LevenshteinFSTCandidatesMethod` (in 8.7.48, page 69)
      - `com.jmorenov.tweetsccore.candidates.method.MetaphoneCandidatesMethod` (in 8.7.55, page 70)
      - `com.jmorenov.tweetsccore.candidates.method.CandidatesMethodCreateInstance` (in 8.7.15, page 63)
        - `com.jmorenov.tweetsccore.candidates.method.CandidatesMethodCreator` (in 8.7.21, page 64)
        - `com.jmorenov.tweetsccore.evaluation.TweetNormEvaluationResult` (in 8.8.1, page 71)
        - `com.jmorenov.tweetsccore.evaluation.TweetNormEvaluator` (in 8.8.7, page 74)
    - `com.jmorenov.tweetsccore.extra.Dictionaries` (in 8.10.8, page 80)
    - `com.jmorenov.tweetsccore.extra.File` (in 8.10.14, page 82)
    - `com.jmorenov.tweetsccore.extra.FreelingInitializer` (in 8.10.20, page 85)
    - `com.jmorenov.tweetsccore.extra.OOV` (in 8.10.26, page 86)
    - `com.jmorenov.tweetsccore.extra.OOVDetector` (in 8.10.32, page 89)
    - `com.jmorenov.tweetsccore.extra.Parser` (in 8.10.38, page 90)
    - `com.jmorenov.tweetsccore.extra.Token` (in 8.10.44, page 94)

- `com.jmorenov.tweetscore.method.Method` (in 8.11.8, page 97)
  - `com.jmorenov.tweetscore.method.DictionaryMethod` (in 8.11.1, page 96)
  - `com.jmorenov.tweetscore.method.TweetSCMethod` (in 8.11.15, page 98)
- `com.jmorenov.tweetscore.ner.NER` (in 8.4.1, page 48)
  - `com.jmorenov.tweetscore.ner.StanfordNLPNER` (in 8.4.14, page 50)
- `com.jmorenov.tweetscore.ner.NERElement` (in 8.4.8, page 49)
- `com.jmorenov.tweetscore.post.FreeLingPOST` (in 8.12.1, page 100)
- `com.jmorenov.tweetscore.post.OpenNLPPOST` (in 8.12.5, page 100)
- `com.jmorenov.tweetscore.post.POST` (in 8.12.9, page 101)
  - `com.jmorenov.tweetscore.post.StanfordNLPPOST` (in 8.12.16, page 101)
- `com.jmorenov.tweetscore.postprocess.PostProcess` (in 8.9.1, page 78)
- `com.jmorenov.tweetscore.preprocess.ApplyRules` (in 8.1.1, page 33)
- `com.jmorenov.tweetscore.preprocess.ApplyRulesResult` (in 8.1.7, page 34)
- `com.jmorenov.tweetscore.preprocess.Rule` (in 8.1.13, page 36)
- `com.jmorenov.tweetscore.preprocess.Rules` (in 8.1.19, page 37)
- `com.jmorenov.tweetscore.spellchecker.SpellChecker` (in 8.13.1, page 102)
- `com.jmorenov.tweetscore.tokenizer.Tokenizer` (in 8.14.29, page 108)
  - `com.jmorenov.tweetscore.tokenizer.FreelingTokenizer` (in 8.14.1, page 105)
  - `com.jmorenov.tweetscore.tokenizer.OpenNLPTokenizer` (in 8.14.8, page 106)
  - `com.jmorenov.tweetscore.tokenizer.SimpleTokenizer` (in 8.14.15, page 107)
  - `com.jmorenov.tweetscore.tokenizer.StanfordNLPTokenizer` (in 8.14.22, page 107)
- `com.jmorenov.tweetscore.twitter.Tweet` (in 8.2.1, page 39)
  - `com.jmorenov.tweetscore.twitter.TweetCorrected` (in 8.2.8, page 42)
- `com.jmorenov.tweetscore.twitter.TwitterConfiguration` (in 8.2.15, page 45)
- `com.jmorenov.tweetscore.twitter.api.Search` (in 8.3.1, page 46)
- `java.lang.Enum`
- `com.jmorenov.tweetscore.candidates.method.CandidatesMethodType` (in 8.7.27, page 65)
  - `com.jmorenov.tweetscore.extra.Annotation` (in 8.10.1, page 79)

## 8.1. Package `com.jmorenov.tweetscore.preprocess`

*Package Contents*

*Page*

### Classes

<b>ApplyRules</b> .....	<b>33</b>
ApplyRules class to apply preprocess rules.	
<b>ApplyRulesResult</b> .....	<b>34</b>
<b>Rule</b> .....	<b>36</b>
Rule class that define a rule element.	
<b>Rules</b> .....	<b>37</b>

Rule class that define the Rules element.

#### 8.1.1. Class ApplyRules

ApplyRules class to apply preprocess rules.

#### 8.1.2. Declaration

```
public class ApplyRules
    extends java.lang.Object
```

#### 8.1.3. Constructor summary

[ApplyRules\(\)](#) Constructor of the class.

#### 8.1.4. Method summary

[apply\(List\)](#) Method to apply the rules to a List of Token.

[apply\(String\)](#) Method to apply the rules to a text.

[applyParallel\(List\)](#) Method to apply the rules with parallelism to a List of Token.

#### 8.1.5. Constructors

- ApplyRules

```
public ApplyRules()
```

- Description

Constructor of the class.

#### 8.1.6. Methods

- apply

```
public ApplyRulesResult apply(java.util.List tokens)
```

- Description

Method to apply the rules to a List of Token.

- Parameters

- tokens – List of tokens

- Returns – ApplyRulesResult



- **apply**

```
public java.util.List apply(java.lang.String text)
```

- **Description**

- Method to apply the rules to a text.

- **Parameters**

- **text** – String with the text

- **Returns** – List of OOVs

- **applyParallel**

```
public ApplyRulesResult applyParallel(java.util.List  
tokens)
```

- **Description**

- Method to apply the rules with parallelism to a List of Token.

- **Parameters**

- **tokens** – List of tokens

- **Returns** – ApplyRulesResult

### 8.1.7. Class ApplyRulesResult

### 8.1.8. Declaration

```
public class ApplyRulesResult  
extends java.lang.Object
```

### 8.1.9. Constructor summary

[ApplyRulesResult\(\)](#) Constructor of the class.

### 8.1.10. Method summary

[addOOV\(OOV\)](#) Method to add an OOV to the list.

[addToken\(Token\)](#) Method to add a token to the list.

[getOOVList\(\)](#) Method to get the list of OOVs.

[getTokens\(\)](#) Method to get the list of tokens.

[setOOVList\(List\)](#) Method to set the list of OOV.

[setTokens\(List\)](#) Method to set the list of tokens.

### 8.1.11. Constructors

- **ApplyRulesResult**

```
public ApplyRulesResult()
```

- **Description**

Constructor of the class.

### 8.1.12. Methods

- **addOOV**

```
public void addOOV(com.jmorenov.tweetscore.extra.OOV  
    oov)
```

- **Description**

Method to add an OOV to the list.

- **Parameters**

- `oov` – OOV

- **addToken**

```
public void addToken(com.jmorenov.tweetscore.extra.  
    Token token)
```

- **Description**

Method to add a token to the list.

- **Parameters**

- `token` – Token

- **getOOVList**

```
public java.util.List getOOVList()
```

- **Description**

Method to get the list of OOVs.

- **Returns** – List OOV

- **getTokens**

```
public java.util.List getTokens()
```

- **Description**

Method to get the list of tokens.

- **Returns** – List Token

- **setOOVList**

```
public void setOOVList(java.util.List oov)
```

- **Description**

Method to set the list of OOV.

- **Parameters**

- `oov` – List OOV

- **setTokens**

```
public void setTokens(java.util.List tokens)
```

- **Description**

Method to set the list of tokens.

- **Parameters**

- `tokens` – List Token

### 8.1.13. Class Rule

Rule class that define a rule element.

### 8.1.14. Declaration

```
public class Rule  
    extends java.lang.Object
```

### 8.1.15. Constructor summary

[Rule\(String, String\)](#) Constructor of the class.

### 8.1.16. Method summary

[getRegex\(\)](#) Method to get the regex of the rule.

[getResult\(\)](#) Method to get the result of a rule.

### 8.1.17. Constructors

- Rule

```
public Rule(java.lang.String regex,java.lang.String
            result)
```

- **Description**  
Constructor of the class.
- **Parameters**
  - `regex` – String
  - `result` – String

### 8.1.18. Methods

- `getRegex`

```
public java.lang.String getRegex()
```

- **Description**  
Method to get the regex of the rule.
- **Returns** – String

- `getResult`

```
public java.lang.String getResult()
```

- **Description**  
Method to get the result of a rule.
- **Returns** – String

### 8.1.19. Class Rules

Rule class that define the Rules element.

### 8.1.20. Declaration

```
public class Rules
    extends java.lang.Object
```

### 8.1.21. Constructor summary

[Rules\(String\)](#) Constructor of the class.

### 8.1.22. Method summary

[`addRule\(Rule\)`](#) Method to add a new rule.

[`getRules\(\)`](#) Method to get the rules.

### 8.1.23. Constructors

#### ▪ Rules

```
public Rules(java.lang.String rulesFilename) throws java
.io.IOException
```

- **Description**

Constructor of the class.

- **Parameters**

- `rulesFilename` – String with the file name of the rules

- **Throws**

- `java.io.IOException` – When the file is not found

### 8.1.24. Methods

#### ▪ `addRule`

```
public void addRule(Rule rule)
```

- **Description**

Method to add a new rule.

- **Parameters**

- `rule` – Rule

#### ▪ `getRules`

```
public java.util.List getRules()
```

- **Description**

Method to get the rules.

- **Returns** – List of Rule

## 8.2. Package com.jmorenov.tweetscore.twitter

<i>Package Contents</i>	<i>Page</i>
<b>Classes</b>	
<b>Tweet</b> .....	<a href="#">39</a>
Tweet class with the structure of a tweet.	
<b>TweetCorrected</b> .....	<a href="#">42</a>
Tweet corrected class with the structure of a corrected tweet.	
<b>TwitterConfiguration</b> .....	<a href="#">45</a>
TwitterConfiguration class with the configuration of the connection with the API of twitter.	

### 8.2.1. Class Tweet

Tweet class with the structure of a tweet.

### 8.2.2. Declaration

```
public class Tweet
    extends java.lang.Object
```

### 8.2.3. All known subclasses

TweetCorrected (in [8.2.8](#), page [42](#))

### 8.2.4. Constructor summary

[Tweet\(\)](#) Default constructor of the class.  
[Tweet\(Status\)](#) Constructor of the class.  
[Tweet\(String, String, String, String\)](#) Constructor of the class.  
[Tweet\(String, String, String, String, String\)](#) Constructor of the class.  
[Tweet\(Tweet\)](#) Copy constructor

### 8.2.5. Method summary

[getDate\(\)](#) Method to get the date of the tweet.  
[getHash\(\)](#) Method to get the hash of the tweet.  
[getId\(\)](#) Method to get the id of the tweet.  
[getText\(\)](#) Method to get the text of the tweet.  
[getUsername\(\)](#) Method to get the username of the tweet.  
[toString\(\)](#) Method to get the string of the Tweet.

### 8.2.6. Constructors

#### ■ Tweet

```
public Tweet()
```

- **Description**

Default constructor of the class.

#### ■ Tweet

```
public Tweet(Status tweetStatus)
```

- **Description**

Constructor of the class.

- **Parameters**

- `tweetStatus` – Status from the object of Twitter4j.

#### ■ Tweet

```
public Tweet(java.lang.String id, java.lang.String  
    username, java.lang.String hash, java.lang.String text)
```

- **Description**

Constructor of the class.

- **Parameters**

- `id` – String with the id of the tweet.
- `username` – String with the username of the tweet.
- `hash` – String with the hash of the tweet.
- `text` – String with the text of the tweet.

#### ■ Tweet

```
public Tweet(java.lang.String id, java.lang.String  
    username, java.lang.String hash, java.lang.String text,  
    java.lang.String date)
```

- **Description**

Constructor of the class.

- **Parameters**

- `id` – String with the id of the tweet.
- `username` – String with the username of the tweet.
- `hash` – String with the hash of the tweet.
- `text` – String with the text of the tweet.
- `date` – String with the date of the tweet.

#### ▪ **Tweet**

```
public Tweet(Tweet tweet)
```

- **Description**

Copy constructor

- **Parameters**

- `tweet` – Tweet to copy from.

#### 8.2.7. Methods

##### ▪ **getDate**

```
public java.lang.String getDate()
```

- **Description**

Method to get the date of the tweet.

- **Returns** – String with the date of the tweet.

##### ▪ **getHash**

```
public java.lang.String getHash()
```

- **Description**

Method to get the hash of the tweet.

- **Returns** – String with the hash of the tweet.

##### ▪ **getId**

```
public java.lang.String getId()
```

- **Description**

Method to get the id of the tweet.

- **Returns** – String with the id of the tweet.



- **getText**

```
public java.lang.String getText()
```

- **Description**

Method to get the text of the tweet.

- **Returns** – String with the text of the tweet.

- **getUsername**

```
public java.lang.String getUsername()
```

- **Description**

Method to get the username of the tweet.

- **Returns** – String with the username of the tweet.

- **toString**

```
public java.lang.String toString()
```

- **Description**

Method to get the string of the Tweet.

- **Returns** – String with the String of the Tweet.

### 8.2.8. Class TweetCorrected

Tweet corrected class with the structure of a corrected tweet.

### 8.2.9. Declaration

```
public class TweetCorrected
    extends com.jmorenov.tweetscore.twitter.Tweet
```

### 8.2.10. Constructor summary

[TweetCorrected\(\)](#) Default constructor of the class.

[TweetCorrected\(String\)](#) Constructor of the class.

[TweetCorrected\(String, String, String, String, String\)](#) Constructor of the class.

[TweetCorrected\(Tweet\)](#) Constructor from tweet.

**8.2.11. Method summary**

**getCorrectedText()** Method to get the corrected tweet.

**getOOVWords()** Method to get the Out-Of-Vocabulary words of the tweet.

**setOOVWords(List)** Method to set the Out-Of-Vocabulary words of the tweet.

**toString()** Method to get the string of the Tweet Corrected.

**toTweetNormString()** Method to get the corrected text for Tweet Norm 2013.

**8.2.12. Constructors**

- **TweetCorrected**

```
public TweetCorrected()
```

- **Description**

Default constructor of the class.

- **TweetCorrected**

```
public TweetCorrected(java.lang.String text)
```

- **Description**

Constructor of the class.

- **Parameters**

- **text** – of the tweet

- **TweetCorrected**

```
public TweetCorrected(java.lang.String id, java.lang.String username, java.lang.String hash, java.lang.String text, java.lang.String date)
```

- **Description**

Constructor of the class.

- **Parameters**

- **id** – of the tweet
    - **username** –
    - **hash** – of the tweet

- `text` – of the tweet
- `date` – of the tweet

#### ▪ `TweetCorrected`

```
public TweetCorrected(Tweet tweet)
```

- **Description**  
Constructor from tweet.
- **Parameters**
  - `tweet` – `Tweet`

### 8.2.13. Methods

#### ▪ `getCorrectedText`

```
public java.lang.String getCorrectedText()
```

- **Description**  
Method to get the corrected tweet.
- **Returns** – String the corrected text

#### ▪ `getOOVWords`

```
public java.util.List getOOVWords()
```

- **Description**  
Method to get the Out-Of-Vocabulary words of the tweet.
- **Returns** – List of OOV

#### ▪ `setOOVWords`

```
public void setOOVWords(java.util.List OOVWords)
```

- **Description**  
Method to set the Out-Of-Vocabulary words of the tweet.
- **Parameters**
  - `OOVWords` – the list of OOV

- **toString**

```
public java.lang.String toString()
```

- **Description**

Method to get the string of the Tweet Corrected.

- **Returns** – String with the String of the class

- **toTweetNormString**

```
public java.lang.String toTweetNormString()
```

- **Description**

Method to get the corrected text for Tweet Norm 2013.

- **Returns** – String with the correctec text.

#### 8.2.14. Members inherited from class Tweet

com.jmorenov.tweetscore.twitter.Tweet (in [8.2.1](#), page [39](#))

- public String getDate()
- public String getHash()
- public String getId()
- public String getText()
- public String getUsername()
- public String toString()

#### 8.2.15. Class TwitterConfiguration

TwitterConfiguration class with the configuration of the connection with the API of twitter.

#### 8.2.16. Declaration

```
public class TwitterConfiguration  
    extends java.lang.Object
```

#### 8.2.17. Method summary

[getInstance\(\)](#) Method to get the instance of the class.

[getTwitterAccess\(\)](#) Method to get the access to the API.

### 8.2.18. Methods

#### ▪ getInstance

```
public static TwitterConfiguration getInstance()
```

- **Description**

Method to get the instance of the class.

- **Returns** – TwitterConfiguration the instance of the class

#### ▪ getTwitterAccess

```
public Twitter getTwitterAccess()
```

- **Description**

Method to get the access to the API.

- **Returns** – Twitter

## 8.3. Package com.jmorenov.tweetscore.twitter.api

*Package Contents*

*Page*

### Classes

**Search** ..... [46](#)  
 Search class to do call on the Twitter API about tweets.

#### 8.3.1. Class Search

Search class to do call on the Twitter API about tweets.

#### 8.3.2. Declaration

```
public class Search
  extends java.lang.Object
```

#### 8.3.3. Constructor summary

[Search\(\)](#) Default constructor of the class.

#### 8.3.4. Method summary

[getAllTweetsOfUser\(String\)](#) Method to get all the tweets of an user.

[getTweetById\(String\)](#) Method to search tweets by it id.

[getTweetsByText\(String\)](#) Method to search tweets.

[getTweetsByTextOfUser\(String, String\)](#) Method to search tweets of an user.

### 8.3.5. Constructors

- **Search**

```
public Search()
```

- **Description**

Default constructor of the class.

### 8.3.6. Methods

- **getAllTweetsOfUser**

```
public java.util.List getAllTweetsOfUser(java.lang.  
String username)
```

- **Description**

Method to get all the tweets of an user.

- **Parameters**

- **username** – the user

- **Returns** – List of Status with the tweets

- **getTweetById**

```
public com.jmorenov.tweetscore.twitter.Tweet  
getTweetById(java.lang.String id)
```

- **Description**

Method to search tweets by it id.

- **Parameters**

- **id** – the id of the tweet

- **Returns** – Status The tweet

- **getTweetsByText**

```
public java.util.List getTweetsByText(java.lang.String  
text)
```

- **Description**

Method to search tweets.

- **Parameters**
  - `text` – the text to search
- **Returns** – List of Status with the tweets

#### ▪ `getTweetsByTextOfUser`

```
public java.util.List getTweetsByTextOfUser(java.lang.
    String username, java.lang.String text)
```

- **Description**  
Method to search tweets of an user.
- **Parameters**
  - `username` – the user
  - `text` – the text to search
- **Returns** – List of Status with the tweets

## 8.4. Package `com.jmorenov.tweetscore.ner`

*Package Contents*

*Page*

### Classes

<b>NER</b> .....	<a href="#">48</a>
POSTagging abstract class.	
<b>NERElement</b> .....	<a href="#">49</a>
NERElement class.	
<b>StanfordNLPNER</b> .....	<a href="#">50</a>
StanfordNLP class.	

### 8.4.1. Class **NER**

POSTagging abstract class.

### 8.4.2. Declaration

```
public abstract class NER
    extends java.lang.Object
```

### 8.4.3. All known subclasses

StanfordNLPNER (in [8.4.14](#), page [50](#))

### 8.4.4. Constructor summary

[NER\(\)](#)

#### 8.4.5. Method summary

[getNERElements\(String\)](#) Method to get a list with the NER Elements detected.

#### 8.4.6. Constructors

- NER

```
public NER()
```

#### 8.4.7. Methods

- [getNERElements](#)

```
public abstract java.util.List getNERElements(java.lang.  
String text)
```

- **Description**

Method to get a list with the NER Elements detected.

- **Returns** – List with the NER Elements.

#### 8.4.8. Class NERElement

NERElement class.

#### 8.4.9. Declaration

```
public class NERElement  
extends java.lang.Object
```

#### 8.4.10. Constructor summary

[NERElement\(String, String\)](#) Constructor of the class

#### 8.4.11. Method summary

[getNerDetected\(\)](#) Method to get the ner detected.

[getOriginalElement\(\)](#) Method to get the original element.



#### 8.4.12. Constructors

##### ▪ NERElement

```
public NERElement(java.lang.String originalElement , java.
    lang.String nerDetected)
```

- **Description**

Constructor of the class

- **Parameters**

- `originalElement` –
- `nerDetected` –

#### 8.4.13. Methods

##### ▪ getNerDetected

```
public java.lang.String getNerDetected()
```

- **Description**

Method to get the ner detected.

- **Returns** – String with the ner detected

##### ▪ getOriginalElement

```
public java.lang.String getOriginalElement()
```

- **Description**

Method to get the original element.

- **Returns** – String with the original element

#### 8.4.14. Class StanfordNLPNER

StanfordNLP class.

#### 8.4.15. Declaration

```
public class StanfordNLPNER
    extends com.jmorenov.tweetscore.ner.NER
```

#### 8.4.16. Constructor summary

[StanfordNLPNER\(String\)](#)

**8.4.17. Method summary**

[getNERElements\(String\)](#) Method to get a list with the NER Elements detected.

**8.4.18. Constructors**

- **StanfordNLPNER**

```
public StanfordNLPNER(java.lang.String text)
```

**8.4.19. Methods**

- **getNERElements**

```
public java.util.List getNERElements(java.lang.String text)
```

- **Description**

Method to get a list with the NER Elements detected.

- **Returns** – List with the NER Elements.

**8.4.20. Members inherited from class NER**

com.jmorenov.tweetscore.ner.NER (in [8.4.1](#), page [48](#))

- public abstract List getNERElements(java.lang.String text)

**8.5. Package com.jmorenov.tweetscore.analyzer**

*Package Contents*

*Page*

**Classes**

<b>AnalysisElement</b> .....	<a href="#">51</a>
AnalysisElement class.	
<b>Analyzer</b> .....	<a href="#">54</a>
Analyzer abstract class.	
<b>FreelingAnalyzer</b> .....	<a href="#">54</a>
FreelingTokenizer class to tokenize a text.	

**8.5.1. Class AnalysisElement**

AnalysisElement class.

### 8.5.2. Declaration

```
public class AnalysisElement
    extends java.lang.Object
```

### 8.5.3. Constructor summary

[AnalysisElement\(String, String, String, String, boolean\)](#) Constructor of the class.

### 8.5.4. Method summary

[getForm\(\)](#) Method to get the form.  
[getLemma\(\)](#) Method to get the lemma.  
[getSenses\(\)](#) Method to get the senses.  
[getTag\(\)](#) Method to get the tag.  
[isMultiWord\(\)](#) Method to get if the element is multi word.  
[toString\(\)](#) Method to get the class as String.

### 8.5.5. Constructors

- **AnalysisElement**

```
public AnalysisElement(java.lang.String form, java.lang.
    String lemma, java.lang.String tag, java.lang.String
    senses, boolean isMultiWord)
```

- **Description**

Constructor of the class.

- **Parameters**

- form –
- lemma –
- tag –
- isMultiWord –

### 8.5.6. Methods

- **getForm**

```
public java.lang.String getForm()
```

- **Description**

Method to get the form.

- **Returns** – String with the form

- **getLemma**

```
public java.lang.String getLemma()
```

- **Description**  
Method to get the lemma.
- **Returns** – String with the lemma

- **getSenses**

```
public java.lang.String getSenses()
```

- **Description**  
Method to get the senses.
- **Returns** – String with the senses

- **getTag**

```
public java.lang.String getTag()
```

- **Description**  
Method to get the tag.
- **Returns** – String with the tag

- **isMultiWord**

```
public boolean isMultiWord()
```

- **Description**  
Method to get if the element is multi word.
- **Returns** – Boolean with the test

- **toString**

```
public java.lang.String toString()
```

- **Description**  
Method to get the class as String.
- **Returns** – String

### 8.5.7. Class Analyzer

Analyzer abstract class.

### 8.5.8. Declaration

```
public abstract class Analyzer
    extends java.lang.Object
```

### 8.5.9. All known subclasses

FreelingAnalyzer (in [8.5.14](#), page [54](#))

### 8.5.10. Constructor summary

[Analyzer\(\)](#)

### 8.5.11. Method summary

[analyzeText\(String\)](#) Method to get a list with the Analysis Elements.

### 8.5.12. Constructors

- Analyzer

```
public Analyzer()
```

### 8.5.13. Methods

- analyzeText

```
public abstract java.util.List analyzeText(java.lang.
    String text)
```

- Description

Method to get a list with the Analysis Elements.

- Returns – List with the Analysis Elements.

### 8.5.14. Class FreelingAnalyzer

FreelingTokenizer class to tokenize a text.

**8.5.15. Declaration**

```
public class FreelingAnalyzer
    extends com.jmorenov.tweetscore.analyzer.Analyzer
```

**8.5.16. Constructor summary**

[FreelingAnalyzer\(\)](#) Constructor of the class.

**8.5.17. Method summary**

[analyzeText\(String\)](#) Method to get a list with the NER Elements detected.

**8.5.18. Constructors**

- **FreelingAnalyzer**

```
public FreelingAnalyzer()
```

- **Description**  
Constructor of the class.

**8.5.19. Methods**

- **analyzeText**

```
public java.util.List analyzeText(java.lang.String text)
```

- **Description**  
Method to get a list with the NER Elements detected.
- **Returns** – List with the NER Elements.

**8.5.20. Members inherited from class Analyzer**

com.jmorenov.tweetscore.analyzer.Analyzer (in [8.5.7](#), page [54](#))

- public abstract List **analyzeText**(java.lang.String text)

**8.6. Package com.jmorenov.tweetscore.candidates**

*Package Contents*

*Page*

**Classes**

**Candidate** ..... [56](#)

Candidate class that define the candidate element.	
<b>CandidatesGenerator</b> .....	<a href="#">58</a>
CandidatesGenerator class that define the generator of candidates.	
<b>CandidatesRanking</b> .....	<a href="#">59</a>
CandidatesRanking class to ranking the candidates.	

### 8.6.1. Class Candidate

Candidate class that define the candidate element.

### 8.6.2. Declaration

```
public class Candidate
    extends java.lang.Object implements java.lang.Comparable
```

### 8.6.3. Constructor summary

[Candidate\(String, CandidatesMethodType\)](#) Constructor of the class.

### 8.6.4. Method summary

[addScore\(double\)](#) Method to add score of the candidate.  
[compareTo\(Candidate\)](#) Method to compare two candidates.  
[getCandidate\(\)](#) Method to get the candidate.  
[getGeneratedBy\(\)](#) Method to get the method that generated the candidate.  
[getScore\(\)](#) Method to get the score of the candidate.  
[setScore\(double\)](#) Method to set the score of the candidate.

### 8.6.5. Constructors

#### ■ Candidate

```
public Candidate(java.lang.String candidate ,method.
    CandidatesMethodType generatedBy)
```

#### • Description

Constructor of the class.

#### • Parameters

- `candidate` – String with the candidate
- `generatedBy` – String with the method that generated the candidate

### 8.6.6. Methods

- **addScore**

```
public void addScore(double score)
```

- **Description**

- Method to add score of the candidate.

- **Parameters**

- `score` – double

- **compareTo**

```
public int compareTo(Candidate candidate)
```

- **Description**

- Method to compare two candidates.

- **Parameters**

- `candidate` – Candidate

- **Returns** – int

- **getCandidate**

```
public java.lang.String getCandidate()
```

- **Description**

- Method to get the candidate.

- **Returns** – String with the candidate

- **getGeneratedBy**

```
public method.CandidatesMethodType getGeneratedBy()
```

- **Description**

- Method to get the method that generated the candidate.

- **Returns** – CandidatesMethodType with the generated by

- **getScore**



```
public double getScore()
```

- **Description**

Method to get the score of the candidate.

- **Returns** – double

- **setScore**

```
public void setScore(double score)
```

- **Description**

Method to set the score of the candidate.

- **Parameters**

- `score` – double

### 8.6.7. Class CandidatesGenerator

CandidatesGenerator class that define the generator of candidates.

### 8.6.8. Declaration

```
public class CandidatesGenerator  
    extends java.lang.Object
```

### 8.6.9. Constructor summary

[CandidatesGenerator\(List\)](#) Constructor of the class.

### 8.6.10. Method summary

[generateCandidates\(List\)](#) Method to generate the candidates of an OOV.

### 8.6.11. Constructors

- **CandidatesGenerator**

```
public CandidatesGenerator(java.util.List methods)
```

- **Description**

Constructor of the class.

- **Parameters**

- `methods` – List of CandidatesMethod

### 8.6.12. Methods

- **generateCandidates**

```
public java.util.List generateCandidates(java.util.List  
    oovs)
```

- **Description**

Method to generate the candidates of an OOV.

- **Parameters**

- `oovs` – List of OOV

- **Returns** – List of OOV

### 8.6.13. Class CandidatesRanking

CandidatesRanking class to ranking the candidates.

### 8.6.14. Declaration

```
public class CandidatesRanking  
    extends java.lang.Object
```

### 8.6.15. Constructor summary

[CandidatesRanking\(\)](#) Constructor of the class.

### 8.6.16. Method summary

[rank\(String, OOV\)](#) Method to ranking the candidates.

### 8.6.17. Constructors

- **CandidatesRanking**

```
public CandidatesRanking()
```

- **Description**

Constructor of the class.

### 8.6.18. Methods

#### ■ rank

```
public java.util.List rank(java.lang.String text ,com.
    jmorenov.tweetscore.extra.OOV oov)
```

#### • Description

Method to ranking the candidates.

#### • Parameters

- `text` – Original text
- `oov` – OOV

#### • Returns – Order List of Candidate

## 8.7. Package `com.jmorenov.tweetscore.candidates.method`

*Package Contents*

*Page*

### Classes

<b>AccentedCandidatesMethod</b> .....	<a href="#">61</a>
AccentedCandidatesMethod class that define a method to generate candidates.	
<b>CandidatesMethod</b> .....	<a href="#">62</a>
CandidatesMethod abstract class that define a method to generate candidates.	
<b>CandidatesMethodCreateInstance</b> .....	<a href="#">63</a>
<b>CandidatesMethodCreator</b> .....	<a href="#">64</a>
<b>CandidatesMethodType</b> .....	<a href="#">65</a>
CandidatesMethodType enum with the different methods to generate candidates.	
<b>FastTextCandidatesMethod</b> .....	<a href="#">66</a>
FastTextCandidatesMethod class that define a method to generate candidates.	
<b>L_LCandidatesMethod</b> .....	<a href="#">67</a>
L_LCandidatesMethod class that define a method to generate candidates.	
<b>LevenshteinFSTCandidatesMethod</b> .....	<a href="#">69</a>
LevenshteinFSTCandidatesMethod class that define a method to generate candidates.	
<b>MetaphoneCandidatesMethod</b> .....	<a href="#">70</a>
MetaphoneCandidatesMethod class that define a method to generate candidates.	

### 8.7.1. Class AccentedCandidatesMethod

AccentedCandidatesMethod class that define a method to generate candidates.

### 8.7.2. Declaration

```
public class AccentedCandidatesMethod
    extends com.jmorenov.tweetscore.candidates.method.
        CandidatesMethod
```

### 8.7.3. Constructor summary

[AccentedCandidatesMethod\(\)](#) Constructor of the class.

### 8.7.4. Method summary

[generateCandidates\(OOV\)](#) Method to generate candidates from an OOV.

[getMethod\(\)](#) Method to obtain the method description.

### 8.7.5. Constructors

- **AccentedCandidatesMethod**

```
public AccentedCandidatesMethod()
```

- **Description**

Constructor of the class.

### 8.7.6. Methods

- **generateCandidates**

```
public java.util.List generateCandidates(com.jmorenov.
    tweetscore.extra.OOV oov)
```

- **Description**

Method to generate candidates from an OOV.

- **Parameters**

- oov – OOV

- **Returns** – List of Candidates

- **getMethod**

```
public CandidatesMethodType getMethod()
```

- **Description**

Method to obtain the method description.

- **Returns** – CandidatesMethodType

### 8.7.7. Members inherited from class CandidatesMethod

`com.jmorenov.tweetscore.candidates.method.CandidatesMethod` (in [8.7.8](#), page [62](#))

- `public abstract List generateCandidates(com.jmorenov.tweetscore.extra.OOV oov)`
- `public abstract CandidatesMethodType getMethod()`

### 8.7.8. Class CandidatesMethod

CandidatesMethod abstract class that define a method to generate candidates.

### 8.7.9. Declaration

```
public abstract class CandidatesMethod
    extends java.lang.Object
```

### 8.7.10. All known subclasses

`LLCandidatesMethod` (in [8.7.41](#), page [67](#)), `MetaphoneCandidatesMethod` (in [8.7.55](#), page [70](#)), `AccentedCandidatesMethod` (in [8.7.1](#), page [61](#)), `FastTextCandidatesMethod` (in [8.7.34](#), page [66](#)), `LevenshteinFSTCandidatesMethod` (in [8.7.48](#), page [69](#))

### 8.7.11. Constructor summary

[CandidatesMethod\(\)](#)

### 8.7.12. Method summary

[generateCandidates\(OOV\)](#) Abstract method to generate candidates from an OOV.

[getMethod\(\)](#) Abstract method to obtain the method description.

### 8.7.13. Constructors

- **CandidatesMethod**

```
public CandidatesMethod()
```

**8.7.14. Methods**▪ **generateCandidates**

```
public abstract java.util.List generateCandidates(com.
    jmorenov.tweetscore.extra.OOV oov)
```

• **Description**

Abstract method to generate candidates from an OOV.

• **Parameters**

- oov – OOV

• **Returns** – List of Candidates▪ **getMethod**

```
public abstract CandidatesMethodType getMethod()
```

• **Description**

Abstract method to obtain the method description.

• **Returns** – CandidatesMethodType**8.7.15. Class CandidatesMethodCreateInstance****8.7.16. Declaration**

```
public class CandidatesMethodCreateInstance
    extends java.lang.Object implements java.util.concurrent.
        Callable
```

**8.7.17. Constructor summary**

[CandidatesMethodCreateInstance\(CandidatesMethodType\)](#)

**8.7.18. Method summary**

[call\(\)](#)

**8.7.19. Constructors**▪ **CandidatesMethodCreateInstance**

```
public CandidatesMethodCreateInstance(
    CandidatesMethodType type)
```

### 8.7.20. Methods

- **call**

`java.lang.Object call()` **throws** `java.lang.Exception`

### 8.7.21. Class **CandidatesMethodCreator**

#### 8.7.22. Declaration

```
public class CandidatesMethodCreator
    extends java.lang.Object
```

#### 8.7.23. Constructor summary

[CandidatesMethodCreator\(\)](#)

#### 8.7.24. Method summary

[getAllMethodParallel\(\)](#)  
[getAllMethods\(\)](#)  
[getMethodByType\(CandidatesMethodType\)](#)

#### 8.7.25. Constructors

- **CandidatesMethodCreator**

```
public CandidatesMethodCreator()
```

### 8.7.26. Methods

- **getAllMethodParallel**

```
public static java.util.List getAllMethodParallel()
```

- **getAllMethods**

```
public static java.util.List getAllMethods()
```

- **getMethodByType**

```
public static CandidatesMethod getMethodByType(
    CandidatesMethodType type)
```

### 8.7.27. Class CandidatesMethodType

CandidatesMethodType enum with the different methods to generate candidates.

### 8.7.28. Declaration

```
public final class CandidatesMethodType
    extends java.lang.Enum
```

### 8.7.29. Field summary

[Accented](#)  
[FastText](#)  
[L\\_L](#)  
[LevenshteinFST](#)  
[Metaphone](#)

### 8.7.30. Method summary

[valueOf\(String\)](#)  
[values\(\)](#)

### 8.7.31. Fields

- public static final CandidatesMethodType **LevenshteinFST**
- public static final CandidatesMethodType **Metaphone**
- public static final CandidatesMethodType **L\_L**
- public static final CandidatesMethodType **FastText**
- public static final CandidatesMethodType **Accented**

### 8.7.32. Methods

- **valueOf**

```
public static CandidatesMethodType valueOf(java.lang.
    String name)
```

- **values**

```
public static CandidatesMethodType[] values()
```



### 8.7.33. Members inherited from class Enum

java.lang.Enum

- protected final Object clone() throws CloneNotSupportedException
- public final int compareTo(Enum arg0)
- public final boolean equals(Object arg0)
- protected final void finalize()
- public final Class getDeclaringClass()
- public final int hashCode()
- public final String name()
- public final int ordinal()
- public String toString()
- public static Enum valueOf(Class arg0, String arg1)

### 8.7.34. Class FastTextCandidatesMethod

FastTextCandidatesMethod class that define a method to generate candidates.

### 8.7.35. Declaration

```
public class FastTextCandidatesMethod
    extends com.jmorenov.tweetsccore.candidates.method.
        CandidatesMethod
```

### 8.7.36. Constructor summary

[FastTextCandidatesMethod\(\)](#) Constructor of the class.

### 8.7.37. Method summary

[generateCandidates\(OOV\)](#) Method to generate candidates from an OOV.

[getMethod\(\)](#) Method to obtain the method description.

### 8.7.38. Constructors

- FastTextCandidatesMethod

```
public FastTextCandidatesMethod()
```

- Description

Constructor of the class.

### 8.7.39. Methods

#### ▪ generateCandidates

```
public java.util.List generateCandidates(com.jmorenov.
    tweetscore.extra.OOV oov)
```

- **Description**  
Method to generate candidates from an OOV.
- **Parameters**
  - oov – OOV
- **Returns** – List of Candidates

#### ▪ getMethod

```
public CandidatesMethodType getMethod()
```

- **Description**  
Method to obtain the method description.
- **Returns** – CandidatesMethodType

### 8.7.40. Members inherited from class CandidatesMethod

com.jmorenov.tweetscore.candidates.method.CandidatesMethod (in 8.7.8, page 62)

- public abstract List generateCandidates(com.jmorenov.tweetscore.extra.OOV oov)
- public abstract CandidatesMethodType getMethod()

### 8.7.41. Class L\_LCandidatesMethod

L\_LCandidatesMethod class that define a method to generate candidates.

### 8.7.42. Declaration

```
public class L_LCandidatesMethod
    extends com.jmorenov.tweetscore.candidates.method.
        CandidatesMethod
```

### 8.7.43. Constructor summary

[L\\_LCandidatesMethod\(\)](#) Constructor of the class.

#### 8.7.44. Method summary

[generateCandidates\(OOV\)](#) Method to generate candidates from an OOV.

[getMethod\(\)](#) Method to obtain the method description.

#### 8.7.45. Constructors

##### ■ L\_LCandidatesMethod

```
public L_LCandidatesMethod()
```

- **Description**

Constructor of the class.

#### 8.7.46. Methods

##### ■ generateCandidates

```
public java.util.List generateCandidates(com.jmorenov.
    tweetscore.extra.OOV oov)
```

- **Description**

Method to generate candidates from an OOV.

- **Parameters**

- oov – OOV

- **Returns** – List of Candidates

##### ■ getMethod

```
public CandidatesMethodType getMethod()
```

- **Description**

Method to obtain the method description.

- **Returns** – CandidatesMethodType

#### 8.7.47. Members inherited from class CandidatesMethod

`com.jmorenov.tweetscore.candidates.method.CandidatesMethod` (in [8.7.8](#), page [62](#))

- `public abstract List generateCandidates(com.jmorenov.tweetscore.extra.OOV oov)`
- `public abstract CandidatesMethodType getMethod()`

**8.7.48. Class LevenshteinFSTCandidatesMethod**

LevenshteinFSTCandidatesMethod class that define a method to generate candidates.

**8.7.49. Declaration**

```
public class LevenshteinFSTCandidatesMethod
    extends com.jmorenov.tweetscore.candidates.method.
        CandidatesMethod
```

**8.7.50. Constructor summary**

[LevenshteinFSTCandidatesMethod\(\)](#) Constructor of the class.

**8.7.51. Method summary**

[generateCandidates\(OOV\)](#) Method to generate candidates from an OOV.

[getMethod\(\)](#) Method to obtain the method description.

**8.7.52. Constructors**

- **LevenshteinFSTCandidatesMethod**

```
public LevenshteinFSTCandidatesMethod()
```

- **Description**

Constructor of the class.

**8.7.53. Methods**

- **generateCandidates**

```
public java.util.List generateCandidates(com.jmorenov.
    tweetscore.extra.OOV oov)
```

- **Description**

Method to generate candidates from an OOV.

- **Parameters**

- oov – OOV

- **Returns** – List of Candidates

- **getMethod**

```
public CandidatesMethodType getMethod()
```

- **Description**  
Method to obtain the method description.
- **Returns** – CandidatesMethodType

#### 8.7.54. Members inherited from class CandidatesMethod

`com.jmorenov.tweetscore.candidates.method.CandidatesMethod` (in 8.7.8, page 62)

- `public abstract List generateCandidates(com.jmorenov.tweetscore.extra.OOV oov)`
- `public abstract CandidatesMethodType getMethod()`

#### 8.7.55. Class MetaphoneCandidatesMethod

MetaphoneCandidatesMethod class that define a method to generate candidates.

#### 8.7.56. Declaration

```
public class MetaphoneCandidatesMethod
    extends com.jmorenov.tweetscore.candidates.method.
        CandidatesMethod
```

#### 8.7.57. Constructor summary

[MetaphoneCandidatesMethod\(\)](#) Constructor of the class.

#### 8.7.58. Method summary

[generateCandidates\(OOV\)](#) Method to generate candidates from an OOV.

[getMethod\(\)](#) Method to obtain the method description.

#### 8.7.59. Constructors

- **MetaphoneCandidatesMethod**

```
public MetaphoneCandidatesMethod()
```

- **Description**  
Constructor of the class.

**8.7.60. Methods**▪ **generateCandidates**

```
public java.util.List generateCandidates(com.jmorenov.
    tweetscore.extra.OOV oov)
```

• **Description**

Method to generate candidates from an OOV.

• **Parameters**

- oov – OOV

• **Returns** – List of Candidates▪ **getMethod**

```
public CandidatesMethodType getMethod()
```

• **Description**

Method to obtain the method description.

• **Returns** – CandidatesMethodType**8.7.61. Members inherited from class CandidatesMethod**

com.jmorenov.tweetscore.candidates.method.CandidatesMethod (in 8.7.8, page 62)

- public abstract List generateCandidates(com.jmorenov.tweetscore.extra.OOV oov)
- public abstract CandidatesMethodType getMethod()

**8.8. Package com.jmorenov.tweetscore.evaluation**

*Package Contents*

*Page*

**Classes**

**TweetNormEvaluationResult** ..... 71

TweetNormEvaluationResult class with the structure of the result.

**TweetNormEvaluator** ..... 74

TweetNormEvaluator class to evaluate methods of spell checker with Tweet Norm 2013 files to test.

**8.8.1. Class TweetNormEvaluationResult**

TweetNormEvaluationResult class with the structure of the result.

### 8.8.2. Declaration

```
public class TweetNormEvaluationResult
    extends java.lang.Object
```

### 8.8.3. Constructor summary

[TweetNormEvaluationResult\(String, long\)](#) Constructor of the class.

### 8.8.4. Method summary

[getAccuracy\(\)](#) Method to get the accuracy.  
[getErrors\(\)](#) Method to get the errors.  
[getExecutionTime\(\)](#) Method to get the execution time.  
[getNegatives\(\)](#) Method to get the negatives.  
[getPositives\(\)](#) Method to get the positives.  
[getResultText\(\)](#) Method to get the result text.  
[setAccuracy\(float\)](#) Method to set the accuracy.  
[setExecutionTime\(double\)](#) Method to set the execution time.  
[toString\(\)](#) Method to get the string with all the results.

### 8.8.5. Constructors

#### ▪ TweetNormEvaluationResult

```
public TweetNormEvaluationResult(java.lang.String
    resultText, long time)
```

- **Description**

Constructor of the class.

- **Parameters**

- `resultText` – String
- `time` – long

### 8.8.6. Methods

#### ▪ getAccuracy

```
public float getAccuracy()
```

- **Description**

Method to get the accuracy.

- **Returns** – float

- **getErrors**

```
public int getErrors()
```

- **Description**  
Method to get the errors.
- **Returns** – int

- **getExecutionTime**

```
public double getExecutionTime()
```

- **Description**  
Method to get the execution time.
- **Returns** – long

- **getNegatives**

```
public int getNegatives()
```

- **Description**  
Method to get the negatives.
- **Returns** – int

- **getPositives**

```
public int getPositives()
```

- **Description**  
Method to get the positives.
- **Returns** – int

- **getResultText**

```
public java.lang.String getResultText()
```

- **Description**  
Method to get the result text.
- **Returns** – String



### ▪ **setAccuracy**

```
public void setAccuracy(float accuracy)
```

- **Description**

Method to set the accuracy.

- **Parameters**

- accuracy – float

### ▪ **setExecutionTime**

```
public void setExecutionTime(double time)
```

- **Description**

Method to set the execution time.

- **Parameters**

- time – long

### ▪ **toString**

```
public java.lang.String toString()
```

- **Description**

Method to get the string with all the results.

- **Returns** – String

## 8.8.7. Class **TweetNormEvaluator**

TweetNormEvaluator class to evaluate methods of spell checker with Tweet Norm 2013 files to test.

### 8.8.8. Declaration

```
public class TweetNormEvaluator
    extends java.lang.Object
```

### 8.8.9. Constructor summary

[TweetNormEvaluator\(\)](#) Default constructor of the class.

[TweetNormEvaluator\(String\)](#) Constructor of the class with parameter.

[TweetNormEvaluator\(String, boolean, int\)](#) Constructor of the class with parameters.

### 8.8.10. Method summary

**evaluate(Method)** Method to evaluate the defined file with a method of spell checker.

**setAnnotatedFile(String)** Method to define the file with the annotated tweets.

**setEvaluatorScriptFile(String)** Method to define the file of the evaluator script.

**setIdsFile(String)** Method to define the file with the ids of the tweets.

**setResultFile(String)** Method to define the result file.

**setTweetsFile(String)** Method to define the file with the tweets.

**setWorkingDirectory(String)** Method to define the working directory.

### 8.8.11. Constructors

#### ■ TweetNormEvaluator

```
public TweetNormEvaluator()
```

##### • Description

Default constructor of the class.

#### ■ TweetNormEvaluator

```
public TweetNormEvaluator(java.lang.String annotatedFile)
```

##### • Description

Constructor of the class with parameter.

##### • Parameters

- **annotatedFile** – String parameter with the name of the file with the annotated tweets.

#### ■ TweetNormEvaluator

```
public TweetNormEvaluator(java.lang.String annotatedFile,
    boolean verbose, int repetitionsOfExecution)
```

##### • Description

Constructor of the class with parameters.

##### • Parameters

- `annotatedFile` – String parameter with the name of the file with the annotated tweets.
- `verbose` – Boolean parameter to define the verbose control.

### 8.8.12. Methods

#### ■ `evaluate`

```
public TweetNormEvaluationResult evaluate(com.jmorenov.  
    tweetscore.method.Method method) throws java.io.  
    IOException
```

- **Description**

Method to evaluate the defined file with a method of spell checker.

- **Parameters**

- `method` – parameter with the method to use.

- **Returns** – `TweetNormEvaluationResult` with the output of the evaluation.

- **Throws**

- `java.io.IOException` – when the file not found.

- **See also**

- [com.jmorenov.tweetscore.method.Method](#) (in 8.11.8, page 97)

#### ■ `setAnnotatedFile`

```
public void setAnnotatedFile(java.lang.String  
    annotatedFile)
```

- **Description**

Method to define the file with the annotated tweets.

- **Parameters**

- `annotatedFile` – String parameter with the name of the file with the annotated tweets.

#### ■ `setEvaluatorScriptFile`

```
public void setEvaluatorScriptFile(java.lang.String  
    evaluatorScriptFile)
```

- **Description**

Method to define the file of the evaluator script.

- **Parameters**

- `evaluatorScriptFile` – String parameter with the name of the evaluator script.

- **setIdFile**

```
public void setIdFile(java.lang.String idsFile)
```

- **Description**

Method to define the file with the ids of the tweets.

- **Parameters**

- `idsFile` – String parameter with the name of the file with the ids of the tweets.

- **setResultFile**

```
public void setResultFile(java.lang.String resultFile)
```

- **Description**

Method to define the result file.

- **Parameters**

- `resultFile` – String parameter with the result file.

- **setTweetsFile**

```
public void setTweetsFile(java.lang.String tweetsFile)
```

- **Description**

Method to define the file with the tweets.

- **Parameters**

- `tweetsFile` – String parameter with the name of the file with the tweets.

- **setWorkingDirectory**

```
public void setWorkingDirectory(java.lang.String  
workingDirectory)
```

- **Description**

Method to define the working directory.

- **Parameters**

- `workingDirectory` – String parameter with the working directory.

## 8.9. Package `com.jmorenov.tweetscore.postprocess`

*Package Contents*

*Page*

### Classes

**PostProcess** ..... [78](#)  
 PostProcess class to apply postprocess

#### 8.9.1. Class **PostProcess**

PostProcess class to apply postprocess

#### 8.9.2. Declaration

```
public class PostProcess
  extends java.lang.Object
```

#### 8.9.3. Constructor summary

[PostProcess\(\)](#)

#### 8.9.4. Method summary

[apply\(String\)](#) Method to apply postprocess

#### 8.9.5. Constructors

- **PostProcess**

```
public PostProcess()
```

#### 8.9.6. Methods

- **apply**

```
public static java.lang.String apply(java.lang.String
  text)
```

- **Description**  
Method to apply postprocess
- **Parameters**
  - `text` – String
- **Returns** – String

## 8.10. Package com.jmorenov.tweetscore.extra

<i>Package Contents</i>	<i>Page</i>
<b>Classes</b>	
<b>Annotation</b> .....	<a href="#">79</a>
Anotation enum with the different anotations possibilities of a tweet.	
<b>Dictionaries</b> .....	<a href="#">80</a>
Dictionaries class to access all the dictionaries.	
<b>File</b> .....	<a href="#">82</a>
File class with funcionality to files.	
<b>FreelingInitializer</b> .....	<a href="#">85</a>
FreelingTokenizer class to initialize Freeling.	
<b>OOV</b> .....	<a href="#">86</a>
Out-Of-Vocabulary class with the structure of a OOV word.	
<b>OOVDetector</b> .....	<a href="#">89</a>
OOVDetector class that define a method to detect OOV.	
<b>Parser</b> .....	<a href="#">90</a>
<b>Token</b> .....	<a href="#">94</a>
Token class with the structure of a token from a text.	

### 8.10.1. Class Annotation

Anotation enum with the different anotations possibilities of a tweet.

### 8.10.2. Declaration

```
public final class Annotation
    extends java.lang.Enum
```

### 8.10.3. Field summary

[Correct](#)  
[NoEs](#)  
[Unknown](#)  
[value](#)  
[Variation](#)

#### 8.10.4. Method summary

[valueOf\(String\)](#)  
[values\(\)](#)

#### 8.10.5. Fields

- `public static final Annotation Variation`
- `public static final Annotation Correct`
- `public static final Annotation NoEs`
- `public static final Annotation Unknown`
- `public int value`

#### 8.10.6. Methods

- `valueOf`

```
public static Annotation valueOf(java.lang.String name)
```

- `values`

```
public static Annotation[] values()
```

#### 8.10.7. Members inherited from class Enum

`java.lang.Enum`

- `protected final Object clone() throws CloneNotSupportedException`
- `public final int compareTo(Enum arg0)`
- `public final boolean equals(Object arg0)`
- `protected final void finalize()`
- `public final Class getDeclaringClass()`
- `public final int hashCode()`
- `public final String name()`
- `public final int ordinal()`
- `public String toString()`
- `public static Enum valueOf(Class arg0, String arg1)`

#### 8.10.8. Class Dictionaries

Dictionaries class to access all the dictionaries.

### 8.10.9. Declaration

```
public class Dictionaries
    extends java.lang.Object
```

### 8.10.10. Constructor summary

[Dictionaries\(\)](#) Constructor of the class.

### 8.10.11. Method summary

[getAllDictionaries\(\)](#) Method to get all the dictionaries.

[getEnglishDictionary\(\)](#) Method to get the english dictionary

[getEntitiesDictionary\(\)](#) Method to get the entities dictionary

[getInstance\(\)](#) Method to get the instance of the class.

[getSpanishDictionary\(\)](#) Method to get the spanish dictionary

[getSpanishPhoneticDictionary\(\)](#) Method to get the spanish phonetic dictionary

### 8.10.12. Constructors

- Dictionaries

```
protected Dictionaries()
```

- Description

Constructor of the class.

### 8.10.13. Methods

- getAllDictionaries

```
public java.util.List getAllDictionaries()
```

- Description

Method to get all the dictionaries.

- Returns – List String

- getEnglishDictionary

```
public java.util.List getEnglishDictionary()
```

- Description

Method to get the english dictionary



- **Returns** – List String

- **getEntitiesDictionary**

```
public java.util.List getEntitiesDictionary()
```

- **Description**  
Method to get the entities dictionary
- **Returns** – List String

- **getInstance**

```
public static Dictionaries getInstance()
```

- **Description**  
Method to get the instance of the class.
- **Returns** – Dictionaries

- **getSpanishDictionary**

```
public java.util.List getSpanishDictionary()
```

- **Description**  
Method to get the spanish dictionary
- **Returns** – List String

- **getSpanishPhoneticDictionary**

```
public java.util.Map getSpanishPhoneticDictionary()
```

- **Description**  
Method to get the spanish phonetic dictionary
- **Returns** – Map String String

#### 8.10.14. Class File

File class with functionality to files.

**8.10.15. Declaration**

```
public class File
    extends java.lang.Object
```

**8.10.16. Constructor summary**

[File\(\)](#)

**8.10.17. Method summary**

[createResourceTempFile\(String, String\)](#) Method to create a temp file from a resource.

[getModelsPath\(\)](#)

[getStreamFromResources\(String\)](#) Method to read a file stream from resources.

[readDictionaryFromResources\(String\)](#) Method to read a dictionary from resources.

[readToByte\(String\)](#) Method to read a file to byte from resources.

[readToStringArray\(String\)](#) Method to read a file to array of string.

**8.10.18. Constructors**

- File

```
public File()
```

**8.10.19. Methods**

- [createResourceTempFile](#)

```
public static java.io.File createResourceTempFile(java.
    lang.String resourcePath, java.lang.String extension)
```

- **Description**

Method to create a temp file from a resource.

- **Parameters**

- resourcePath – String

- **Returns** – File

- [getModelsPath](#)

```
public static java.lang.String getModelsPath()
```

### ■ `getStreamFromResources`

```
public static java.io.InputStream getStreamFromResources  
    (java.lang.String fileName) throws java.io.  
    IOException
```

- **Description**

Method to read a file stream from resources.

- **Parameters**

- `fileName` – the name of the file.

- **Returns** – InputStream of the file.

- **Throws**

- `java.io.IOException` – when the file is not found.

### ■ `readDictionaryFromResources`

```
public static java.util.List readDictionaryFromResources  
    (java.lang.String fileName) throws java.io.  
    IOException
```

- **Description**

Method to read a dictionary from resources.

- **Parameters**

- `fileName` – String

- **Returns** – List of String

- **Throws**

- `java.io.IOException` – When the file is not found

### ■ `readToByte`

```
public static byte[] readToByte(java.lang.String  
    fileName) throws java.io.IOException
```

- **Description**

Method to read a file to byte from resources.

- **Parameters**

- `fileName` – the name of the file.

- **Returns** – byte[] of the file.

- **Throws**

- `java.io.IOException` – when the file is not found.

- **readToStringArray**

```
public static java.lang.String[] readToStringArray(java.
    lang.String fileName) throws java.io.IOException
```

- **Description**

Method to read a file to array of string.

- **Parameters**

- `fileName` – String with the name of the file.

- **Returns** – `String[]` with the lines.

- **Throws**

- `java.io.IOException` – when the file is not found.

#### 8.10.20. Class **FreelingInitializer**

FreelingTokenizer class to initialize Freeling.

#### 8.10.21. Declaration

```
public class FreelingInitializer
    extends java.lang.Object
```

#### 8.10.22. Constructor summary

[FreelingInitializer\(\)](#)

#### 8.10.23. Method summary

[init\(\)](#) Constructor of the class

#### 8.10.24. Constructors

- **FreelingInitializer**

```
public FreelingInitializer()
```

### 8.10.25. Methods

- **init**

```
public static java.lang.String init()
```

- **Description**

Constructor of the class

### 8.10.26. Class OOV

Out-Of-Vocabulary class with the structure of a OOV word.

### 8.10.27. Declaration

```
public class OOV
    extends java.lang.Object implements java.lang.Comparable
```

### 8.10.28. Constructor summary

**OOV(String, int, int)** Constructor of the class.

**OOV(Token)** Constructor of the class.

### 8.10.29. Method summary

**addAllCandidates(List)** Method to add candidates of an OOV.

**compareTo(OOV)** Method to compare two OOVs.

**getAnnotation()** Method to get the annotation.

**getCandidates()** Method to get the candidates of an OOV.

**getCorrection()** Method to get the correction.

**getEndPosition()** Method to get the end position into the original text.

**getStartPosition()** Method to get the start position into the original text.

**getToken()** Method to get the token.

**setAnnotation(Annotation)** Method to set the annotation

**setCandidates(List)** Method to set the candidates of an OOV.

**setCorrection(String)** Method to set the correction.

### 8.10.30. Constructors

- **OOV**

```
public OOV(java.lang.String token, int startPosition, int
    endPosition)
```

- **Description**

Constructor of the class.

- **Parameters**

- `token` – String with the word or token of the OOV.
- `startPosition` – int with the initial position of the OOV in the original text.
- `endPosition` – int with the final position of the OOV in the original text.

- **OOV**

```
public OOV(Token token)
```

- **Description**

Constructor of the class.

- **Parameters**

- `token` – Token

### 8.10.31. Methods

- **addAllCandidates**

```
public void addAllCandidates(java.util.List candidates)
```

- **Description**

Method to add candidates of an OOV.

- **Parameters**

- `candidates` – List of Candidate

- **compareTo**

```
public int compareTo(OOV oov)
```

- **Description**

Method to compare two OOVs.

- **Parameters**

- `oov` – OOV

- **Returns** – int

### ▪ **getAnnotation**

```
public Annotation getAnnotation()
```

- **Description**

Method to get the annotation.

- **Returns** – Annotation

### ▪ **getCandidates**

```
public java.util.List getCandidates()
```

- **Description**

Method to get the candidates of an OOV.

- **Returns** – List of Candidate

### ▪ **getCorrection**

```
public java.lang.String getCorrection()
```

- **Description**

Method to get the correction.

- **Returns** – String

### ▪ **getEndPosition**

```
public int getEndPosition()
```

- **Description**

Method to get the end position into the original text.

- **Returns** – int

### ▪ **getStartPosition**

```
public int getStartPosition()
```

- **Description**

Method to get the start position into the original text.

- **Returns** – int

- **getToken**

```
public java.lang.String getToken()
```

- **Description**  
Method to get the token.
- **Returns** – String

- **setAnnotation**

```
public void setAnnotation(Annotation annotation)
```

- **Description**  
Method to set the annotation
- **Parameters**
  - `annotation` – Annotation

- **setCandidates**

```
public void setCandidates(java.util.List candidates)
```

- **Description**  
Method to set the candidates of an OOV.
- **Parameters**
  - `candidates` – List of Candidate

- **setCorrection**

```
public void setCorrection(java.lang.String correction)
```

- **Description**  
Method to set the correction.
- **Parameters**
  - `correction` – String

### 8.10.32. Class OOVDetector

OOVDetector class that define a method to detect OOV.



### 8.10.33. Declaration

```
public class OOVDetector
    extends java.lang.Object
```

### 8.10.34. Constructor summary

[OOVDetector\(\)](#) Constructor of the class.

### 8.10.35. Method summary

[detectOOV\(List\)](#) Method to detect the OOV.

### 8.10.36. Constructors

- OOVDetector

```
public OOVDetector()
```

- Description

Constructor of the class.

### 8.10.37. Methods

- detectOOV

```
public java.util.List detectOOV(java.util.List tokens)
```

- Description

Method to detect the OOV.

- Parameters

- `tokens` – List of Token

- Returns – List of OOV

### 8.10.38. Class Parser

### 8.10.39. Declaration

```
public class Parser
    extends java.lang.Object
```

### 8.10.40. Constructor summary

[Parser\(\)](#)

**8.10.41. Method summary**

[getHashtagRegex\(\)](#) Method to get the hashtag regex pattern.  
[getNumberRegex\(\)](#) Method to get the hashtag regex pattern.  
[getURLRegex\(\)](#) Method to get the url regex pattern.  
[getUsernameRegex\(\)](#) Method to get the user name regex pattern.  
[isHashtag\(String\)](#) Method to check if a word is a hashtag of Twitter.  
[isNumber\(String\)](#) Method to check if a word is a number.  
[isPunctuationSign\(String\)](#) Method to check if a word is a punctuation sign.  
[isUrl\(String\)](#) Method to check if a word is a Url.  
[isUsername\(String\)](#) Method to check if a word is a username of Twitter.  
[isValidWord\(String\)](#) Method to check if a word is a valid word.  
[removeEmojiFromText\(String\)](#) Method to remove the emojis from a text.

**8.10.42. Constructors**

- Parser

```
public Parser()
```

**8.10.43. Methods**

- getHashtagRegex

```
public static java.lang.String getHashtagRegex()
```

- **Description**  
Method to get the hashtag regex pattern.
- **Returns** – String with the pattern

- getNumberRegex

```
public static java.lang.String getNumberRegex()
```

- **Description**  
Method to get the hashtag regex pattern.
- **Returns** – String with the pattern

- getURLRegex

```
public static java.lang.String getURLRegex()
```

- **Description**

Method to get the url regex pattern.

- **Returns** – String with the pattern

- **getUsernameRegex**

```
public static java.lang.String getUsernameRegex()
```

- **Description**

Method to get the user name regex pattern.

- **Returns** – String with the pattern

- **isHashtag**

```
public static java.lang.Boolean isHashtag(java.lang.  
String word)
```

- **Description**

Method to check if a word is a hashtag of Twitter.

- **Parameters**

- word – String with the word to check.

- **Returns** – Boolean control parameter.

- **isNumber**

```
public static java.lang.Boolean isNumber(java.lang.  
String word)
```

- **Description**

Method to check if a word is a number.

- **Parameters**

- word – String with the word to check.

- **Returns** – Boolean control parameter.

- **isPunctuationSign**

```
public static java.lang.Boolean isPunctuationSign(java.
    lang.String word)
```

- **Description**

Method to check if a word is a punctuation sign.

- **Parameters**

- **word** – String with the word to check.

- **Returns** – Boolean control parameter.

- **isUrl**

```
public static java.lang.Boolean isUrl(java.lang.String
    word)
```

- **Description**

Method to check if a word is a Url.

- **Parameters**

- **word** – String with the word to check.

- **Returns** – Boolean control parameter.

- **isUsername**

```
public static java.lang.Boolean isUsername(java.lang.
    String word)
```

- **Description**

Method to check if a word is a username of Twitter.

- **Parameters**

- **word** – String with the word to check.

- **Returns** – Boolean control parameter.

- **isValidWord**

```
public static java.lang.Boolean isValidWord(java.lang.
    String word)
```

- **Description**

Method to check if a word is a valid word.

- **Parameters**

- **word** – String with the word to check.
- **Returns** – Boolean control parameter.

#### ▪ **removeEmojiFromText**

```
public static java.lang.String removeEmojiFromText(java.
    lang.String text)
```

- **Description**  
Method to remove the emojis from a text.
- **Parameters**
  - **text** – String with the text to remove the emojis.
- **Returns** – String with the text without the emojis.

#### 8.10.44. **Class Token**

Token class with the structure of a token from a text.

#### 8.10.45. **Declaration**

```
public class Token
    extends java.lang.Object
```

#### 8.10.46. **Constructor summary**

[Token\(String, int, int\)](#) Constructor of the class.

#### 8.10.47. **Method summary**

[getEndPosition\(\)](#) Method to get the end position  
[getStartPosition\(\)](#) Method to get the start position.  
[getText\(\)](#) Method to get the text of the token.

#### 8.10.48. **Constructors**

##### ▪ **Token**

```
public Token(java.lang.String text, int startPosition, int
    endPosition)
```

- **Description**  
Constructor of the class.
- **Parameters**

- `text` – String the text of the token
- `startPosition` – int the start position of the token in the text
- `endPosition` – int the end position of the token in the text

#### 8.10.49. Methods

##### ▪ `getEndPosition`

```
public int getEndPosition()
```

- **Description**  
Method to get the end position
- **Returns** – int

##### ▪ `getStartPosition`

```
public int getStartPosition()
```

- **Description**  
Method to get the start position.
- **Returns** – int

##### ▪ `getText`

```
public java.lang.String getText()
```

- **Description**  
Method to get the text of the token.
- **Returns** – String

### 8.11. Package com.jmorenov.tweetscore.method

*Package Contents*

*Page*

#### Classes

<b>DictionaryMethod</b> .....	96
DictionaryMethod class with the method of spell checker with dictionaries.	
<b>Method</b> .....	97
Method abstract class.	
<b>TweetSCMethod</b> .....	98
TweetSCMethod class that define a method to spell check.	

### 8.11.1. Class DictionaryMethod

DictionaryMethod class with the method of spell checker with dictionaries.

### 8.11.2. Declaration

```
public class DictionaryMethod
    extends com.jmorenov.tweetscore.method.Method
```

### 8.11.3. Constructor summary

[DictionaryMethod\(\)](#) Default constructor of the class.

### 8.11.4. Method summary

[correctTweet\(Tweet\)](#) Method to get the corrected tweet.

[toString\(\)](#) Method to get the String of the method.

### 8.11.5. Constructors

#### ▪ DictionaryMethod

```
public DictionaryMethod() throws java.io.IOException
```

- **Description**

Default constructor of the class.

- **Throws**

- `java.io.IOException` – when the file not found.

### 8.11.6. Methods

#### ▪ correctTweet

```
public com.jmorenov.tweetscore.twitter.TweetCorrected
    correctTweet(com.jmorenov.tweetscore.twitter.Tweet
        tweet)
```

- **Description**

Method to get the corrected tweet.

- **Parameters**

- `tweet` – Tweet with the tweet to correct.

- **Returns** – TweetCorrected with the corrected tweet.

- **toString**

```
public java.lang.String toString()
```

- **Description**

Method to get the String of the method.

- **Returns** – String with the String of the method.

### 8.11.7. Members inherited from class Method

com.jmorenov.tweetscore.method.Method (in [8.11.8](#), page [97](#))

- public abstract TweetCorrected **correctTweet**(com.jmorenov.tweetscore.twitter.Tweet tweet)
- public abstract String **toString**()

### 8.11.8. Class Method

Method abstract class.

### 8.11.9. Declaration

```
public abstract class Method
    extends java.lang.Object
```

### 8.11.10. All known subclasses

TweetSCMethod (in [8.11.15](#), page [98](#)), DictionaryMethod (in [8.11.1](#), page [96](#))

### 8.11.11. Constructor summary

[Method\(\)](#) Default constructor of the class.

### 8.11.12. Method summary

[correctTweet\(Tweet\)](#) Abstract method to get the corrected tweet.

[toString\(\)](#) Abstract method to get the String of the method.

### 8.11.13. Constructors

- **Method**

```
public Method()
```

- **Description**

Default constructor of the class.



#### 8.11.14. Methods

##### ▪ correctTweet

```
public abstract com.jmorenov.tweetscore.twitter.
    TweetCorrected correctTweet(com.jmorenov.tweetscore.
        twitter.Tweet tweet)
```

##### • Description

Abstract method to get the corrected tweet.

##### • Parameters

- `tweet` – Tweet with the tweet to correct.

##### • Returns – TweetCorrected with the corrected tweet.

##### ▪ toString

```
public abstract java.lang.String toString()
```

##### • Description

Abstract method to get the String of the method.

##### • Returns – String with the String of the method.

#### 8.11.15. Class TweetSCMethod

TweetSCMethod class that define a method to spell check.

#### 8.11.16. Declaration

```
public class TweetSCMethod
    extends com.jmorenov.tweetscore.method.Method
```

#### 8.11.17. Constructor summary

[TweetSCMethod\(\)](#) Constructor of the class.

#### 8.11.18. Method summary

[correctTweet\(Tweet\)](#) Method to correct a tweet.

[toString\(\)](#) Method to get the description of the method.

### 8.11.19. Constructors

#### ▪ TweetSCMethod

```
public TweetSCMethod()
```

- **Description**

Constructor of the class.

### 8.11.20. Methods

#### ▪ correctTweet

```
public com.jmorenov.tweetscore.twitter.TweetCorrected  
correctTweet(com.jmorenov.tweetscore.twitter.Tweet  
tweet)
```

- **Description**

Method to correct a tweet.

- **Parameters**

- `tweet` – Tweet with the tweet to correct.

- **Returns** – TweetCorrected

#### ▪ toString

```
public java.lang.String toString()
```

- **Description**

Method to get the description of the method.

- **Returns** – String

### 8.11.21. Members inherited from class Method

`com.jmorenov.tweetscore.method.Method` (in [8.11.8](#), page [97](#))

- `public abstract TweetCorrected correctTweet(com.jmorenov.tweetscore.twitter.Tweet tweet)`
- `public abstract String toString()`

## 8.12. Package `com.jmorenov.tweetscore.post`

*Package Contents*

*Page*

### Classes

<b>FreeLingPOST</b> .....	100
FreeLingPOST class to get the POST of a text.	
<b>OpenNLPPOST</b> .....	100
OpenNLPPOST class to get the POST of a text.	
<b>POST</b> .....	101
<b>StanfordNLPPOST</b> .....	101

### 8.12.1. Class `FreeLingPOST`

FreeLingPOST class to get the POST of a text. <https://talp-upc.gitbooks.io/freeling-4-1-user-manual/content/>

### 8.12.2. Declaration

```
public class FreeLingPOST
    extends java.lang.Object
```

### 8.12.3. Constructor summary

[FreeLingPOST\(\)](#)

### 8.12.4. Constructors

- `FreeLingPOST`

```
public FreeLingPOST()
```

### 8.12.5. Class `OpenNLPPOST`

OpenNLPPOST class to get the POST of a text. <https://opennlp.apache.org/docs/1.8.4/manual/opennlp.html>

### 8.12.6. Declaration

```
public class OpenNLPPOST
    extends java.lang.Object
```

### 8.12.7. Constructor summary

[OpenNLPPOST\(\)](#)

### 8.12.8. Constructors

- OpenNLPPOST

```
public OpenNLPPOST()
```

### 8.12.9. Class POST

#### 8.12.10. Declaration

```
public abstract class POST  
    extends java.lang.Object
```

#### 8.12.11. All known subclasses

StanfordNLPPOST (in [8.12.16](#), page [101](#))

#### 8.12.12. Constructor summary

[POST\(\)](#)

#### 8.12.13. Method summary

[getTags\(\)](#)

#### 8.12.14. Constructors

- POST

```
public POST()
```

#### 8.12.15. Methods

- getTags

```
public abstract java.lang.String getTags()
```

### 8.12.16. Class StanfordNLPPOST

#### 8.12.17. Declaration

```
public class StanfordNLPPOST  
    extends com.jmorenov.tweetscore.post.POST
```

#### 8.12.18. Constructor summary

[StanfordNLPPOST\(String\)](#)

**8.12.19. Method summary**[getTags\(\)](#)**8.12.20. Constructors**

- **StanfordNLPPOST**

```
public StanfordNLPPOST(java.lang.String text)
```

**8.12.21. Methods**

- **getTags**

```
public abstract java.lang.String getTags()
```

**8.12.22. Members inherited from class POST**

`com.jmorenov.tweetscore.post.POST` (in [8.12.9](#), page [101](#))

- `public abstract String getTags()`

**8.13. Package com.jmorenov.tweetscore.spellchecker***Package Contents**Page***Classes**

**SpellChecker** ..... [102](#)

SpellChecker class to correct a text.

**8.13.1. Class SpellChecker**

SpellChecker class to correct a text.

**8.13.2. Declaration**

```
public class SpellChecker
    extends java.lang.Object
```

**8.13.3. Constructor summary**

[SpellChecker\(Method\)](#) Constructor of the class.

#### 8.13.4. Method summary

- [correctText\(String\)](#) Method to correct the text.
- [correctTweet\(Tweet\)](#) Method to correct a tweet.
- [getMethodDescription\(\)](#) Method to get spell checker method description.
- [setMethod\(Method\)](#) Method to define the spell checker method.

#### 8.13.5. Constructors

- **SpellChecker**

```
public SpellChecker(com.jmorenov.tweetscore.method.  
    Method method)
```

- **Description**  
Constructor of the class.
- **Parameters**
  - `method` – parameter with the method to use.
- **See also**
  - [com.jmorenov.tweetscore.method.Method](#) (in 8.11.8, page 97)

#### 8.13.6. Methods

- **correctText**

```
public java.lang.String correctText(java.lang.String  
    text)
```

- **Description**  
Method to correct the text.
- **Parameters**
  - `text` – String with the text to correct.
- **Returns** – String with the corrected text.

- **correctTweet**

```
public com.jmorenov.tweetscore.twitter.TweetCorrected  
    correctTweet(com.jmorenov.tweetscore.twitter.Tweet  
        tweet)
```

- **Description**

Method to correct a tweet.

- **Parameters**

- `tweet` – Tweet with the tweet.

- **Returns** – TweetCorrected with the corrected tweet.

- **getMethodDescription**

```
public java.lang.String getMethodDescription()
```

- **Description**

Method to get spell checker method description.

- **Returns** – String with the description of the method.

- **setMethod**

```
public void setMethod(com.jmorenov.tweetscore.method.
    Method method)
```

- **Description**

Method to define the spell checker method.

- **Parameters**

- `method` – parameter with the method to use.

## 8.14. Package `com.jmorenov.tweetscore.tokenizer`

*Package Contents*

*Page*

### Classes

<b>FreelingTokenizer</b> .....	<a href="#">105</a>
FreelingTokenizer class to tokenize a text.	
<b>OpenNLPTokenizer</b> .....	<a href="#">106</a>
OpenNLPTokenizer class to tokenize a text.	
<b>SimpleTokenizer</b> .....	<a href="#">107</a>
SimpleTokenizer class to tokenize a text.	
<b>StanfordNLPTokenizer</b> .....	<a href="#">107</a>
StanfordNLPTokenizer class to tokenize a text.	
<b>Tokenizer</b> .....	<a href="#">108</a>
Tokenizer abstract class.	

### 8.14.1. Class **FreelingTokenizer**

FreelingTokenizer class to tokenize a text.

### 8.14.2. Declaration

```
public class FreelingTokenizer
    extends com.jmorenov.tweetscore.tokenizer.Tokenizer
```

### 8.14.3. Constructor summary

[FreelingTokenizer\(\)](#) Constructor of the class

### 8.14.4. Method summary

[getTokens\(String\)](#) Method to get the tokens from the text.

### 8.14.5. Constructors

- **FreelingTokenizer**

```
public FreelingTokenizer()
```

- **Description**

Constructor of the class

### 8.14.6. Methods

- **getTokens**

```
public java.util.List getTokens(java.lang.String text)
```

- **Description**

Method to get the tokens from the text.

- **Parameters**

- **text** – String with the text

- **Returns** – List of String with the tokens

### 8.14.7. Members inherited from class **Tokenizer**

`com.jmorenov.tweetscore.tokenizer.Tokenizer` (in [8.14.29](#), page [108](#))

- `public abstract List getTokens(java.lang.String text)`



### 8.14.8. Class OpenNLPTokenizer

OpenNLPTokenizer class to tokenize a text. <https://opennlp.apache.org/docs/1.8.4/manual/opennlp.ht>

### 8.14.9. Declaration

```
public class OpenNLPTokenizer
    extends com.jmorenov.tweetscore.tokenizer.Tokenizer
```

### 8.14.10. Constructor summary

[OpenNLPTokenizer\(\)](#) Constructor of the class

### 8.14.11. Method summary

[getTokens\(String\)](#) Method to get the tokens from the text.

### 8.14.12. Constructors

- OpenNLPTokenizer

```
public OpenNLPTokenizer() throws java.io.IOException
```

- **Description**  
Constructor of the class
- **Throws**
  - java.io.IOException –

### 8.14.13. Methods

- getTokens

```
public java.util.List getTokens(java.lang.String text)
```

- **Description**  
Method to get the tokens from the text.
- **Parameters**
  - text – String with the text
- **Returns** – List of String with the tokens

### 8.14.14. Members inherited from class Tokenizer

com.jmorenov.tweetscore.tokenizer.Tokenizer (in [8.14.29](#), page [108](#))

- public abstract List getTokens(java.lang.String text)

### 8.14.15. Class SimpleTokenizer

SimpleTokenizer class to tokenize a text.

### 8.14.16. Declaration

```
public class SimpleTokenizer
    extends com.jmorenov.tweetscore.tokenizer.Tokenizer
```

### 8.14.17. Constructor summary

[SimpleTokenizer\(\)](#)

### 8.14.18. Method summary

[getTokens\(String\)](#) Method to get the tokens from the text.

### 8.14.19. Constructors

- SimpleTokenizer

```
public SimpleTokenizer()
```

### 8.14.20. Methods

- getTokens

```
public java.util.List getTokens(java.lang.String text)
```

- Description

Method to get the tokens from the text.

- Parameters

- text – String with the text

- Returns – List of String with the tokens

### 8.14.21. Members inherited from class Tokenizer

com.jmorenov.tweetscore.tokenizer.Tokenizer (in [8.14.29](#), page [108](#))

- public abstract List getTokens(java.lang.String text)

### 8.14.22. Class StanfordNLPTokenizer

StanfordNLPTokenizer class to tokenize a text. <https://stanfordnlp.github.io/CoreNLP/>

### 8.14.23. Declaration

```
public class StanfordNLPTokenizer
    extends com.jmorenov.tweetscore.tokenizer.Tokenizer
```

### 8.14.24. Constructor summary

[StanfordNLPTokenizer\(\)](#) Constructor of the class

### 8.14.25. Method summary

[getTokens\(String\)](#) Method to get the tokens from the text.

### 8.14.26. Constructors

- **StanfordNLPTokenizer**

```
public StanfordNLPTokenizer()
```

- **Description**

Constructor of the class

### 8.14.27. Methods

- **getTokens**

```
public java.util.List getTokens(java.lang.String text)
```

- **Description**

Method to get the tokens from the text.

- **Parameters**

- **text** – String with the text

- **Returns** – List of String with the tokens

### 8.14.28. Members inherited from class Tokenizer

`com.jmorenov.tweetscore.tokenizer.Tokenizer` (in [8.14.29](#), page 108)

- `public abstract List getTokens(java.lang.String text)`

### 8.14.29. Class Tokenizer

Tokenizer abstract class.

### 8.14.30. Declaration

```
public abstract class Tokenizer
    extends java.lang.Object
```

### 8.14.31. All known subclasses

FreelingTokenizer (in [8.14.1](#), page [105](#)), StanfordNLPTokenizer (in [8.14.22](#), page [107](#)), OpenNLPTokenizer (in [8.14.8](#), page [106](#)), SimpleTokenizer (in [8.14.15](#), page [107](#))

### 8.14.32. Constructor summary

[Tokenizer\(\)](#)

### 8.14.33. Method summary

[getTokens\(String\)](#) Method to get the tokens from a text.

### 8.14.34. Constructors

- Tokenizer

```
public Tokenizer()
```

### 8.14.35. Methods

- getTokens

```
public abstract java.util.List getTokens(java.lang.
    String text)
```

- **Description**  
Method to get the tokens from a text.
- **Parameters**
  - `text` – String with the text
- **Returns** – List of Token



## 9. TweetSCWeb Documentación del código (Java Documentation)

### Class Hierarchy

#### Classes

- java.lang.Object
  - SpringBootServletInitializer
    - com.jmorenov.tweetscweb.ServletInitializer (in 9.1.13, page 114)
  - com.jmorenov.tweetscweb.Application (in 9.1.1, page 112)
  - com.jmorenov.tweetscweb.Response (in 9.1.7, page 112)
  - com.jmorenov.tweetscweb.TweetCorrectedListModel (in 9.1.19, page 115)
  - com.jmorenov.tweetscweb.TweetCorrectorAPIController (in 9.1.32, page 116)
  - com.jmorenov.tweetscweb.TweetCorrectorController (in 9.1.38, page 118)
  - com.jmorenov.tweetscweb.TweetListModel (in 9.1.44, page 119)
  - com.jmorenov.tweetscweb.TweetModel (in 9.1.50, page 120)
    - com.jmorenov.tweetscweb.TweetCorrectedModel (in 9.1.25, page 116)
  - com.jmorenov.tweetscweb.TweetSearchQuery (in 9.1.59, page 121)
  - com.jmorenov.tweetscweb.TweetSearchQueryModel (in 9.1.65, page 122)

### 9.1. Package com.jmorenov.tweetscweb

<i>Package Contents</i>	<i>Page</i>
<b>Classes</b>	
<b>Application</b> .....	112
Application class.	
<b>Response</b> .....	112
Response class.	
<b>ServletInitializer</b> .....	114
ServletInitializer class.	
<b>TweetCorrectedListModel</b> .....	115
TweetCorrectedListModel class with the model of the list of tweets corrected.	
<b>TweetCorrectedModel</b> .....	116
<b>TweetCorrectorAPIController</b> .....	116
TweetCorrectorAPIController class with the controller of the API.	
<b>TweetCorrectorController</b> .....	118
TweetCorrectorController class with the controller of the frontend.	
<b>TweetListModel</b> .....	119
TweetListModel class with the model of the list of tweets.	
<b>TweetModel</b> .....	120
<b>TweetSearchQuery</b> .....	121

TweetSearchQuery class with the functionality to work over the queries.

**TweetSearchQueryModel** ..... [122](#)

TweetSearchQueryModel class with the model of the queries.

### 9.1.1. Class Application

Application class.

### 9.1.2. Declaration

```
public class Application
    extends java.lang.Object
```

### 9.1.3. Constructor summary

[Application\(\)](#)

### 9.1.4. Method summary

[main\(String\[\]\)](#) Main method of the web application.

### 9.1.5. Constructors

#### ▪ Application

```
public Application()
```

### 9.1.6. Methods

#### ▪ main

```
public static void main(java.lang.String [] args)
```

#### • Description

Main method of the web application.

#### • Parameters

- args – String[] with the arguments of the execution.

### 9.1.7. Class Response

Response class.

### 9.1.8. Declaration

```
public class Response
    extends java.lang.Object
```

### 9.1.9. Constructor summary

[Response\(\)](#) Default constructor of the class.

[Response\(String, Object\)](#) Constructor of the class.

### 9.1.10. Method summary

[getData\(\)](#) Method to get the data of the response

[getStatus\(\)](#) Method to get the status of the response.

[setData\(Object\)](#) Method to define the data of the response

[setStatus\(String\)](#) Method to define the status of the response.

### 9.1.11. Constructors

- Response

```
public Response()
```

- Description

Default constructor of the class.

- Response

```
public Response(java.lang.String status, java.lang.Object
    data)
```

- Description

Constructor of the class.

- Parameters

- status – String with the status of the response.

- data – Object with the value of the response.

### 9.1.12. Methods

- getData

```
public java.lang.Object getData()
```



- **Description**

Method to get the data of the response

- **Returns** – Object with the value of the response.

- **getStatus**

```
public java.lang.String getStatus()
```

- **Description**

Method to get the status of the response.

- **Returns** – String with the status of the response.

- **setData**

```
public void setData(java.lang.Object data)
```

- **Description**

Method to define the data of the response

- **Parameters**

- **data** – Object with the value of the response.

- **setStatus**

```
public void setStatus(java.lang.String status)
```

- **Description**

Method to define the status of the response.

- **Parameters**

- **status** – String with the status.

### 9.1.13. Class ServletInitializer

ServletInitializer class.

### 9.1.14. Declaration

```
public class ServletInitializer  
    extends SpringBootServletInitializer
```

### 9.1.15. Constructor summary

[ServletInitializer\(\)](#)

#### 9.1.16. Method summary

[configure\(SpringApplicationBuilder\)](#)

#### 9.1.17. Constructors

- ServletInitializer

```
public ServletInitializer()
```

#### 9.1.18. Methods

- configure

```
protected SpringApplicationBuilder configure(  
    SpringApplicationBuilder application)
```

#### 9.1.19. Class TweetCorrectedListModel

TweetCorrectedListModel class with the model of the list of tweets corrected.

#### 9.1.20. Declaration

```
public class TweetCorrectedListModel  
    extends java.lang.Object
```

#### 9.1.21. Field summary

[tweets](#)

#### 9.1.22. Constructor summary

[TweetCorrectedListModel\(\)](#)

#### 9.1.23. Fields

- public java.util.List tweets

#### 9.1.24. Constructors

- TweetCorrectedListModel

```
public TweetCorrectedListModel()
```

### 9.1.25. Class `TweetCorrectedModel`

#### 9.1.26. Declaration

```
public class TweetCorrectedModel
    extends com.jmorenov.tweetsweb.TweetModel
```

#### 9.1.27. Field summary

[correctedText](#)

#### 9.1.28. Constructor summary

[TweetCorrectedModel\(\)](#)  
[TweetCorrectedModel\(TweetCorrected\)](#)

#### 9.1.29. Fields

- `public java.lang.String correctedText`

#### 9.1.30. Constructors

- `TweetCorrectedModel`

```
public TweetCorrectedModel()
```

- `TweetCorrectedModel`

```
public TweetCorrectedModel(TweetCorrected tweetCorrected
)
```

#### 9.1.31. Members inherited from class `TweetModel`

`com.jmorenov.tweetsweb.TweetModel` (in [9.1.50](#), page [120](#))

- `public date`
- `public hash`
- `public id`
- `public text`
- `public Tweet toTweet()`
- `public username`

#### 9.1.32. Class `TweetCorrectorApiController`

`TweetCorrectorApiController` class with the controller of the API.

### 9.1.33. Declaration

```
public class TweetCorrectorAPIController
    extends java.lang.Object
```

### 9.1.34. Constructor summary

[TweetCorrectorAPIController\(\)](#)

### 9.1.35. Method summary

[advancedCorrectSubmit\(TweetListModel\)](#) Method to control the api calls of advanced corrector.

[getTweets\(TweetSearchQueryModel\)](#) Method to control the api calls.

[simpleCorrectSubmit\(TweetModel\)](#) Method to control the api calls of simple corrector.

### 9.1.36. Constructors

- **TweetCorrectorAPIController**

```
public TweetCorrectorAPIController()
```

### 9.1.37. Methods

- **advancedCorrectSubmit**

```
public Response advancedCorrectSubmit(TweetListModel
    tweetListModel)
```

- **Description**  
Method to control the api calls of advanced corrector.
- **Parameters**
  - `tweetListModel` – with the model of the call.
- **Returns** – with the response of the call.

- **getTweets**

```
public Response getTweets(TweetSearchQueryModel
    tweetSearchQueryModel)
```

- **Description**  
Method to control the api calls.

- **Parameters**

- `tweetSearchQueryModel` – with the model of the call.

- **Returns** – with the response of the call.

- **simpleCorrectSubmit**

```
public Response simpleCorrectSubmit(TweetModel
    tweetModel)
```

- **Description**

Method to control the api calls of simple corrector.

- **Parameters**

- `tweetModel` – with the model of the call.

- **Returns** – with the response of the call.

### 9.1.38. Class **TweetCorrectorController**

`TweetCorrectorController` class with the controller of the frontend.

### 9.1.39. Declaration

```
public class TweetCorrectorController
    extends java.lang.Object
```

### 9.1.40. Constructor summary

[TweetCorrectorController\(\)](#)

### 9.1.41. Method summary

[homeForm\(Model\)](#) Method to control the frontend calls.

### 9.1.42. Constructors

- **TweetCorrectorController**

```
public TweetCorrectorController()
```

#### 9.1.43. Methods

- **homeForm**

```
public java.lang.String homeForm(Model model)
```

- **Description**

Method to control the frontend calls.

- **Parameters**

- `model` – Model with the model of the call.

- **Returns** – String with the template to show.

#### 9.1.44. Class TweetListModel

TweetListModel class with the model of the list of tweets.

#### 9.1.45. Declaration

```
public class TweetListModel  
    extends java.lang.Object
```

#### 9.1.46. Field summary

[tweets](#)

#### 9.1.47. Constructor summary

[TweetListModel\(\)](#)

#### 9.1.48. Fields

- `public java.util.List tweets`

#### 9.1.49. Constructors

- **TweetListModel**

```
public TweetListModel()
```

### 9.1.50. Class TweetModel

#### 9.1.51. Declaration

```
public class TweetModel
    extends java.lang.Object
```

#### 9.1.52. All known subclasses

[TweetCorrectedModel](#) (in [9.1.25](#), page 116)

#### 9.1.53. Field summary

[date](#)  
[hash](#)  
[id](#)  
[text](#)  
[username](#)

#### 9.1.54. Constructor summary

[TweetModel\(\)](#)  
[TweetModel\(Tweet\)](#)

#### 9.1.55. Method summary

[toTweet\(\)](#)

#### 9.1.56. Fields

- `public java.lang.String id`
- `public java.lang.String username`
- `public java.lang.String hash`
- `public java.lang.String text`
- `public java.lang.String date`

#### 9.1.57. Constructors

- `TweetModel`

```
public TweetModel()
```

- `TweetModel`

```
public TweetModel(Tweet tweet)
```

#### 9.1.58. Methods

- **toTweet**

```
public Tweet toTweet()
```

#### 9.1.59. Class TweetSearchQuery

TweetSearchQuery class with the functionality to work over the queries.

#### 9.1.60. Declaration

```
public class TweetSearchQuery
    extends java.lang.Object
```

#### 9.1.61. Constructor summary

[TweetSearchQuery\(TweetSearchQueryModel\)](#) Constructor of the class.

#### 9.1.62. Method summary

[isValidQuery\(\)](#) Method to get if the query is valid or not.

[loadTweets\(\)](#) Method to load the tweets from the query.

#### 9.1.63. Constructors

- **TweetSearchQuery**

```
public TweetSearchQuery(TweetSearchQueryModel
    tweetSearchQueryModel)
```

- **Description**

Constructor of the class.

- **Parameters**

- `tweetSearchQueryModel` – TweetSearchQueryModel with the data.



#### 9.1.64. Methods

- **isValidQuery**

```
public boolean isValidQuery()
```

- **Description**

Method to get if the query is valid or not.

- **Returns** – Boolean

- **loadTweets**

```
public java.util.List loadTweets()
```

- **Description**

Method to load the tweets from the query.

- **Returns** – List of tweet

#### 9.1.65. Class TweetSearchQueryModel

TweetSearchQueryModel class with the model of the queries.

#### 9.1.66. Declaration

```
public class TweetSearchQueryModel  
    extends java.lang.Object
```

#### 9.1.67. Constructor summary

[TweetSearchQueryModel\(\)](#)

#### 9.1.68. Method summary

[getQuery\(\)](#) Method to get the query.

[getTweets\(\)](#) Method to get the tweets.

[setQuery\(String\)](#) Method to set the query.

[setTweets\(List\)](#) Method to set the tweets.

#### 9.1.69. Constructors

- **TweetSearchQueryModel**

```
public TweetSearchQueryModel()
```

### 9.1.70. Methods

#### ■ getQuery

```
public java.lang.String getQuery()
```

- **Description**

Method to get the query.

- **Returns** – String

#### ■ getTweets

```
public java.util.List getTweets()
```

- **Description**

Method to get the tweets.

- **Returns** – List of tweet

#### ■ setQuery

```
public void setQuery(java.lang.String query)
```

- **Description**

Method to set the query.

- **Parameters**

- `query` – String

#### ■ setTweets

```
public void setTweets(java.util.List tweets)
```

- **Description**

Method to set the tweets.

- **Parameters**

- `tweets` – List of tweet



## 10. TweetSCExecutable Documentación del código (Java Documentation)

### Class Hierarchy

#### Classes

- java.lang.Object
  - com.jmorenov.tweetscexecutable.SpellCheckerRun (in 10.1.1, page 125)
  - com.jmorenov.tweetscexecutable.SpellCheckerRunResult (in 10.1.7, page 126)

### 10.1. Package com.jmorenov.tweetscexecutable

*Package Contents*

*Page*

#### Classes

SpellCheckerRun .....	125
SpellCheckerRun class.	
SpellCheckerRunResult .....	126

#### 10.1.1. Class SpellCheckerRun

SpellCheckerRun class.

#### 10.1.2. Declaration

```
public class SpellCheckerRun
    extends java.lang.Object
```

#### 10.1.3. Constructor summary

[SpellCheckerRun\(\)](#)

#### 10.1.4. Method summary

[main\(String\[\]\)](#) Main method  
[run\(String\[\]\)](#) Method to run the Spell checker.

#### 10.1.5. Constructors

- SpellCheckerRun

```
public SpellCheckerRun()
```

### 10.1.6. Methods

- **main**

```
public static void main(java.lang.String [] args)
```

- **Description**

- Main method

- **Parameters**

- args – String[] with the arguments.

- **run**

```
public static SpellCheckerRunResult run(java.lang.String  
[] args) throws ParseException
```

- **Description**

- Method to run the Spell checker.

- **Parameters**

- args – List of String

- **Returns** – SpellCheckerRunResult with the result

### 10.1.7. Class SpellCheckerRunResult

### 10.1.8. Declaration

```
public class SpellCheckerRunResult  
extends java.lang.Object
```

### 10.1.9. Field summary

[options](#)  
[result](#)

### 10.1.10. Constructor summary

[SpellCheckerRunResult\(String, Options\)](#)

### 10.1.11. Fields

- public java.lang.String result
- public Options options

### 10.1.12. Constructors

- **SpellCheckerRunResult**

```
public SpellCheckerRunResult(java.lang.String result ,  
                             Options options)
```



## 11. ANEXOS

### 11.1. Glosario de términos

- **Modelo (estadístico) del lenguaje:** Un modelo estadístico del lenguaje es una distribución de probabilidad sobre secuencias de palabras. Un tipo de modelo del lenguaje es el unigrama, también se suele llamar modelo de bolsa de palabras. La dispersidad en los datos es un problema al construir modelos del lenguaje. La secuencia de palabras más probable puede no aparecer en los datos de entrenamiento. Una solución es realizar la suposición de que la probabilidad de una palabra sólo depende de las  $n$  palabras previas. Esto es conocido como el modelo  $n$ -grama, unigrama cuando  $n=1$ . Los modelos del lenguaje neuronales o modelos del lenguaje continuos: modelo del lenguaje Skip-gram, base de word2vec.
- **Modelo del lenguaje N-grama:** Un modelo de  $n$ -grama es un tipo de modelo probabilístico que permite hacer predicción estadística del próximo elemento de cierta secuencia de elementos sucedida hasta el momento. Un modelo de  $n$ -grama puede ser definido por una cadena de Márkov de orden  $n-1$ . Predice  $x_i$  basándose en los  $n$  elementos anteriores.
- **Cadena de Márkov:** En la teoría de la probabilidad, se conoce como cadena de Márkov o modelo de Márkov a un tipo especial de proceso estocástico discreto en el que la probabilidad de que ocurra un evento depende solamente del evento inmediatamente anterior. En matemáticas se define como un proceso estocástico discreto que cumple con la propiedad de Márkov, es decir, si se conoce la historia del sistema hasta su instante actual, su estado presente resume toda la información relevante para describir en probabilidad su futuro.
- **Proceso de Márkov:** Fenómeno aleatorio dependiente del tiempo para el cual se cumple la propiedad de Márkov. Frecuentemente el término cadena de Márkov se usa para dar a entender que un proceso de Márkov tiene un espacio de estados discreto (infinito o numerable).
- **Modelo oculto de Márkov:** Un modelo oculto de Márkov (Hidden Markov Model, HMM) es un modelo estadístico en el que se asume que el sistema a modelar es un proceso de Márkov de parámetros desconocidos. El objetivo es determinar los parámetros desconocidos (u ocultos) de dicha cadena a partir de los parámetros observables. Un HMM se puede considerar como la red bayesiana más simple.
- **Etiquetado gramatical:** El etiquetado gramatical (part-of-speech tagging, POS tagging o POST) se considera el proceso de asignar a cada palabra de un texto su categoría gramatical. Las soluciones se pueden dividir en dos grandes grupos: aproximaciones lingüísticas basadas en un conjunto de reglas establecidas manualmente por expertos aprendidas de forma (semi)automática, y



las aproximaciones de aprendizaje automático que usan textos, generalmente anotados, para establecer los modelos. Además se pueden encontrar aproximaciones híbridas que combinan ciertos aspectos de las anteriores.

## Referencias

- [1] Alicia Ageno, Pere R. Comas, Lluís Padró, and Jordi Turmo. The talp-upc approach to tweet-norm 2013, 2013.
- [2] Iñaki Alegria, Nora Aranberri, Pere R. Comas, Víctor Fresno, Pablo Gamallo, Lluís Padró, Iñaki San Vicente, Jordi Turmo, and Arkaitz Zubiaga. Tweetnorm: a benchmark for lexical normalization of spanish tweets, 2015.
- [3] Iñaki Alegria, Nora Aranberri, Víctor Fresno, Pablo Gamallo, Lluís Padró, Iñaki San Vicente, Jordi Turmo, and Arkaitz Zubiaga. Introducción a la tarea compartida tweet-norm 2013: Normalización léxica de tuits en español, 2013.
- [4] Apache. Opennlp. <http://opennlp.apache.org>.
- [5] AiTi Aw, Min Zhang, Juan Xiao, and Jian Su. A phrase-based statistical model for sms text normalization, 2009.
- [6] Richard Beaufort, Sophie Roekhaut, Louise-Amelie Cougnon, and Cedrick Fairon. A hybrid rule/model-based finite-state framework for normalizing sms messages, 2002.
- [7] Y. Bengio, R. Ducharme, and P. Vincent. A neural probabilistic language model, 2003.
- [8] Eric Brill and Robert C. Moore. An improved error model for noisy channel spelling correction, 2000.
- [9] Jhon Adrián Cerón-Guzmán and Elizabeth León-Guzmán. Lexical normalization of spanish tweets, 2016.
- [10] Monojit Choudhury, Rahul Saraf, Vijit Jain, Animesh Mukherjee, Sudeshna Sarkar, and Anupam Basu. Investigation and modeling of the structure of texting language, 2007.
- [11] Paul Cook and Suzanne Stevenson. An unsupervised model for text message normalization, 2009.
- [12] J.M. Coteló, F.L. Cruz, J.A. Troyano, and F.J. Ortega. A modular approach for lexical normalization applied to spanish tweets, 2015.
- [13] dwyl. english-words. <https://github.com/dwyl/english-words>.
- [14] dylon. liblevenshtein. <https://github.com/universal-automata/liblevenshtein-java>.
- [15] Jacob Eisenstein. What to do about bad language on the internet, 2013.
- [16] Facebook. fasttext. <https://fasttext.cc/>.

- [17] Tim Finin, Will Murnane, Anand Karandikar, Nicholas Keller, Justin Martineau, and Mark Dredze. Annotating named entities in twitter data with crowd-sourcing, 2010.
- [18] Jenny Rose Finkel, Trond Grenager, and Christopher Manning. Incorporating non-local information into information extraction systems by gibbs sampling, 2005.
- [19] Jenny Rose Finkel and Christopher D. Manning. Nested named entity recognition, 2009.
- [20] Jennifer Foster, Ozlem Cetinoglu, Joachim Wagner, Joseph Le Roux, Joakim Nivre, Deirdre Hogan, and Josef van Genabith. From news to comment: Resources and benchmarks for parsing the language of web 2.0, 2011.
- [21] Freeling. Freeling. <http://nlp.lsi.upc.edu/freeling/>.
- [22] Pablo Gamallo, Marcos García, and Santiago Fernández-Lanza. Word normalization in twitter using finite-state transducers, 2013.
- [23] Pablo Gamallo, Marcos García, and José Ramon Pichel. A method to lexical normalisation of tweets, 2013.
- [24] Kevin Gimpel, Nathan Schneider, Brendan O'Connor, Dipanjan Das, Daniel Mills, Jacob Eisenstein, Michael, Heilman, Dani Yogatama, Jeffrey Flanigan, and Noah A. Smith. Part-of-speech tagging for twitter: annotation, features, and experiments, 2011.
- [25] Jose M. Gomez-Hidalgo, Andrés A. Caurcel-Díaz, and Yovan Iñiguez del Rio. Un método de análisis de lenguaje tipo sms para el castellano, 2013.
- [26] Google. Google cloud engine. <https://cloud.google.com/>.
- [27] Stanford NLP Group. Stanfordnlp core. <https://stanfordnlp.github.io/CoreNLP/>.
- [28] Bo Han and Timothy Baldwin. Lexical normalisation of short text messages: Makn sens a twitter, 2011.
- [29] Bo han, Paul Cook, and Timothy Baldwin. unimelb: Spanish text normalisation, 2013.
- [30] K. Heafield. Faster and smaller language model queries, 2011.
- [31] Mans Hulden and Jerid Francom. Weighted and unweighted transducers for tweet normalization, 2013.
- [32] Martin Jansche and Steven P. Abney. Information extraction from voicemail transcripts, 2002.

- [33] Joseph Kaufmann and Jugal Kalita. Syntactic normalization of twitter messages, 2010.
- [34] Catherine Kobus, Francois Yvon, and Graldine Damnati. Transcrire les sms comme on reconnait la parole, 2008.
- [35] George R. Krupka and Kevin Hausman. Isoquest: Description of the netowlm extractor system as used in muc-7., 1998.
- [36] Xiaohua Liu, Shaodian Zhang, Furu Wei, and Ming Zhou. Recognizing named entities in tweets, 2011.
- [37] T. Mikolov, A. Deoras, S. Kombrink, L. Burget, and J. Cernocký. Empirical evaluation and combination of advanced language modeling techniques, 2011.
- [38] Tomas Mikolov, Kai Chen, Greg Corrado, and Jeffrey Dean. Efficient estimation of word representations in vector space, 2013.
- [39] Einat Minkov, Richard C. Wang, and William W. Cohen. Extracting personal names from email: applying named entity recognition to informal text, 2005.
- [40] Javier Moreno. TweetSC spell checker app. <https://jmorenov.github.io/TweetSC/>.
- [41] Javier Moreno. TweetSC web. <https://tweetsc.github.io>.
- [42] Mosquera, Alejandro, Elena Lloret, and Paloma Moreda. Towards facilitating the accessibility of web 2.0 texts through text normalisation, 2012.
- [43] Alejandro Mosquera. Algoritmo del metáfono. [https://github.com/amsqr/Spanish-Metaphone/blob/master/phonetic\\_algorithms\\_es.py](https://github.com/amsqr/Spanish-Metaphone/blob/master/phonetic_algorithms_es.py).
- [44] Alejandro Mosquera and Paloma Moreda. DLSI en tweet-norm 2013: Normalización de tweets en español, 2013.
- [45] Juan M. Coteló Moya, Fermín L Cruz, and Jose A. Troyano. Resource-based lexical approach to tweet-norm task, 2013.
- [46] Forsyth Eric N. and Craig H. Martell. Lexical and discourse analysis of online chat dialog, 2007.
- [47] Peter Norvig. How to write a spelling corrector. <http://norvig.com/spell-correct.html>, 2007.
- [48] Jesús Oliva, José I. Serrano, María D. Del Castillo, and Angel Iglesias. SMS normalization: combining phonetics, morphology and semantics, 2011.
- [49] Olutobi Owoputi, Brendan O'Connor, Chris Dyer, Kevin Gimpel, Nathan Schneider, and Noah A. Smith. Improved part-of-speech tagging for online conversational text with word clusters, 2013.

- [50] James L. Peterson. Computer programs for detecting and correcting spelling errors., 1980.
- [51] Bojanowski Piotr, Grave Edouard, Joulin Armand, and Mikolov Tomas. Enriching word vectors with subword information, 2017.
- [52] Alan Ritter, Colin Cherry, and Bill Dolan. Unsupervised modeling of twitter conversations, 2010.
- [53] Alan Ritter, Sam Clark, Mausam, and Oren Etzioni. Named entity recognition in tweets: an experimental study, 2011.
- [54] Pablo Ruiz, Montse Cuadros, and Thierry Etchegoyhen. Lexical normalization of spanish tweets with preprocessing rules, domain-specific edit distances, and language models, 2013.
- [55] Pablo Ruiz, Montse Cuadros, and Thierry Etchegoyhen. Lexical normalization of spanish tweets with rule-based components and language models, 2014.
- [56] Arturo Montejo Ráez, M. Carlos Diaz Galiano, Eugenio Martínez Cámara, M. Teresa Martín Valdivia, Miguel A. García Cumbreñas, and L. Alfonso Ureña López. Sinai at twitter-normalization 2013, 2013.
- [57] Erik F. Tjong Kim Sang and Fien De Meulder. Introduction to the conll-2003 shared task: language independent named entity recognition, 2003.
- [58] H. Schwenk. Continuous space language models, 2007.
- [59] Claude Elwood Shannon. A mathematical theory of communication, 1948.
- [60] Beaux Sharifi, Mark-Anthony Hutton, and Jugal Kalita. Summarizing microblogs automatically, 2010.
- [61] Sameer Singh, Dustin Hillard, and Chris Leggetter. Minimally-supervised extraction of entities from text advertisements, 2010.
- [62] Enrique Sánchez-Villamil, Mikel L. Forcada, and Rafael C. Carrasco. Unsupervised training of a finite-state sliding-window part-of-speech tagger, 2004.
- [63] Kristina Toutanova and Robert C. Moore. Pronunciation modeling for improved spelling correction, 2002.
- [64] Tweet-Norm. Tweet-norm. <http://komunitatea.elhuyar.eus/tweet-norm/>.
- [65] Xabier Saralegi Urizar and Iñaki San Vicente Roncal. Elhuyar at tweetnorm 2013, 2013.
- [66] Jesús Vilares, Miguel A. Alonso, and David Vilares. Prototipado rápido de un sistema de normalización de tuits: Una aproximación léxica, 2013.

- 
- [67] Casey Whitelaw, Ben Hutchinson, Grace Y. Chung, and Gerard Ellis. Using the web for language independent spellchecking and autocorrection, 2009.
  - [68] GuoDong Zhou and Jian Su. Named entity recognition using an hmm-based chunk tagger., 2002.
  - [69] Óscar Muñoz-García, Silvia Vázquez, and Nuria Bel. Exploiting web-based collective knowledge for micropost normalisation, 2013.