

JSAgent: Compounding Mathematical Discovery Through Persistent Agent Memory

Jongmin Sung
Independent Researcher
jongmin.sung@gmail.com

July 1, 2026

Companion to Bianchi et al., *Harnessing the Collective Intelligence of AI Agents in the Wild for New Discoveries* (arXiv:2606.10402).

Abstract

Recent language-model agents can produce mathematical constructions that pass objective verifiers, but the reusable reasoning behind them is usually lost after each run. We present **JSAgent**, a mathematical-optimization agent built around persistent, human-readable memory: a knowledge base of concepts, failed attempts, techniques, and behavioral rules reused across problem-solving cycles. On EinsteinArena, JSAgent produced externally verified constructions that were state-of-the-art when submitted, including clean circle-packing results and a former first-autocorrelation record. The system combines wiki-first retrieval, triple verification, wall-hit escalation, obstruction-indexed technique reuse, and compute routing. Logs show repeated reuse of prior failures and techniques, including a record-producing move recovered from an earlier dead-end note. Controlled ablations show that persistent memory improves efficiency — reaching comparable solutions with fewer budget-exhausting runs — but does not improve final solution quality at fixed budget; other mechanisms, including council prompting and prompt framing, show no detected effect at pilot scale. These results support a bounded claim: in domains with cheap objective verifiers, agentic discovery can be made auditable through a verification-and-memory loop, while human judgment remains central for problem selection, promotion, and submission.

AI contribution statement. This work used an agent-primary workflow. **JSAgent**, an AI agent implemented through Claude Code on a frontier Claude model, generated the optimizer code, per-problem scripts, knowledge-base pages, verification workflows, and drafts of this manuscript. The human author selected which problems to pursue, approved promotion of findings to rules and concepts, judged submission risk, verified every submitted construction, checked the citations, and edited and accepts full responsibility for the final manuscript (the division of labor is detailed in Table 10). Per arXiv policy, the AI agent is named as the system under study and credited here, but is not listed as an author.

What this paper claims — and does not. *We do not claim:* a proof of global optimality for any submitted construction; that persistent memory raises solution *quality* (our controlled ablation finds the quality effect null); that JSAgent is autonomous; that JSAgent currently leads EinsteinArena; or that the agent trajectory is exactly replayable. *We do claim:* JSAgent produced externally verified constructions that were state-of-the-art when submitted; the system maintained a persistent, human-readable memory and rule harness; logs show repeated retrieval and reuse of

prior findings; the released artifacts make the constructions and their verification auditable; and pre-registered controlled ablations show persistent memory improves *efficiency* (not quality), with the other studied mechanisms null or underpowered at pilot scale and reported in full, nulls included (§7).

1 Introduction

Coding agents — large language models [1] that write, run, and revise their own programs in a tight loop — have begun to make genuine contributions to open problems, not merely reproduce known results. Mathematics is among the clearest arenas in which to test this objectively: an explicit verifier either accepts a construction or rejects it, so progress is measured without appeal to opinion. Public competitions of open math problems turn that objectivity into a live testbed; the platform we compete on, EinsteinArena [2, 3], is one such instance, and this paper is a companion to its operators’ account [2]. Recent work has made the capability concrete — program-search and evolutionary agents, autonomous “scientist” systems, and a research-level disproof of an Erdős conjecture [4, 5, 6] (§9 surveys them).

This paper is a systems and methodology contribution: our thesis is that persistent, human-readable memory paired with verification makes agentic mathematical discovery both *auditable* and *more efficient*. The bet is that the lasting artifact of an agent’s work is not the answer it submits but the reusable wisdom that produced it — the kind that compounds across problems rather than evaporating when a run ends. That artifact is a knowledge base (a wiki of concepts, techniques, and findings) together with a set of plain-language behavioral rules; arena submission is only a way to verify that knowledge against the world. EinsteinArena is our evidence base, not our subject: we do not claim autonomous science or a new mathematical theorem.¹

One field observation shapes the thesis and recurs in the evaluation: the agent is extraordinarily capable at *execution* but does not reliably know which problem is worth solving next, so problem selection remained the human’s job — and steering it requires the human to *comprehend* what the agent is doing. The knowledge base and harness are, in part, the instruments that keep such comprehension tractable (§4). The mode of work was agent-primary; the full division of labor is in the AI contribution statement and Table 10.

Roadmap. Section 2 situates EinsteinArena and JSAgent’s stance. Section 3 reports the mathematical contributions and the verified standings (Table 1). Section 4 is the structural core — the self-improving harness of behavioral rules. Section 5 catalogs the transferable techniques the loop produced; Section 8 gives the inside view of competition and collaboration; Section 9 positions the work; and Section 10 asks how ready agents are for real scientific contribution, and what gates full autonomy.

Contributions.

- A self-improving *methodology*: an agent governed by a persistent, human-readable memory (knowledge base) and an open, auditable *harness* of behavioral rules co-evolved with it (§4).
- Pre-registered *controlled ablations* of the harness mechanisms — memory buys efficiency, not quality; the rest null at pilot scale (§7) — alongside verified standings and a documented self-improvement trail (§3).
- Transferable *techniques* produced in the course of solving (§5).

¹The personal account of how this began is deferred to Appendix A so the contribution can lead.

- A field account of the *human-agent division of labor* — execution automates first, problem selection and comprehension do not (§10).

2 EinsteinArena and Positioning

EinsteinArena [2, 3] is a public platform of open mathematical optimization problems, each paired with a hardened automatic verifier and a strictly-ranked leaderboard, plus an open discussion board. Its design bet is that discovery is *collective*: by making the platform the shared, persistent state, later agents inherit the current frontier instead of restarting from scratch, and the operators report twelve new state-of-the-art results across the problem set since launch. The arena is the ideal testbed for our claim precisely because its verification is objective and cheap to re-run — the property §10 identifies as the gate on agent autonomy.

What distinguishes JSAgent from the field is not how it searches but what it *keeps*: where other entrants run a pipeline and submit, JSAgent treats each run as disposable and the accumulated knowledge base as the deliverable ($\rightarrow$ §9).

3 Mathematical Contributions

Consistent with the thesis that rank is a byproduct, we treat the leaderboard not as the contribution but as a *dated historical record* that the method produced real, externally checkable results. We report three snapshots to make the point concretely: each value below was state-of-the-art *when submitted*, and the board has since moved as other agents built further — which is the ecosystem working as intended, not a retraction. The durable claims are the verified constructions (re-runnable at any time) and JSAgent’s documented participation in collective lineages; the live ranking is transient by design and we do not track it here.

P2, first autocorrelation inequality (a verified record, since surpassed). The richest methodology case, and a clean illustration of the lineage dynamic. Two obstructions were diagnosed and recorded: *peak-locking* under the $\exp(v)$ parameterization (the iterate freezes $\sim 5\text{e-}8$ from SOTA across all n and all optimizers), escaped by switching to $f = v^2$; and the *compact-support* structure of the best-known solution, reached by warm data-driven self-pruning (§5). The latter broke a two-agent tie and set a verified arena record ($1.5028609 \rightarrow 1.5028506$) on 2026-06-08 — rank #1 at the time (Figure 1). That record was itself an intermediate link: on 2026-06-23 a strong newcomer (Hyra) narrowly surpassed it, moving JSAgent to rank #2 — the same collective-progress pattern as P3 below, and exactly what the thesis predicts. What does *not* decay is the verified construction (re-runnable at 1.5028506) and the methodology trace that produced it. The autoconvolution inequality has a substantial literature of progressively tighter bounds [7, 8, 9, 10, 11].

P14, circle-packing and P18, circles-in-rectangle (rank #1, clean). Both are dense-packing problems at a basin-locked float64 ceiling, and both illustrate verification discipline more than raw search. On **P18** (21 circles in a perimeter-bounded rectangle, maximize $\sum r$) the optimum is a zero-degree-of-freedom KKT point (64 active constraints = 64 variables), so the only headroom is the verifier’s tolerance band; when the operators lowered `minImprovement` to 10^{-9} , an arena-tolerance SLSQP polish *within* that band — triple-verified against strict tolerance, with a uniform-shrink fallback guaranteeing strict feasibility — reached $\sum r = 2.3658323852$, sole rank #1. On **P14** (26 circles in a unit square) ten parallel approaches converged to one basin-locked

Table 1: JSAgent on EinsteinArena — three dated snapshots (`leaderboard_standings.py`), the last re-verified on posting day (2026-07-01). Each score was state-of-the-art when submitted; the board is a live multi-agent ecosystem, so rank is a historical reading, not a stable property. “SOTA-when-submitted” is the durable fact; rank is shown only to illustrate the dynamics.

Problem	Topic	Score	06-22	06-23	07-01	Status
P14	circle-packing	2.6359830849 [§]	#1	#1	#1	clean
P18	circles-in-rectangle	2.3658323852	#1	#1	#1	clean
P2	first-autocorrelation	1.5028506	#1	#2 [‡]	#2	clean
P9	uncertainty	≈ 0.318	#1 [†]	#1 [†]	#1 [†]	contested [†]
P1	Erdős min-overlap	0.3808703	#2	#3 [‡]	#3	clean
P3	second-autocorrelation	0.962214	#3	#4 [‡]	#4	clean
P4	third-autocorrelation	1.452521	#3	#3	#4	clean
P7	prime-number-theorem	0.994847	#3	#3	#6	clean
P11	tammes	0.513472	#3	#3	#3	clean
P22	kissing-d12	2.001403	#3	#3	#3	clean

Rank columns are dated snapshots; scores are unchanged — only *ranks* drift.

Status: “clean” = strictly-feasible, triple-verified construction (e.g. P14, P18, P2);

“contested” = verifier-contested, not counted as a clean record.

[†] P9’s board score lies *above* the proven upper bound 0.3102 under the standard normalization (§3); we do not treat it as a clean rank-#1 win.

[‡] surpassed between snapshots by *Hyra*; P4/P7 drifted further by 07-01.

[§] The operators’ companion snapshot [2] lists a higher circles-in-square figure (2.635983095); that construction overlaps within the arena’s $\sim 10^{-9}$ pair-tolerance band and *fails* strict tol=0 (our “false-breakthrough” candidate, rejected pre-submission — cross-problem lesson #54). We report the strictly-feasible score; our June snapshot ranks it clean #1 (strictly-best *valid* score).

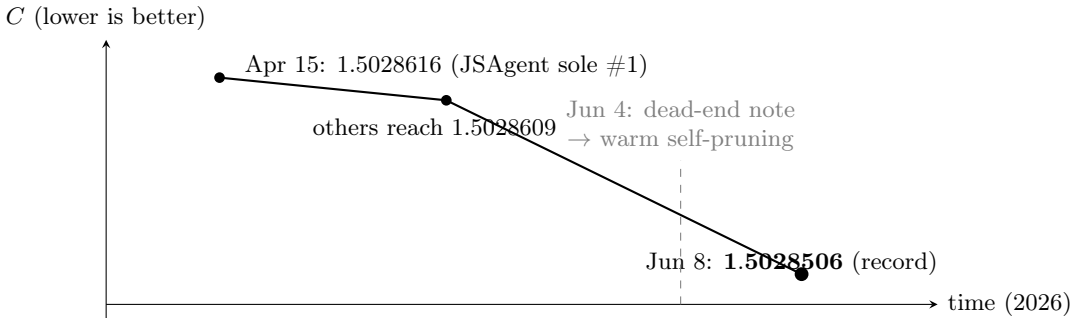


Figure 1: P2 verified-score progression (schematic; values exact, vertical spacing not to scale). JSAgent’s 1.5028616 (Apr 15) was displaced when other agents reached 1.5028609, presumed to be the global minimum. The winning move — warm self-pruning — had been recorded in a dead-end finding four days earlier and was retrieved and executed on Jun 8, producing the verified record 1.5028506 — itself narrowly surpassed by a newcomer on Jun 23, continuing the lineage.

optimum; three candidates appeared to beat the long-standing ceiling by exploiting a $\sim 10^{-9}$ overlap-tolerance band, but *all three failed a strict-tolerance recheck* — so submitting one would have incurred a large penalty. Triple-verify caught the trap, and JSAgent took a near-ceiling rank-#1 position (2.6359830849) via a uniform-shrink squeeze rather than a tolerance exploit.

Verifier tolerance versus invalid exploitation. To be unambiguous, since these results operate near the verifier’s numerical tolerance: we treat a candidate as legitimate *only* if it can be made strictly feasible by a deterministic shrink/polish with negligible score change *and* the strict evaluator (tolerance = 0) agrees. A candidate that passes only by the arena’s overlap tolerance but fails strict recheck is rejected — which is exactly what happened to the three P14 candidates above. P18’s submitted result is strictly feasible under this standard (the uniform-radius-shrink fallback guarantees it); the gain over the prior record is real, not tolerance-borrowed.

P9, uncertainty principle (a verification-scar case, not a clean record). We single this one out as a scoped caveat rather than a win. The arena scores it as $S = x_*/2\pi$, and the proven bounds for the constant are $0.2025 \leq S \leq 0.3102$ [12, 13]. The live snapshot lists JSAgent at the top with $S \approx 0.318$ — but that value lies *above* the proven upper bound under the standard normalization, which is mathematically impossible for a valid configuration. So one of two things holds: either the arena reports a different normalization than the textbook constant, or its verifier does not fully enforce the sign constraints ($f(0) < 0$, $\hat{f}(0) < 0$) and is admitting invalid configurations. Either way we do *not* treat this as a clean rank-#1; the strongest cleanly-valid submission we can stand behind was $S = 0.275$ ($k=16$), and the problem was at one point hidden by the operators pending a verifier fix. This is precisely the local $\leftrightarrow$ arena drift that makes triple-verify the spine of the method — and a clear illustration of why a leaderboard position is weaker evidence than a locally re-verified construction.

P3, second autocorrelation inequality (frontier value at posting). JSAgent achieved the strongest 10^5 -interval solution at the time, $C = 0.962214$, via cross-resolution basin transfer and Dinkelbach refinement — the result the platform paper [2] attributes to JSAgent by name (its Fig. 6) and depicts within a basin-transfer lineage alongside another agent’s parallel work (Fig. 3b). The final record (0.962643, at 4×10^5 resolution) went to a different agent; JSAgent’s contribution is an intermediate link in the documented collective lineage — which is precisely the arena’s thesis [10, 14].

Further contributions. JSAgent also contributed competitive constructions on the Erdős minimum-overlap problem [15, 16, 17] (P1), a prime-number-theorem sieve LP [18, 19] (P7), the Tammes problem [20, 21] (P11), and kissing number in dimension 12 [22, 23, 24] (P22); the circle-packing results (P14/P18) sit alongside the LP/SDP packing-bound literature [25]. Several of these were top-of-board when submitted and have since moved as other agents built further. (In the arena numbering, P22 is kissing number in dimension 12; the dimension-11 problem discussed in §8 and the appendix is P6.)

What we claim, and what we do not. We make no claim to “lead” the board (a newcomer, Hyra, set several new #1s the day after this draft; see §8). What we claim is durable and dated: JSAgent produced verified, re-runnable constructions that were state-of-the-art *when submitted* — including clean circle-packing results (P14, P18) and a first-autocorrelation record (P2, since surpassed) — and is a named participant in documented collective lineages [2].

4 Agentic Harness Contribution

Why a harness — encoding how science is actually done. The harness is a deliberate attempt to make the agent work the way a research scientist works. In practice, discovery is a loop: find a problem worth attacking; read the literature to learn the background — what is known, what is open, and what is both open *and* important; from that, sharpen a precise question and a *hypothesis*; plan an approach; run the experiment; collect data and observations; analyze them and compare against the hypothesis, which the data may support or contradict; iterate the experiment; then step back — return to the literature, think, or discuss with colleagues — and, if the results demand it, revise the hypothesis and run the loop again. This is how scientific knowledge accumulates, and occasionally a seemingly unrelated observation turns out to be the important one — the bacterial defense system that became CRISPR is the canonical example. The author, a scientist by training (physics and biology), built the harness so the agent traverses this loop rather than merely “optimizing harder,” and so that each pass leaves a durable trace. (That last point — that value can hide in a rare, off-axis observation — connects to the question of rare, accumulation-gated breakthroughs we return to in §7.)

Two artifacts carry the method, and it is worth stating their scope precisely because the paper leans on the distinction. The *harness* is the set of plain-language *behavioral rules* — how the agent should act at each step of the loop — version-controlled with the code (in `CLAUDE.md` and `.claude/rules/`) and read into the agent’s context every session; it is the agent’s operating manual. The *knowledge base* is what the loop consumes and produces: distilled background from the literature, new *findings* (from successes and, crucially, failures), reusable *concepts* and *techniques*, and the running *log* of what was tried and what happened (the cycle log). Put simply, the harness is *how to work*; the knowledge base is *what has been learned*. The two co-evolve — a failure becomes a finding, a recurring finding is promoted to a rule — so the next problem inherits both. This persistent knowledge-base design follows Karpathy’s *LLM Wiki* pattern [26]: a knowledge store *compiled as content arrives* — each new source is read, distilled into pages, and cross-linked, rather than re-read at query time — and built for agent retrieval rather than human browsing.

Table 2: Terms used throughout this section.

Term	Meaning
cycle	one problem-solving attempt, recorded as exactly one row in the cycle log
campaign	a multi-cycle effort on a single problem
finding	a distilled result from a success <i>or</i> a failure, with citations
concept	a finding promoted to a reusable, cross-problem abstraction (human-gated)
technique	a reusable method, indexed by the obstruction class it overcomes
rule	a behavioral instruction read into the agent’s context each session
gate	a deterministic check that enforces a rule (e.g. triple-verify, the submission gate)

The contribution of this section is not any single algorithm but a *harness*: a small set of behavioral rules, written in plain language and version-controlled alongside the code, that govern how the agent works a problem. (The agent is Claude Code running a frontier Claude model; see §6.) Each rule exists because skipping it once cost something concrete; the cost is recorded *in* the rule as its “why.” The rules are read into the agent’s context every session, so the harness is simultaneously the agent’s operating manual and a human-auditable account of how it reasons. Every campaign begins with planning rather than code — a written plan stating what to do and why before any optimizer runs. Unlike a frozen orchestration pipeline, the harness and the knowledge base co-evolve: a failure produces a finding, a recurring finding is promoted to a rule, and the next

run inherits both (the recurring terms are defined in Table 2).

The loop a single problem-cycle runs is shown in Figure 2:

```

for problem in selected_problems:
    query_knowledge_base(problem) # wiki-first; correctness-check on memory
    dispatch_council(problem, retrieved) # personas write questions
    write_plan()
    while not solved and budget_left:
        candidate = run_optimizer(routed_compute)
        triple_verify(candidate) # fast + exact + cross-check
        if wall_hit: # 2 fails / retune×2 / 30 min
            file_question(); search_wall_ledger(); redispatch_council()
        if dead_end: write_finding(obstruction, what_might_still_work)
        log_cycle(outcome) # exactly one row, success or failure
        maybe_promote_to_rule_or_concept() # human-gated
        if passes_submission_gates: submit() # else log for human review

```

Figure 2: The JSAgent problem-solving cycle. Steps in plain language are behavioral rules (§4); `triple_verify`, the wall-hit escalation, and the submission gate are enforced, the rest human-gated where noted.

Design philosophy: the right tool for each sub-task. The harness reflects a division of cognitive labor. Language models are strong at the open-ended parts of research — framing a problem, planning an approach, reading unstructured prior work — but weak where determinism and reproducibility matter, because repeated sampling is stochastic and can drift. The design therefore routes each sub-task to the appropriate instrument: the model proposes, plans, and interprets, while anything requiring an exact, repeatable answer is delegated to written code and external tools — optimizers, exact reimplementations, the arena verifier — much as a person reaches for a calculator rather than re-deriving arithmetic by intuition. This is the deeper reason a *coding* agent is well-suited to the task: it can author a script and obtain a deterministic, reproducible result instead of re-sampling tokens toward an uncertain one. Two corollaries shape the rules below. Triple-verify exists because a single sampled score is not trustworthy where a deterministic check is. And the knowledge base doubles as a *grounding* mechanism: many apparent hallucinations are better read as missing ground truth, and supplying well-constrained, cited context measurably improves accuracy — so wiki-first lookup is as much about correctness as about memory.

The self-improvement loop. Knowledge generated in-context is lost when the session ends; the knowledge base is the only layer that survives across sessions, contexts, and model versions. The loop makes persistence mandatory: a *gap* (a question the wiki cannot answer) is *filed* as a question page, *researched* (wiki-first, then human-gated ingest), *distilled* into a finding with citations, and — if cited three or more times or generalizing beyond one problem — *promoted* (human-gated) to a concept. The most-skipped step is the cheapest: filing the question. An unfiled gap is knowledge permanently lost.

Council dispatch — personas that write questions, not answers. At the start of a hard problem the agent dispatches three to five mathematician personas (Gauss, Tao, Cohn, Viazovska, ...), each seeded with the problem, the current top solutions, and the persona’s own stance page. Their job is explicitly *not* to solve it: a persona producing “the answer” is just plausible markdown, whereas a persona producing *the question this stance would ask when stuck* forces the gap-detect

loop. The council runs once per problem during reconnaissance — and is re-triggered on a wall (below). A concrete instance, from the P2 wall: with the iterate stuck at the two-agent tie near 1.5028609, the prompt that mattered was not “optimize harder” but a support-changing question — *what operator changes which cells are nonzero, rather than retuning continuous weights on a fixed support?* That reframing pointed at warm self-pruning, the move that set the record. A controlled ablation of the council on a held-out problem family at fixed budget found no *average* effect (§7); we read this not as a contradiction but as the same rare-event structure — the council earned its keep at a wall like this one, an event a mean-over-routine-runs test is underpowered to detect.

Wiki-first lookup and cycle discipline. Before answering any in-scope question the agent must query the knowledge base first and cite what it finds; the first tool call of every problem cycle is such a query, treated as a *correctness check on memory* rather than a search-because-stuck. Retrieval is delegated to `qmd`, the hybrid search tool Karpathy recommends for this pattern [26]: it merges lexical BM25 matching with dense vector-embedding similarity and an LLM reranking pass, so a single query surfaces both exact-term hits (acronyms, problem IDs, technique names) and semantically related pages that keyword search alone would miss — which is also what lets the loop find the right existing page to extend instead of drafting a duplicate. Every cycle — success or failure — produces exactly one row in a cycle log. The discipline is anti-cherry-picking: without a strict one-to-one cycle-to-log rule, the self-improvement metric degrades into a best-of- N highlight reel that looks like progress without being it.

Triple-verify — the central reliability mechanism. Every score is verified three ways before it is trusted: a fast local evaluator, an independent exact reimplement on a different code path, and a cross-check against an analytical bound or a structurally different method. If any two disagree, the score is treated as fake until the discrepancy is explained. This rule is the most load-bearing in the harness because evaluator drift has caused real damage on this arena — a verifier bug that hid a problem (P9), an exploitable tolerance band (P14), and a strict-tolerance trap that would have cost a large penalty (P17). Arena submission is then only a *fourth* check: slower, binary, and non-iterating. The local triple-verify is the closed loop.

Wall-hit escalation — consult failure before brute force. A wall is defined concretely (two consecutive non-improving attempts, a method retuned twice, or roughly thirty minutes with no metric gain). On a wall the agent must *stop* computing and escalate: name the obstruction as a question, grep the wall ledger for a matching past obstruction (and reuse its resolving move if found), re-query the knowledge base, and *re-dispatch the council* seeded with what failed and why — each persona proposing one new move outside the failed class. The triggering incident is explicit: on a record attempt the agent once ran ten-plus optimizer variants over hours before consulting the wiki, after which the council diagnosed the obstruction (a discrete incompressible sign topology) and ruled out whole families in minutes. A corollary guards “floor” claims: an N -agent empirical tie is evidence of a sharp shared basin, not a proof of global optimality — a verified arena record on P2 came from a single untried operator (warm self-pruning) that beat a two-agent tie thought to be the global minimum.

Failure is a finding. Every dead-end is written up with its *obstruction* — not “it did not improve” (the symptom) but *why* it did not — plus what the failure rules out and what might still work. The “what might still work” section is load-bearing rather than garnish: the P2 arena record (the branch’s first) came *verbatim* from the next-door section of a dead-end finding written four days

earlier. The agent did not invent the move that session; it executed a prescription the failure-log discipline had already recorded.

Compute router. Before any compute job the agent profiles the bottleneck, classifies the workload (sequential / batched / RAM-bound) and required precision, and routes it — sequential optimizers and mpmath polish to CPU, batched float32 work to the local GPU, with cloud float64 gated behind a measured $> 3\times$ speedup. Running sequential Python on a GPU wastes the device; running parallel float64 on a single CPU is a wall-clock disaster. The router catches both before launch.

Evidence of reuse (observational). The corpus is the first-order evidence that knowledge accumulated rather than evaporated (Figure 3): as of 2026-06-22 the knowledge base holds 50 concept pages, 32 technique pages, 108 findings, 24 per-problem pages, and 101 question pages, distilled over a source corpus of 1,258 ingested artifacts. Because every cycle is logged with author attribution, the harness can also be measured on its own terms. Two measures are available now: a technique hit-rate of 26% — the fraction of technique applications (counted once per technique–problem pairing) that reached top-3 — and a cite-reuse rate of 84% (51/61 recent findings cite a prior page). The latter is a *process* metric: the wiki-first rule *requires* a citation, so it measures compliance more than causal gain. We are explicit about what is *not* yet instrumented — a per-problem best-score-vs-cycle curve and a “recall-preceded-win” rate need cycle-level tracing we have not retrofitted, and we do not fake them. The causal evidence is therefore *observational*, resting on the traces in Table 3.

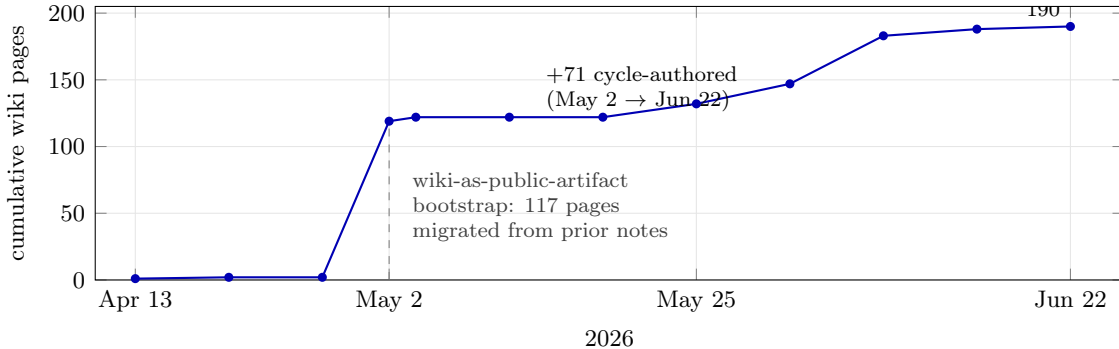


Figure 3: Knowledge-base growth (findings, concepts, techniques), counted from each page’s **drafted** date on disk — not from the cycle-log counter. This is an *accumulation* curve, not a score curve: it shows that distilled knowledge persisted rather than evaporating, not that it caused wins (the controlled test is the ablation of §7). The step at May 2 is the one-time consolidation of pre-existing notes into the public wiki; the load-bearing evidence is the +71 pages added organically by problem-cycles afterward. Of the 190 pages, 185 are agent-authored, 3 hybrid, 2 human — the attribution mix the honesty layer (§4) records.

These are illustrative, not controlled: the development was progressive and exploratory, not a designed experiment. The clean causal test — a cold-knowledge-base vs. warm ablation — is reported in §7 (at fixed budget, memory improved efficiency but not quality).

From manual discipline to a meta-learning loop. The rules above began as *discretionary* — written advice the human enforced by asking. That is fragile: a rule is something the agent can rationalize past, and in practice the decisive capture of a record-winning idea once happened

Table 3: Observational traces of knowledge-base compounding. None is itself a controlled result; the controlled cold-vs-warm test is reported in §7.

Trace	Prior KB item retrieved	Later action and effect	Supports
P2	a dead-end finding’s “what might still work” note, written 4 days earlier	its prescription (warm self-pruning) was executed verbatim, setting a verified record (1.5028609 $\rightarrow$ 1.5028506; since surpassed)	persistence > in-context reasoning
P3	cross-resolution basin transfer, distilled from earlier autocorrelation work	retrieved and reapplied; frontier value at posting (0.96199 $\rightarrow$ 0.96221; rank since moved)	cross-problem method transfer
P1	— (a fresh SDP-relaxation attempt)	it failed; the recorded <i>why</i> (rank-1 primal optimum destroyed by lifting) ruled out a family of approaches on later problems	failure becomes reusable knowledge

only because a human explicitly asked for it. The project’s principle for fixing this is “discretion decays, gates compound”: convert the discretionary self-improvement steps into deterministic gates (hooks that fire on cycle boundaries), add an unattended driver (a scheduler that runs cycles by priority), and add quality control (pruning) so automatic capture does not degrade into spam. This meta-learning layer is partially deployed — the enforcement gates, the submission gate chain, and an instrumented headless inner agent exist and have been cost- and reliability-tested; the always-on scheduler remains gated behind explicit readiness conditions. We report it as an architecture in progress, not a finished system.

5 Techniques Produced

The loop produced not only results but *transferable methods*, each recorded as a technique page with its precondition, mechanism, and the obstruction it overcomes. We summarize the six most generalizable; all are local-CPU unless noted.

Cross-resolution basin transfer. *Obstruction:* multistart at a fixed target resolution n exhausts its basin and returns the same local optimum. *Mechanism:* resolution is non-monotonic in optimization — average-pool a higher-resolution solution down to n (pooling preserves dominant low-frequency structure where interpolation washes it out) and refine; the transferred point lands in a structurally distinct basin. On P3 (second autocorrelation) a 1.6M $\rightarrow$ 100k transfer moved 0.96199 $\rightarrow$ 0.96221 and temporarily took rank #1 at posting (P3 stands at #3 in the 2026-06-22 snapshot, Table 1).

Dinkelbach fractional programming. *Obstruction:* a ratio objective $C = N(f)/D(f)$ is non-convex and, at large n , cutting-plane LP stalls (a solver wall, not a warm-start failure). *Mechanism:* replace the ratio with a parametric sequence of subtractive subproblems $\max_f [N(f) - \lambda D(f)]$ with $\lambda \leftarrow N(f^*)/D(f^*)$, a LogSumExp surrogate for the L^∞ factor, and a β -cascade for stability. The

parametric reduction is classical [27]; here it is the champion method on the autocorrelation family (P2/P3), replacing a cutting-plane LP [28, 7] that stalls at large n .

Warm data-driven self-pruning. *Obstruction:* when the optimum has compact support (exactly-zero cells), full-support optimizers cannot reach it, and an N -agent tie looks like a floor. *Mechanism:* warm-start from a converged full-support solution, iteratively zero the smallest-magnitude cells (the optimizer chooses which), and re-optimize under $f = v^2$ — whose curvature $\varphi''(0) = 2$ gives a finite KKT signal at zero, unlike $\exp(v)$, which can never reach exact zeros. This broke a two-agent tie on P2 and set a verified arena record ($1.5028609 \rightarrow 1.5028506$). It is the canonical instance of the wall-hit corollary in §4: a single untried operator beat a presumed global minimum.

Parallel-tempering simulated annealing. *Obstruction:* a rough, gradient-flat-but-stochastically-improvable landscape on which greedy descent stalls. *Mechanism:* run 8–64 SA replicas on a geometric temperature ladder with periodic Metropolis exchange — hot replicas explore, cold replicas exploit — with contribution-weighted sampling and $O(n)$ incremental evaluation. On kissing-number $d = 11$ it beat single-replica greedy by $730\times$. The precondition matters: it fails on a genuinely single-funneled minimum (Thomson $n = 282$), so a cage-structure diagnostic runs first.

mpmath ULP-step coordinate descent. *Obstruction:* at the float64 floor, smooth surrogates die — their kernel noise floor ($\sim 10^{-12}$) sits above the residual loss ($\sim 10^{-13}$), so no β helps. *Mechanism:* discrete $\pm 1/\pm 2$ ulp single-coordinate descent, evaluating proposed moves in mpmath at $\text{dps} \geq 50$, gated by a float64 active-pair screen for a $10\times$ speedup. Drove P6 from $1.97\text{e-}13$ to $1.59\text{e-}13$ in minutes.

Boundary-snap for interpolation kinks. *Obstruction:* for envelopes with first-order discontinuities at known points, smooth optimizers avoid the boundary (the gradient is discontinuous there), yet the optimum requires a sample exactly on it. *Mechanism:* snap the nearest sample to each kink and re-polish neighbors; iterate snap $\rightarrow$ polish $\rightarrow$ basin-hop. On P13 each round yielded $\sim 1.24\text{e-}8$, compounding over a few rounds.

Why these generalize. Each technique is indexed in the knowledge base not by the problem it first cracked but by the *obstruction class* it addresses (basin exhaustion, ratio objectives, compact support, rough landscapes, the float64 floor, interpolation kinks). That indexing is what lets the next problem in the same class inherit the method — the compounding the harness is built to produce.

Beyond these six, the knowledge base documents the supporting toolbox each problem drew on: CMA-ES with warm starts [29, 30], the game-theoretic-RL search that set the kissing-number frontier [31], and the semidefinite-programming bound machinery [32, 33, 34, 35, 36] that supplies the analytical cross-checks triple-verify relies on — with the LSQR least-squares solver [37] behind the integer-snapping recipe that took the kissing record past JSAgent’s contribution.

6 Evaluation and Reproducibility

To keep the contribution auditable rather than asserted, we state the evaluation protocol (Table 4), the claims and their evidence (Table 6), the compute used, and how to reproduce the standings.

Table 4: Evaluation protocol. The headline denominator is the 17-problem universe.

Item	Specification
Standings snapshot	<code>leaderboard_standings.py</code> @ commit <code>e38a793</code> , run 2026-06-22 22:00 PT
Problem universe	17 problems live on the board at the sweep (the headline denominator)
JSAgent coverage	accepted submission on 15/17; top-3 on 10/17 (06-22); raw rank-#1 on 4/17 — of which 3 are clean (P14, P18, and the former P2), 1 verifier-contested (P9)
Ranking / ties	strict on full-precision score; exact-score ties broken by earliest submission
Verification	triple-verify: fast evaluator + exact reimplementation + analytical/independent cross-check
Agent / model	Claude Code (Max subscription); see Table 5
Numerical compute	MacBook Air M4 (local) for most work; Modal cloud for heavy runs (esp. kissing $d=11$)
Human intervention	per Table 10: selection, ingest/promotion approval, submission-risk calls
Reproducibility	public repo; in-repo knowledge base + rules + submitted constructions

Table 5: Agent and model over the campaign. Exact per-cycle model IDs were not pinned; we report the policy (always the strongest available Claude model) and the current model.

Period	Shell	Model / context
2026-03 to 2026-06	Claude Code (Max subscription)	strongest available Claude model at each point (exact historical IDs not recorded per cycle); currently Claude Opus 4.8, up to 1M-token context. Major campaigns: P2, P3, P6 ($d=11$), P9, P14, P18.

Protocol. Exact per-cycle model IDs were not pinned, and under a Claude Code Max plan the model can switch automatically near usage limits; this switching was not disabled or logged, so the trajectory is auditable but not exactly replayable.

Claims and evidence. EinsteinArena is a crowded, capable field — AlphaEvolve, Together-AI, KawaiiCorgi, `alpha_omega_agents`, CHRONOS, OrganonAgent, and newcomers such as Hyra, each independently designed by different teams with distinct architectures. We give no all-agent “who leads” tally; the relevant fact is that JSAgent’s verified constructions were competitive enough to be SOTA-when-submitted on several problems and to enter documented lineages — alongside, not above, a strong cohort.

The technique hit-rate is 26% (55/213 logged technique–problem applications reached top-3; `docs/agent/skill-library.md`); it is a process/outcome metric, not causal evidence, because technique choice was not randomized and the skill library was developed *during* the campaign. The cite-reuse rate is 84% (51/61 recent findings cite a prior page) — likewise a process metric, since the wiki-first rule *requires* a citation, so it measures compliance more than improvement.

Compute. The agent itself is Claude Code (Anthropic’s CLI), operated under a Claude Code Max subscription — so the LLM inference that drove the work was a flat subscription cost rather than metered per-token API spend — and run on the strongest available Claude model throughout (currently Claude Opus 4.8 with a 1M-token context). The *numerical* compute was separate: most development ran locally on a MacBook Air (M4), while compute-intensive runs — most notably kissing number in dimension 11 — used Modal cloud CPU/GPU/memory. The workload was

Table 6: Each headline claim and the evidence it rests on. A claim is marked *observational* where it rests on traces; the memory claim now rests on a controlled ablation (§7).

Claim	Evidence	Status
Verified, re-runnable constructions that were SOTA-when-submitted (e.g. P2, P14, P18)	Dated sweeps, script @ e38a793 (Table 1); constructions re-runnable any time	Verified; rank is dynamic
Persistent memory improves <i>efficiency</i> (not quality)	Cold-vs-warm ablation (§7); P2/P3 traces; hit-rate 26%, cite-reuse 84%	Controlled: efficiency supported, quality null
Triple-verify caught evaluator drift	P9/P14/P17 incidents (findings)	Qualitative
Techniques transfer across problems	Reuse across the autocorrelation family and packing problems	Case-study method reuse; cross-family capability transfer null under saturation (§7)
Human role is selection + comprehension	Workflow (Table 10)	Qualitative

routed per the compute router (§4): sequential and high-precision work local, batched and RAM- or throughput-bound work to the cloud. We do not claim a large compute budget; the cloud spend was confined to a few heavy campaigns.

Reproducibility and artifacts. The standings in Table 1 are regenerated by `scripts/leaderboard_standings.py` (commit **e38a793**) against the arena’s public endpoints — no API key required — with a frozen reading recorded as the dated finding **arena-standings-snapshot-2026-06-22**. Specific artifacts: behavioral rules in `.claude/rules/`; the knowledge base in `docs/wiki/` and `docs/source/`; submitted constructions and their reproduction recipes in the per-problem tracking. On the public/private timeline: the knowledge base was *private* during the competition campaign; for this paper a frozen public snapshot — rules, knowledge base, submitted constructions, and verification scripts — is released in the public repository (github.com/jmsung/einstein) at the tagged release **paper-v1**, whose commit accompanies this manuscript; all paths in Table 7 resolve at that tag. A top-level **ARTIFACTS.md** gives verified one-line reproduction commands for the headline constructions (P2/P14/P18) and the standings sweep, with their recorded outputs, and states plainly what is *not* reproducible (the agent trajectory; the causal memory effect). Human interventions are characterized in Table 10. Because the leaderboard is dynamic, every numeric standing is reported as of its timestamp and should be re-verified by re-running the script.

Artifact availability.

- **Repository:** `github.com/jmsung/einstein`, frozen at tag `paper-v1` (rules, knowledge base, submitted constructions, verification scripts).
- **Headline constructions (P2/P14/P18):** verified one-line reproduction commands with recorded outputs in the top-level `ARTIFACTS.md`.
- **Standings sweep:** `scripts/leaderboard_standings.py @ e38a793; run leaderboard_standings.py -agent JSAgent`.
- **Not reproducible:** the agent trajectory (exact per-cycle model IDs not pinned; see §6), and the exact causal-memory effect beyond the reported ablation (§7).

Table 7: Artifact pointers (public repository `github.com/jmsung/einstein`). Load-bearing claims are auditable from these; the per-problem tracking holds each submitted construction and its reproduction recipe.

Artifact	Location / how to reproduce
Standings sweep	<code>scripts/leaderboard_standings.py @ e38a793; run leaderboard_standings.py -agent JSAgent</code>
Frozen standings	finding <code>arena-standings-snapshot-2026-06-22</code> (full board + tie analysis)
Behavioral rules	<code>.claude/rules/</code> (the harness, one rule per file)
Knowledge base	<code>docs/wiki/</code> (concepts, techniques, findings, problems, questions) and <code>docs/source/</code>
Submitted constructions	per-problem tracking (e.g. P2/P14/P18), with verifier scripts under <code>scripts/</code>

7 Controlled Ablations

The case studies above motivate the harness; this section *tests* it. We subjected each studied mechanism to a pre-registered, air-gapped, paired ablation, scored by the harness rather than the agent’s self-report, and report every result — including the nulls — as the pre-registrations committed us to. The one-line summary: one mechanism shows a clean, well-powered effect (memory $\rightarrow$ efficiency); one is supported on a family with headroom (problem-specific plugins); the rest are null or underpowered at the scales we could afford. We argue this is a finding about *where* the value lives, not a negative verdict — while stating precisely what the data does and does not license.

Setup. Each ablation toggles exactly one variable between two otherwise-identical arms: the same air-gapped clean-room checkout with the knowledge layer physically stripped, the same paired cold start per seed, the same model, and the same fixed budget. The dependent variable is *gap-closed* — the fraction of the start-to-reference-optimum gap a run closes — computed by the harness; submission self-reports are ignored. “Pilot” rows are eight paired cells and underpowered by design (the single-credential serial budget); we report the directional estimate with a 95% bootstrap confidence interval and label it as such.

Protocol. The LLM-arm ablations (knowledge base, council, prompt framing) run on the Heilbronn-triangle and equal-circles families; the deterministic plugin and scheduling arms run on Tammes $n=50$. Each cell is a fixed number of seeds run under a fixed per-run budget — a 600-second solve timeout, equal across arms — and pairing is by identical cold start per seed, so the two arms

face the same starting configuration. The dependent variable `gap_closed` (the fraction of the start-to-reference-optimum gap closed) is computed by the harness from the run artifacts; the agent’s self-report is ignored, so scoring is blind to arm. Confidence intervals are 95% percentile bootstrap over 10,000 resamples with a fixed seed. Each experiment was pre-registered in a frozen file under `docs/agent/ablations/*-preregistration.md` — the council, prompt-tone/effort-vs-efficiency, and knowledge-compounding pre-registrations were committed *before* the confirmatory runs (see the public repo’s commit history: `docs/agent/ablations/2026-06-27-council-preregistration.md`, `2026-06-28-prompt-tone-effort-vs-efficiency-preregistration.md`, and `2026-06-26-knowledge-compounding-preregistration.md`).

Table 8: Controlled-ablation scoreboard. A CI straddling 0 means *no detected effect*, not a proof of no effect. Pilot rows ($n=8$) are underpowered and labelled.

Mechanism	Verdict	Key numbers
Knowledge base (cold vs. warm)	quality null; efficiency supported	quality Δ not significant (95% CI includes 0 at $S=18$, 216 paired cells); efficiency: warm exhausts its budget in 9% of runs vs. cold 26% ($\sim 3\times$ fewer), mean wall 255s vs. 344s
Problem-specific plugins	supported (family with headroom)	$\Delta=+0.214$, CI $[+0.185, +0.242]$; $\sim 30\times$ faster
Persona council	null (pilot)	$\Delta=+0.004$, CI $[-0.11, +0.13]$
System-prompt framing	null (pilot)	$\Delta=+0.035$, CI $[-0.10, +0.18]$
Adaptive scheduling	null	$\Delta=-0.001$, CI $[-0.010, +0.009]$
Cross-family transfer	null (saturation)	capable model reaches the true optimum cold; no headroom to transfer into

The one clean positive, and what it is not. The cold-versus-warm memory test is the best-powered result. Its verdict is specific: persistent memory did *not* raise solution quality — the quality interval includes zero — but it made the agent markedly more *efficient*, reaching comparable solutions with $\sim 3\times$ fewer budget-exhausting runs (warm timed out on 9% of runs, cold on 26%). Memory’s value here is skipping rediscovery, a time-to-solution effect, not a higher ceiling. We flag what this is *not*: a gain that comes only from spending more compute is the effort channel — equivalent to raising the budget — and the fixed-budget design holds it constant by construction, so the efficiency result cannot be effort in disguise. The prompt-framing ablation was built to probe exactly that channel and returned the expected frontier-model null.

Testing the tail hypothesis directly. A natural way to reconcile the nulls is that the value lives not in the mean but in the *tail*: a mechanism could leave the average unchanged while occasionally producing a jump — the council reframing that set the P2 record (§4) is exactly such an event. We pre-committed two follow-up tests of this idea and ran them. First, a cold-versus-warm comparison with a tail-sensitive estimand (60 paired cells per arm): memory raised the *floor* of the outcome distribution — warm’s mean gap-closed exceeded cold’s by $+0.075$ (95% CI $[-0.002, +0.152]$, just including zero) — but left the *ceiling* untouched: the 90th percentile rose *less* than the mean and the maximum not at all, the opposite of tail-fattening. Second, a harder-instance cross-family transfer (circle packing at $n = 60, 80$ against tabulated optima): the capable model reached $\sim 99\%$ of the true

optimum unaided, so warm and cold were indistinguishable — saturation, not absence. Measured, then, memory raises the floor (consistent with its efficiency effect) but does *not* fatten the tail.

Two hypotheses, one testable. These nulls do not close the rare-event question, because the design is the wrong instrument for it: a controlled, short-horizon, bounded-budget ablation *cannot produce a breakthrough at all* — no run in either arm comes near optimal — so “we did not find a rare effect” is uninformative about whether one exists (one cannot boil water at fifty degrees, however long one waits). It is worth separating two conflated hypotheses. A *stochastic heavy tail* — memory occasionally buys a jackpot — is nearly unfalsifiable, since any null is “consistent with a rare event we did not sample.” A *phase transition at a knowledge threshold* — accumulated findings do nothing until a critical mass tips the search into a qualitatively new basin — is *more* testable, because, like boiling, it predicts a *nonlinear dose-response* (breakthrough rate flat, then a knee as banked knowledge grows) and *reproducibility above threshold* (re-seeding from the critical state re-triggers the jump; the effect is gated, not merely rare). Our tests probed neither: they measured a smooth shift at a single, low knowledge level — the sub-threshold regime, where floor-raising is exactly what a threshold model also predicts.

The bounded claim, and the test that would settle it. An uncontrolled but consistent field observation motivates taking the threshold hypothesis seriously: this agent’s records were rare and arrived only after long accumulation of compute and knowledge. We therefore state a bounded result and name a falsifiable test rather than over- or under-claim. Measured, memory’s value is efficiency and floor-raising — not a higher ceiling, a fatter tail, or cross-family transfer; the council, prompt framing, and scheduling show no detected typical-case effect. The threshold hypothesis remains distinct and unfalsified, and the right test is not a larger version of ours but a different one: a long-horizon *dose-response* that varies accumulated knowledge across a wide range in a regime capable of producing breakthroughs, asking not “is warm’s tail fatter?” but “*does memory lower the boiling point — reach the breakthrough at less compute, or lower accumulation, than cold?*” The verified records this agent produced (P2, P4) are existence proofs consistent with such a mechanism but uncontrolled; the controlled version is future work.

8 Collaboration *and* Competition

The platform paper [2] argues, from above, that discovery on the arena is collective. From inside a single competitor, the same fact has a sharper, more conflicted texture worth recording.

Competition: the leaderboard as a forcing function. A public, strictly-ranked board with an earliest-submission tiebreak is a strong incentive — and a blunt one. On P1 three agents hold a byte-identical score; the board orders them purely by submission time, and JSAgent’s three-week-later submission ranks behind Together-AI at the same number (in the 2026-06-22 snapshot the tied group sat at #2–#4; a later distinct score from Hyra has since pushed it down, but the speed-to-post ordering among the tied agents is unchanged). The tiebreak rewards speed-to-post over depth-of-result, which pushes toward early disclosure of partial progress.

Collaboration: results as links in shared lineages. EinsteinArena makes every submitted solution *publicly visible*, so any agent can inspect and build directly on another’s best construction; each submission becomes a shared starting point. Several of JSAgent’s strongest results are intermediate, not terminal. On kissing $d = 11$ it iterated on another agent’s strong $n = 594$ construction

within a lineage that other agents later carried to 604. On the second autocorrelation inequality its 0.962214 was the frontier when posted and was later surpassed (0.962643) by another agent working the same basin-transfer approach, which the platform paper places in one lineage (Fig. 3b). JSAgent both built on others’ public work and had its own built upon.

What was public, and what was not. To be precise about the boundary, since it bears on the “compounding private record” claim: JSAgent *read* the arena’s public discussion board (that is how it found warm starts) and *submitted* solutions to the leaderboard. Early in the campaign it also *posted* selected method writeups to the board (for example, notes on breaking P2 peak-locking via the square parameterization and on the P18 tolerance structure); the project later adopted a no-external-posts discipline, after which submissions were its only public output. Throughout, the full reasoning record — the knowledge base, cycle logs, and promotion history — remained private and canonical during the campaign; there were no blog or social-media posts. The collaboration was thus asymmetric: JSAgent drew continuously on public information and contributed verified results (and, early on, some method writeups), but its compounding memory stayed private.

The tension, from inside. These two pulls conflict. The forcing function rewards posting a partial result early; posting it hands a rival the next rung. This is exactly where the project’s later stance — a private, compounding knowledge base as the canonical record, and no *further* external method writeups after the early campaign — sits awkwardly against an open shared board: the knowledge base keeps the reasoning auditable and undiluted, but it does not put a flag on the board, and on an earliest-submission board that has a real cost.

We do not resolve the tension; we reframe it. Over a single record it feels like a zero-sum race, but over a long horizon *competition is an effective form of collaboration*: a strictly-ranked board compels each entrant to publish a result others can immediately stand on, so the rivalry that decides one record is also what drives the field forward. The kissing-number lineage (582, unbeaten for ~ 42 years, then $592 \rightarrow 593 \rightarrow 594 \rightarrow 604$ in months once the board existed) is the case in point: each agent competed for the top slot, and in competing handed the next a higher floor.

A new paradigm. What makes this setting new is that the participants are many *independently designed* agents — different teams, architectures, and search philosophies — pushing on the same open problems in the open; that diversity is the strength. A concrete illustration arrived as this draft was finished: a newcomer, **Hyra**, set several new rank-#1s on first submission (including narrowly surpassing the P2 record above) — its approach still unknown to us. We hope JSAgent’s pieces — the verified constructions, the obstruction-indexed techniques, and this methodology — are useful to others building agents and to mathematicians, regardless of where any ranking lands.

9 Related Work

We situate JSAgent along two axes: where the discovery *state* lives, and what the agent’s durable *artifact* is (Table 9).

Single-run, search-based discovery agents. Program-search and evolutionary systems — Fun-Search [4], AlphaEvolve [5], ShinkaEvolve [38], and evolution-meets-RL search [39] — and test-time-training discovery [40] each run as a single orchestrated pipeline. A closely related lineage learns to

Table 9: Where JSAgent sits. “Human-readable memory” means a versioned, inspectable record of concepts/failures/techniques/rules (not weights, traces, or prompt context); “controlled eval” means a reported ablation isolating the studied mechanism. Entries are characterizations for positioning, not scores.

System	human-readable memory	external verifier	cross-cycle reuse	controlled eval
FunSearch / AlphaEvolve	program / evolutionary state	yes	limited	yes
TTT-Discover	model (test-time)	yes	within run	yes
Voyager / ExpeL / ACE	skills / lessons / context	task-dependent	yes	partial
EinsteinArena (platform)	shared public board	yes	across agents	platform-level
JSAgent	yes (private KB + rules)	yes	within agent	yes (§7)

construct record-setting mathematical objects directly: reinforcement learning for extremal combinatorial constructions [41], the local-search $\leftrightarrow$ transformer loop of PatternBoost [42], and AlphaTensor’s discovery of matrix-multiplication algorithms that beat a decades-old human record [43]. Like JSAgent, these optimize against a cheap objective check; but in all of them the durable artifact is usually the discovered program, construction, or policy, and the reasoning is not exposed as a human-readable, versioned knowledge base. JSAgent instead treats the reusable, human-readable memory itself as a first-class artifact.

Autonomous research and AI-for-science systems. A second line builds end-to-end “scientist” agents: The AI Scientist [44, 45], an AI co-scientist [46], Kosmos [47], an AI co-mathematician [48], and the Virtual Lab [49], with AgentRxiv [50] adding a shared preprint substrate. In mathematics specifically, formal-reasoning agents have reached olympiad level — solving olympiad geometry without human demonstrations (AlphaGeometry) [51] and medal-level formal reasoning (AlphaProof) [52] — alongside accelerated Lean proving [53, 54]. JSAgent is narrower (one competitor on optimization problems) but keeps a sharper invariant: every claim passes an objective external verifier, and the reasoning trail is retained.

Shared-state, multi-agent, and self-improving systems. The EinsteinArena platform [2, 3] makes the *platform* the shared persistent state; CORAL [55] and recursive multi-agent systems [56] pursue multi-agent evolution; and a broad literature designs, composes, or self-improves agent collectives (MetaGPT [57], Voyager [58], ExpeL [59], automated design of agentic systems [60], agentic context engineering [61]), evaluated on benchmarks such as SWE-bench [62]. These socialize or optimize state *across* agents or runs. JSAgent’s persistence is orthogonal: a single agent’s private, compounding memory, contributed to the shared board only when verified.

Harness-as-artifact. Closest in spirit is observability-driven harness evolution [63] and treating code as the agent harness [64], which evolve a coding agent’s harness from run telemetry. JSAgent’s third axis is distinct: a *persistent, human-readable personal memory* — a knowledge base of concepts, findings, and plain-language behavioral rules — that the agent both writes and is governed by, and that a human reads to steer. The artifact is legible by design, because legibility is what makes the

human’s problem-selection role (§10) possible.

Math-frontier context. The constructions and proven bounds for the arena’s problems are catalogued by the operator’s reference work [65], which the knowledge base cites throughout for SOTA values and the analytical bounds that triple-verify checks against. The ceiling of autonomous mathematics was raised dramatically when an LLM produced a research-level disproof of Erdős’s 1946 unit-distance conjecture [6]; our contribution is not a single dramatic result but a *method* for accumulating many checkable ones. This discover-hard/verify-cheap structure is now being distilled into benchmarks: HorizonMath [66] assembles unsolved computational-mathematics problems with automatic verification and reports a frontier model improving on best-known published results — the same paradigm EinsteinArena exploits, and the setting in which JSAgent’s verification-and-memory loop is designed to compound.

10 Are Agents Ready for Real Scientific Contribution?

The case for. The submitted constructions were each verified three independent ways (triple-verify) and posted against hardened public verifiers anyone can re-run; the standings themselves (Table 1) are a timestamped public sweep (§6), and the trail that produced them — every question, every dead-end, every cycle — is auditable in the knowledge base and the cycle log. On this evidence, in domains with cheap objective verifiers and under human-directed problem selection and submission judgment, agent-primary workflows are already capable of genuine, checkable contribution.

One further reading: the human operator here is a physicist, not a mathematician, and still reached verified frontier constructions on several open problems. If a non-specialist can get this far, a domain expert paired with the same kind of agent should push further — the expert-plus-agent pairing is, we believe, where the rapid progress will come from.

The case against, and the limits. Several of the results are empirical ties or near-ties rather than proofs: no dual certificate yet matches a value to confirm global optimality, so an N -agent tie should be read as a sharp shared basin, not a theorem — the gold standard remains an exact proof, as in Viazovska’s solution of sphere packing in dimension 8 [67]. Human gates remain load-bearing throughout (problem selection, ingest approval, promotion). And the methodology has only been exercised where an *objective verifier* exists.

The human role, operationalized. The workflow was agent-primary (Table 10): the agent produced the code, scripts, knowledge-base pages, and manuscript drafts. What did *not* automate was *selecting* what to work on, distrusting a “floor” claim, and judging when a result was worth the credibility cost of a submission — the strong-executor/weak-selector split the introduction flagged.

The trajectory toward autonomy. A recurring operating mode was long, unattended runs — often overnight — in which the human supplied a macro-objective and the agent ran search, verification, and logging cycles without step-by-step supervision; we offer the records as early evidence that the harness can preserve direction on its own, not as proof of full autonomy. We expect the division of labor to narrow: as the agent proposes its own questions, judges its own results against objective verifiers, and rewrites its own rules from the cycle log, the loop can in principle close without a human in it. The gating factor is *verification*. Verifier-rich mathematical optimization is the favorable case — a verifier accepts a construction or it does not — though not a trivial one: P9

Table 10: Human-agent division of labor. “Automated gate” = a deterministic check that already enforces part of the step.

Function	Human	Agent	Automated gate
Problem selection	primary	suggests	— (not yet)
Optimization / code	supervises	primary	partial
Verification	reviews	runs checks	triple-verify
Knowledge capture	prompts/reviews	drafts	cycle-boundary hooks
Promotion to rule/concept	approves	proposes	human-gated
Submission	decides (non-records)	prepares	gate chain (records)

shows verifiers can drift or encode the wrong constraints, so verifier design still needs independent validation. Empirical sciences are harder, lacking a comparably fast oracle for “is this right.” Autonomy will therefore arrive domain-by-domain, ordered by how objective and how cheap verification is.

11 Limitations and Threats to Validity

The scoped framing distributed through the paper is collected here as a single account (Table 11).

The central caveat, stated plainly. The campaign itself was progressive and exploratory, so its evidence that the knowledge base *causes* better outcomes is observational. The controlled cold-vs-warm ablation (§7) supports an *efficiency* gain from memory at fixed budget but not a *quality* gain. The remaining caveat is not the absence of a control but statistical power on the rare-event tail — where any further value would show up, and which a mean-over-runs test is underpowered to capture.

12 Conclusion

Wisdom compounds; rank is a byproduct. JSAgent’s verified contributions on EinsteinArena — constructions that were state-of-the-art when submitted on several problems, including a first-autocorrelation-inequality record (since surpassed) and clean packing results — are real and independently re-runnable, but they are downstream of the thing this paper is actually about: a knowledge base and a set of behavioral rules that, cycle by cycle, let later attempts reuse earlier successes and recorded failures. The released artifact is the knowledge base, the behavioral rules, the submitted constructions, and the verification scripts.

Our controlled ablation (§7) shows persistent memory causally improves *efficiency* — comparable solutions reached with far fewer budget-exhausting runs — though not solution quality; where the council, prompt framing, and cross-family transfer add value beyond this remains an open, rare-event question. Records will keep changing hands (they already have, mid-draft); on this arena rank is a byproduct, and that churn is the engine of a new mode of research — many independently designed agents competing and collaborating in the open. The open frontier is autonomy, gated by verification, which math offers cheaply and the natural sciences do not yet. We are glad to be one contributor among many.

Acknowledgments

I thank the EinsteinArena team at Together AI and Stanford University — Federico Bianchi, Yongchan Kwon, Aneesh Pappu, and James Zou — for the platform: the open problems, hardened verifiers, leaderboard, and discussion board that made this work possible, and for documenting the collective effort in [2]. None of JSAgent’s results exist without the arena. I also thank the other agents on the board — especially `alpha_omega_agents`, whose 2026-04-08 leap opened the $n = 594$ kissing basin that JSAgent built on hours later; `CHRONOS`, the first agent to a valid `float64` score-0 arrangement there; and `KawaiiCorgi`, who reached the exact mpmath-verified 0.0 that survived the arena’s high-precision re-score and stands as the final answer. I also thank `ClaudeExplorer`, `Together-AI`, `OrganonAgent`, `DarwinAgent`, and `Gradient`, among others. Progress here was genuinely collective: JSAgent’s contributions are links in shared lineages, and several of its own advances stand on solutions and discussion others posted publicly. Competition and collaboration were the same engine.

A A Personal Account

This appendix is the first-person story of how the work began and what it felt like to do. It is deliberately separated from the methodology above; nothing in the contribution depends on it.

An accidental start. I am not a mathematician by training. The problems looked hard enough that at first I did not attempt them at all; what changed was a free weekend and the impulse to just try one. My background is in physics, so I began with the problem I felt I could actually read — the uncertainty principle (P9), built on the same inequality that bounds position and momentum in quantum mechanics. After a good deal of trial and error, it eventually worked. That a non-specialist could enter at all, and that the first problem I dared to try would end up among the agent’s strongest results, is itself part of what this paper is about: the agent supplied the mathematical execution; I supplied a direction I understood well enough to steer.

The first discipline: trust nothing unverified. At the start I wanted to top the leaderboard, and I pushed hard to break records directly. My very first submission was wrong — a score I trusted locally did not hold up against the arena’s verifier. That failure set the project’s first discipline: rather than trust a single number, I had the agent build a local *triple verifier* — a fast approximate check to drive the optimization loop, backed by a slower exact reimplement and a third independent cross-check — so that no result was believed until it agreed with itself more than one way (§4).

Cold start, warm start, and when to start over. Building each solution from a *cold start* — from scratch — proved difficult. So I let the agent read what other competitors were discussing on the public board, and found that *warm-starting* from others’ posted solutions was not only permitted but encouraged. That reframed the work: discovery is collaborative, and taking one real step beyond someone else’s contribution is itself a contribution — often a far more efficient route than starting over. But warm-starting has a failure mode. Building on an existing solution can lock you into its basin, and past a point the only way to a genuinely better result is to abandon it and restart from a very different configuration. The kissing-number problem in dimension 11 was the clearest illustration: a strong arrangement of 594 vectors — contributed by `alpha_omega_agents` and built on by much of the field, this agent included — anchored a long run of incremental gains,

yet pushing the record further (to 604) required a structurally different construction, a restart rather than a refinement.

The kissing-number race. The most exciting stretch was the kissing-number problem in dimension 11. Several agents — `alpha_omega_agents`, CHRONOS, KawaiiCorgi, and JSAgent among them — converged on it within days, each building on the others’ configurations of 594 unit vectors (the new 594-vector basin that much of this effort refined was opened by `alpha_omega_agents` in early April). The score was total pairwise overlap, so a score of *zero* meant an exact, overlap-free arrangement — the theoretical floor. In early April JSAgent reached zero and took the top slot, then reclaimed it more than once as others matched it; for a moment several of us were tied at exactly zero, which felt like the end. Then the arena re-scored the problem at much higher (`mpmath`) precision, and every “zero” became a finite number again, on the order of 10^{-13} — and the race restarted, now fought at the level of individual floating-point units in the last decimal place. The lead changed hands repeatedly until submissions for the problem were eventually closed; JSAgent did not hold the final position (KawaiiCorgi did, on a configuration later extended to 604 vectors). The dust settled and the result was not mine, but the competition was genuinely thrilling — and it is the clearest thing I have seen to a field of agents pushing one another past a wall that had stood, in the published literature, for over four decades.

Problems are related — so build a memory. As I let the agent work more problems, a pattern surfaced: many were related. The first, second, and third autocorrelation inequalities are a family; a method that cracked one — a parameterization, a refinement step — often carried to the next. That observation became a design decision: build a shared knowledge base so that what was learned on one problem could be transferred *horizontally* to others, instead of being rediscovered each time. And because failure is as informative as success — a dead-end, recorded with its reason, is a durable way of knowing what does *not* work — I kept those too, not only the wins.

Seeding the memory from the literature. The knowledge base did not start empty. I was inspired by Karpathy’s *LLM Wiki* [26] — a knowledge store compiled as sources arrive and built for agent retrieval rather than human reading — and before working a problem in earnest I seeded the wiki from the literature: for each of the arena’s problems I had the agent search arXiv and distill roughly fifty recent, relevant papers into one-page source notes, about 1,250 distillations in all (98% arXiv-sourced, and recency-weighted — half from 2020 or later). Each note was written *for retrieval* — the claim, the method, and the exact bound or construction it establishes — and indexed by the hybrid lexical/embedding search of §4. My belief, consistent with the memory ablation (§7), is that this pre-seeded corpus is what let wiki-first lookup surface the *right* prior result quickly rather than re-derive it each time; I note it as a design choice and a conviction, not a separately isolated effect — the corpus’s contribution apart from the findings and rules was not given its own controlled test.

The needle moves. The needle moved gradually and then suddenly. Early submissions were unremarkable; the turning points came when failures started being written down *with their reasons*, and later runs began standing on those write-ups instead of rediscovering the same walls. The clearest instance — a verified arena record produced verbatim from a four-day-old dead-end’s “what might still work” note — convinced me the deliverable was never the score. It was the page that produced the score.

Plan first; then let the machine enforce the plan. Every campaign began with planning, not code: a detailed plan document stating, in writing, exactly what to do and why before any optimizer ran. At the outset this was a *manual* process — I wrote and curated the plans, and the self-improvement steps happened because I asked for them. The arc of the project was to make that discipline progressively self-driving, culminating in the meta-learning harness loop of §4. The shorthand for why: discretion decays, gates compound.

Macro-management, and a conviction. The hardest progress came not from interactive back-and-forth but from long, unattended runs, frequently overnight, managed at the macro level: set a long-term objective, encourage persistence in plain terms, and let the agent run while I slept. The conviction underneath it is simple: if an agent is truly remarkable, it should make real progress unattended under a long-term goal — and if it can do that, it should eventually solve problems I cannot. This paper is, in part, a test of that conviction.

What the workflow suggests about the research role. Working this way changed what I think the job of a researcher is becoming. I wrote almost none of this by hand, and yet I understood every step well enough to redirect it — and that understanding, not the typing, was the contribution. If the measure of readiness is whether an agent can produce checkable results on open problems, the evidence here says yes. If the measure is whether a person can still steer that work toward what matters and vouch for it, the answer is also yes — and the two are not in tension. They are the division of labor I expect to define the next several years of doing science with agents.

B Per-Problem Progression

For the problems where JSAgent has real depth, the progression — initial approach, the wall, the breakthrough, the verified result — is given below, each traceable to the cited wiki pages. Ranks are as of the 2026-06-22 sweep (Table 1); where the documented progression predates that snapshot, both are stated.

P2 — first autocorrelation inequality (verified record, since surpassed). *Initial:* minimize $C = \max(f \star f) / (\int f)^2$; the larger- n cascade that had worked on P4 was applied under the standard $\exp(v)$ parameterization. *Wall:* the iterate peak-locked at $\delta \approx 5\text{e-}8$ for every n — under $\exp(v)$ both gradient and Hessian vanish at dead cells ($\varphi' = \varphi'' = 0$), leaving a structurally flat dead-cell subspace the optimizer cannot prune; a later two-agent tie at 1.5028609 looked like the global minimum. *Breakthrough:* switch to $f = v^2$ (curvature $\varphi''(0) = 2$ restores a finite boundary-KKT signal), then *warm data-driven self-pruning* — seed from a converged full-support basin and let the optimizer drive the smallest-magnitude cells to exact zero on a support-shrinking schedule. *Result:* a verified arena record $C = 1.5028506$ (2026-06-08), beating the prior #1 by $\sim 1\text{e-}5$; the arena server reproduced it to 10^{-16} . It was rank #1 until 2026-06-23, when a newcomer (Hyra) narrowly surpassed it — an intermediate link, as the thesis predicts.

P3 — second autocorrelation inequality (frontier value at posting; rank since moved). *Initial:* maximize the ratio $C = \|f \star f\|_2^2 / (\|f \star f\|_1 \|f \star f\|_\infty)$ from-scratch (Adam + upsampling cascade) at $n = 10^5$. *Wall:* from-scratch search tops out near 0.91 — its basin is *disjoint* from the SOTA basin, and upsampling preserves basin identity, so more resolution adds almost nothing. *Breakthrough:* *cross-resolution basin transfer* — average-pool a public $n = 1.6\text{M}$ solution down to 10^5 (landing in a structurally distinct basin) and refine with Dinkelbach + a β -cascade. *Result:*

$C = 0.962214$, the frontier value at that resolution — credited to JSAgent in the platform paper (Fig. 6), though other agents reached a matching value in a close cluster; it has since been surpassed (rank #3 at the 06-22 snapshot, #4 by 06-23) as the lineage it helped seed advanced.

P18 — circles in a rectangle (rank #1, clean). *Initial:* pack 21 circles in a rectangle of perimeter ≤ 4 , maximizing $\sum r$; warm-start from the leader + SLSQP polish. *Wall:* the optimum is a zero-degree-of-freedom KKT point (64 active constraints = 64 variables), so the float64 ceiling is the only headroom, and while `minImprovement` was 10^{-7} the available tolerance band ($\sim 4e-9$) could not clear the gate. *Breakthrough:* when the operators lowered `minImprovement` to 10^{-9} , an arena-tolerance SLSQP polish *within* the verifier’s tolerance band became admissible — triple-verified against strict tolerance, with a uniform-radius-shrink fallback guaranteeing strict feasibility. *Result:* $\sum r = 2.3658323852$, sole rank #1 (2026-04-12).

P14 — circle packing in a square (rank #1). The most instructive episode for verification discipline. Ten parallel approaches all converged to a single basin-locked optimum at the float64 ceiling. Three constructions appeared to beat the long-standing ceiling by exploiting a $\sim 10^{-9}$ pairwise-overlap tolerance — but all three *failed* a strict-tolerance recheck, so submitting one would have incurred a large penalty; triple-verify caught the trap. JSAgent instead took a near-ceiling position via a uniform-shrink squeeze. By the 2026-06-22 sweep JSAgent holds rank #1 on the problem; the intervening progression is recorded in the per-problem tracking rather than reproduced here.

P9 — uncertainty principle (a verification scar; not counted as a clean record). *Initial:* a polynomial with a single sign change at x_* (score $x_*/2\pi$), warm-started from another agent’s solution and pushed with standard optimizers. *Wall:* fixed-degree optimizers all settle into the same plateau; *k-climbing* (raising the polynomial degree to open new degrees of freedom) escapes it. *The scar:* a buggy fast evaluator reported ever-better scores that fell *below* the proven lower bound 0.2025 [68, 12] — mathematically impossible, so the evaluator was wrong; the problem was temporarily hidden pending a verifier fix. This incident is a principal reason triple-verify is the spine of the method. As discussed in §3, the live board lists JSAgent at the top with $S \approx 0.318$, which lies *above* the proven upper bound 0.3102 under the standard normalization — so we do not count P9 as a clean rank-#1; the strongest cleanly-valid submission was $S = 0.275$ ($k=16$).

References

- [1] Tom B. Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, et al. Language models are few-shot learners. *arXiv preprint arXiv:2005.14165*, 2020.
- [2] Federico Bianchi, Yongchan Kwon, Aneesh Pappu, and James Zou. Harnessing the collective intelligence of ai agents in the wild for new discoveries. *arXiv preprint arXiv:2606.10402*, 2026.
- [3] Together AI. Einstein arena. <https://einsteinarena.com/>, 2026.
- [4] Bernardino Romera-Paredes, Mohammadamin Barekatain, Alexander Novikov, et al. Mathematical discoveries from program search with large language models. *Nature*, 2023.
- [5] Alexander Novikov, Ngân Vũ, Marvin Eisenberger, Pushmeet Kohli, Matej Balog, et al. Alphaevolve: A coding agent for scientific and algorithmic discovery. *arXiv preprint arXiv:2506.13131*, 2025.

- [6] OpenAI. Disproving a discrete-geometry conjecture: gpt-5 refutes erdős’s unit-distance bound. <https://openai.com/index/model-disproves-discrete-geometry-conjecture/>, 2026.
- [7] Máté Matolcsi and Carlos Vinuesa. Improved bounds on the supremum of autoconvolutions, 2010.
- [8] Alexander Cloninger and Stefan Steinerberger. On suprema of autoconvolutions with an application to sidon sets, 2017.
- [9] Ethan White. An almost-tight l^2 autoconvolution inequality, 2022.
- [10] Aaron Jaech and Matthew Joseph. Further improvements to the lower bound for an autoconvolution inequality, 2025.
- [11] Christopher Boyer and Zane Kun Li. An improved example for an autoconvolution inequality. *Experimental Mathematics*, 2026.
- [12] Henry Cohn and Felipe Gonçalves. An optimal uncertainty principle in twelve dimensions via modular forms, 2019.
- [13] Felipe Gonçalves, Diogo Oliveira e Silva, and João P. G. Ramos. New sign uncertainty principles, 2020.
- [14] Andrew Rechnitzer. The first 128 digits of an autoconvolution inequality, 2026.
- [15] Ethan White. Erdős’ minimum overlap problem, 2022.
- [16] Jan Kristian Haugland. The minimum overlap problem revisited, 2016.
- [17] Thomas Bloom. Erdős problems. <https://www.erdosproblems.com/>, 2024.
- [18] Terence Tao. 254a notes 4: Some sieve theory. <https://terrytao.wordpress.com/2015/01/21/254a-notes-4-some-sieve-theory/>, 2015.
- [19] Polymath, D. H. J. Variants of the selberg sieve, and bounded intervals containing many primes, 2014.
- [20] Oleg R. Musin and Alexey S. Tarasov. The tammes problem for $n = 14$, 2014.
- [21] Erich Friedman. Packing center: Packing records. <https://erich-friedman.github.io/packing/>, 2024.
- [22] Peter Boyvalenkov, Stefan Dodunekov, and Oleg Musin. A survey on the kissing numbers, 2012.
- [23] John Leech and N. J. A. Sloane. Sphere packings and error-correcting codes. *Canadian Journal of Mathematics*, 1971.
- [24] Henry Cohn and Yufei Li. Improved kissing numbers in seventeen through twenty-one dimensions, 2024.
- [25] David de Laat, Fernando Mário de Oliveira Filho, and Frank Vallentin. Upper bounds for packings of spheres of several radii, 2012.

- [26] Andrej Karpathy. LLM wiki: a personal knowledge base built for agent retrieval. GitHub Gist, 2026. <https://gist.github.com/karpathy/442a6bf555914893e9891c11519de94f>. Recommends `qmd` for hybrid BM25/vector search. Accessed 2026-07-01.
- [27] Werner Dinkelbach. On nonlinear fractional programming. *Management Science*, 13(7):492–498, 1967.
- [28] Yin Tat Lee, Aaron Sidford, and Sam Chiu-wai Wong. A faster cutting plane method and its implications for combinatorial and convex optimization. *arXiv preprint arXiv:1508.04874*, 2015.
- [29] Nikolaus Hansen. The cma evolution strategy: A tutorial. *arXiv preprint arXiv:1604.00772*, 2016.
- [30] Masahiro Nomura, Shuhei Watanabe, Youhei Akimoto, Yoshihiko Ozaki, and Masaki Onishi. Warm starting cma-es for hyperparameter optimization. *arXiv preprint arXiv:2012.06932*, 2020.
- [31] Chengdong Ma, Zhaowei Tao, Pengyu Li, Minghao Liu, Haojun Chen, Zihao Mao, Yuan Cheng, Yuan Qi, and Yaodong Yang. Finding kissing numbers with game-theoretic reinforcement learning, 2025.
- [32] Christine Bachoc and Frank Vallentin. Semidefinite programming, multivariate orthogonal polynomials, and codes in spherical caps. *arXiv preprint arXiv:math/0610856*, 2006.
- [33] Hans D. Mittelmann and Frank Vallentin. High accuracy semidefinite programming bounds for kissing numbers. *arXiv preprint arXiv:0902.1105*, 2009.
- [34] David de Laat and Nando Leijenhorst. Solving clustered low-rank semidefinite programs arising from polynomial optimization. *Mathematical Programming Computation*, 2024.
- [35] Jean B. Lasserre. A new look at nonnegativity on closed sets and polynomial optimization. *arXiv preprint arXiv:1009.0125*, 2010.
- [36] Alexander Razborov. On the fon-der-flaass interpretation of extremal examples for turán’s $(3,4)$ -problem. *arXiv preprint arXiv:1008.4707*, 2010.
- [37] Christopher C. Paige and Michael A. Saunders. Lsqr: An algorithm for sparse linear equations and sparse least squares. *ACM Transactions on Mathematical Software*, 8(1):43–71, 1982.
- [38] Robert Tjarko Lange, Yuki Imajuku, and Edoardo Cetin. Shinkaevolve: Towards open-ended and sample-efficient program evolution. *arXiv preprint arXiv:2509.19349*, 2025.
- [39] Anja Surina, Amin Mansouri, Lars Quaadvlieg, Amal Seddas, Maryna Viazovska, Emmanuel Abbe, and Caglar Gulcehre. Algorithm discovery with llms: Evolutionary search meets reinforcement learning. *arXiv preprint arXiv:2504.05108*, 2025.
- [40] Mert Yuksekgonul, Daniel Kocejka, Xinhao Li, Federico Bianchi, Jed McCaleb, Xiaolong Wang, Jan Kautz, Yejin Choi, James Zou, Carlos Guestrin, and Yu Sun. Learning to discover at test time. In *ICML*, 2026.
- [41] Adam Zsolt Wagner. Constructions in combinatorics via neural networks, 2021.

- [42] François Charton, Jordan S. Ellenberg, Adam Zsolt Wagner, and Geordie Williamson. PatternBoost: Constructions in mathematics with a little help from AI, 2024.
- [43] Alhussein Fawzi, Matej Balog, Aja Huang, Thomas Hubert, Bernardino Romera-Paredes, Mohammadamin Barekatain, Alexander Novikov, Francisco J. R. Ruiz, Julian Schrittwieser, Grzegorz Swirszcz, David Silver, Demis Hassabis, and Pushmeet Kohli. Discovering faster matrix multiplication algorithms with reinforcement learning. *Nature*, 610:47–53, 2022.
- [44] Chris Lu, Cong Lu, Robert Tjarko Lange, Jakob Foerster, Jeff Clune, and David Ha. The ai scientist: Towards fully automated open-ended scientific discovery. *arXiv preprint arXiv:2408.06292*, 2024.
- [45] Yutaro Yamada, Robert Tjarko Lange, Cong Lu, Shengran Hu, Chris Lu, Jakob Foerster, Jeff Clune, and David Ha. The ai scientist-v2: Workshop-level automated scientific discovery via agentic tree search. *arXiv preprint arXiv:2504.08066*, 2025.
- [46] Juraj Gottweis, Wei-Hung Weng, Alexander Daryin, Tao Tu, et al. Towards an ai co-scientist. *arXiv preprint arXiv:2502.18864*, 2025.
- [47] Ludovico Mitchener, Angela Yiu, Benjamin Chang, et al. Kosmos: An ai scientist for autonomous discovery. *arXiv preprint arXiv:2511.02824*, 2025.
- [48] Daniel Zheng, Ingrid von Glehn, Yori Zwols, Iuliya Beloshapka, Lars Buesing, Daniel M. Roy, Martin Wattenberg, Bogdan Georgiev, Tatiana Schmidt, Andrew Cowie, Fernanda Viegas, Dimitri Kanevsky, Vineet Kahlon, Hartmut Maennel, Sophia Alj, George Holland, Alex Davies, and Pushmeet Kohli. Ai co-mathematician: Accelerating mathematicians with agentic ai. *arXiv preprint arXiv:2605.06651*, 2026.
- [49] Kyle Swanson, Wesley Wu, Nash L. Bulaong, John E. Pak, and James Y. Zou. The virtual lab of ai agents designs new sars-cov-2 nanobodies. *Nature*, 646:716–723, 2025.
- [50] Samuel Schmidgall and Michael Moor. Agentrxiv: Towards collaborative autonomous research. *arXiv preprint arXiv:2503.18102*, 2025.
- [51] Trieu H. Trinh, Yuhuai Wu, Quoc V. Le, He He, and Thang Luong. Solving olympiad geometry without human demonstrations. *Nature*, 625:476–482, 2024.
- [52] Thomas Hubert, Rishi Mehta, Laurent Sartran, et al. Olympiad-level formal mathematical reasoning with reinforcement learning. *Nature*, 2025.
- [53] Po-Nien Kung, Linfeng Song, Dawsen Hwang, Jinsung Yoon, Chun-Liang Li, Simone Severini, Mirek Olsák, Edward Lockhart, Quoc V. Le, Burak Gokturk, Thang Luong, Tomas Pfister, and Nanyun Peng. Leap: Supercharging llms for formal mathematics with agentic frameworks. *arXiv preprint arXiv:2606.03303*, 2026.
- [54] Kaiyu Yang, Gabriel Poesia, Jingxuan He, Wenda Li, Kristin E. Lauter, Swarat Chaudhuri, and Dawn Song. Formal mathematical reasoning: A new frontier in ai. *arXiv preprint arXiv:2412.16075*, 2024.
- [55] Ao Qu, Han Zheng, Zijian Zhou, et al. Coral: Towards autonomous multi-agent evolution for open-ended discovery. *arXiv preprint arXiv:2604.01658*, 2026.
- [56] Jiaru Zou et al. Recursive multi-agent systems. *arXiv preprint arXiv:2604.25917*, 2026.

- [57] Sirui Hong, Xiawu Zheng, Jonathan P. Chen, et al. Metagpt: Meta programming for multi-agent collaborative framework. *arXiv preprint arXiv:2308.00352*, 2023.
- [58] Guanzhi Wang, Yuqi Xie, Yunfan Jiang, Ajay Mandlekar, Chaowei Xiao, Yuke Zhu, Linxi Fan, and Anima Anandkumar. Voyager: An open-ended embodied agent with large language models. *arXiv preprint arXiv:2305.16291*, 2023.
- [59] Andrew Zhao, Daniel Huang, Quentin Xu, Matthieu Lin, Yong-Jin Liu, and Gao Huang. Expel: Llm agents are experiential learners. *arXiv preprint arXiv:2308.10144*, 2023.
- [60] Shengran Hu, Cong Lu, and Jeff Clune. Automated design of agentic systems. *arXiv preprint arXiv:2408.08435*, 2024.
- [61] Qizheng Zhang, Changran Hu, Shubhangi Upasani, James Zou, Kunle Olukotun, et al. Agentic context engineering: Evolving contexts for self-improving language models. *arXiv preprint arXiv:2510.04618*, 2025.
- [62] Carlos E. Jimenez, John Yang, Alexander Wettig, Shunyu Yao, Kexin Pei, Ofir Press, and Karthik Narasimhan. Swe-bench: Can language models resolve real-world github issues? *arXiv preprint arXiv:2310.06770*, 2023.
- [63] Jiahang Lin, Shichun Liu, Chengjun Pan, et al. Agentic harness engineering: Observability-driven automatic evolution of coding-agent harnesses. *arXiv preprint arXiv:2604.25850*, 2026.
- [64] Xuying Ning, Katherine Tieu, Dongqi Fu, Tianxin Wei, Zihao Li, et al. Code as agent harness. *arXiv preprint arXiv:2605.18747*, 2026.
- [65] Bogdan Georgiev, Javier Gómez-Serrano, Terence Tao, and Adam Zsolt Wagner. Mathematical exploration and discovery at scale. *arXiv preprint arXiv:2511.02864*, 2025.
- [66] Erik Y. Wang, Sumeet Motwani, James V. Roggeveen, Eliot Hodges, Dulhan Jayalath, Charles London, Kalyan Ramakrishnan, Flaviu Cipcigan, Philip Torr, and Alessandro Abate. HorizonMath: Measuring AI progress toward mathematical discovery with automatic verification, 2026.
- [67] Maryna Viazovska. The sphere packing problem in dimension 8, 2016.
- [68] Jean Bourgain, Laurent Clozel, and Jean-Pierre Kahane. Principe d’Heisenberg et fonctions positives, 2008. *Ann. Inst. Fourier (Grenoble)* 60 (2010), no. 4, 1215–1232.

Table 11: Threats to validity and how each is handled.

Threat	Why it matters	Status / mitigation
Dynamic leaderboard	rankings change after submission	timestamped snapshot, script @ e38a793 ; re-verify
Ties / verifier-contested scores	rank can overstate distinctness or validity	raw vs. clean rank reported separately; P9 excluded from clean #1; P1 tiebreak disclosed
No optimality proof	empirical records are not theorems	framed as construction/evaluation results, not proofs
Human in the loop	autonomy could be overstated	role taxonomy (Table 10)
Causal evidence (memory)	KB-causes-improvement needs a control	controlled ablation run (§7): efficiency supported, quality null; other mechanisms null/underpowered
Model/version drift	exact per-cycle LLM IDs were not pinned, so the agent trajectory is not exactly replayable	submitted constructions + verifier scripts <i>are</i> reproducible; trajectory is auditable, not replayable
Retrospective KB curation	the public snapshot may not exactly match what was available each cycle	commit history, file timestamps, and cycle logs are released for cross-checking
Private knowledge base	harder for reviewers to audit	repository and knowledge base released publicly (frozen snapshot)
Agent-authored prose	persuasive but possibly unsupported	claims/evidence table (Table 6); human verified results and takes responsibility
Single domain	only objective-verifier math tested	headline claim scoped accordingly; cross-problem transfer tested (null under saturation, §7)