








De-sidoring data after/against

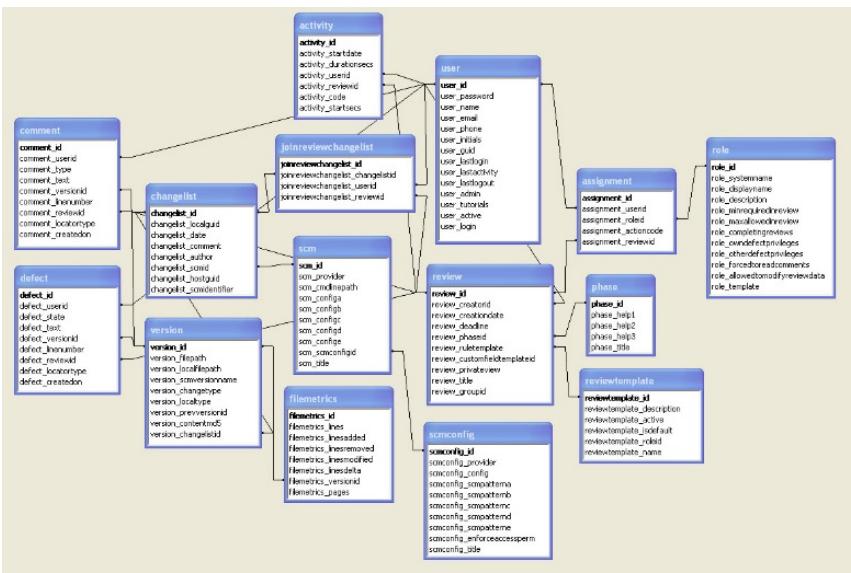




```

USE [AdventureWorks]
SET STATISTICS IO ON
SELECT
    v.[VendorID]
    ,v.[Name]
    ,coalesce(c.[Title], '') + ' ' + c.[FirstName] + coalesce(' ' + c.[P
    [MiddleName], '') + ' ' + c.[LastName] + coalesce(' ' + c.[Suffix], ' '
    '')

FROM [Purchasing].[Vendor] v
INNER JOIN [Purchasing].[VendorContact] vc
ON vc.[VendorID] = v.[VendorID]
INNER JOIN [Person].[Contact] c
ON c.[ContactID] = vc.[ContactID]
SET STATISTICS IO OFF
  
```

Results | Messages |

(156 row(s) affected)  
Table 'Contact'. Scan count 0, logical reads 330, physical reads 0, read-ahead reads 0  
Table 'VendorContact'. Scan count 104, logical reads 208, physical reads 0, read-ahead reads 0  
Table 'Vendor'. Scan count 1, logical reads 4, physical reads 0, read-ahead reads 0

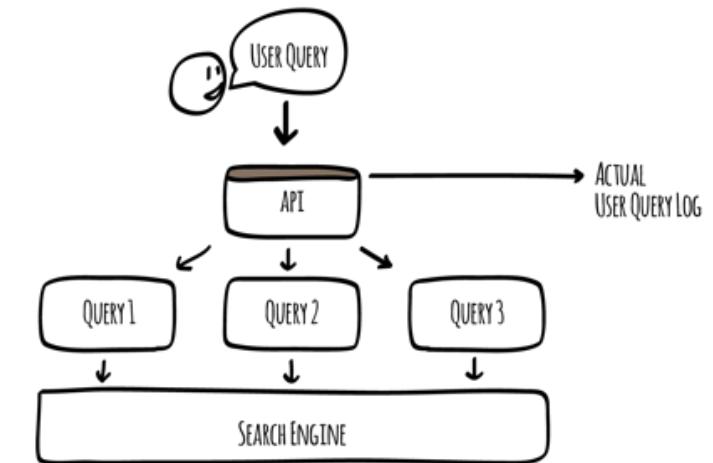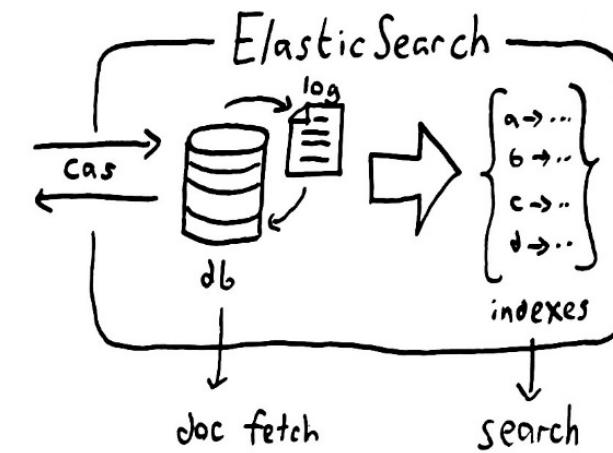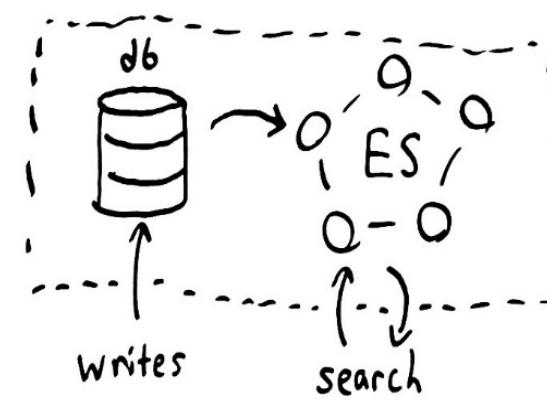

{Schemas, Views, SQL Queries}

{Data Types, Indexes, APIs}

!headline! Headline! Headline! Headline!

