

Connecting VSCode to your Docker container

This guide will help you set up Visual Studio Code (VSCode) to connect to your running Docker container. This will allow you to edit and execute code inside the container seamlessly.

This guide will help you set up Visual Studio Code (VSCode) to connect to your running Docker container. This will allow you to edit and execute code inside the container seamlessly.

Later in the course, we will probably use Cursor instead of VSCode.

Before you begin, ensure that you have:

Before you begin, ensure that you have:

1. A running Docker container with SSH enabled.

Before you begin, ensure that you have:

1. A running Docker container with SSH enabled.
 - Follow the steps in “Start the class Docker container”

Before you begin, ensure that you have:

1. A running **Docker container** with SSH enabled.
 - Follow the steps in “Start the class Docker container”
2. **VSCode** installed on your computer.

Before you begin, ensure that you have:

1. A **running Docker container** with SSH enabled.
 - Follow the steps in “Start the class Docker container”
2. **VSCode** installed on your computer.
 - Download it from Visual Studio Code.


Before you begin, ensure that you have:

1. A **running Docker container** with SSH enabled.

- Follow the steps in “Start the class Docker container”

2. **VSCode** installed on your computer.

- Download it from Visual Studio Code.
- Install the “Remote - SSH” and “Dev - Containers” extensions from the Extensions Marketplace.

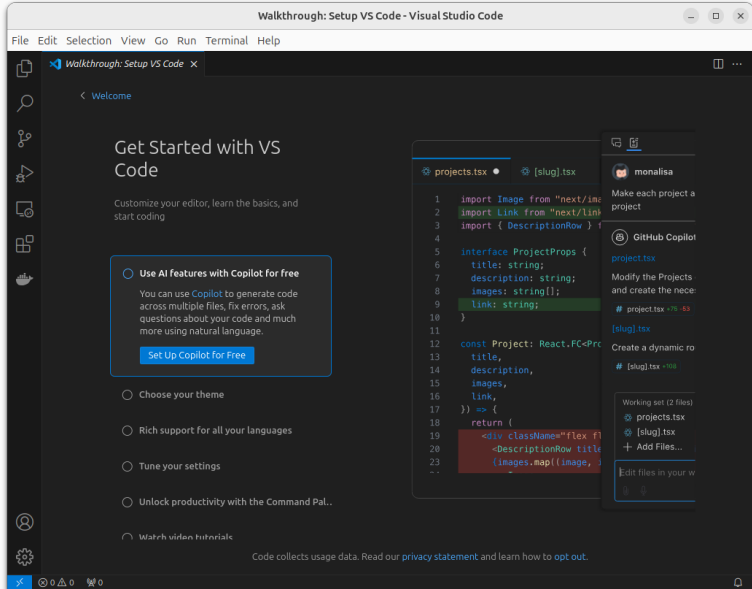

You can use the “Dev - Containers” extension to connect directly to the running container:

You can use the “Dev - Containers” extension to connect directly to the running container:

1. Attach to the container:

You can use the “Dev - Containers” extension to connect directly to the running container:

1. Attach to the container:

- Press `Ctrl+Shift+P` (or `Cmd+Shift+P` on Mac) to open the command palette.

You can use the “Dev - Containers” extension to connect directly to the running container:


1. **Attach to the container:**


- Press **Ctrl+Shift+P** (or **Cmd+Shift+P** on Mac) to open the command palette.
- Type **Dev-Containers: Attach to Running Container** and select it.

You can use the “Dev - Containers” extension to connect directly to the running container:

1. Attach to the container:

- Press **Ctrl+Shift+P** (or **Cmd+Shift+P** on Mac) to open the command palette.
- Type **Dev-Containers: Attach to Running Container** and select it.
- Choose **class-container** from the list.

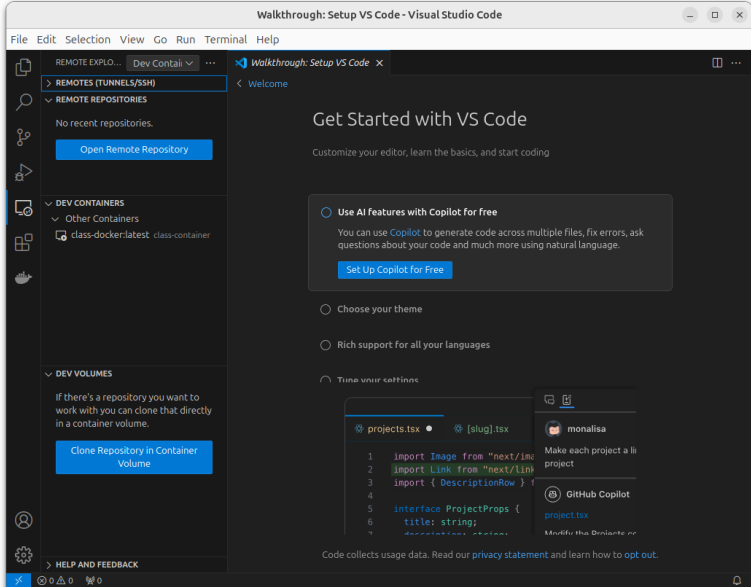

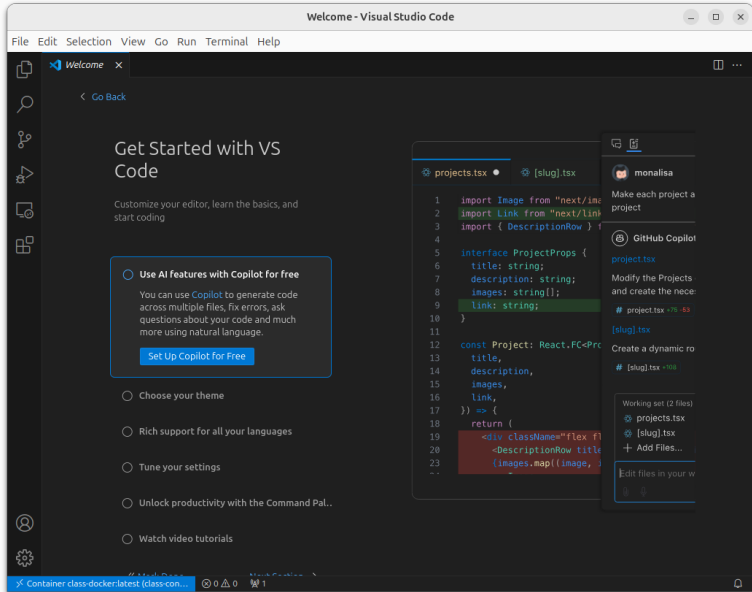

2. Open the workspace:

2. Open the workspace:


- VSCode will open a new window where you can find the container's `/workspace` directory.


2. Open the workspace:

- VSCode will open a new window where you can find the container's `/workspace` directory.
- You can now edit, debug, and execute code directly inside the container.

2. Open the workspace:

- VSCode will open a new window where you can find the container's **/workspace** directory.
- You can now edit, debug, and execute code directly inside the container.
- You will have to install other extensions as needed, such as the Python one and the Jupyter one.

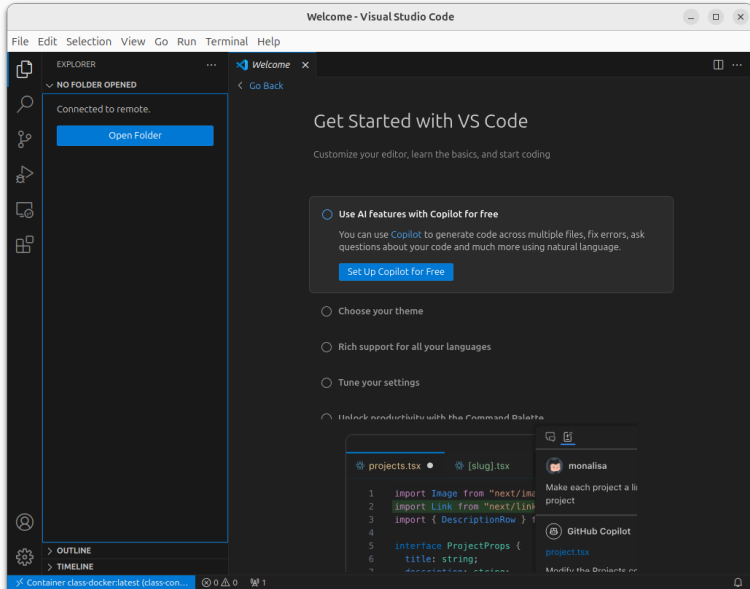

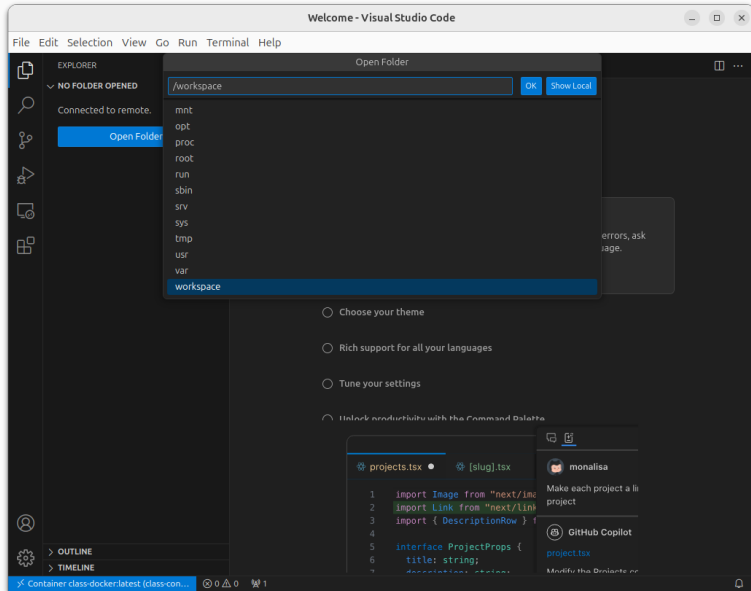

1. Create a Python file:

1. Create a Python file:

- Inside the container, create a file named `test.py`:

```
print("Hello from Docker!")
```

Test your setup

1. Create a Python file:

- Inside the container, create a file named `test.py`:

```
print("Hello from Docker!")
```

2. Run the file:

Test your setup

1. Create a Python file:

- Inside the container, create a file named `test.py`:

```
print("Hello from Docker!")
```

2. Run the file:

- Use the integrated terminal in VSCode to run:

```
python3 test.py
```


Test your setup

1. Create a Python file:

- Inside the container, create a file named `test.py`:

```
print("Hello from Docker!")
```

2. Run the file:

- Use the integrated terminal in VSCode to run:

```
python3 test.py
```

- Verify that the output is `Hello from Docker!`.

1. No container found:

1. No container found:

- Verify the container is running using `docker ps`.

1. No container found:

- Verify the container is running using `docker ps`.

2. VSCode cannot attach to container:

1. No container found:

- Verify the container is running using `docker ps`.

2. VSCode cannot attach to container:

- Check that the “Remote - Containers” extension is installed.

1. No container found:

- Verify the container is running using `docker ps`.

2. VSCode cannot attach to container:

- Check that the “Remote - Containers” extension is installed.
- Ensure Docker Desktop is running.

1. No container found:

- Verify the container is running using `docker ps`.

2. VSCode cannot attach to container:

- Check that the “Remote - Containers” extension is installed.
- Ensure Docker Desktop is running.

3. Python not found:

1. No container found:

- Verify the container is running using `docker ps`.

2. VSCode cannot attach to container:

- Check that the “Remote - Containers” extension is installed.
- Ensure Docker Desktop is running.

3. Python not found:

- Verify Python is installed in the container:

```
python3 --version
```


This setup allows you to use a full-featured development environment while keeping your code and dependencies isolated in a container.