

# M21 2026 July 2026 N400 Component

Joanna Morris

2026-07-16

## Contents

|          |                                                                                       |          |
|----------|---------------------------------------------------------------------------------------|----------|
| <b>1</b> | <b>Setup</b>                                                                          | <b>2</b> |
| <b>2</b> | <b>Load Files</b>                                                                     | <b>3</b> |
| <b>3</b> | <b>N400 WORD DATA: INTERACTION WITH LP (PRIMARY ANALYSES)</b>                         | <b>4</b> |
| 3.1      | N400 WORD DATA: BASE FREQUENCY and LP as FIXED EFFECTS; OS as COVARIATE               | 4        |
| 3.1.1    | Model                                                                                 | 4        |
| 3.1.2    | Means and Contrasts                                                                   | 5        |
| 3.1.3    | Plots                                                                                 | 6        |
| 3.2      | N400 WORD DATA: FAMILY SIZE and LP as FIXED EFFECTS; OS as COVARIATE                  | 6        |
| 3.2.1    | Model                                                                                 | 6        |
| 3.2.2    | Means                                                                                 | 6        |
| 3.2.3    | Plots (Interaction Not significant)                                                   | 7        |
| 3.3      | N400 WORD DATA: Interaction Plots— BASE FREQUENCY x LP; FAMILY SIZE x LP              | 7        |
| <b>4</b> | <b>N400 WORD DATA: INTERACTION WITH OS (EXPLORATORY ANALYSES)</b>                     | <b>7</b> |
| 4.1      | N400 WORD DATA: BASE FREQUENCY and OS as FIXED EFFECTS; LP as COVARIATE               | 7        |
| 4.2      | N400 WORD DATA: FAMILY SIZE and OS as FIXED EFFECTS; LP as COVARIATE                  | 8        |
| <b>5</b> | <b>N400 NONWORD DATA : SYMMETRICAL MODEL, INTERACTION WITH LP AND OS</b>              | <b>9</b> |
| 5.1      | N400 NONWORD DATA: Family Size                                                        | 9        |
| 5.1.1    | Symmetric Model                                                                       | 9        |
| 5.1.2    | Means and Contrasts                                                                   | 10       |
|          | Complexity × Family Size x LP Interaction                                             | 10       |
|          | Complexity × Family Size interaction averaged across LP                               | 12       |
|          | Complexity × LP interaction averaged over Family Size:                                | 12       |
|          | FS × LP interaction averaged over Complexity:                                         | 13       |
|          | Complexity × OS interaction averaged over Family Size:                                | 13       |
| 5.1.3    | PLOT 2-WAY INTERACTIONS                                                               | 13       |
|          | FAMILY SIZE X COMPLEXITY Plot                                                         | 13       |
|          | COMPLEXITY x LP Plot; FAMILY SIZE X LP Plot; COMPLEXITY x OS Plot                     | 14       |
| 5.1.4    | PLOT 3-WAY INTERACTIONS                                                               | 14       |
|          | Plots: COMPLEXITY x LP faceted by Family size; FAMILY SIZE x LP Faceted by Complexity | 14       |
|          | COMPLEXITY x LP and FAMILY SIZE x LP Interaction Plots                                | 15       |
|          | Plots: COMPLEXITY x OS faceted by Family size; FAMILY SIZE x OS Faceted by Complexity | 15       |

# 1 Setup

Load libraries

Set emmeans options

```
emm_options(  
  lmer.df = "kenward-roger",  
  pbkrtest.limit = 10000,  
  disable.pbkrtest = FALSE  
)
```

Set ggplot parameters

```
# Color palette  
my_palette_1 <- c(  
  "#E31A1C", # red  
  "#1F78B4" # blue  
)  
  
my_palette_2 <- c(  
  "#0072B2", # dark blue  
  "#E69F00" # orange/gold  
)  
my_linetypes_1 <- c("dashed", "solid")  
  
# Theme  
my_theme <- theme_classic(base_size = 8) +  
  theme(  
    legend.position = "bottom",  
    legend.direction = "horizontal",  
    legend.box = "horizontal"  
  )  
  
# Common guides  
my_guides <- guides(  
  colour = guide_legend(nrow = 1),  
  fill = guide_legend(nrow = 1)  
)
```

Define 2-way interaction table function

Function use for Complexity  $\times$  LP table:

```
emm_complexity_LP_N400 <- emmeans(  
  m_nw_N400_fs,  
  ~ complexity | LP,  
  at = list(LP = c(-1, 0, 1))  
)  
  
compact_emm_table(  
  emm_complexity_LP_N400,  
  by_var = LP,  
  condition_prefix = "LP"  
)
```

for Family Size  $\times$  LP table:

```
emm_FS_LP_N400 <- emmeans(  
  m_nw_N400_fs,  
  ~ family_size | LP,  
  at = list(LP = c(-1, 0, 1))  
)  
  
compact_emm_table(  
  emm_FS_LP_N400,  
  by_var = LP,  
  condition_prefix = "LP"  
)
```

For 3-way use this function like this:

```
emm_3way <- emmeans(  
  m_nw_N400_fs,  
  ~ complexity * family_size | LP,  
  at = list(LP = c(-1, 0, 1))  
)  
  
compact_3way_table(  
  emm_3way,  
  by_var = LP,  
  condition_prefix = "LP",  
  factor1 = complexity,  
  factor2 = family_size  
)
```

)

## 2 Load Files

```
# Load data: rt words

rt_w <- read_csv("rt_words_frq.csv") |>
  filter(correct == 1) |>
  mutate(
    SubjID = factor(SubjID),
    Item = factor(target),
    logRT = log(response_time),
    OS = as.numeric(Dim.2),
    LP = as.numeric(Dim.1),
    zLogBF = as.numeric(scale(LogBF)),
    zLogFS = as.numeric(scale(LogFS))
  )

# Load data: rt nonwords

rt_nw <- read_csv("rt_nwords_frq.csv") |>
  filter(correct == 1) |>
  mutate(
    SubjID = factor(SubjID),
    ItemID = factor(ItemID),
    complexity = factor(complexity,
      levels = c("SIMP", "COMP"),
      labels = c("Simple", "Complex")),
    logRT = log(response_time),
    OS = as.numeric(Dim.2),
    LP = as.numeric(Dim.1),
    zLogBF = as.numeric(scale(LogBF)),
    zLogFS = as.numeric(scale(LogFS))
  )

# Load data: erp_fs words

erp_fs_w <- read_csv("erp_fs_dmg_words.csv") |>
  mutate(
    SubjID = factor(SubjID),
    chlabel = factor(chlabel),
    family_size = factor(family_size,
      levels = c("Small", "Large")),
    time_window = factor(time_window),
    OS = as.numeric(Dim.2),
    LP = as.numeric(Dim.1)
  )

# Load data: erp_fs nonwords

erp_fs_nw <- read_csv("erp_fs_dmg_nonwords.csv") |>
  mutate(
    SubjID = factor(SubjID),
    chlabel = factor(chlabel),
    family_size = factor(family_size,
      levels = c("Small", "Large")),
    complexity = factor(complexity,
      labels = c("Simple", "Complex")),
    time_window = factor(time_window),
    OS = as.numeric(Dim.2),
    LP = as.numeric(Dim.1)
  )

# Load data: erp_bf words

erp_bf_w <- read_csv("erp_bf_dmg_words.csv") |>
  mutate(
    SubjID = factor(SubjID),
    chlabel = factor(chlabel),
    base_frequency = factor(base_frequency,
      levels = c("Low", "High")),
    time_window = factor(time_window),
    OS = as.numeric(Dim.2),
    LP = as.numeric(Dim.1)
  )

# Load data: erp_bf nonwords

erp_bf_nw <- read_csv("erp_bf_dmg_nonwords.csv") |>
  mutate(
    SubjID = factor(SubjID),
    chlabel = factor(chlabel),
    base_frequency = factor(base_frequency,
      levels = c("Low", "High")),
```

```

    complexity = factor(complexity,
                        labels = c("Simple", "Complex")),
    time_window = factor(time_window),
    OS = as.numeric(Dim.2),
    LP = as.numeric(Dim.1)
  )
}

range(erp_fs_w$LP)

[[ [1] -2.674523  3.111265
range(erp_fs_w$OS)

[[ [1] -1.975820  1.926921

```

### 3 N400 WORD DATA: INTERACTION WITH LP (PRIMARY ANALYSES)

#### 3.1 N400 WORD DATA: BASE FREQUENCY and LP as FIXED EFFECTS; OS as COVARIATE

##### 3.1.1 Model

```

contrasts(erp_bf_w$base_frequency) <- c(-0.5, 0.5)

m_w_N400_bf <- lmer(
  value ~ base_frequency * LP + OS +
    (1 | SubjID) +
    (1 | SubjID:chlabel),
  data = subset(erp_bf_w, time_window == "N400"),
  control = lmerControl(optimizer = "bobyqa")
)
summary(m_w_N400_bf)

[[ Linear mixed model fit by REML. t-tests use Satterthwaite's method ['lmerModLmerTest']
[[ Formula: value ~ base_frequency * LP + OS + (1 | SubjID) + (1 | SubjID:chlabel)
[[ Data: subset(erp_bf_w, time_window == "N400")
[[ Control: lmerControl(optimizer = "bobyqa")
[[
[[ REML criterion at convergence: 19468.7
[[
[[ Scaled residuals:
[[      Min       1Q   Median       3Q      Max
[[ -11.6094  -0.3522   0.0107   0.3807  10.5439
[[
[[ Random effects:
[[ Groups      Name                Variance Std.Dev.
[[ SubjID:chlabel (Intercept)  23.249    4.822
[[ SubjID       (Intercept)  18.541    4.306
[[ Residual                    9.157    3.026
[[ Number of obs: 3240, groups: SubjID:chlabel, 1620; SubjID, 60
[[
[[ Fixed effects:
[[              Estimate Std. Error    df t value Pr(>|t|)
[[ (Intercept)    5.617e-01  5.722e-01  5.700e+01  0.982  0.3304
[[ base_frequency1 2.141e-01  1.064e-01  1.618e+03  2.012  0.0444 *
[[ LP             4.677e-02  4.652e-01  5.700e+01  0.101  0.9203
[[ OS             1.290e+00  6.399e-01  5.700e+01  2.016  0.0485 *
[[ base_frequency1:LP 3.444e-01  8.659e-02  1.618e+03  3.977  7.29e-05 ***
[[ ---
[[ Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
[[
[[ Correlation of Fixed Effects:
[[              (Intr) bs_fr1 LP      OS
[[ bas_frnc1  0.000
[[ LP         0.038  0.000
[[ OS        -0.046  0.000  0.021
[[ bs_frnc1:LP 0.000  0.039  0.000  0.000
[[
[[ # Effect sizes for individual terms
eta_squared(m_w_N400_bf, partial = TRUE)

[[ # Effect Size for ANOVA (Type III)
[[
[[ Parameter      | Eta2 (partial) |      95% CI
[[ -----
[[ base_frequency |      2.50e-03 | [0.00, 1.00]

```

```

|| LP | 1.77e-04 | [0.00, 1.00]
|| OS | 0.07 | [0.00, 1.00]
|| base_frequency:LP | 9.68e-03 | [0.00, 1.00]
||
|| - One-sided CIs: upper bound fixed at [1.00].

```

```

# Model R²
r2_nakagawa(m_w_N400_bf)

```

```

|| # R2 for Mixed Models
||
|| Conditional R2: 0.825
|| Marginal R2: 0.026

```

### 3.1.2 Means and Contrasts

```

as.tibble(emmeans(m_w_N400_bf, ~ base_frequency)) |> print()

```

```

|| # A tibble: 2 x 6
|| base_frequency emmean SE df lower.CL upper.CL
|| <fct> <dbl> <dbl> <dbl> <dbl> <dbl>
|| 1 Low 0.515 0.574 58.0 -0.634 1.66
|| 2 High 0.712 0.574 58.0 -0.436 1.86

```

```

emm_bf_LP <- emmeans(m_w_N400_bf,
  ~ base_frequency | LP,
  at = list(LP = c(-2.5, -1, 0, 1, 3)))

```

```

emm_part <- summary(emm_bf_LP) |>
  as.data.frame() |>
  transmute(LP, Effect = paste("EMM:", base_frequency), Estimate = emmean, SE, df,
    lower.CL, upper.CL, t.ratio = NA_real_, p.value = NA_real_)

```

```

contrast_part <- pairs(emm_bf_LP) |>
  summary() |>
  as.data.frame() |>
  transmute(LP, Effect = paste("Contrast:", contrast), Estimate = estimate, SE, df,
    lower.CL = NA_real_, upper.CL = NA_real_, t.ratio, p.value)

```

```

emm_contrast_table_LP_N400_words <- bind_rows(emm_part, contrast_part) |>
  arrange(LP, Effect)|>
  mutate(
    Estimate = round(Estimate, 2),
    SE = round(SE, 2),
    df = round(df, 1),
    lower.CL = round(lower.CL, 2),
    upper.CL = round(upper.CL, 2),
    t.ratio = round(t.ratio, 2),
    p.value = round(p.value, 3)
  )

```

```

as.tibble(emm_contrast_table_LP_N400_words, digits = 3) |> print(n=20)

```

```

|| # A tibble: 15 x 9
|| LP Effect Estimate SE df lower.CL upper.CL t.ratio p.value
|| <dbl> <chr> <dbl> <dbl> <dbl> <dbl> <dbl> <dbl>
|| 1 -2.5 Contrast: Low - High 0.65 0.24 1618 NA NA 2.72 0.007
|| 2 -2.5 EMM: High 0.18 1.28 58 -2.39 2.74 NA NA
|| 3 -2.5 EMM: Low 0.82 1.28 58 -1.74 3.39 NA NA
|| 4 -1 Contrast: Low - High 0.13 0.13 1618 NA NA 0.97 0.333
|| 5 -1 EMM: High 0.5 0.73 58 -0.95 1.96 NA NA
|| 6 -1 EMM: Low 0.63 0.73 58 -0.82 2.09 NA NA
|| 7 0 Contrast: Low - High -0.21 0.11 1618 NA NA -2.01 0.044
|| 8 0 EMM: High 0.72 0.57 58 -0.43 1.87 NA NA
|| 9 0 EMM: Low 0.51 0.57 58 -0.64 1.66 NA NA
|| 10 1 Contrast: Low - High -0.56 0.14 1618 NA NA -3.99 0
|| 11 1 EMM: High 0.94 0.75 58 -0.57 2.45 NA NA
|| 12 1 EMM: Low 0.38 0.75 58 -1.13 1.89 NA NA
|| 13 3 Contrast: Low - High -1.25 0.28 1618 NA NA -4.38 0
|| 14 3 EMM: High 1.38 1.54 58 -1.69 4.45 NA NA
|| 15 3 EMM: Low 0.13 1.54 58 -2.94 3.21 NA NA

```

### 3.1.3 Plots

## 3.2 N400 WORD DATA: FAMILY SIZE and LP as FIXED EFFECTS; OS as COVARIATE

### 3.2.1 Model

```
contrasts(erp_fs_w$family_size) <- c(-0.5, 0.5)

m_w_N400_fs <- lmer(
  value ~ family_size * LP + OS +
    (1 | SubjID) +
    (1 | SubjID:chlabel),
  data = subset(erp_fs_w, time_window == "N400"),
  control = lmerControl(optimizer = "bobyqa")
)
summary(m_w_N400_fs)

|| Linear mixed model fit by REML. t-tests use Satterthwaite's method ['lmerModLmerTest']
|| Formula: value ~ family_size * LP + OS + (1 | SubjID) + (1 | SubjID:chlabel)
|| Data: subset(erp_fs_w, time_window == "N400")
|| Control: lmerControl(optimizer = "bobyqa")
||
|| REML criterion at convergence: 15561.8
||
|| Scaled residuals:
||      Min       1Q   Median       3Q      Max
|| -10.9307  -0.3874   0.0081   0.4071   6.2048
||
|| Random effects:
|| Groups          Name                Variance Std.Dev.
|| SubjID:chlabel (Intercept)  5.238      2.289
|| SubjID         (Intercept)  4.575      2.139
|| Residual                        3.304      1.818
|| Number of obs: 3240, groups: SubjID:chlabel, 1620; SubjID, 60
||
|| Fixed effects:
||              Estimate Std. Error      df t value Pr(>|t|)
|| (Intercept)   2.618e-01  2.842e-01  5.700e+01  0.921   0.3608
|| family_size1  4.522e-01  6.392e-02  1.618e+03  7.074 2.23e-12 ***
|| LP            1.231e-03  2.311e-01  5.700e+01  0.005   0.9958
|| OS            6.771e-01  3.179e-01  5.700e+01  2.130   0.0375 *
|| family_size1:LP -7.114e-02  5.201e-02  1.618e+03 -1.368   0.1716
|| ---
|| Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
||
|| Correlation of Fixed Effects:
||              (Intr) fmly_1 LP      OS
|| family_siz1  0.000
|| LP           0.038  0.000
|| OS           -0.046  0.000  0.021
|| fmly_sz1:LP  0.000  0.039  0.000  0.000

# Effect sizes for individual terms
eta_squared(m_w_N400_fs, partial = TRUE)

|| # Effect Size for ANOVA (Type III)
||
|| Parameter      | Eta2 (partial) |      95% CI
|| -----|-----|-----|
|| family_size    |      0.03      | [0.02, 1.00]
|| LP             | 4.98e-07      | [0.00, 1.00]
|| OS             |      0.07      | [0.00, 1.00]
|| family_size:LP | 1.15e-03      | [0.00, 1.00]
||
|| - One-sided CIs: upper bound fixed at [1.00].

# Model R²
r2_nakagawa(m_w_N400_fs)

|| # R2 for Mixed Models
||
|| Conditional R2: 0.756
|| Marginal R2: 0.031
```

### 3.2.2 Means

```
as.tibble(emmeans(m_w_N400_fs, ~ family_size)) |> print()

|| # A tibble: 2 x 6
```

```

|| family_size emmean SE df lower.CL upper.CL
|| <fct> <dbl> <dbl> <dbl> <dbl> <dbl>
|| 1 Small 0.0623 0.286 58.5 -0.509 0.634
|| 2 Large 0.518 0.286 58.5 -0.0535 1.09

```

### 3.2.3 Plots (Interaction Not significant)


## 3.3 N400 WORD DATA: Interaction Plots— BASE FREQUENCY x LP; FAMILY SIZE x LP

```

row1 <- plot_grid(BFxLP_n400, FSxLP_n400, ncol = 2)

plot_grid(
  ggdraw() + draw_label("N400 Word Data", fontface = "bold"),
  row1,
  ncol = 1,
  rel_heights = c(0.08, 1)
)

```

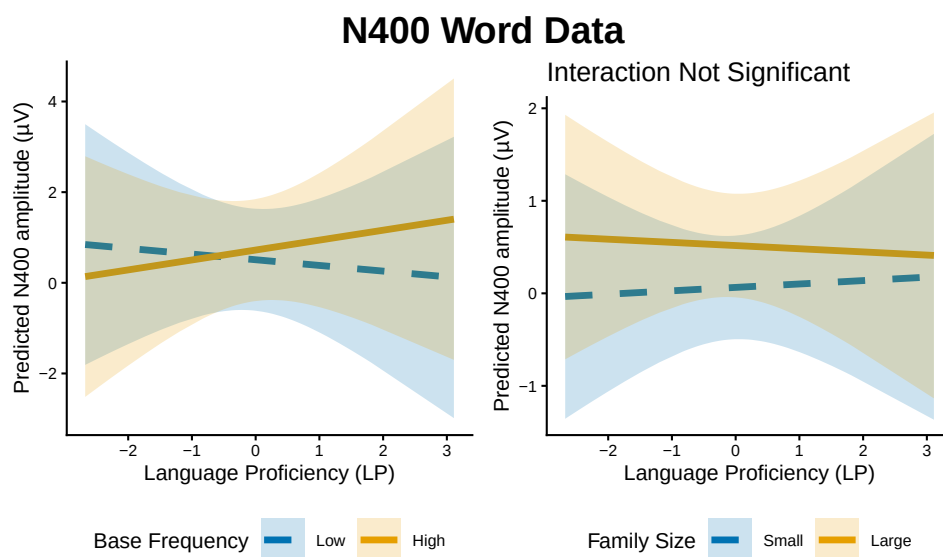

Does the slopes of the lines in the significant interactions, significantly differ from zero?

```
test(entrends(m_w_N400_bf, ~ base_frequency, var = "LP"))
```

```

|| base_frequency LP.trend SE df t.ratio p.value
|| Low -0.125 0.467 58 -0.268 0.7893
|| High 0.219 0.467 58 0.469 0.6411
||
|| Degrees-of-freedom method: kenward-roger

```

## 4 N400 WORD DATA: INTERACTION WITH OS (EXPLORATORY ANALYSES)

### 4.1 N400 WORD DATA: BASE FREQUENCY and OS as FIXED EFFECTS; LP as COVARIATE

```

# BINNED BY BASE FREQUENCY
m_w_N400_bf_OS <- lmer(
  value ~ base_frequency * OS + LP +
    (1 | SubjID) + (1 | SubjID:chlabel),
  data = subset(erp_bf_w, time_window == "N400"),
  control = lmerControl(optimizer = "bobyqa")
)
summary(m_w_N400_bf_OS)

```

```

|| Linear mixed model fit by REML. t-tests use Satterthwaite's method ['lmerModLmerTest']
|| Formula: value ~ base_frequency * OS + LP + (1 | SubjID) + (1 | SubjID:chlabel)
|| Data: subset(erp_bf_w, time_window == "N400")
|| Control: lmerControl(optimizer = "bobyqa")

```

```

||
|| REML criterion at convergence: 19481.2
||
|| Scaled residuals:
||      Min       1Q   Median       3Q      Max
|| -11.6252  -0.3573   0.0068   0.3789  10.5554
||
|| Random effects:
||  Groups      Name      Variance Std.Dev.
||  SubjID:chlabel (Intercept) 23.212   4.818
||  SubjID        (Intercept) 18.541   4.306
||  Residual                9.232   3.038
|| Number of obs: 3240, groups:  SubjID:chlabel, 1620; SubjID, 60
||
|| Fixed effects:
||              Estimate Std. Error      df t value Pr(>|t|)
|| (Intercept)    5.617e-01  5.722e-01  5.700e+01   0.982   0.3304
|| base_frequency1 1.893e-01  1.069e-01  1.618e+03   1.772   0.0767 .
|| OS             1.290e+00  6.399e-01  5.700e+01   2.016   0.0485 *
|| LP             4.677e-02  4.652e-01  5.700e+01   0.101   0.9203
|| base_frequency1:OS 1.947e-01  1.196e-01  1.618e+03   1.628   0.1036
|| ---
|| Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
||
|| Correlation of Fixed Effects:
||              (Intr) bs_fr1 OS      LP
|| bs_fr1:chlabel 0.000
|| OS              -0.046  0.000
|| LP              0.038  0.000  0.021
|| bs_fr1:OS      0.000 -0.047  0.000  0.000

```

## 4.2 N400 WORD DATA: FAMILY SIZE and OS as FIXED EFFECTS; LP as COVARIATE

```

# BINNED BY FAMILY SIZE

m_w_N400_fs_OS <- lmer(
  value ~ family_size * OS + LP +
    (1 | SubjID) + (1 | SubjID:chlabel),
  data = subset(erp_fs_w, time_window == "N400"),
  control = lmerControl(optimizer = "bobyqa")
)
summary(m_w_N400_fs_OS)

|| Linear mixed model fit by REML. t-tests use Satterthwaite's method ['lmerModLmerTest']
|| Formula: value ~ family_size * OS + LP + (1 | SubjID) + (1 | SubjID:chlabel)
|| Data: subset(erp_fs_w, time_window == "N400")
|| Control: lmerControl(optimizer = "bobyqa")
||
|| REML criterion at convergence: 15561.4
||
|| Scaled residuals:
||      Min       1Q   Median       3Q      Max
|| -10.9068  -0.3881   0.0130   0.4078   6.1805
||
|| Random effects:
||  Groups      Name      Variance Std.Dev.
||  SubjID:chlabel (Intercept) 5.237   2.289
||  SubjID        (Intercept) 4.575   2.139
||  Residual                3.304   1.818
|| Number of obs: 3240, groups:  SubjID:chlabel, 1620; SubjID, 60
||
|| Fixed effects:
||              Estimate Std. Error      df t value Pr(>|t|)
|| (Intercept)    2.618e-01  2.842e-01  5.700e+01   0.921   0.3608
|| family_size1    4.518e-01  6.394e-02  1.618e+03   7.066 2.37e-12 ***
|| OS             6.771e-01  3.179e-01  5.700e+01   2.130   0.0375 *
|| LP             1.231e-03  2.311e-01  5.700e+01   0.005   0.9958
|| family_size1:OS 9.090e-02  7.155e-02  1.618e+03   1.270   0.2041
|| ---
|| Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
||
|| Correlation of Fixed Effects:
||              (Intr) fmly_1 OS      LP
|| family_size1 0.000
|| OS           -0.046  0.000
|| LP           0.038  0.000  0.021
|| fmly_sz1:OS 0.000 -0.047  0.000  0.000

```

## 5 N400 NONWORD DATA : SYMMETRICAL MODEL, INTER-ACTION WITH LP AND OS

For the nonword N400, does the symmetric model we just ran replace the separate LP and OS models, or do all three get reported?\*\*\*

The symmetric model is the cleanest solution — it tests both dimensions in the same model and provides the strongest evidence for the dissociation. The separate models are now superseded.

### 5.1 N400 NONWORD DATA: Family Size

#### 5.1.1 Symmetric Model

```
contrasts(erp_fs_nw$complexity) <- c(-0.5, 0.5)
contrasts(erp_fs_nw$family_size) <- c(-0.5, 0.5)

m_nw_N400_fs_symmetric <- lmer(
  value ~ complexity * family_size * LP +
    complexity * family_size * OS +
    (1 | SubjID) + (1 | SubjID:chlabel),
  data = subset(erp_fs_nw, time_window == "N400"),
  control = lmerControl(optimizer = "bobyqa")
)

summary(m_nw_N400_fs_symmetric)

|| Linear mixed model fit by REML. t-tests use Satterthwaite's method ['lmerModLmerTest']
|| Formula: value ~ complexity * family_size * LP + complexity * family_size * OS + (1 | SubjID) + (1 | SubjID:chlabel)
|| Data: subset(erp_fs_nw, time_window == "N400")
|| Control: lmerControl(optimizer = "bobyqa")
||
|| REML criterion at convergence: 32974.7
||
|| Scaled residuals:
||      Min       1Q   Median       3Q      Max
|| -14.0373  -0.4804  -0.0160   0.4598  14.1912
||
|| Random effects:
|| Groups             Name             Variance Std.Dev.
|| SubjID:chlabel    (Intercept)    6.392     2.528
|| SubjID            (Intercept)    5.568     2.360
|| Residual                    6.100     2.470
|| Number of obs: 6480, groups: SubjID:chlabel, 1620; SubjID, 60
||
|| Fixed effects:
||              Estimate Std. Error      df t value Pr(>|t|)
|| (Intercept)    -0.45163    0.31311    57.00007   -1.442 0.154665
|| complexity1    -0.46942    0.06147  4851.00008   -7.636 2.68e-14 ***
|| family_size1    0.08473    0.06147  4851.00008    1.378 0.168178
|| LP              0.01139    0.25458    57.00006    0.045 0.964463
|| OS              0.38123    0.35019    57.00006    1.089 0.280904
|| complexity1:family_size1 -0.44594    0.12295  4851.00008   -3.627 0.000290 ***
|| complexity1:LP    0.25409    0.04998  4851.00008    5.084 3.84e-07 ***
|| family_size1:LP    0.12220    0.04998  4851.00008    2.445 0.014528 *
|| complexity1:OS    0.23998    0.06876  4851.00008    3.490 0.000487 ***
|| family_size1:OS    0.06566    0.06876  4851.00008    0.955 0.339609
|| complexity1:family_size1:LP 0.22934    0.09997  4851.00008    2.294 0.021819 *
|| complexity1:family_size1:OS 0.14265    0.13751  4851.00008    1.037 0.299619
|| ---
|| Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
||
|| Correlation of Fixed Effects:
||      (Intr) cmplx1 fmly_1 LP      OS      cm1:_1 cm1:LP f_1:LP cm1:OS f_1:OS c1:_1:L
|| complexity1  0.000
|| family_size1 0.000 0.000
|| LP           0.038 0.000 0.000
|| OS           -0.046 0.000 0.000 0.021
|| cmplxty1:_1  0.000 0.000 0.000 0.000 0.000
|| cmplxty1:LP  0.000 0.038 0.000 0.000 0.000 0.000
|| fmly_sz1:LP  0.000 0.000 0.038 0.000 0.000 0.000 0.000
|| cmplxty1:OS  0.000 -0.046 0.000 0.000 0.000 0.000 0.021 0.000
|| fmly_sz1:OS  0.000 0.000 -0.046 0.000 0.000 0.000 0.000 0.021 0.000
|| cmpl1:_1:LP  0.000 0.000 0.000 0.000 0.000 0.038 0.000 0.000 0.000 0.000
|| cmpl1:_1:OS  0.000 0.000 0.000 0.000 0.000 -0.046 0.000 0.000 0.000 0.021

# Effect Sizes
eta_squared(m_nw_N400_fs_symmetric, partial = TRUE)

|| # Effect Size for ANOVA (Type III)
||
```

```

|| Parameter | Eta2 (partial) | 95% CI
|| -----
|| complexity | 0.01 | [0.01, 1.00]
|| family_size | 3.91e-04 | [0.00, 1.00]
|| LP | 3.51e-05 | [0.00, 1.00]
|| OS | 0.02 | [0.00, 1.00]
|| complexity:family_size | 2.70e-03 | [0.00, 1.00]
|| complexity:LP | 5.30e-03 | [0.00, 1.00]
|| family_size:LP | 1.23e-03 | [0.00, 1.00]
|| complexity:OS | 2.51e-03 | [0.00, 1.00]
|| family_size:OS | 1.88e-04 | [0.00, 1.00]
|| complexity:family_size:LP | 1.08e-03 | [0.00, 1.00]
|| complexity:family_size:OS | 2.22e-04 | [0.00, 1.00]
||
|| - One-sided CIs: upper bound fixed at [1.00].

```

```

# R-squared
r2_nakagawa(m_nw_N400_fs_symmetric)

```

```

|| # R2 for Mixed Models
||
|| Conditional R2: 0.667
|| Marginal R2: 0.013

```

## 5.1.2 Means and Contrasts

```

emm_options(lmer.df = "satterthwaite")

range(erp_bf_nw$LP)

```

## Complexity × Family Size x LP Interaction

```

|| [1] -2.674523 3.111265

```

```

range(erp_bf_nw$OS)

```

```

|| [1] -1.975820 1.926921

```

```

# LP three-way follow-up
emm_3way_LP <- emmeans(m_nw_N400_fs_symmetric,
  ~ complexity * family_size | LP,
  at = list(LP = c(-2.5, -1, 0, 1, 3)),
  lmerTest.limit = 6480)

```

```

LP_3way_contrasts <- compact_3way_table(
  emm_3way_LP,
  by_var = LP,
  condition_prefix = "LP",
  factor1 = complexity,
  factor2 = family_size
)
as.tibble(LP_3way_contrasts) |> print(n = 50)

```

```

|| # A tibble: 45 x 9
|| Comparison Condition Estimate SE df lower.CL upper.CL t.ratio p.value
|| <chr> <chr> <dbl> <dbl> <dbl> <dbl> <dbl> <dbl>
|| 1 Complex Large LP = -1 -0.99 0.4 60.3 -1.79 -0.19 NA NA
|| 2 Complex Small LP = -1 -0.62 0.4 60.3 -1.42 0.18 NA NA
|| 3 Simple Large LP = -1 0.06 0.4 60.3 -0.74 0.86 NA NA
|| 4 Simple Small LP = -1 -0.24 0.4 60.3 -1.04 0.56 NA NA
|| 5 Int: Simple - Complex across Small - Large LP = -1 -0.67 0.16 4851 NA NA -4.31 0
|| 6 Small - Large LP = -1 | complexity = Complex 0.37 0.11 4851 NA NA 3.36 0.001
|| 7 Small - Large LP = -1 | complexity = Simple -0.3 0.11 4851 NA NA -2.73 0.006
|| 8 Simple - Complex LP = -1 | family_size = Large 1.05 0.11 4851 NA NA 9.55 0
|| 9 Simple - Complex LP = -1 | family_size = Small 0.38 0.11 4851 NA NA 3.45 0.001
|| 10 Complex Large LP = -2.5 -1.37 0.71 60.3 -2.79 0.04 NA NA
|| 11 Complex Small LP = -2.5 -0.65 0.71 60.3 -2.07 0.77 NA NA
|| 12 Simple Large LP = -2.5 0.23 0.71 60.3 -1.19 1.64 NA NA
|| 13 Simple Small LP = -2.5 -0.06 0.71 60.3 -1.48 1.35 NA NA
|| 14 Int: Simple - Complex across Small - Large LP = -2.5 -1.01 0.27 4851 NA NA -3.7 0
|| 15 Small - Large LP = -2.5 | complexity = Complex 0.72 0.19 4851 NA NA 3.74 0
|| 16 Small - Large LP = -2.5 | complexity = Simple -0.29 0.19 4851 NA NA -1.49 0.136
|| 17 Simple - Complex LP = -2.5 | family_size = Large 1.6 0.19 4851 NA NA 8.26 0
|| 18 Simple - Complex LP = -2.5 | family_size = Small 0.59 0.19 4851 NA NA 3.03 0.002
|| 19 Complex Large LP = 0 -0.73 0.32 60.3 -1.37 -0.1 NA NA
|| 20 Complex Small LP = 0 -0.6 0.32 60.3 -1.23 0.04 NA NA
|| 21 Simple Large LP = 0 -0.05 0.32 60.3 -0.69 0.58 NA NA
|| 22 Simple Small LP = 0 -0.36 0.32 60.3 -0.99 0.27 NA NA
|| 23 Int: Simple - Complex across Small - Large LP = 0 -0.44 0.12 4851 NA NA -3.58 0
|| 24 Small - Large LP = 0 | complexity = Complex 0.13 0.09 4851 NA NA 1.53 0.127
|| 25 Small - Large LP = 0 | complexity = Simple -0.31 0.09 4851 NA NA -3.54 0

```

```

|| 26 Simple - Complex          LP = 0 | family_size = Large      0.68 0.09 4851      NA      NA      7.82 0
|| 27 Simple - Complex          LP = 0 | family_size = Small      0.24 0.09 4851      NA      NA      2.76 0.006
|| 28 Complex Large             LP = 1                          -0.47 0.42 60.3    -1.31 0.36 NA      NA
|| 29 Complex Small             LP = 1                          -0.58 0.42 60.3    -1.41 0.25 NA      NA
|| 30 Simple Large              LP = 1                          -0.16 0.42 60.3    -1      0.67 NA      NA
|| 31 Simple Small              LP = 1                          -0.48 0.42 60.3    -1.31 0.35 NA      NA
|| 32 Int: Simple - Complex across Small - Large LP = 1                -0.21 0.16 4851      NA      NA     -1.31 0.192
|| 33 Small - Large             LP = 1 | complexity = Complex    -0.1 0.11 4851      NA      NA     -0.91 0.36
|| 34 Small - Large             LP = 1 | complexity = Simple    -0.31 0.11 4851      NA      NA     -2.76 0.006
|| 35 Simple - Complex          LP = 1 | family_size = Large      0.31 0.11 4851      NA      NA      2.72 0.007
|| 36 Simple - Complex          LP = 1 | family_size = Small      0.1 0.11 4851      NA      NA      0.88 0.381
|| 37 Complex Large             LP = 3                          0.04 0.85 60.3     -1.66 1.74 NA      NA
|| 38 Complex Small             LP = 3                         -0.54 0.85 60.3     -2.24 1.16 NA      NA
|| 39 Simple Large              LP = 3                         -0.39 0.85 60.3     -2.09 1.31 NA      NA
|| 40 Simple Small              LP = 3                         -0.72 0.85 60.3     -2.42 0.98 NA      NA
|| 41 Int: Simple - Complex across Small - Large LP = 3                  0.25 0.33 4851      NA      NA      0.76 0.45
|| 42 Small - Large             LP = 3 | complexity = Complex    -0.58 0.23 4851      NA      NA     -2.49 0.013
|| 43 Small - Large             LP = 3 | complexity = Simple    -0.33 0.23 4851      NA      NA     -1.42 0.155
|| 44 Simple - Complex          LP = 3 | family_size = Large      -0.43 0.23 4851      NA      NA     -1.84 0.066
|| 45 Simple - Complex          LP = 3 | family_size = Small     -0.18 0.23 4851      NA      NA     -0.77 0.441

```

```

# OS three-way follow-up
emm_3way_OS <- emmeans(m_nw_N400_fs_symmetric,
  ~ family_size * complexity | OS,
  at = list(OS = c(-1.9, -1, 0, 1, 1.9)),
  lmerTest.limit = 6480)

```

```

OS_3way_contrasts <- compact_3way_table(
  emm_3way_OS,
  by_var = OS,
  condition_prefix = "OS",
  factor1 = complexity,
  factor2 = family_size
)
as.tibble(OS_3way_contrasts) |> print(n = 50)

```

```

|| # A tibble: 45 x 9
||   Comparison          Condition Estimate SE    df lower.CL upper.CL t.ratio p.value
||   <chr>              <chr>      <dbl> <dbl> <dbl> <dbl> <dbl> <dbl>
|| 1 Complex Large      OS = -1      -1.34 0.49 60.3    -2.31 -0.36 NA      NA
|| 2 Complex Small      OS = -1      -1.05 0.49 60.3    -2.03 -0.08 NA      NA
|| 3 Simple Large       OS = -1      -0.32 0.49 60.3    -1.29 0.66 NA      NA
|| 4 Simple Small       OS = -1      -0.63 0.49 60.3    -1.6 0.35 NA      NA
|| 5 Int: Simple - Complex across Small - Large OS = -1        -0.6 0.19 4851      NA      NA     -3.18 0.001
|| 6 Small - Large      OS = -1 | complexity = Complex    0.29 0.13 4851      NA      NA      2.15 0.032
|| 7 Small - Large      OS = -1 | complexity = Simple    -0.31 0.13 4851      NA      NA     -2.35 0.019
|| 8 Simple - Complex   OS = -1 | family_size = Large      1.02 0.13 4851      NA      NA      7.66 0
|| 9 Simple - Complex   OS = -1 | family_size = Small      0.42 0.13 4851      NA      NA      3.16 0.002
|| 10 Complex Large     OS = -1.9     -1.85 0.76 60.3    -3.37 -0.33 NA      NA
|| 11 Complex Small     OS = -1.9     -1.44 0.76 60.3    -2.96 0.08 NA      NA
|| 12 Simple Large      OS = -1.9     -0.55 0.76 60.3    -2.07 0.97 NA      NA
|| 13 Simple Small      OS = -1.9     -0.87 0.76 60.3    -2.39 0.65 NA      NA
|| 14 Int: Simple - Complex across Small - Large OS = -1.9       -0.73 0.29 4851      NA      NA     -2.48 0.013
|| 15 Small - Large     OS = -1.9 | complexity = Complex    0.41 0.21 4851      NA      NA      1.97 0.049
|| 16 Small - Large     OS = -1.9 | complexity = Simple    -0.32 0.21 4851      NA      NA     -1.53 0.126
|| 17 Simple - Complex   OS = -1.9 | family_size = Large      1.3 0.21 4851      NA      NA      6.12 0
|| 18 Simple - Complex   OS = -1.9 | family_size = Small      0.57 0.21 4851      NA      NA      2.76 0.006
|| 19 Complex Large     OS = 0        -0.77 0.32 60.3    -1.4 -0.13 NA      NA
|| 20 Complex Small     OS = 0        -0.62 0.32 60.3    -1.25 0.02 NA      NA
|| 21 Simple Large      OS = 0        -0.06 0.32 60.3    -0.69 0.58 NA      NA
|| 22 Simple Small      OS = 0        -0.37 0.32 60.3    -1 0.27 NA      NA
|| 23 Int: Simple - Complex across Small - Large OS = 0         -0.46 0.12 4851      NA      NA     -3.72 0
|| 24 Small - Large     OS = 0 | complexity = Complex    0.15 0.09 4851      NA      NA      1.72 0.085
|| 25 Small - Large     OS = 0 | complexity = Simple    -0.31 0.09 4851      NA      NA     -3.54 0
|| 26 Simple - Complex   OS = 0 | family_size = Large      0.71 0.09 4851      NA      NA      8.17 0
|| 27 Simple - Complex   OS = 0 | family_size = Small      0.25 0.09 4851      NA      NA      2.91 0.004
|| 28 Complex Large     OS = 1        -0.2 0.47 60.3    -1.13 0.73 NA      NA
|| 29 Complex Small     OS = 1       -0.19 0.47 60.3    -1.12 0.74 NA      NA
|| 30 Simple Large      OS = 1         0.2 0.47 60.3    -0.73 1.13 NA      NA
|| 31 Simple Small      OS = 1       -0.1 0.47 60.3    -1.03 0.83 NA      NA
|| 32 Int: Simple - Complex across Small - Large OS = 1        -0.31 0.18 4851      NA      NA     -1.75 0.081
|| 33 Small - Large     OS = 1 | complexity = Complex    0.01 0.13 4851      NA      NA      0.1 0.921
|| 34 Small - Large     OS = 1 | complexity = Simple    -0.3 0.13 4851      NA      NA     -2.37 0.018
|| 35 Simple - Complex   OS = 1 | family_size = Large      0.4 0.13 4851      NA      NA      3.13 0.002
|| 36 Simple - Complex   OS = 1 | family_size = Small      0.08 0.13 4851      NA      NA      0.66 0.507
|| 37 Complex Large     OS = 1.9       0.31 0.73 60.3    -1.15 1.78 NA      NA
|| 38 Complex Small     OS = 1.9       0.2 0.73 60.3    -1.26 1.67 NA      NA
|| 39 Simple Large      OS = 1.9       0.43 0.73 60.3    -1.03 1.9 NA      NA
|| 40 Simple Small      OS = 1.9       0.14 0.73 60.3    -1.33 1.6 NA      NA
|| 41 Int: Simple - Complex across Small - Large OS = 1.9       -0.19 0.28 4851      NA      NA     -0.66 0.512
|| 42 Small - Large     OS = 1.9 | complexity = Complex    -0.11 0.2 4851      NA      NA     -0.55 0.581

```

|                     |                                |       |     |      |    |    |       |       |
|---------------------|--------------------------------|-------|-----|------|----|----|-------|-------|
| 43 Small - Large    | OS = 1.9   complexity = Simple | -0.3  | 0.2 | 4851 | NA | NA | -1.48 | 0.139 |
| 44 Simple - Complex | OS = 1.9   family_size = Large | 0.12  | 0.2 | 4851 | NA | NA | 0.59  | 0.554 |
| 45 Simple - Complex | OS = 1.9   family_size = Small | -0.07 | 0.2 | 4851 | NA | NA | -0.34 | 0.737 |

```
emm_complexity_FS_N400 <- emmeans(
  m_nw_N400_fs_symmetric,
  ~ complexity | family_size,
  lmerTest.limit = 6480)

complexityxfamily_size_table <- as.tibble(compact_emm_table(
  emm_complexity_FS_N400,
  by_var = family_size
)) |> print()
```

## Complexity × Family Size interaction averaged across LP

| # A tibble: 6 x 9  | Comparison | Condition | Estimate | SE    | df    | lower.CL | upper.CL | t.ratio | p.value |
|--------------------|------------|-----------|----------|-------|-------|----------|----------|---------|---------|
| <chr>              | <chr>      | <dbl>     | <dbl>    | <dbl> | <dbl> | <dbl>    | <dbl>    | <dbl>   | <dbl>   |
| 1 Complex          | Large      | -0.74     | 0.32     | 60.3  | -1.38 | -0.11    | NA       | NA      |         |
| 2 Simple           | Large      | -0.05     | 0.32     | 60.3  | -0.68 | 0.59     | NA       | NA      |         |
| 3 Simple - Complex | Large      | 0.7       | 0.09     | 4851  | NA    | NA       | 8.03     | 0       |         |
| 4 Complex          | Small      | -0.6      | 0.32     | 60.3  | -1.23 | 0.03     | NA       | NA      |         |
| 5 Simple           | Small      | -0.35     | 0.32     | 60.3  | -0.99 | 0.28     | NA       | NA      |         |
| 6 Simple - Complex | Small      | 0.25      | 0.09     | 4851  | NA    | NA       | 2.84     | 0.005   |         |

```
emm_complexity_CMP_N400 <- emmeans(
  m_nw_N400_fs_symmetric,
  ~ family_size | complexity,
  lmerTest.limit = 6480)

family_size_x_complexity_table <- as.tibble(compact_emm_table(
  emm_complexity_CMP_N400,
  by_var = complexity
)) |> print()
```

| # A tibble: 6 x 9 | Comparison | Condition | Estimate | SE    | df    | lower.CL | upper.CL | t.ratio | p.value |
|-------------------|------------|-----------|----------|-------|-------|----------|----------|---------|---------|
| <chr>             | <chr>      | <dbl>     | <dbl>    | <dbl> | <dbl> | <dbl>    | <dbl>    | <dbl>   | <dbl>   |
| 1 Large           | Complex    | -0.74     | 0.32     | 60.3  | -1.38 | -0.11    | NA       | NA      |         |
| 2 Small           | Complex    | -0.6      | 0.32     | 60.3  | -1.23 | 0.03     | NA       | NA      |         |
| 3 Small - Large   | Complex    | 0.14      | 0.09     | 4851  | NA    | NA       | 1.66     | 0.097   |         |
| 4 Large           | Simple     | -0.05     | 0.32     | 60.3  | -0.68 | 0.59     | NA       | NA      |         |
| 5 Small           | Simple     | -0.35     | 0.32     | 60.3  | -0.99 | 0.28     | NA       | NA      |         |
| 6 Small - Large   | Simple     | -0.31     | 0.09     | 4851  | NA    | NA       | -3.54    | 0       |         |

transmute() creates a new data frame containing only the specified computations. factor() is used to encode a vector as a factor

```
emm_complexity_LP_N400 <- emmeans(
  m_nw_N400_fs_symmetric,
  ~ complexity | LP,
  at = list(LP = c(-2.5, -1, 0, 1, 3)),
  lmerTest.limit = 6480
)

complexityxLP_table <- as.tibble(compact_emm_table(
  emm_complexity_LP_N400,
  by_var = LP,
  condition_prefix = "LP"
)) |> print(n = 20)
```

## Complexity × LP interaction averaged over Family Size:

| # A tibble: 15 x 9  | Comparison | Condition | Estimate | SE    | df    | lower.CL | upper.CL | t.ratio | p.value |
|---------------------|------------|-----------|----------|-------|-------|----------|----------|---------|---------|
| <chr>               | <chr>      | <dbl>     | <dbl>    | <dbl> | <dbl> | <dbl>    | <dbl>    | <dbl>   | <dbl>   |
| 1 Complex           | LP = -1    | -0.8      | 0.4      | 58.1  | -1.6  | -0.01    | NA       | NA      |         |
| 2 Simple            | LP = -1    | -0.09     | 0.4      | 58.1  | -0.89 | 0.71     | NA       | NA      |         |
| 3 Simple - Complex  | LP = -1    | 0.71      | 0.08     | 4851  | NA    | NA       | 9.19     | 0       |         |
| 4 Complex           | LP = -2.5  | -1.01     | 0.7      | 58.1  | -2.42 | 0.39     | NA       | NA      |         |
| 5 Simple            | LP = -2.5  | 0.08      | 0.7      | 58.1  | -1.32 | 1.49     | NA       | NA      |         |
| 6 Simple - Complex  | LP = -2.5  | 1.09      | 0.14     | 4851  | NA    | NA       | 7.99     | 0       |         |
| 7 Complex           | LP = 0     | -0.67     | 0.31     | 58.1  | -1.29 | -0.04    | NA       | NA      |         |
| 8 Simple            | LP = 0     | -0.21     | 0.31     | 58.1  | -0.84 | 0.42     | NA       | NA      |         |
| 9 Simple - Complex  | LP = 0     | 0.46      | 0.06     | 4851  | NA    | NA       | 7.48     | 0       |         |
| 10 Complex          | LP = 1     | -0.53     | 0.41     | 58.1  | -1.35 | 0.3      | NA       | NA      |         |
| 11 Simple           | LP = 1     | -0.32     | 0.41     | 58.1  | -1.15 | 0.5      | NA       | NA      |         |
| 12 Simple - Complex | LP = 1     | 0.21      | 0.08     | 4851  | NA    | NA       | 2.54     | 0.011   |         |
| 13 Complex          | LP = 3     | -0.25     | 0.84     | 58.1  | -1.93 | 1.43     | NA       | NA      |         |
| 14 Simple           | LP = 3     | -0.55     | 0.84     | 58.1  | -2.24 | 1.13     | NA       | NA      |         |

```
|| 15 Simple - Complex LP = 3      -0.3  0.16 4851      NA      NA      -1.84  0.065
```

```
emm_FS_LP_N400 <- emmeans(
  m_nw_N400_fs_symmetric,
  ~ family_size | LP,
  at = list(LP = c(-2.5, -1, 0, 1, 3)),
  lmerTest.limit = 6480
)

family_size_x_LP_table <- as.tibble(compact_emm_table(
  emm_FS_LP_N400,
  by_var = LP,
  condition_prefix = "LP"
)) |> print()
```

### FS × LP interaction averaged over Complexity:

```
|| # A tibble: 15 x 9
||   Comparison      Condition Estimate      SE      df lower.CL upper.CL t.ratio p.value
||   <chr>          <chr>      <dbl> <dbl> <dbl> <dbl> <dbl> <dbl> <dbl>
|| 1 Large          LP = -1      -0.46  0.4   58.1   -1.26  0.33    NA      NA
|| 2 Small          LP = -1      -0.43  0.4   58.1   -1.23  0.37    NA      NA
|| 3 Small - Large LP = -1        0.03  0.08 4851    NA      NA      0.45  0.655
|| 4 Large          LP = -2.5     -0.57  0.7   58.1   -1.98  0.83    NA      NA
|| 5 Small          LP = -2.5     -0.36  0.7   58.1   -1.76  1.05    NA      NA
|| 6 Small - Large LP = -2.5     0.22  0.14 4851    NA      NA      1.59  0.112
|| 7 Large          LP = 0        -0.39  0.31  58.1   -1.02  0.24    NA      NA
|| 8 Small          LP = 0        -0.48  0.31  58.1   -1.11  0.15    NA      NA
|| 9 Small - Large LP = 0        -0.09  0.06 4851    NA      NA     -1.42  0.154
|| 10 Large         LP = 1        -0.32  0.41  58.1   -1.15  0.51    NA      NA
|| 11 Small         LP = 1        -0.53  0.41  58.1   -1.36  0.3     NA      NA
|| 12 Small - Large LP = 1        -0.21  0.08 4851    NA      NA     -2.6   0.009
|| 13 Large         LP = 3        -0.17  0.84  58.1   -1.86  1.51    NA      NA
|| 14 Small         LP = 3        -0.63  0.84  58.1   -2.31  1.05    NA      NA
|| 15 Small - Large LP = 3        -0.45  0.16 4851    NA      NA     -2.76  0.006
```

```
emm_complexity_OS_N400 <- emmeans(
  m_nw_N400_fs_symmetric,
  ~ complexity | OS,
  at = list(OS = c(-1.9, -1, 0, 1, 1.9)),
  lmerTest.limit = 6480
)


complexity_x_OS_table <- as.tibble(compact_emm_table(
  emm_complexity_OS_N400,
  by_var = OS,
  condition_prefix = "OS"
)) |> print(n = 20)
```

### Complexity × OS interaction averaged over Family Size:


```
|| # A tibble: 15 x 9
||   Comparison      Condition Estimate      SE      df lower.CL upper.CL t.ratio p.value
||   <chr>          <chr>      <dbl> <dbl> <dbl> <dbl> <dbl> <dbl> <dbl>
|| 1 Complex        OS = -1      -1.19  0.48  58.1   -2.16 -0.23    NA      NA
|| 2 Simple          OS = -1      -0.47  0.48  58.1   -1.44  0.49    NA      NA
|| 3 Simple - Complex OS = -1        0.72  0.09 4851    NA      NA      7.65  0
|| 4 Complex        OS = -1.9     -1.65  0.75  58.1   -3.15 -0.14    NA      NA
|| 5 Simple          OS = -1.9     -0.71  0.75  58.1   -2.21  0.8     NA      NA
|| 6 Simple - Complex OS = -1.9     0.94  0.15 4851    NA      NA      6.38  0
|| 7 Complex        OS = 0        -0.69  0.31  58.1   -1.32 -0.06    NA      NA
|| 8 Simple          OS = 0        -0.21  0.31  58.1   -0.84  0.42    NA      NA
|| 9 Simple - Complex OS = 0        0.48  0.06 4851    NA      NA      7.84  0
|| 10 Complex       OS = 1        -0.19  0.46  58.1   -1.11  0.73    NA      NA
|| 11 Simple         OS = 1        0.05  0.46  58.1   -0.87  0.97    NA      NA
|| 12 Simple - Complex OS = 1        0.24  0.09 4851    NA      NA      2.68  0.007
|| 13 Complex       OS = 1.9     0.26  0.73  58.1   -1.19  1.71    NA      NA
|| 14 Simple         OS = 1.9     0.29  0.73  58.1   -1.17  1.74    NA      NA
|| 15 Simple - Complex OS = 1.9     0.03  0.14 4851    NA      NA      0.18  0.856
```

## 5.1.3 PLOT 2-WAY INTERACTIONS

### FAMILY SIZE X COMPLEXITY Plot

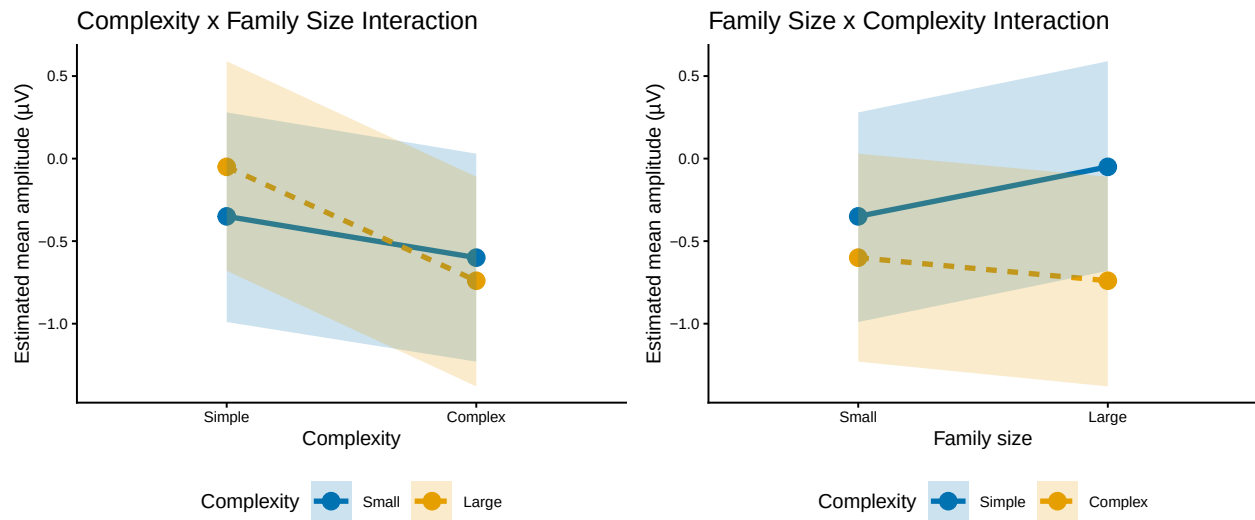


### COMPLEXITY x LP Plot; FAMILY SIZE X LP Plot; COMPLEXITY x OS Plot

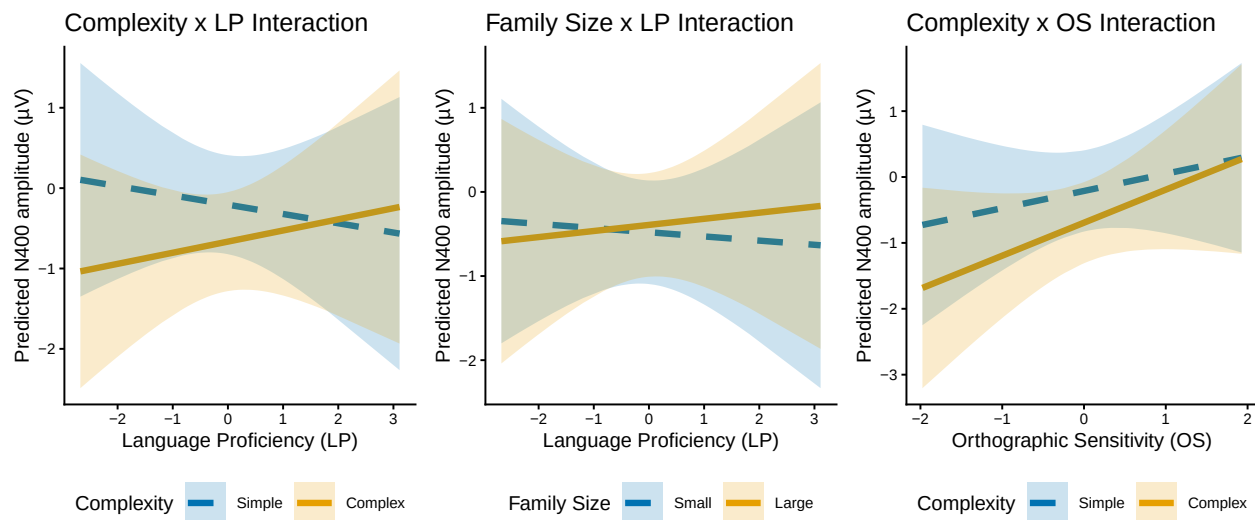

#### 5.1.4 PLOT 3-WAY INTERACTIONS

Plots: COMPLEXITY x LP faceted by Family size; FAMILY SIZE x LP Faceted by Complexity

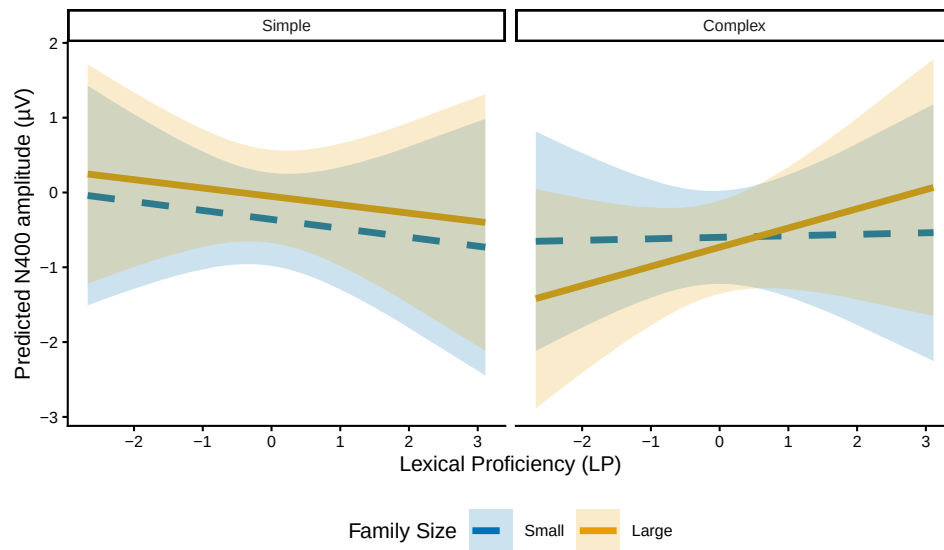


**COMPLEXITY x LP and FAMILY SIZE x LP Interaction Plots** Plot Simple-Complex difference across LP

Plot Small Family - Large Family difference across LP

Print Both Plots

## N400 NonWord Data

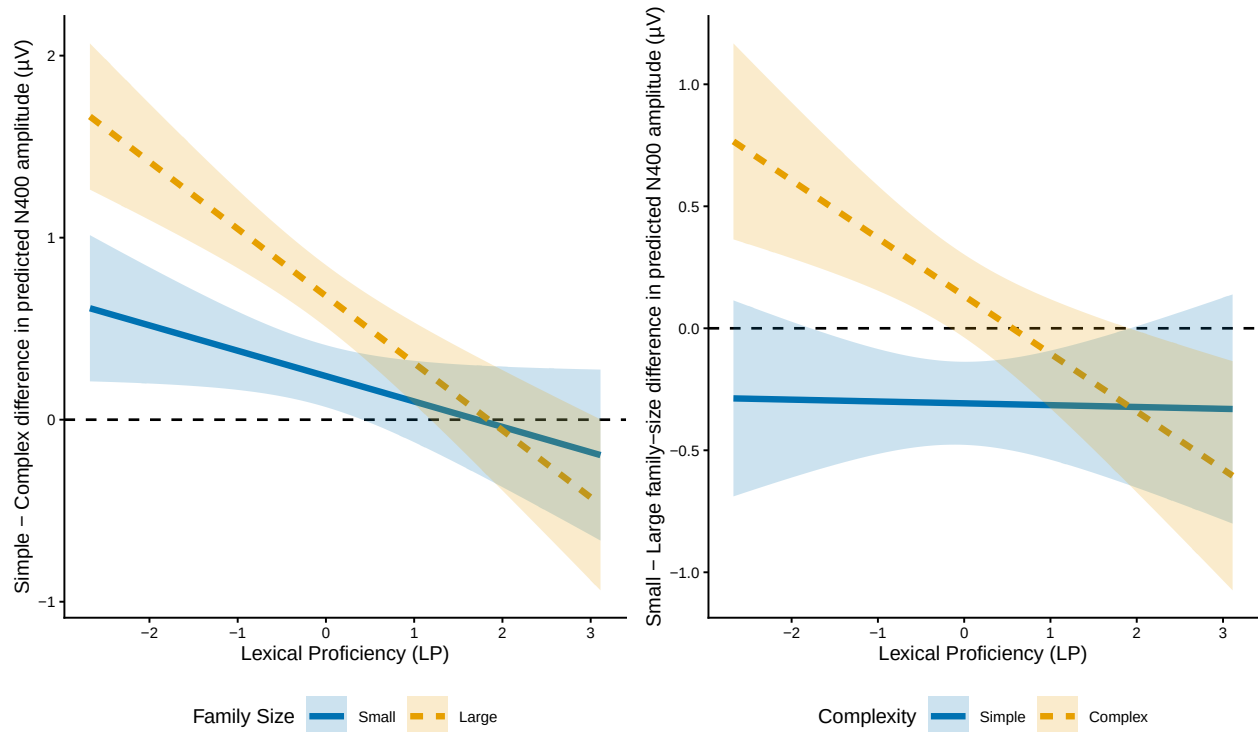

**Plots: COMPLEXITY x OS faceted by Family size; FAMILY SIZE x OS Faceted by Complexity**

