

Aluno: Joao Pedro
3DS/AMS


Subqueries

Prof: Salomão

Questão 1: Média Salarial de Elite (Subquery Independente)

Codigo:

```
SELECT nickname, salario
FROM pro_players
WHERE salario > (
  SELECT AVG(salario)
  FROM pro_players
);
```

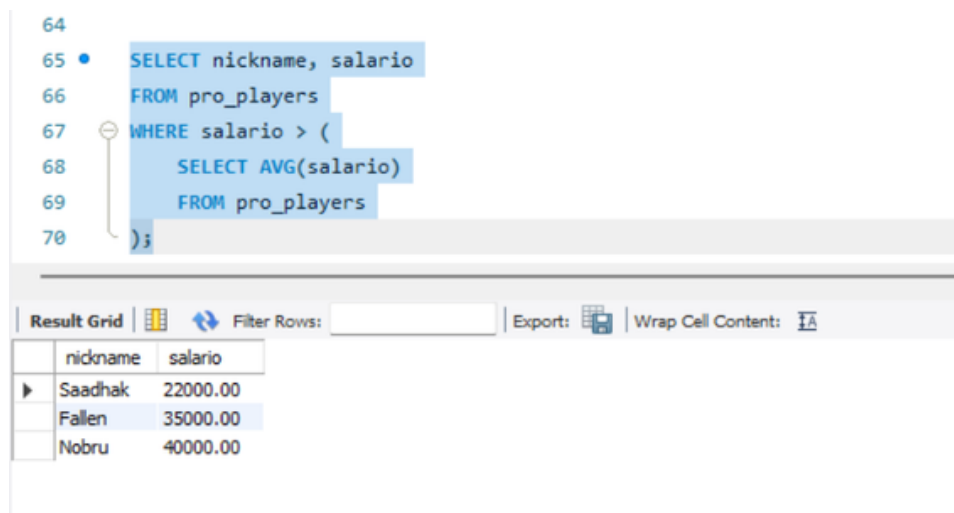


The screenshot shows a SQL query editor with a query highlighted in blue. The query is: `SELECT nickname, salario FROM pro_players WHERE salario > (SELECT AVG(salario) FROM pro_players);`. Below the editor is a 'Result Grid' showing the results of the query. The grid has two columns: 'nickname' and 'salario'. The results are: Saadhak (22000.00), Fallen (35000.00), and Nobru (40000.00). The 'Fallen' row is highlighted in blue.

nickname	salario
Saadhak	22000.00
Fallen	35000.00
Nobru	40000.00

Questão 2: Disparidade por Divisão (Subquery Correlacionada)

Codigo:

```
SELECT P.nickname, P.salario, P.id_equipe
FROM pro_players P
WHERE P.id_equipe IS NOT NULL
      AND P.salario > (
      SELECT AVG(P2.salario)
      FROM pro_players P2
      WHERE P2.id_equipe = P.id_equipe
      );
```

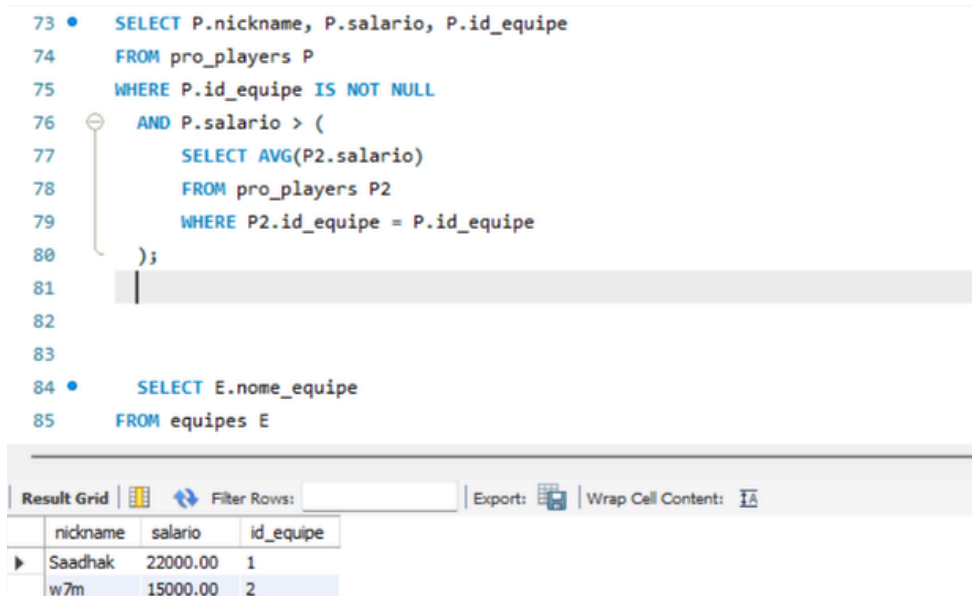

The screenshot shows a SQL IDE interface. The top pane displays a SQL query with line numbers 73 to 85. The query is a correlated subquery that filters players based on their salary relative to the average salary of their team. The bottom pane shows the 'Result Grid' with columns 'nickname', 'salario', and 'id_equipe'. It contains two rows of data.

```
73 • SELECT P.nickname, P.salario, P.id_equipe
74   FROM pro_players P
75   WHERE P.id_equipe IS NOT NULL
76         AND P.salario > (
77             SELECT AVG(P2.salario)
78             FROM pro_players P2
79             WHERE P2.id_equipe = P.id_equipe
80         );
81
82
83
84 • SELECT E.nome_equipe
85   FROM equipes E
```

Result Grid

	nickname	salario	id_equipe
▶	Saadhak	22000.00	1
	w7m	15000.00	2

Questão 3: Auditoria de Marketing (Operador EXISTS)

Codigo:

```
SELECT E.nome_equipe
FROM equipes E
WHERE EXISTS (
    SELECT 1
    FROM patrocinadores P
    WHERE P.id_equipe = E.id
);
```

```
84 • SELECT E.nome_equipe
85     FROM equipes E
86     WHERE EXISTS (
87         SELECT 1
88         FROM patrocinadores P
89         WHERE P.id_equipe = E.id
90     );
91
```

Result Grid


	nome_equipe
▶	Loud Esports
	Pain Gaming
	Furia
	Fluxo

Questão 4: Alerta de Inatividade Operacional (Operador NOT EXISTS)

Codigo:

```
SELECT E.nome_equipe
FROM equipes E
WHERE NOT EXISTS (
    SELECT 1
    FROM pro_players P
    WHERE P.id_equipe = E.id
);
```

```
92 • SELECT E.nome_equipe
93     FROM equipes E
94     WHERE NOT EXISTS (
95         SELECT 1
96         FROM pro_players P
97         WHERE P.id_equipe = E.id
98     );
```

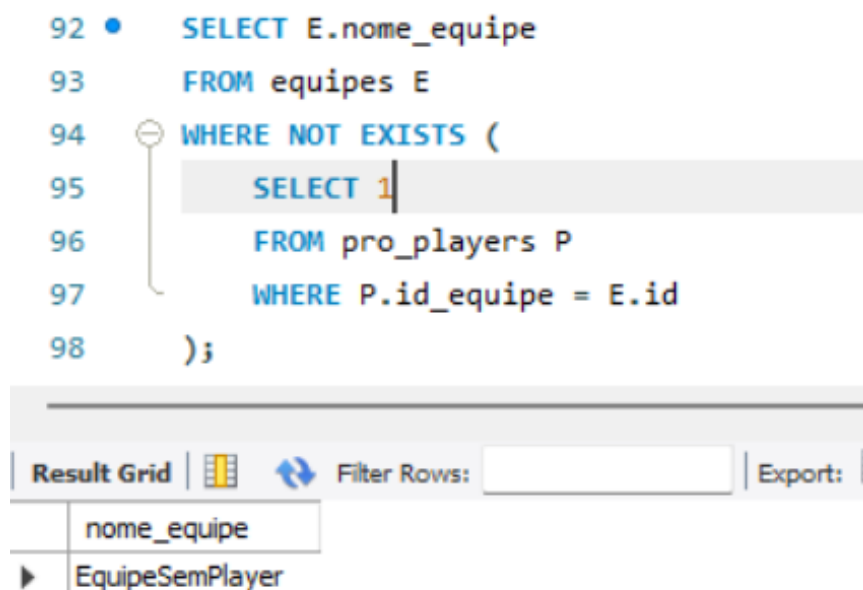

The screenshot shows a SQL IDE interface. The query is displayed in a text editor with line numbers 92 to 98. Below the editor, there is a 'Result Grid' section. The 'Result Grid' has a header row with the column 'nome_equipe' and a data row with the value 'EquipeSemPlayer'. To the right of the 'Result Grid', there is a 'Filter Rows' section with a search box and an 'Export' button.

nome_equipe
EquipeSemPlayer

Questionario exercício 2

← → ↻ prosalomaon.github.io/apostilas/componentes/banco-de-dados-ii/bimestre-02/aula-15/exercicio-02/ ☆ 📄 J ⋮

☐ d) Nenhuma, pois subqueries são comandos exclusivos de projeções e relatórios via SELECT.

FECHAR RESPOSTAS

RESULTADO:

Você acertou 25 de 25 perguntas (100%).
Excelente! Você dominou os conceitos.

VOLTAR PARA AULA

© 2026 - Professor Salomão