

Terraform Plan:

```
joao@beiro@JOAOPC:~/tf-module-lab-joao$ terraform plan
Terraform used the selected providers to generate the following execution plan. Resource actions are indicated with the following symbols:
+ create

Terraform will perform the following actions:

# azurem_network_interface.nic will be created
+ resource "azurem_network_interface" "nic" {
  + accelerated_networking_enabled = (known after apply)
  + applied_dns_servers            = (known after apply)
  + dns_servers                   = (known after apply)
  + enable_accelerated_networking = (known after apply)
  + enable_ip_forwarding          = (known after apply)
  + id                            = (known after apply)
  + internal_domain_name_suffix   = (known after apply)
  + ip_forwarding_enabled         = (known after apply)
  + location                      = "eastus"
  + mac_address                   = (known after apply)
  + name                          = "nic-mod-lab-joao"
  + private_ip_address            = (known after apply)
  + private_ip_addresses          = (known after apply)
  + resource_group_name           = "rg-mod-lab-joao"
  + virtual_machine_id            = (known after apply)

  + ip_configuration {
    + gateway_load_balancer_frontend_ip_configuration_id = (known after apply)
    + name                                               = "ipconfig1"
    + primary                                            = (known after apply)
    + private_ip_address                               = (known after apply)
    + private_ip_address_allocation                    = "Dynamic"
    + private_ip_address_version                       = "IPv4"
    + subnet_id                                        = (known after apply)
  }
}
```

```
# azurem_resource_group.rg_demo will be created
+ resource "azurem_resource_group" "rg_demo" {
  + id      = (known after apply)
  + location = "eastus"
  + name    = "rg-mod-lab-joao"
}

# azurem_subnet.subnet will be created
+ resource "azurem_subnet" "subnet" {
  + address_prefixes = [
    + "10.0.1.0/24",
  ]
  + default_outbound_access_enabled = true
  + enforce_private_link_endpoint_network_policies = (known after apply)
  + enforce_private_link_service_network_policies = (known after apply)
  + id                                            = (known after apply)
  + name                                         = "subnet-mod-lab-joao"
  + private_endpoint_network_policies           = (known after apply)
  + private_endpoint_network_policies_enabled   = (known after apply)
  + private_link_service_network_policies_enabled = (known after apply)
  + resource_group_name                         = "rg-mod-lab-joao"
  + virtual_network_name                       = "vnet-mod-lab-joao"
}
```

```
# azurem_virtual_network.vnet will be created
+ resource "azurem_virtual_network" "vnet" {
  + address_space = [
    + "10.0.0.0/16",
  ]
  + dns_servers = (known after apply)
  + guid        = (known after apply)
  + id          = (known after apply)
  + location    = "eastus"
  + name        = "vnet-mod-lab-joao"
  + resource_group_name = "rg-mod-lab-joao"
  + subnet       = (known after apply)
}

# local_file.ssh_private_key will be created
+ resource "local_file" "ssh_private_key" {
  + content          = (sensitive value)
  + content_base64sha256 = (known after apply)
  + content_base64sha512 = (known after apply)
  + content_md5       = (known after apply)
  + content_sha1      = (known after apply)
  + content_sha256    = (known after apply)
  + content_sha512    = (known after apply)
  + directory_permission = "0777"
  + file_permission    = "0600"
  + filename           = "./ssh_private_key.pem"
  + id                 = (known after apply)
}
```

```
# tls_private_key.ssh will be created
+ resource "tls_private_key" "ssh" {
  + algorithm      = "RSA"
  + ecdsa_curve    = "P224"
  + id             = (known after apply)
  + private_key_openssh = (sensitive value)
  + private_key_pem   = (sensitive value)
  + private_key_pem_pkcs8 = (sensitive value)
  + public_key_fingerprint_md5 = (known after apply)
  + public_key_fingerprint_sha256 = (known after apply)
  + public_key_openssh = (known after apply)
  + public_key_pem     = (known after apply)
  + rsa_bits           = 4096
}
```

```
# module.azurelinux_vm.azurelinux_virtual_machine.vm will be created
+ resource "azurelinux_virtual_machine" "vm" {
  + admin_username          = "joaologin"
  + allow_extension_operations = true
  + bypass_platform_safety_checks_on_user_schedule_enabled = false
  + computer_name           = (known after apply)
  + disable_password_authentication = true
  + disk_controller_type    = (known after apply)
  + extensions_time_budget  = "PT1H30M"
  + id                      = (known after apply)
  + location                = "eastus"
  + max_bid_price           = -1
  + name                    = "vm-lab-module-joao"
  + network_interface_ids   = (known after apply)
  + patch_assessment_mode   = "ImageDefault"
  + patch_mode              = "ImageDefault"
  + platform_fault_domain   = -1
  + priority                = "Regular"
  + private_ip_address      = (known after apply)
  + private_ip_addresses    = (known after apply)
  + provision_vm_agent      = true
  + public_ip_address       = (known after apply)
  + public_ip_addresses     = (known after apply)
  + resource_group_name     = "rg-mod-lab-joao"
  + size                    = "Standard_B1s"
  + virtual_machine_id      = (known after apply)
  + vm_agent_platform_updates_enabled = false

  + admin_ssh_key {
    + public_key = (known after apply)
    + username   = "joaologin"
  }
}
```

```
+ os_disk {
  + caching          = "ReadWrite"
  + disk_size_gb     = (known after apply)
  + name             = (known after apply)
  + storage_account_type = "Standard_LRS"
  + write_accelerator_enabled = false
}

+ source_image_reference {
  + offer    = "UbuntuServer"
  + publisher = "Canonical"
  + sku      = "18.04-LTS"
  + version  = "latest"
}

+ termination_notification (known after apply)
}
```


Plan: 7 to add, 0 to change, 0 to destroy.

Changes to Outputs:

```
+ ssh_private_key = (sensitive value)
```

Note: You didn't use the -out option to save this plan, so Terraform can't guarantee to take exactly these actions if you run "terraform apply" now.

Terraform apply

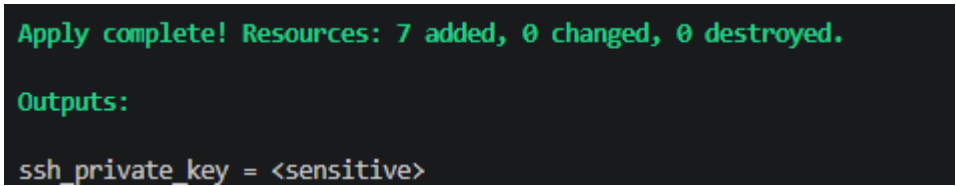

Resource group with all needed for the lab:

rg-mod-lab-joao

Resource group

How to manage these changes more efficiently with deployment tools?

How to manage changes with deployment tools?

Export resource groups using Bicep or Terraform

Search

+ Create

Manage view

Delete resource group

Refresh

Export to CSV

Open query

Assign tags

Move

Delete

Export template

Open in mobile

Add to service group

Overview

Activity log

Access control (IAM)

Tags

Resource visualizer

Events

Settings

Cost Management

Monitoring

Automation

Help

Essentials

Subscription

Diogo's Subscription

da9c53c-7096-4293-9bb1-47ad8263db1a

Deployments

2 Succeeded

Location

East US

Tags

Add tags

Resources

Recommendations

Filter for any field...

Type equals all

Location equals all

Add filter

Name	Type	Location
nic-mod-lab-joao	Network Interface	East US
nic-mod-lab-joao-nsg	Network security group	East US
pip-vnet-mod-lab-joao-eastus-subnet-mod-lab-joao	Public IP address	East US
vm-lab-module-joao	Virtual machine	East US
vm-lab-module-joao_OsDisk_1_0e31d7b71ffb4d59bba9fa0f2dd034f1	Disk	East US
vnet-mod-lab-joao	Virtual network	East US
vnet-mod-lab-joao-bastion	Bastion	East US
vnet-mod-lab-joao-ipv4	Public IP address	East US

VM connected:

