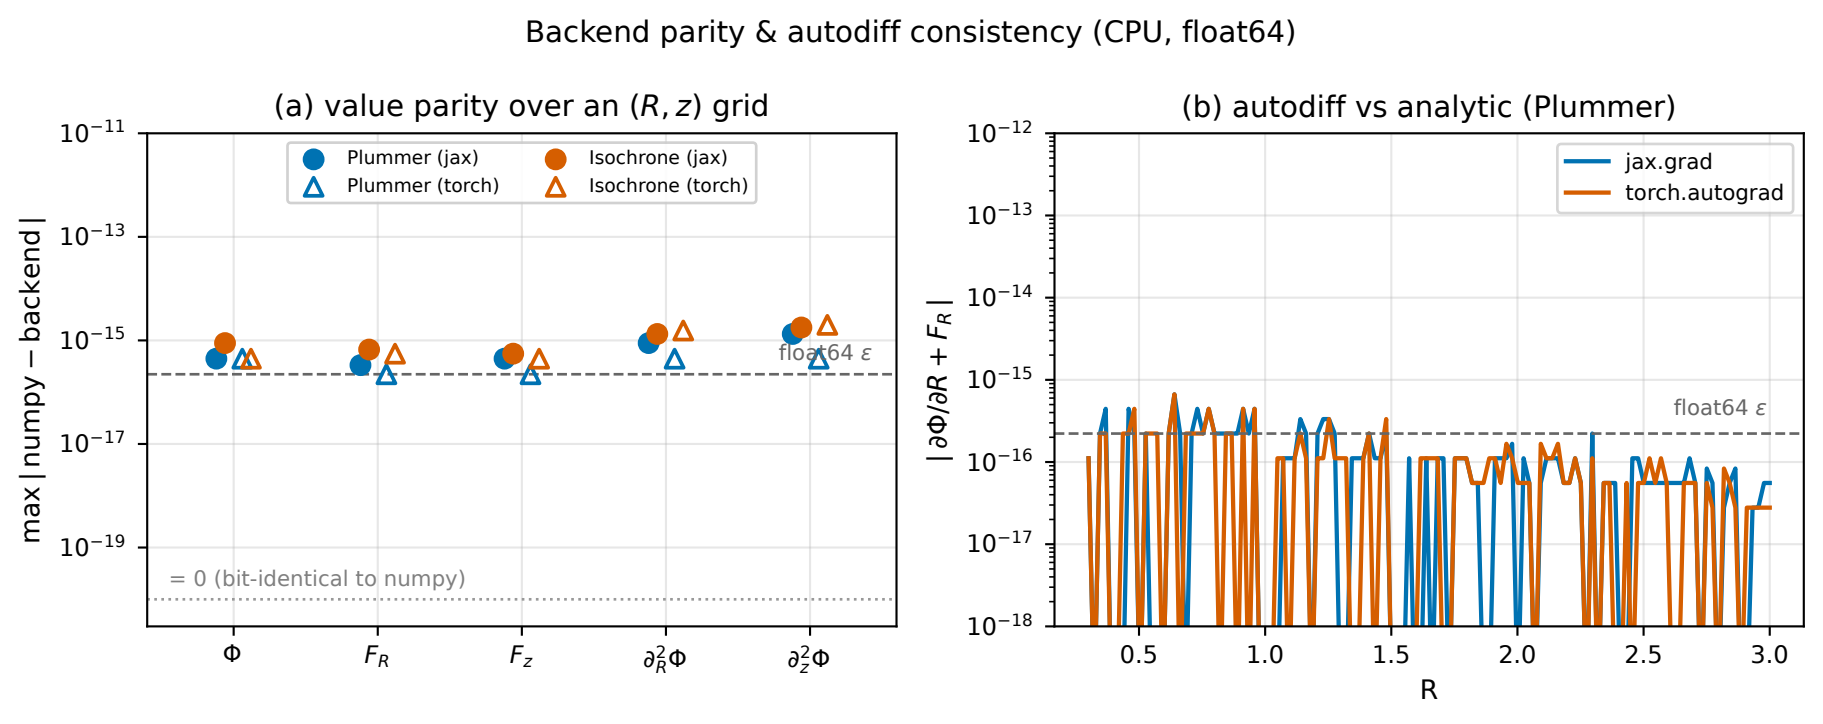
Backend parity & autodiff consistency (CPU, float64)
(a) value parity over an (R, z) grid
max | numpy − backend |
Plummer (jax)
Plummer (torch)
Isochrone (jax)
Isochrone (torch)
float64 ε
= 0 (bit-identical to numpy)
Φ
F_R
F_z
$\partial_R^2\Phi$
$\partial_z^2\Phi$
(b) autodiff vs analytic (Plummer)
$|\,\partial\Phi/\partial R + F_R\,|$
jax.grad
torch.autograd
float64 ε
R