

# Tomcat Native 2

## Final Report

Jocelyn Thode and Simon Brulhart

jocelyn.thode@unifr.ch

simon.brulhart@unifr.ch

17th June 2016

Tomcat Native 2 is a project mandated by Red Hat. It aims at providing a JNI wrapper for OpenSSL for use in both Undertow and Tomcat. This project is the practical part of the R&D Workshop course given at the University of Neuchâtel as part of the Joint Master in Computer Science.



MASTER IN  
COMPUTER  
SCIENCE



## Contents

<b>1</b>	<b>Project description</b>	<b>2</b>
1.1	Project context . . . . .	2
1.2	Goals and objectives of the project . . . . .	2
<b>2</b>	<b>Project organization</b>	<b>3</b>
<b>3</b>	<b>Realization</b>	<b>3</b>
3.1	Build . . . . .	3
<b>4</b>	<b>Architecture</b>	<b>4</b>
<b>5</b>	<b>Results</b>	<b>4</b>
<b>6</b>	<b>Issues</b>	<b>4</b>
6.1	Diverging Philosophies . . . . .	5
6.2	Dynamic Loading . . . . .	5
<b>7</b>	<b>Future Works</b>	<b>5</b>
7.1	Dynamic Loading . . . . .	5
7.2	TLS/SSL Integration . . . . .	5

## List of Figures

1	Diagram showing the different ways to use TLS/SSL in Tomcat.	6
2	Diagram showing the end result of our project. . . . .	7

# 1 Project description

## 1.1 Project context

For this project we are working with Red Hat which is a multinational software company that provides open-source software and technical support to enterprises[[redhat](#)]. At the moment, Tomcat[[tomcat](#)] and Undertow[[undertow](#)] are among the most used Java web servers. Both rely on TLS/SSL to encrypt and secure communications between a client and a server. To achieve good performance Tomcat Native[[tomcat-native](#)] provides access to OpenSSL in Tomcat. It uses Apache Portable Runtime (APR) to do so. Unfortunately, Undertow isn't compatible with Tomcat Native at the moment. Until last year, the APR would manage the encrypted sockets by itself. However this implied a lot of C code to maintain. To ease maintenance, some work has been done to use OpenSSL APIs directly instead. This works well enough despite some acceptable performance penalty. However the APR still provides the bindings to these APIs. We now want to strip the current solution of the APR and make the result compatible with Undertow.

Figure 1 shows an overview of the different ways to use TLS/SSL in Tomcat. This figure describes the path taken by a piece of data, going from Tomcat/Undertow to the OS network layer. There is a different color for each way to use TLS/SSL.

## 1.2 Goals and objectives of the project

Our project aims to refactor Tomcat Native to drop APR and only rely on our own JNI wrapper to interface with OpenSSL. This should make Tomcat Native much more maintainable while keeping great performance when using TLS/SSL. The project also aims to make the resulting Tomcat Native 2 usable in Undertow while keeping the compatibility with Tomcat. This means we need to :

1. Study the source code of Tomcat Native, Undertow and some experiments already done to use OpenSSL in Undertow.
2. Remove all APR code present in Tomcat Native
3. Abstract Tomcat Native to be used in Tomcat and Undertow
4. Provide good documentation so that the open-source community can use the project
5. Run benchmarks to test the implementation on multiple platforms
6. Merge OpenSSL 1.1 in Tomcat Native 2
7. Extend the OpenSSL support by adding JNIs for more features

Figure 2 shows what is expected at the end of the project.

## 2 Project organization

This project requires us to read some documentation and source code. We also need to write reports and presentations. To keep the code base clean, we decided to adopt the same strategy as Numa de Montmollin last year and split our work in two different repositories on Github.

tomcat-native2-doc is the repository documenting the progress of our project. We put every report and presentation in the repo. This repo also contains a wiki which hosts the logbook, work plan and our different articles. The articles are useful to share our findings and more importantly to not forget about them.

tomcat-native2 is the repository dedicated to the code. This repo includes our implementation, and the documentation directly concerning it. For example, it should contain a ReadMe describing the building process and the main purpose of the project.

## 3 Realization

The project was realized as follows: Tomcat Native 2 is built as a common code base between Undertow and Tomcat. It should be compiled in standalone and optionally loaded at run time if the user need to use the OpenSSL engine.

What I added sounds partly redundant with next paragraph

For this purpose, we needed to move some Tomcat code related to Tomcat-Native into our repo. Unfortunately the entire Java code could not be the same in Undertow and Tomcat. The reasons are explained in the section 6.

Is this really an issue in the end?

The C code used in Tomcat Native 2 does not rely on APR anymore. It only works under POSIX compatible systems for now. Tomcat Native 2 is working with OpenSSL up to 1.1. To use Tomcat Native 2 one needs to build the native and java parts and then include the generated jar as a dependency on both Tomcat and Undertow.

In Undertow, a sample example has been provided to showcase how to use Tomcat Native 2 together with the web server.

In Tomcat, simply using the NIO.2 or NIO connector should work if specifying our library.

reformulate ?

### 3.1 Build

#### 3.1.1 Tomcat Native 2

1. `ant jar`
2. `cd native`
3. `./buildconf && ./configure && make`

(make might return an error because it tries to install the libraries after building them, but this is not important)

### 3.1.2 Tomcat

1. `TCN2=path/to/tomcat-native-repository`
2. `git clone https://github.com/jocelynhode/tomcat.git && cd tomcat`
3. `git checkout undercat_trunk`
4. `echo "tcn2.jar=$TCN2/dist/tomcat-native-1.2.8.jar" >> build.properties`
5. `ant`

### 3.1.3 Undertow

1. `TCN2=path/to/tomcat-native-repository`
2. `git clone https://github.com/jocelynhode/undertow.git && cd undertow`
3. `git checkout undercat_trunk`
4. `./deps.sh "$TCN2"`
5. `mvn package -DskipTests -Dcheckstyle.skip`

The build process is also available in more details on the ReadMe of the Tomcat Native 2 repository, as well as specific instructions to run the obtained builds.

## 4 Architecture

specify the basic architecture of our software use the diagram maybe

## 5 Results

here speak about benchmarks

## 6 Issues

During this project, we face two issues described in the following subsections.

## 6.1 Diverging Philosophies

When we made Tomcat Native 2 Compatible we wanted to have everything in common in the Java code between Undertow and Tomcat. Unfortunately this was not possible due to diverging opinions between the Tomcat and Undertow maintainers.

This means that in the future, Undertow will have to have the Java parts related to Tomcat Native 2 in a different Repository that would be called as a dependency when using Tomcat Native 2. The same applies to Tomcat.

Figure

list diagram of differing parts

shows which parts are common and which are not in the architecture.

## 6.2 Dynamic Loading

Some experiments regarding dynamic loading were performed in a separate branch on our Tomcat Native 2 repository. This would enable Tomcat Native 2 to not only use OpenSSL but other TLS/SSL libraries such as LibreSSL or BoringSSL.

Unfortunately we encountered some bugs while trying to integrate it in Tomcat Native 2. Taking the time to debug this would have taken too much time to the detriment of the rest of the project. We therefore made the decision to stop working on this feature.

## 7 Future Works

We completed all the obligatory milestones of the projects. However, some optional tasks were either not started or not finished.

The current code is only a prototype. In the future, tests should be put in place to ensure the code is working as expected in every situations. Tomcat Native 2 should also have a streamlined build process. This should be done when it is eventually merged in Tomcat and Undertow.

### 7.1 Dynamic Loading

We unfortunately could not find the time to finish dynamic loading as this proved to be more complicated than we anticipated as stated in section 6.

In the future adding Dynamic Loading to Tomcat Native 2 could be a boon for the project.

### 7.2 TLS/SSL Integration

At the moment Tomcat Native 2 does not support the use of sessions. This was not needed to have a working prototype. However, to have a complete library sessions must be supported.

Support for OpenSSL handshake callback should be implemented down the line. Currently we rely on a hack to make it work.

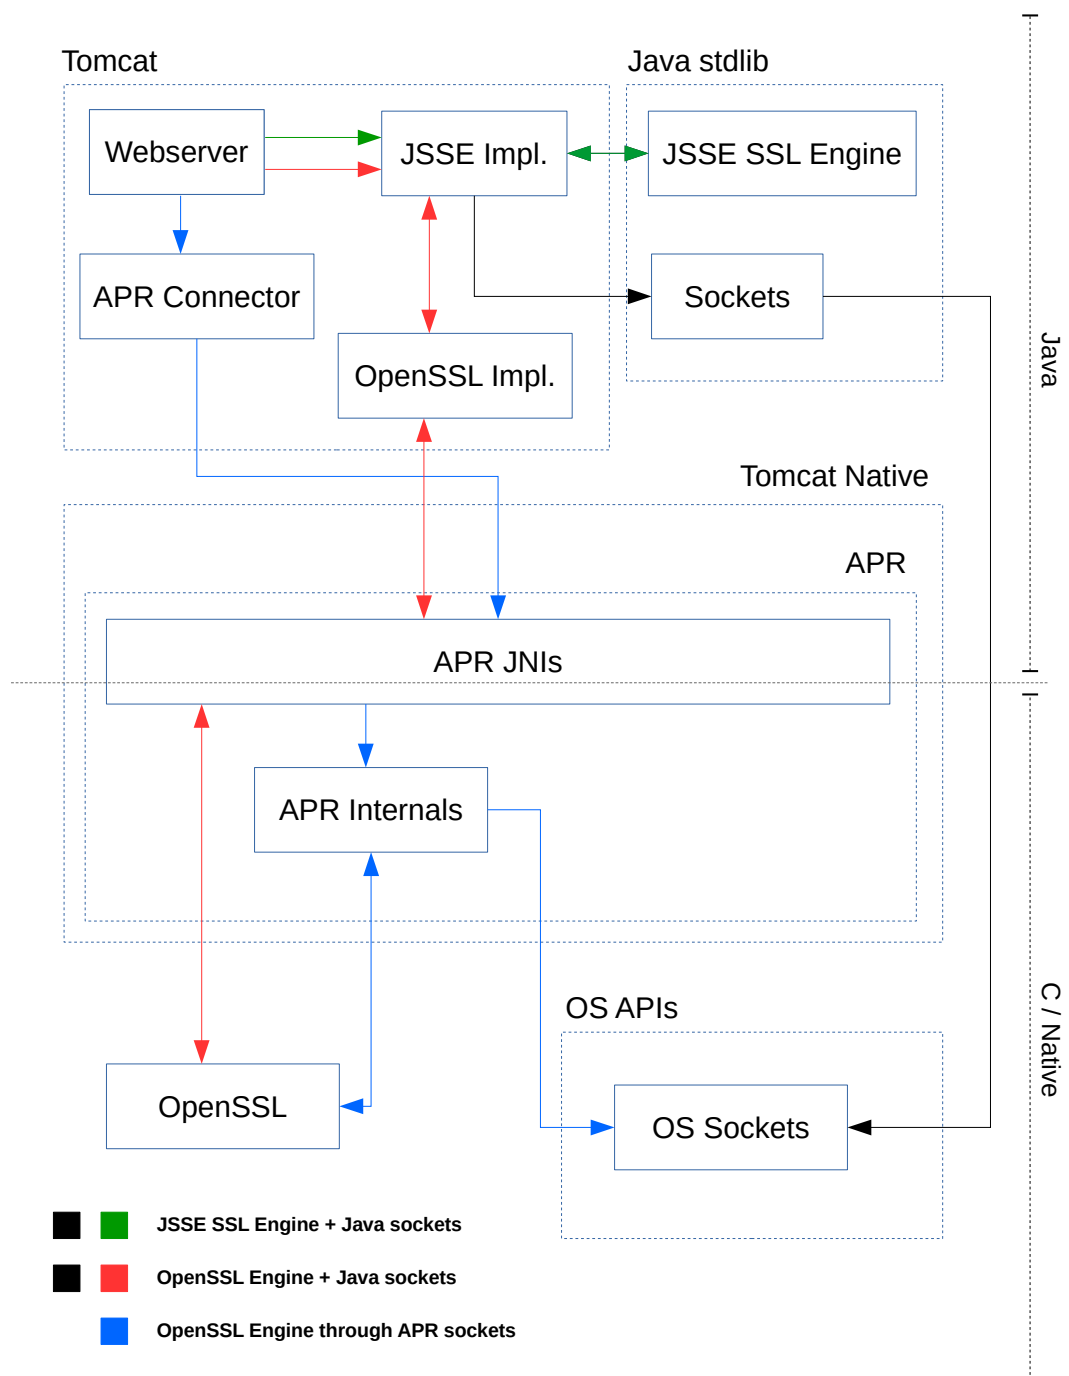


Figure 1: Diagram showing the different ways to use TLS/SSL in Tomcat.

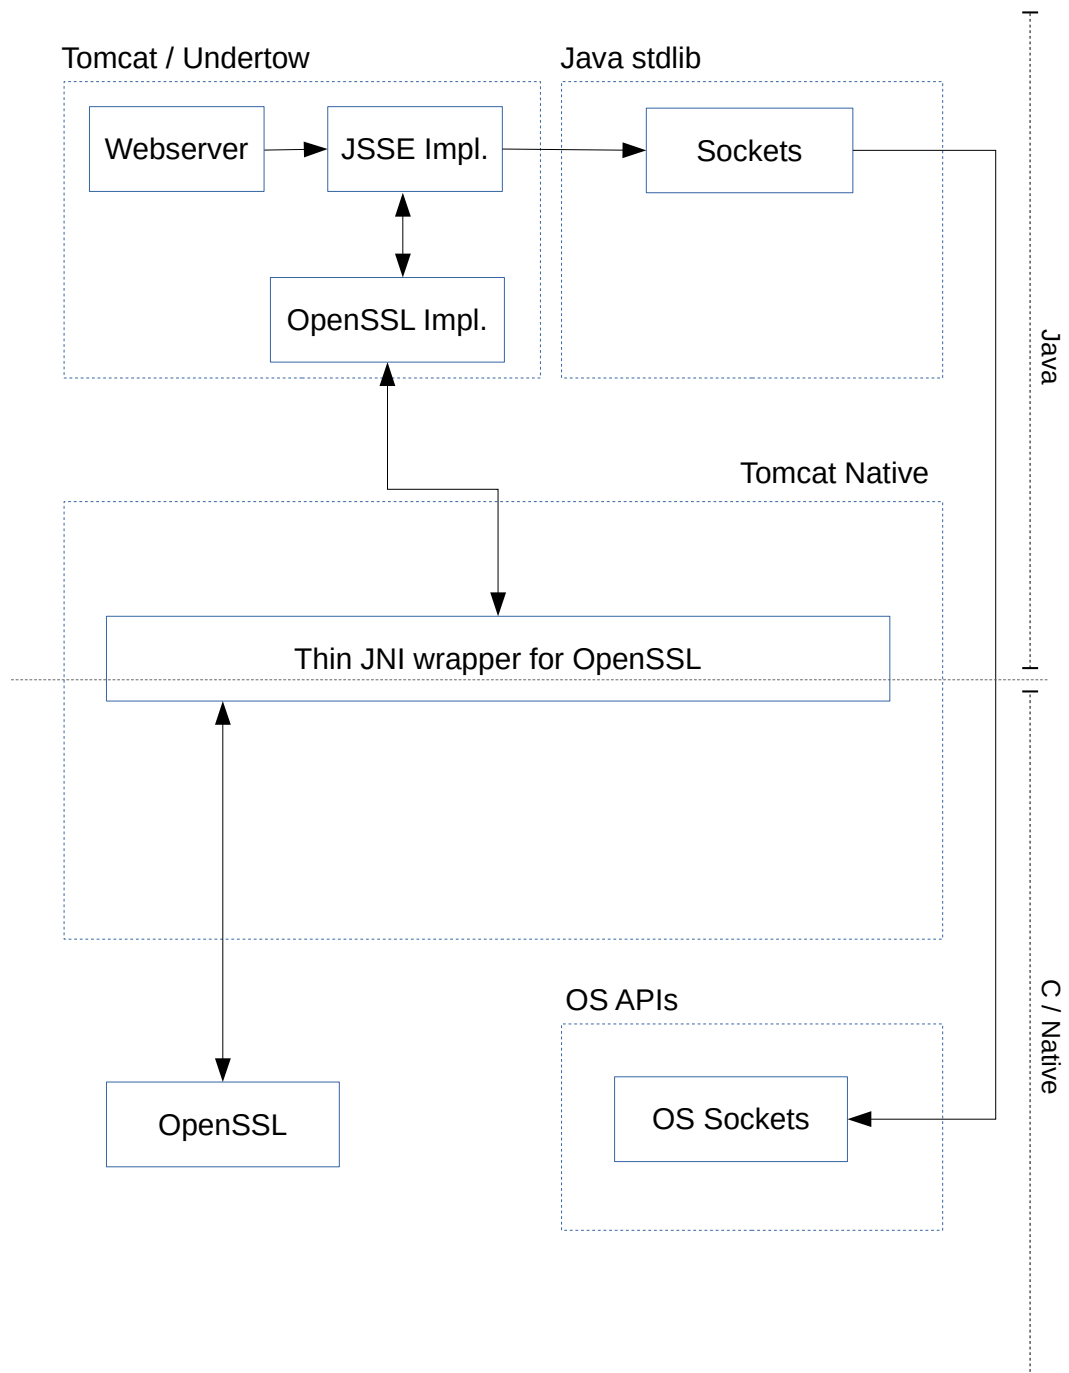


Figure 2: Diagram showing the end result of our project.