

HIGH-LEVEL PROGRAMMING I

Intro to C Programming (Part 2/2) by Prasanna Ghali

Outline

2

- What is C?
- C's Strengths
- Why not C?
- History of C
- Procedural Paradigm
- Organization of C Programs
- Writing and Calling Functions
- Creating and Running a C Program
- C Programs with Multiple Source Files
- Header Files: Interface vs. Implementation

What is C? (1 / 3)

3

- C is a high-level language
 - ▣ Provides constructs for structured programming
 - ▣ Supports functions and procedural paradigm
 - ▣ Supports user-definable derived data types
- C is a (relatively) low-level language
 - ▣ Supports full range of native machine types
 - ▣ Supports access to machine-level addresses
 - ▣ Provides operations that correspond closely to machine's built-in instructions

What is C? (2/3)

4

- C is a small language and is therefore easy to learn
 - ▣ Provides limited set of features compared to other languages
 - ▣ Uses library for commonly required features including input/output, file management, memory management, math, ...
 - ▣ We'll use about 34 keywords

we've come across
these keywords



signed, unsigned, char, short, int, long,
float, double, void, if, else, while, return

What is C? (3/3)

5

- C is a general purpose programming language
 - ▣ Can be used to program variety of different applications
 - ▣ Most widely used systems programming language for implementing operating systems, compilers, databases, ...
 - ▣ De facto standard for programming embedded systems
- Provides excellent foundation for learning ALL other languages

C's Strengths

6

- ❑ Simple
- ❑ Efficient
- ❑ Integration with Unix/Linux
- ❑ Portable
- ❑ Standard library
- ❑ Powerful
- ❑ Flexible


Why Not C?

7

- C programs can be error-prone
 - ▣ Permissiveness and flexibility may provide too wide latitude for some programmers
- C programs can be terse
 - ▣ Brevity may be difficult for some programmers
- Large scale C programs can be difficult to maintain
 - ▣ Language itself doesn't provide support for modular and object-oriented paradigms


History of C (1/2)

8

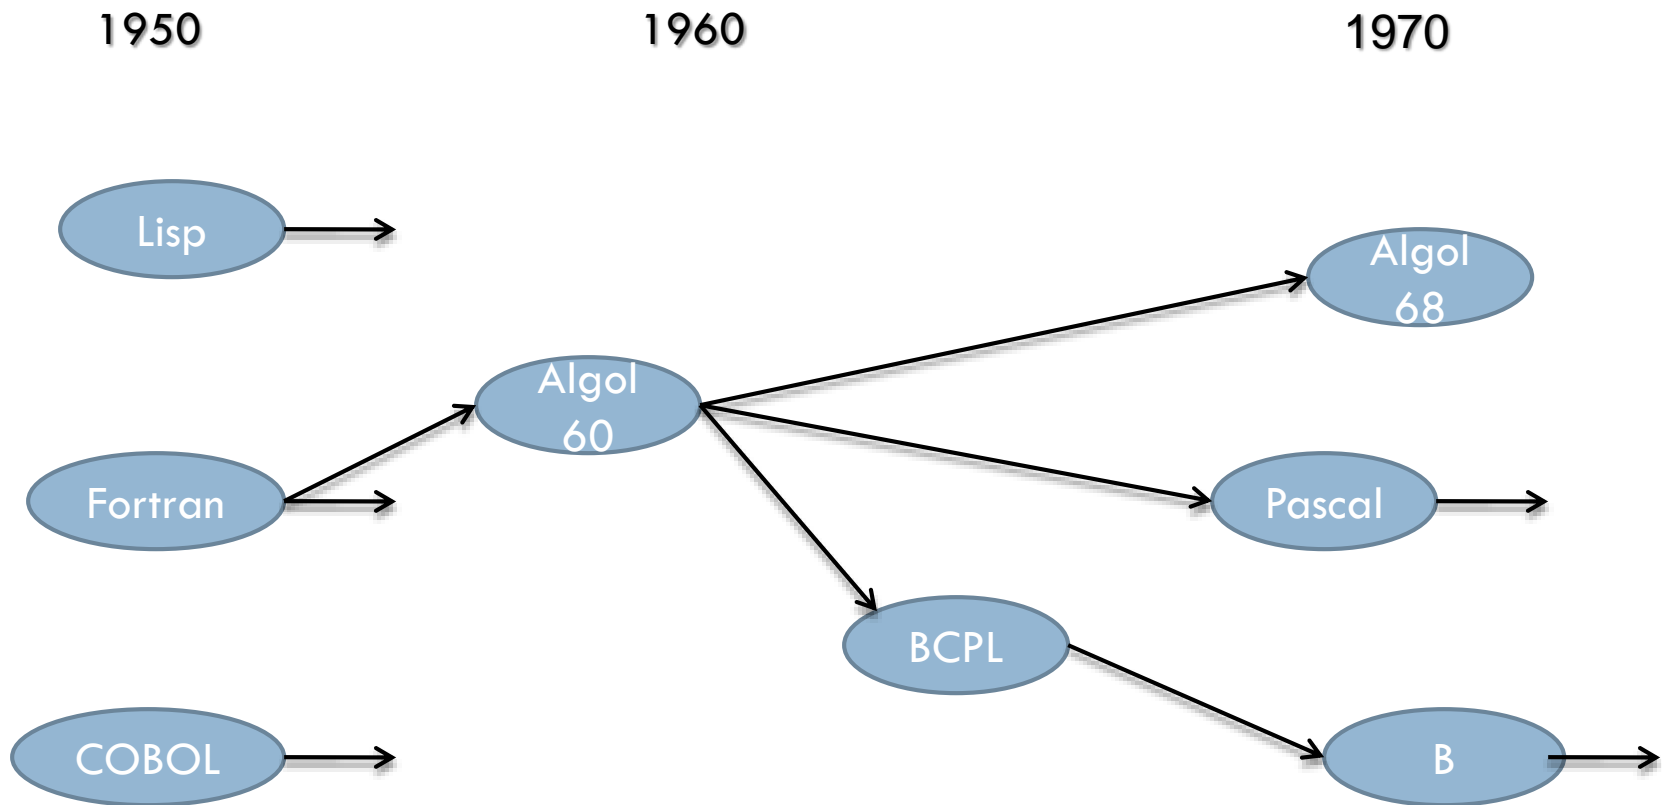

History of C (2/2)

9

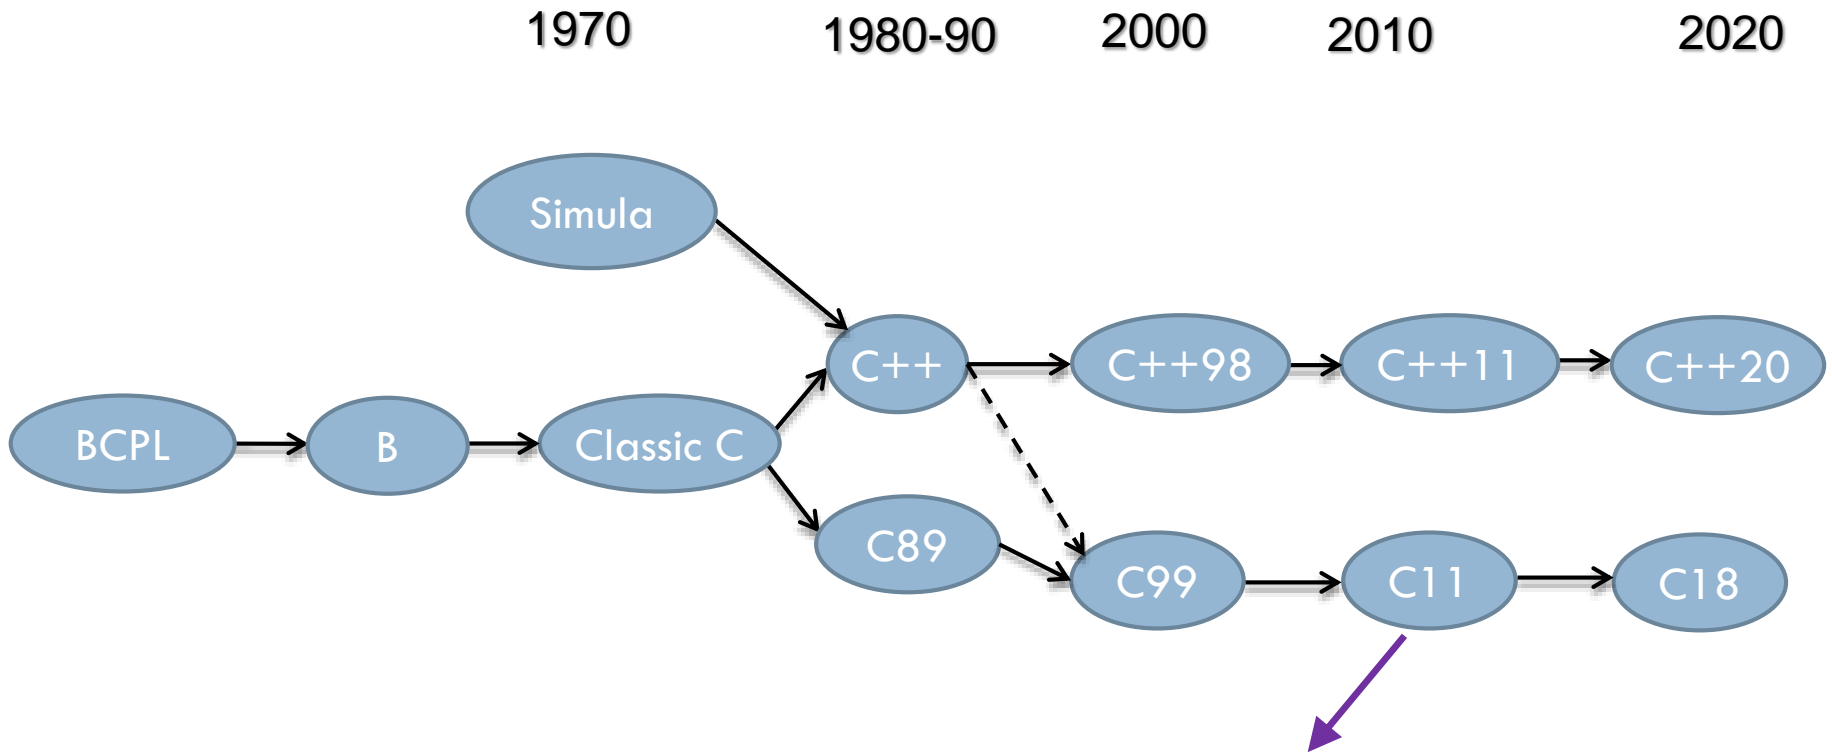

This course will use C11

Consider Complex Problem (1 / 2)

10

- You have to send flowers to your grandmother (who lives in Japan) for her birthday
 - ▣ Plant flowers
 - ▣ Water flowers
 - ▣ Pick flowers
 - ▣ Fly to Japan with flowers

Consider Complex Problem (2/2)

11

- You have to send flowers to your grandmother (who lives in Japan) for her birthday
 - ▣ Plant flowers
 - Make trip to nursery to make purchases
 - Prepare soil in pot
 - Plant seeds in pot
 - ...
 - ▣ Water flowers
 - ▣ Pick flowers
 - ▣ Fly to Japan with flowers

Another Complex Problem (1 / 2)

12

- You're asked to organize catering for a wedding
 - ▣ Make up guest list
 - ▣ Invite guests
 - ▣ Select appropriate menu
 - ▣ Book reception hall
 - ▣ ...

Another Complex Problem (2/2)

13

- You're asked to organize catering for a wedding
 - ▣ Make up guest list
 - Get list from groom
 - Get list from bride
 - Check for conflicts
 - Check with bride about groom's list
 - Check with groom about bride's list
 - Check final list with groom's parents
 - Check final list with bride's parents
 - ...
 - ▣ Invite guests
 - ...
 - ▣ Select appropriate menu
 - ▣ Book reception hall
 - ▣ ...

Procedural Programming Paradigm

(1 / 2)

14

- Breaking down tasks into smaller subtasks is good plan of attack for solving complex programming problems too
 - ▣ Each “large” task is decomposed into smaller subtasks and so forth
 - ▣ Process is continued until subtask can be implemented by single **algorithm**
- Synonyms for this strategy: ***top-down design, procedural abstraction, functional decomposition, divide-and-conquer, stepwise refinement***

Procedural Programming Paradigm

(2/2)

15

- In C/C++, algorithm is packaged into building block called ***function***
 - ▣ Other languages refer to function as ***procedure*** or ***subroutine*** or ***method***
- Program is organized into these smaller, independent units called ***functions***



Advantages of Functions


16

- Divide and conquer approach to complexity
 - ▣ Divide complicated whole into simpler and more manageable units
 - ▣ Standalone, independent functions are easier to understand, implement, maintain, test and debug
- Cost and pace of development
 - ▣ Different people can work on different functions simultaneously
- Building blocks for programs
 - ▣ Write function once and use it many times in same program or many other programs

Organization of C Programs (1/3)


17

- C was designed to use procedural paradigm to solve programming problems
 - ▣ Program is *synchronization* of different functions to solve problem

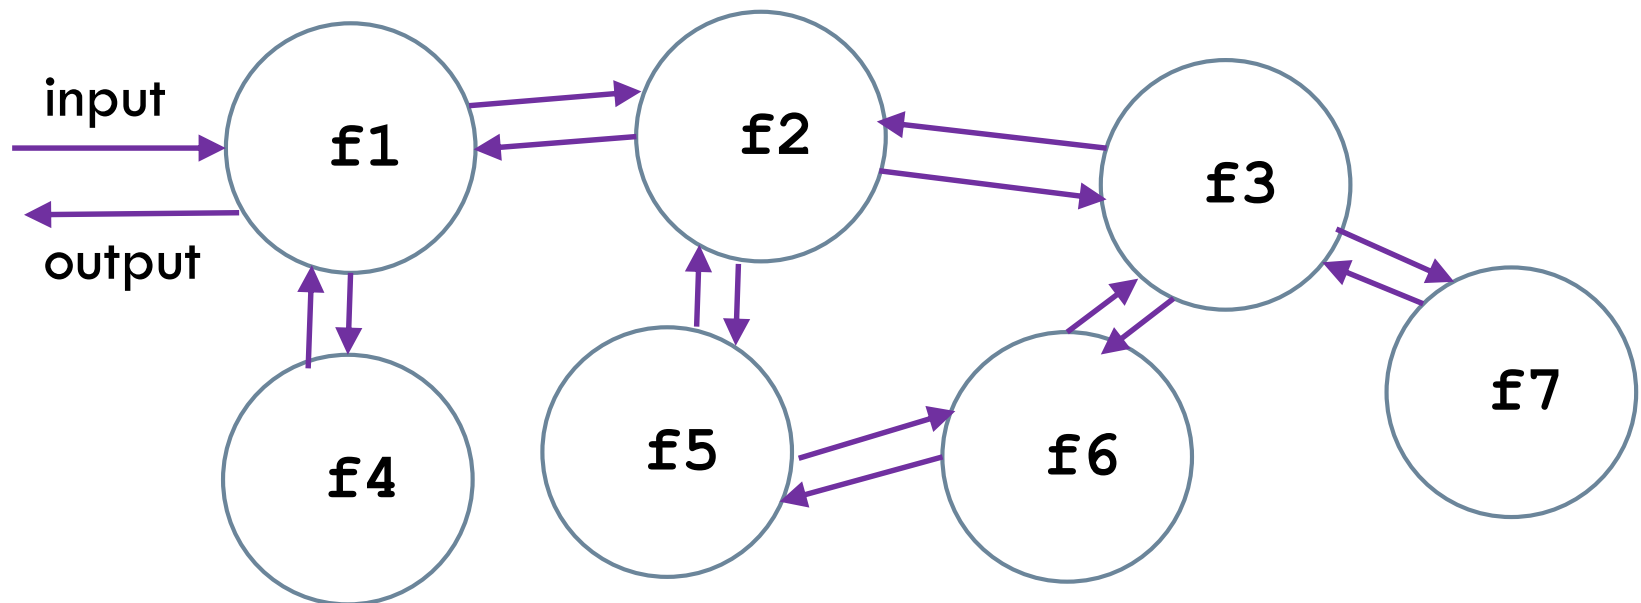

Organization of C Programs (2/3)

18

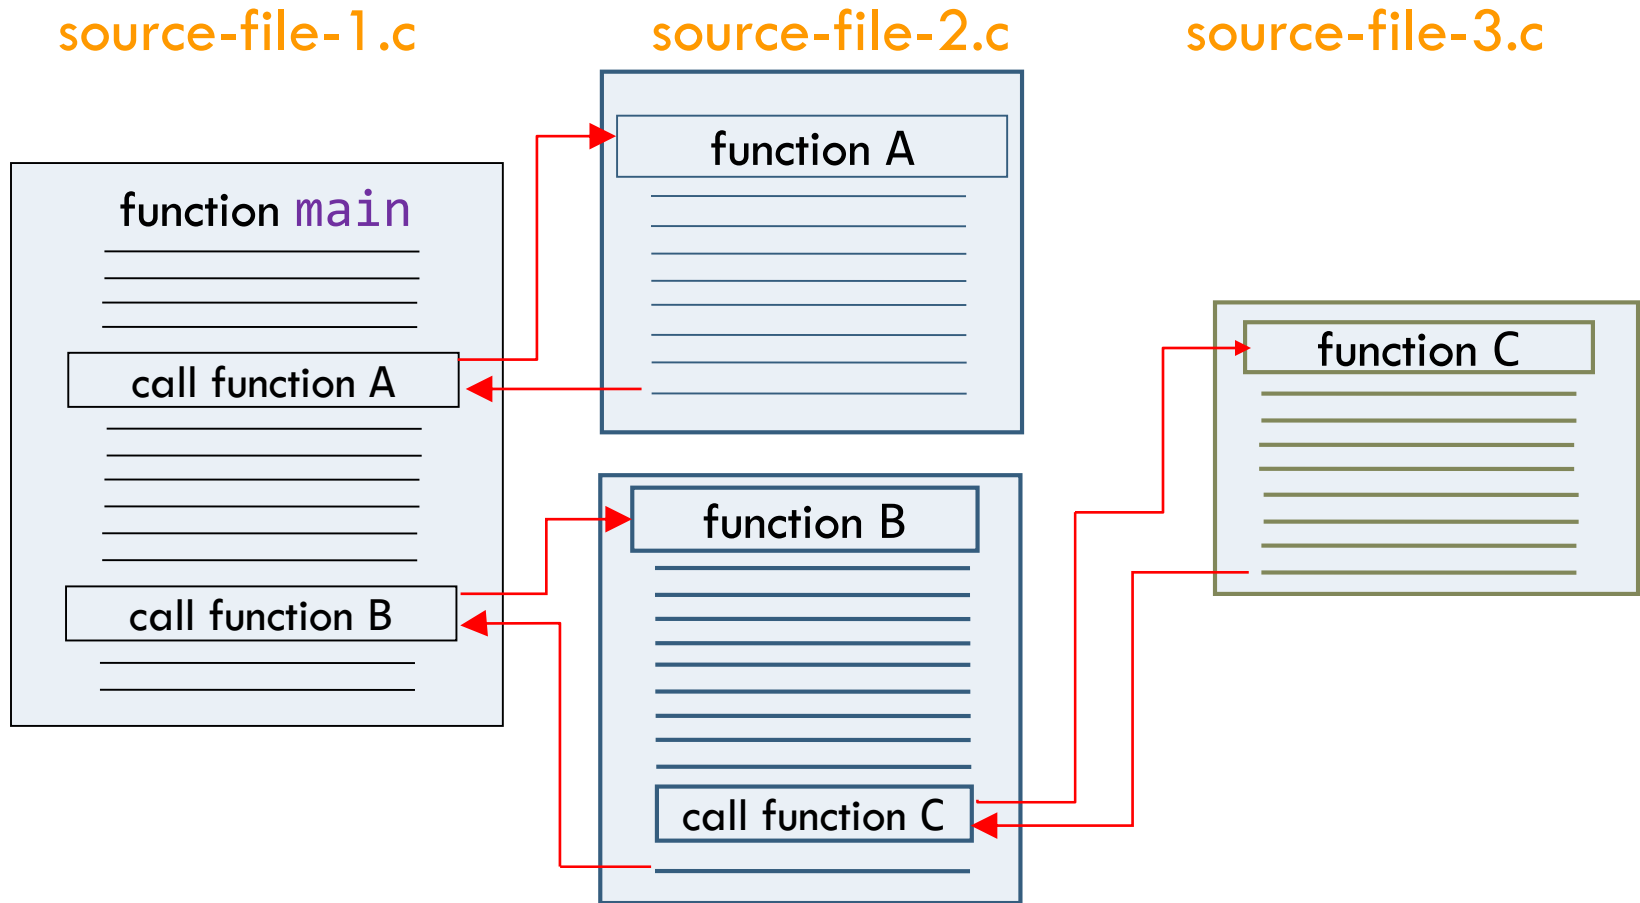

- Every C program must have *one and only one* function called `main` → not a C/C++ keyword!!!

Organization of C Programs (3/3)

19

- Related functions are organized into a source file
- Think of C program as one or more source files with each source file containing one or more related functions

```
// source-file-1.c
preprocessing directives

function prototypes

data declarations (global)

return-type
main(parameter declarations)
{
    data declarations (local)
    statements
}

other functions
```

```
// source-file-n.c
preprocessing directives

function prototypes

data declarations (global)

... return-type function-name
(parameter declarations)
{
    data declarations (local)
    statements
}

other functions
```

How to ~~Write~~ Define a Function

(1 / 3)

20



- 1) Every function *must* have a name
- 2) C has rules for specifying names

specifies type of output value

Comma-separated list of input values

{ and } are used to group statements that implement function

```
return-type function-name(parameter-list)
{
    statements
}
```

In C, each statement is expression followed by ;

How to ~~Write~~ Define a Function

(2/3)

21



this variable in parameter list is called *formal parameter* or just *parameter* i.e., `num` is parameter of type `int`

```
int abs(int num)  
{  
    if (num < 0) {  
        num = -num;  
    }  
    return num;  
}
```

The code is annotated with three numbered circles: (1) points to the opening parenthesis of the parameter list, (2) points to the parameter `int num`, and (3) points to the `return num;` statement.

C statements are terminated by `;`

Statement says “function will return an output value `num` of type `int`”

How to ~~Write~~ Define a Function

(3/3)

22



```
int max(int x, int y)
{
    if (x > y) {
        return x;
    } else {
        return y;
    }
}
```

Simplest C Program: Does Nothing!!!

23

Every C program *must* have one and only function named **main**

Here, we're saying that **main** takes *no* input value(s)

main *must* return an output value of type **int**

void is keyword indicating no value!!!

{ and } are used to group statements that implement function

```
int main(void)
```

```
{  
    return 0;  
}
```

return is keyword used in a statement to terminate function or to return output value

Statement says "function will return an output value **0** of type **int**"

Every C statement must terminate with ;

①

②

③

④

⑧

⑤

⑥

⑦

How to Call a Function

24

this *variable* in parameter list is called *parameter*

```
int abs(int num) {  
    if (num < 0) {  
        num = -num;  
    }  
    return num;  
}
```

```
int main(void) {  
    int x = -10;  
    x = abs(x);  
    return 0;  
}
```

variable `x` is declared
type `int` and initialized
with value -10

- 1) At run-time, client function `main` calls function `abs` using function call operator `()`
- 2) Argument `x` is evaluated to value `-10`
- 3) Result of evaluation is used to initialize parameter `num` to value `-10`
- 4) Function `abs` returns value `10` back to client before terminating
- 5) So, result of calling function `abs` is value `10` of type `int` – this value is then assigned to `x`

Function `abs` is called by using its name followed by `()` that enclose a value (`x` here)
Value `x` in function call operator is called *argument*

Creating and Running a C Program


25

```
// this is file nothing.c
int main(void)
{
    return 0;
}
```

OS program that loads executable
nothing.out into memory

Program nothing.out begins execution
once loader has installed executable in
memory

```
gcc -std=c11 -pedantic-errors -Wstrict-prototypes
-Wall -Wextra -Werror nothing.c -o nothing.out
```

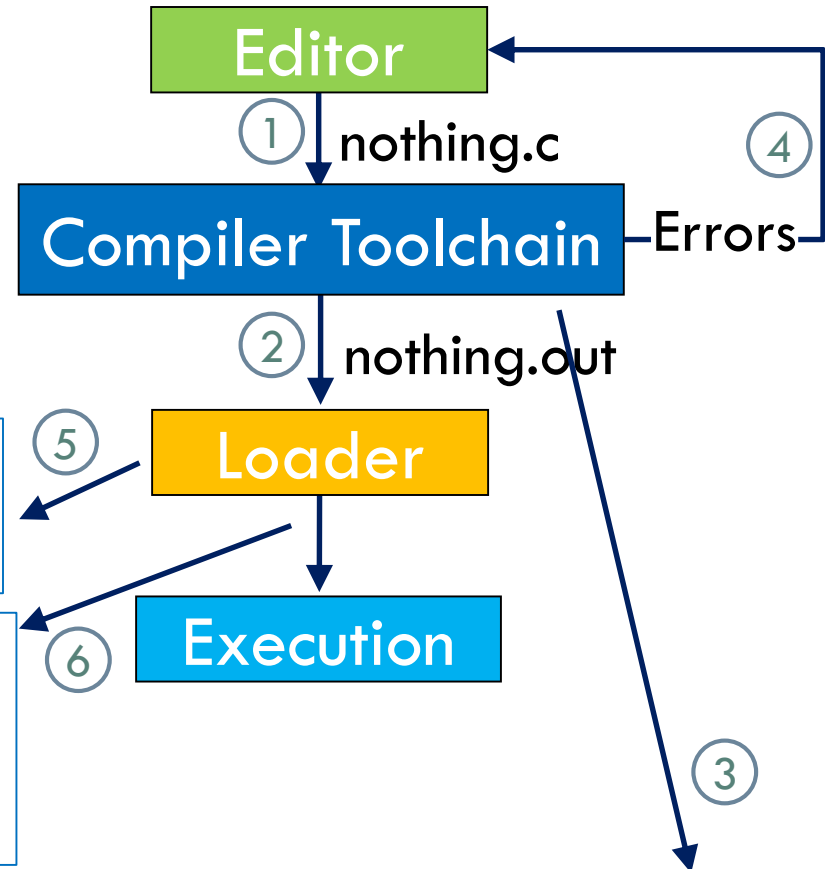

gcc Options

26

- `-std=c11` Uses C11 standard
- `-pedantic-errors` Gives an error (not just a warning) if code is not following C11 standard
- `-Wstrict-prototypes` Disallows things allowed in old C standards – we want C code to be compatible with C++
- `-Wall` Warns about anything that compiler finds shady
- `-Wextra` Warns about more shady things than `-Wall`
- `-Werror` Converts warnings to errors so that code with warnings is never successfully compiled
- `-o nothing.out` Specifies name of output file; otherwise file name defaults to `a.out`

```
gcc -std=c11 -pedantic-errors -Wstrict-prototypes  
-Wall -Wextra -Werror nothing.c -o nothing.out
```

Next Simplest C Program: Print a Greeting!!! (1 / 2)

27

- 1) Strange syntax that is not a part of C!!!
- 2) Any line that begins with # is directive to another program called *preprocessor*.
- 3) Think of preprocessor as editor that modifies C source file according to directives that begin with # character

- 1) C has no facilities for I/O.
- 2) Instead, it has set of libraries to support I/O, math, date & time, and many other functionalities.
- 3) Functionalities in each library are declared in a standard header file.
- 4) To use a particular library's functions, add preprocessor `#include` command

```
// this is file hello.c
#include <stdio.h>


int main(void)
{
    printf("Hello World\n");
    return 0;
}
```

Next Simplest C Program: Print a Greeting!!! (2/2)

28

```
// this is file hello.c
#include <stdio.h>

int main(void)
{
    printf("Hello World\n");
    return 0;
}
```

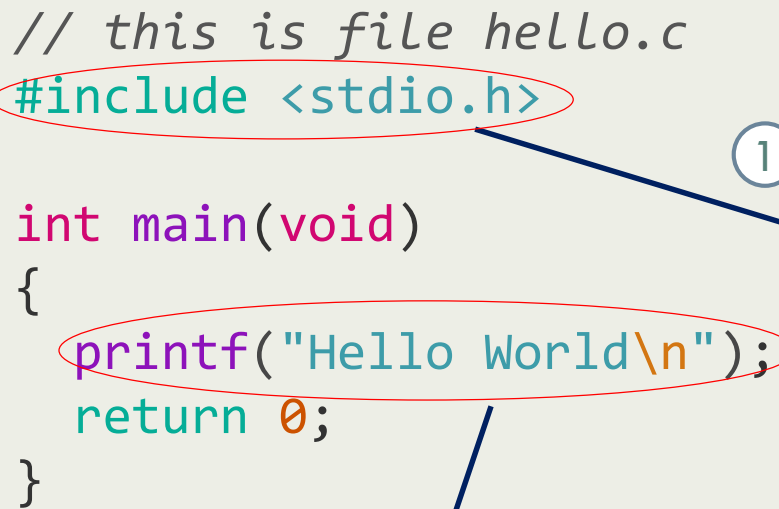

- 1) File `stdio.h` is called *header file*
- 2) It contains *prototype* of function `printf`
- 3) Makes name `printf` and function's parameter list and return type known to compiler
- 4) C/C++ require all names used in source file to be *declared* before their first use
- 5) Preprocessor will replace 1st line with contents of header file
- 6) `<` and `>` delimiting header file name simply tell compiler where to find the file

- 1) Function `printf` is part of standard C library
- 2) It is used to print information to standard output (the screen)
- 3) It is one of the most complex functions in the library
- 4) Argument `"Hello World\n"` represents a string (sequence of characters) with `\n` representing a newline


Compilation Phases (1 / 2)

29

Compiler toolchain consists of four phases: *preprocessor*, *compiler*, *assembler*, and *linker*

```
// this is file hello.c
#include <stdio.h>

int main(void)
{
    printf(" Hello World\n");
    return 0;
}
```

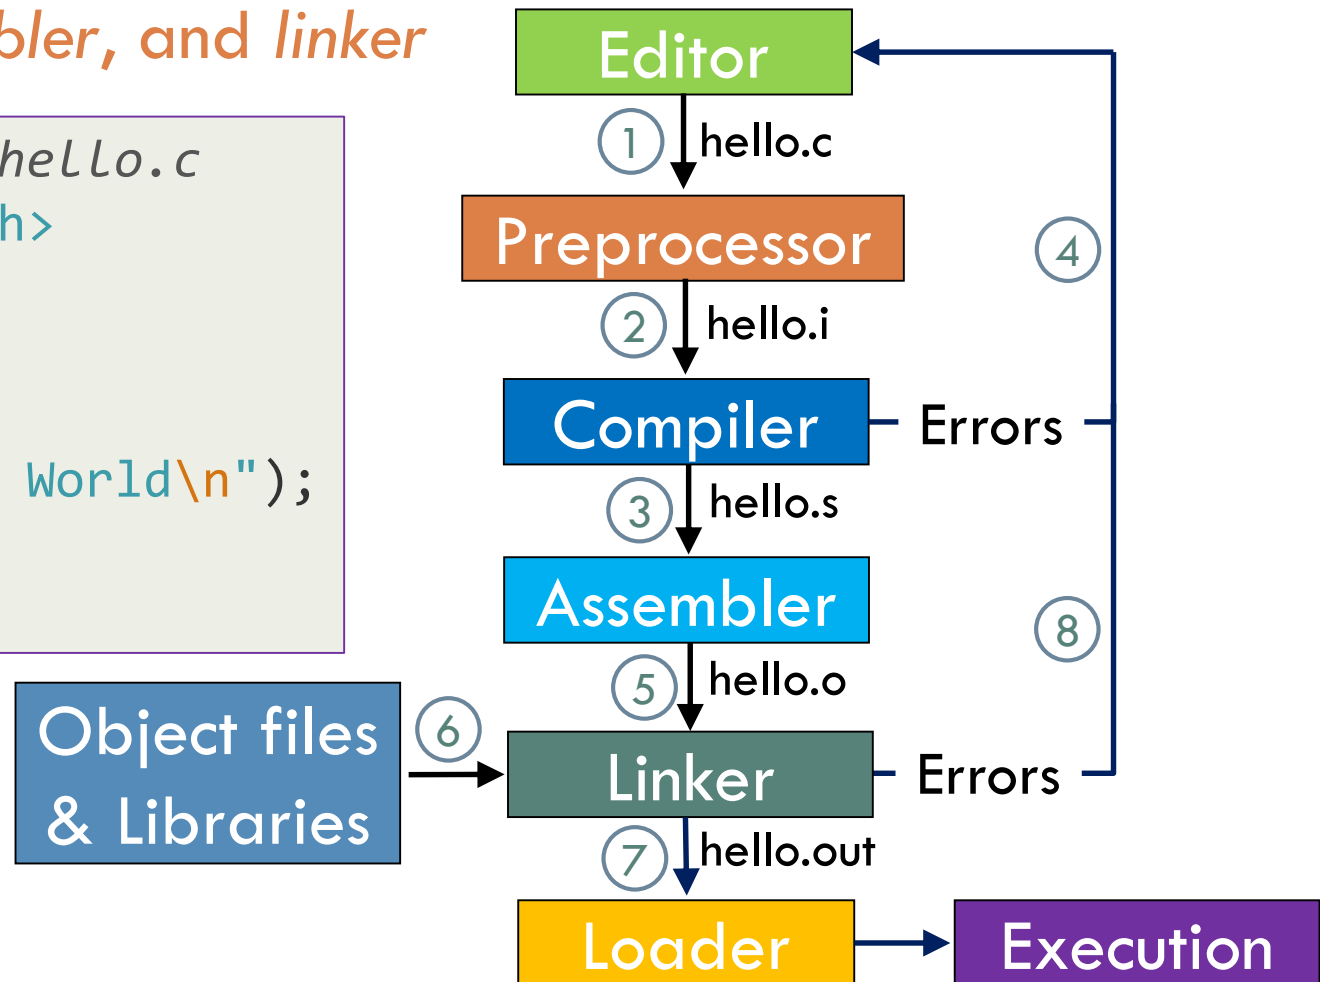


Compilation Phases (2/2)

30

- Preprocess only (I'm not using all required gcc options for brevity)
 - ▣ `gcc -std=c11 -E hello.c -o hello.i`
- Compile only
 - ▣ `gcc -std=c11 -S hello.i -o hello.s`
- Assemble: `gcc -c hello.s -o hello.o`
- Link: `gcc hello.o -o hello.out`
- Execute: `./hello.out`

Creating a C Program (1/2)

31

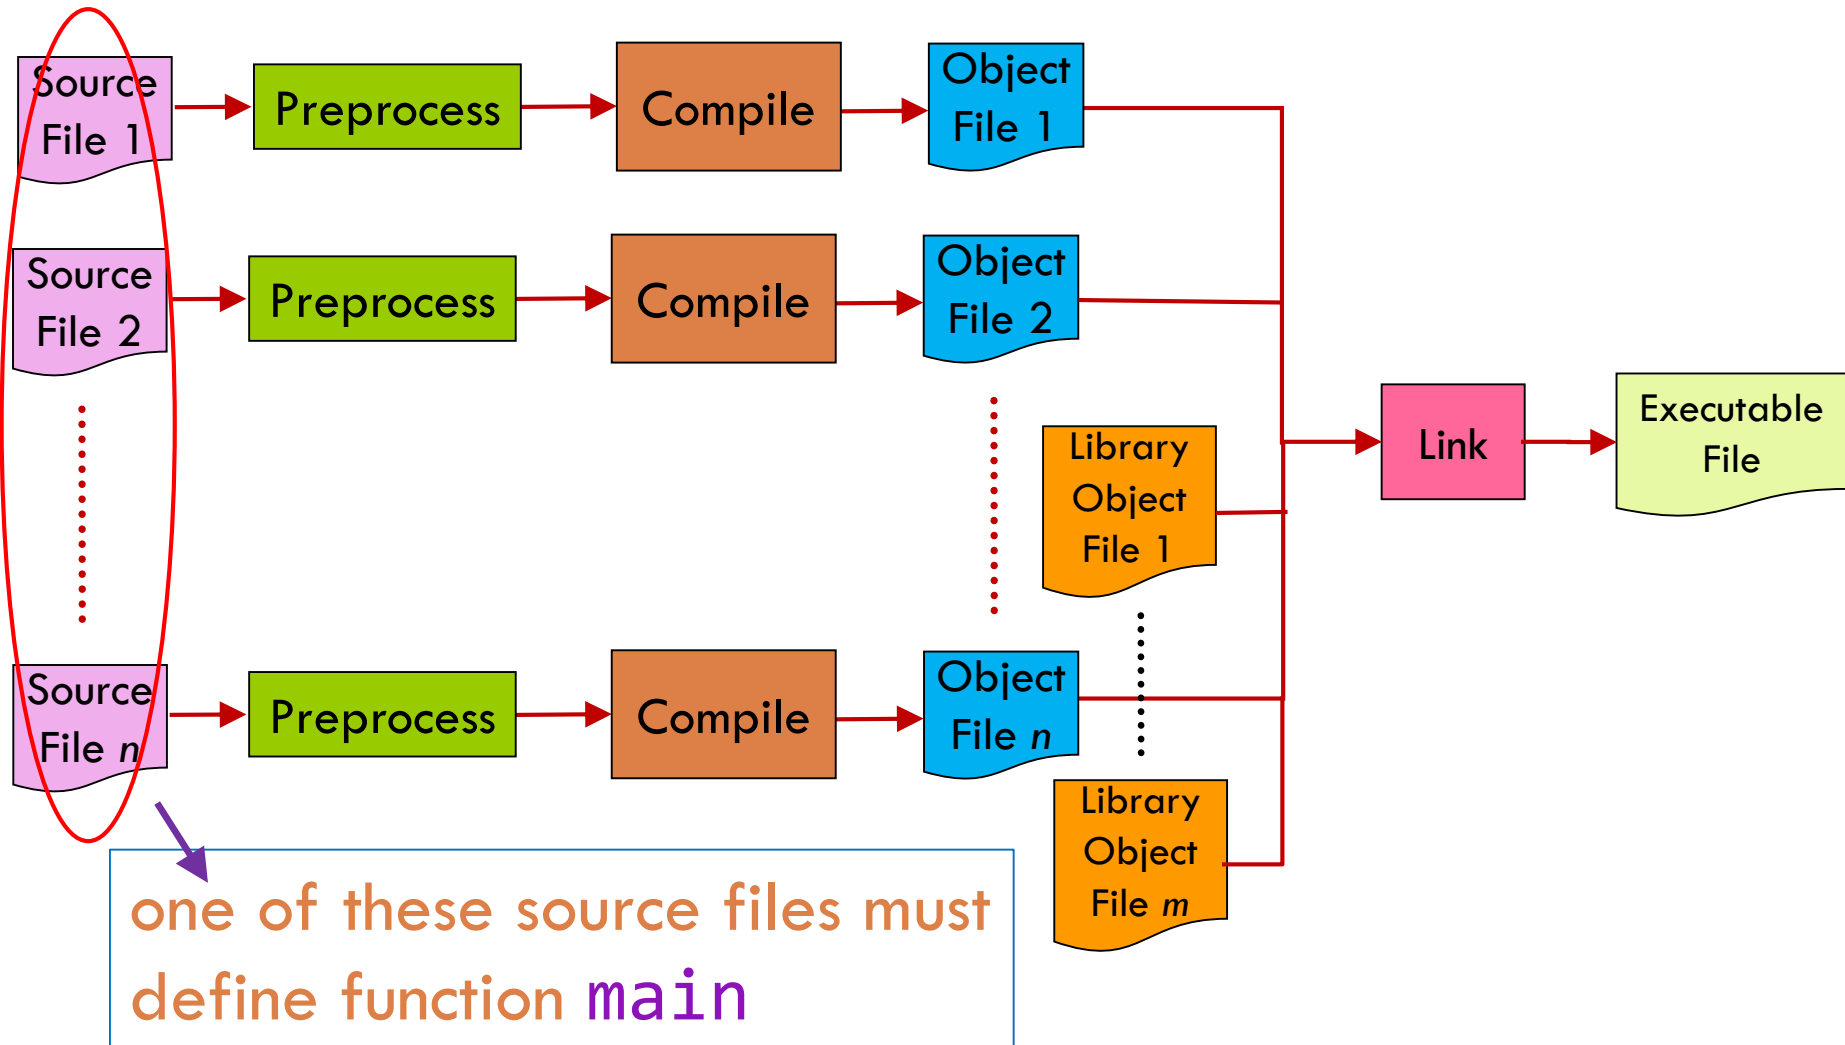

Creating a C Program (2/2)

32

- Compiler consumes *each* source file individually without being aware of presence of other source files!!!
- Linker consumes *all* object files together to create executable file

Multiple Source Files (1 / 6)

33

- Deconstruct `hello.c` into two source files and one header file

```
// this is file hello.c  
#include <stdio.h>  
  
int main(void)  
{  
    printf("Hello World\n");  
    return 0;  
}
```

Multiple Source Files (2/6): hello-decl.h

34

```
// this is file hello-decl.h  
  
// hello prints a greeting to standard output  
void hello(void);
```

①



Declaration of identifier `hello`: `hello` is a function that takes no input and returns no output

Multiple Source Files (3/6): hello-defn.c

35

```
#include <stdio.h>

// definition of function hello
void hello(void) {
    printf("Hello World!!!\n");
}
```

①

②

Compile
only!!!

③

1) File `stdio.h` is included to provide *function prototype* (or *declaration*) of standard C library function `printf`
2) `<` and `>` delimiting header file name simply tell compiler where to find the file [the compiler will look in its installation directory]


```
gcc -std=c11 -pedantic-errors -Wstrict-prototypes  
-Wall -Wextra -Werror -c hello-defn.c -o hello-defn.o
```

Multiple Source Files (4/6): driver.c

36

```
#include "hello-decl.h"

int main(void) {
    hello();
    return 0;
}
```

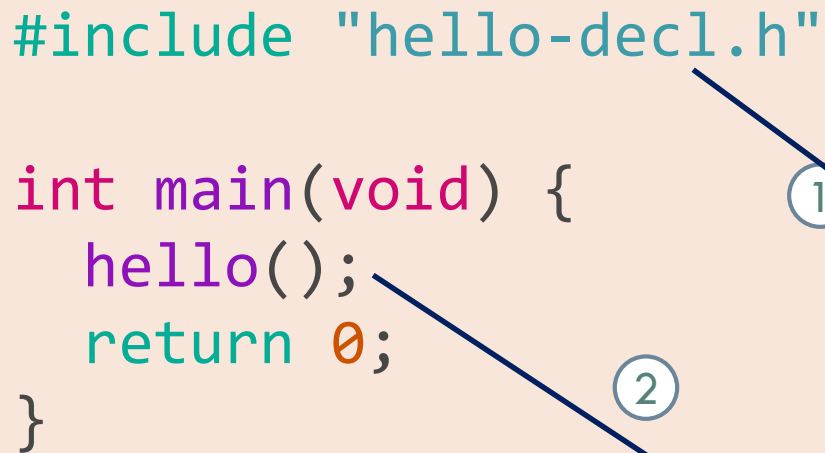

- 1) File `hello-decl.h` is included to provide *function prototype* (or *declaration*) of function `hello`
- 2) Pair of double quote delimiters `"` tells preprocessor to search for header file in current directory

- 1) Compiler doesn't care where or how function `hello` is defined
- 2) Compiler only cares whether call to `hello` matches declaration in `hello-decl.h`

`gcc -std=c11 -pedantic-errors -Wstrict-prototypes -Wall -Wextra -Werror -c driver.c -o driver.o`

Multiple Source Files (5/6): driver.c

37

```
#include "hello-decl.h"
#include <stdio.h>
#include <stdio.h>
int main(void) {
    hello();
    return 0;
}
```

① File `hello-decl.h` is included to provide *function declaration* (or *prototype*) of function `hello`

② To prove a point, C standard library file `stdio.h` is [unnecessarily] included here

- ③
- 1) Can have multiple declarations of function `printf`!!!
 - 2) But, there can be *only one definition* of a function (and a variable)
 - 3) Otherwise, linker will not create executable.

④

```
gcc -std=c11 -pedantic-errors -Wstrict-prototypes  
-Wall -Wextra -Werror -c driver.c -o driver.o
```

Multiple Source Files (6/6): Linking Object & Library Files

38

- Two object files:
 - ▣ `driver.o` with definition of function `main`
 - ▣ `hello-defn.o` with definition of function `hello`
- C standard library: `libc.a` with definition of function `printf`
 - ▣ Find location of C standard library file thro' this command: `gcc -print-file-name=libc.a`
- Link these files into executable `hello.out`

```
gcc driver.o hello-defn.o -o hello.out
```

Interface versus Implementation

39

```
// this is file hello-decl.h  
  
void hello(void);
```



①

- 1) Header file specifies *function prototypes*
- 2) Function prototype is an *interface* that only specifies *what the function does*

```
// this is file hello-defn.c  
#include <stdio.h>  
  
// definition of function hello  
void hello(void) {  
    printf("Hello World!!!\n");  
}
```



②

- 1) Source file specifies *function definitions*
- 2) Function definition is an *implementation* that specifies *how* function accomplishes purpose advertised/promised by interface

Mathematical Functions

40

```
#include <math.h>
#include <stdio.h>
```

①

File `math.h` is included to provide *function prototype (or declaration)* of standard C library function `sqrt`

```
int main(void) {
    double px = 0.0, py = 0.0;
    double qx = 3.0, qy = 4.0;
    double w = qx - px, h = qy - py;
    double dist = sqrt(w*w + h*h);
    printf("Distance is %f\n", dist);
    return 0;
}
```

Call to `printf` displays following line:

Distance is 5.000000

②

③

Shorthand for link object files with library file `libm.a`

```
gcc -std=c11 -pedantic-errors -Wstrict-prototypes
-Wall -Wextra -Werror dist.c -o dist.out -lm
```

④

Summary

41

- C program consists of source files with each file consisting of functions
- Function is encapsulation of algorithm
 - ▣ Think of function as statements grouped together and given a name
- C programs must have one and only one function called `main`
 - ▣ `main` function is starting point of execution of C program
- Each source file must be individually compiled into object file
- Object files are linked together into an executable
- Must explicitly link to C math standard library functions