


Lab 10: Creating a Full Stack Application

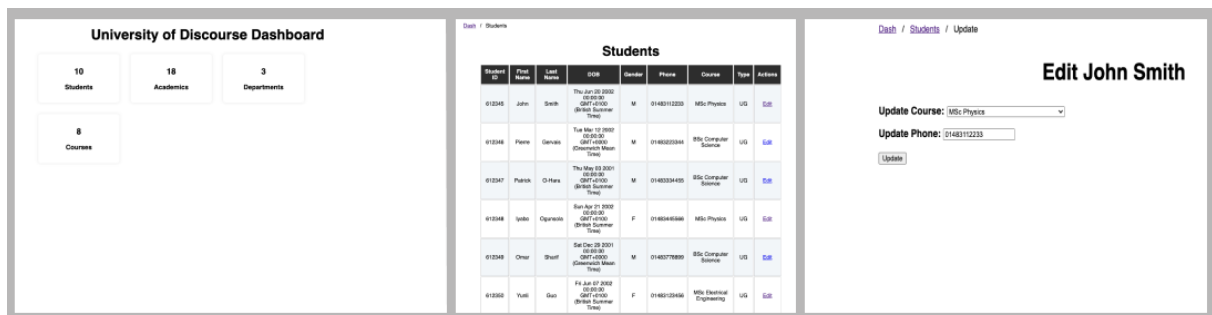

This is what we are making in this lab

In this lab, you'll combine everything you've learned so far. In doing so, we are going to make a full-stack web application. By the end of this session, you'll add a web front-end to our university of discourse database. You'll be able to display a list of students and update the course they are on.

Dependencies

Ensure the Node Environment path is set on your VM, and you have installed VS code (see, the week 8 lab, “exercise 0.1 : Leveling up our Development Environment”. If you are working along from home, you won't need to set the path; however, you will need to install VSCode (see, <https://code.visualstudio.com/download>) and NodeJS (see, <https://nodejs.org/en>).


0.0 Getting Started

In this part of the lab, we'll get set up and get the starter code.

Exercise 0.1 : Getting Started


1. As always, start and connect to your Azure Labs' virtual machine (VM) by visiting this link: <https://labs.azure.com/virtualmachines>.
2. Connect to the VM:
 1. Toggle the button to start – it might take a while.
 2. Once it changes to Running, click on the monitor icon.
 3. A file will be downloaded – click on it to run it, and you will be prompted to enter the password you created last time. IMPORTANT: the username must be `labuser` (remove the `~/`).

4. Remember to click on the following icon to make the window resize appropriately
3. Within your VM, create a folder in your `C:\code` directory called `lab_10`.

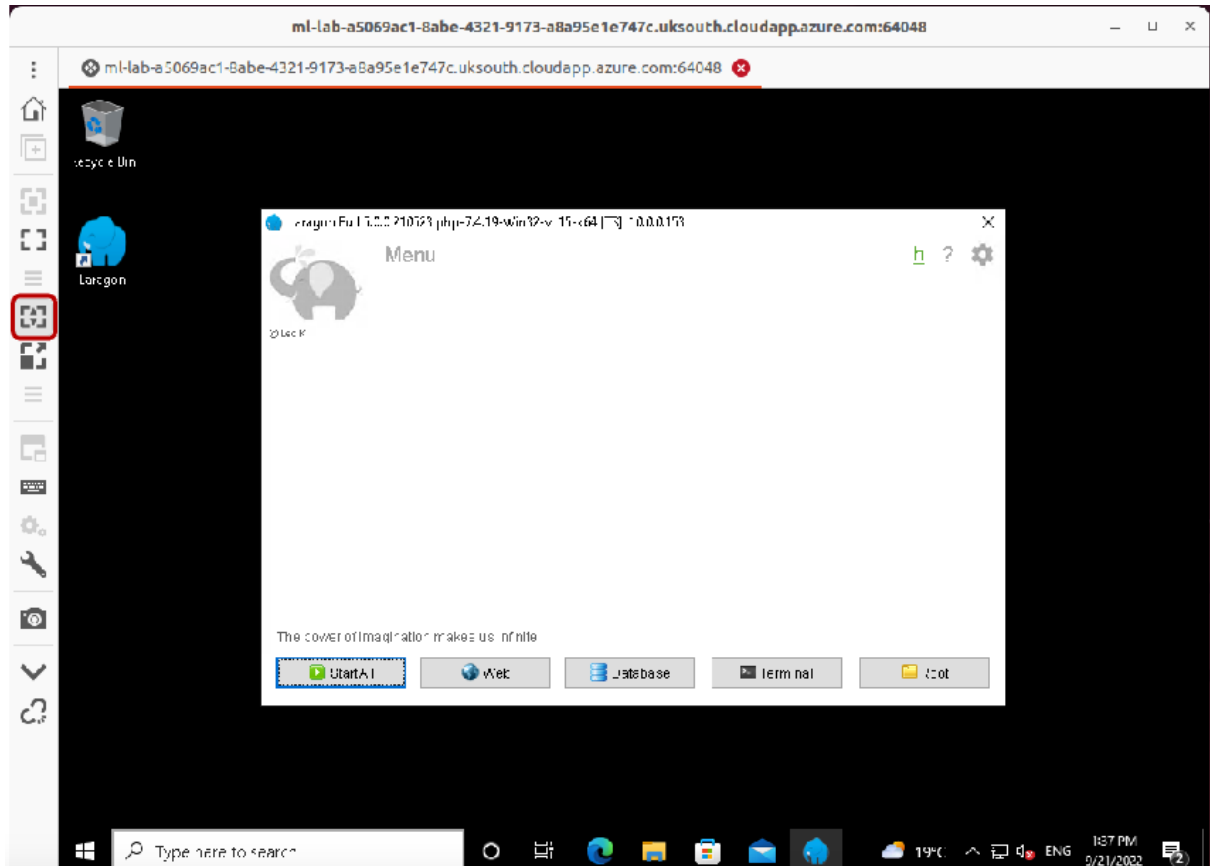

4. Open Laragon and start all services.
5. Open VS Code and open the `lab_10` folder.

Exercise 0.2: Getting the starter code

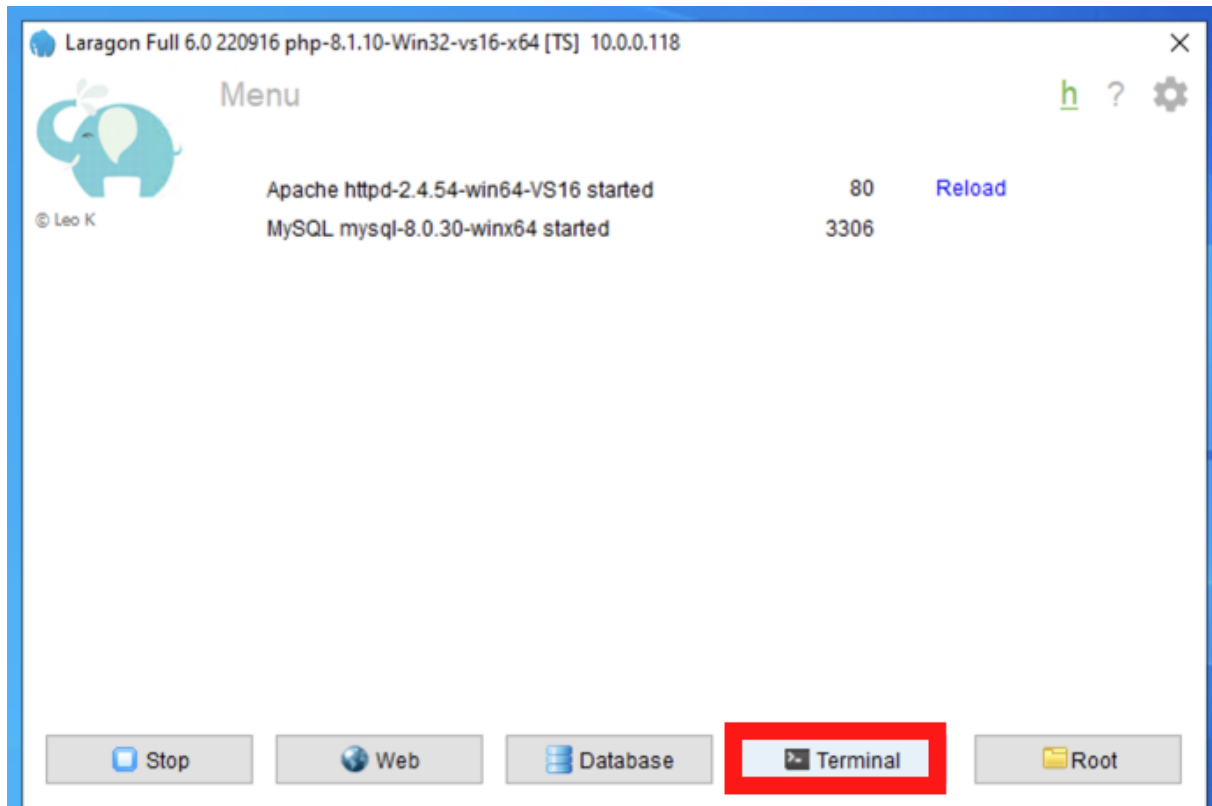


1. Open the Laragon terminal.
2. Navigate to your `lab_10` folder: `cd C:\code\lab_10`, and run the following command (**don't forget the `.` at the end, this tells git to clone the code into the current directory**):


```
git clone https://github.com/joeappleton18/web-and-database-lab-10.  
git .
```

This will clone the starter code into your `lab_10` folder.

1. Take a look at the code in VS Code (**pro tip:** type `code .` in the terminal and it will open VS code in the context of the directory you are located in). You should see a number of files and folders. For now, we are interested in `seeds\university.sql`. Open the file, and take a look. This is the SQL script that will create our familiar University of Discord database and populate it with some data. To keep it separate from our other database, I've called it `university_web`. Let's load this database into our MySQL server.

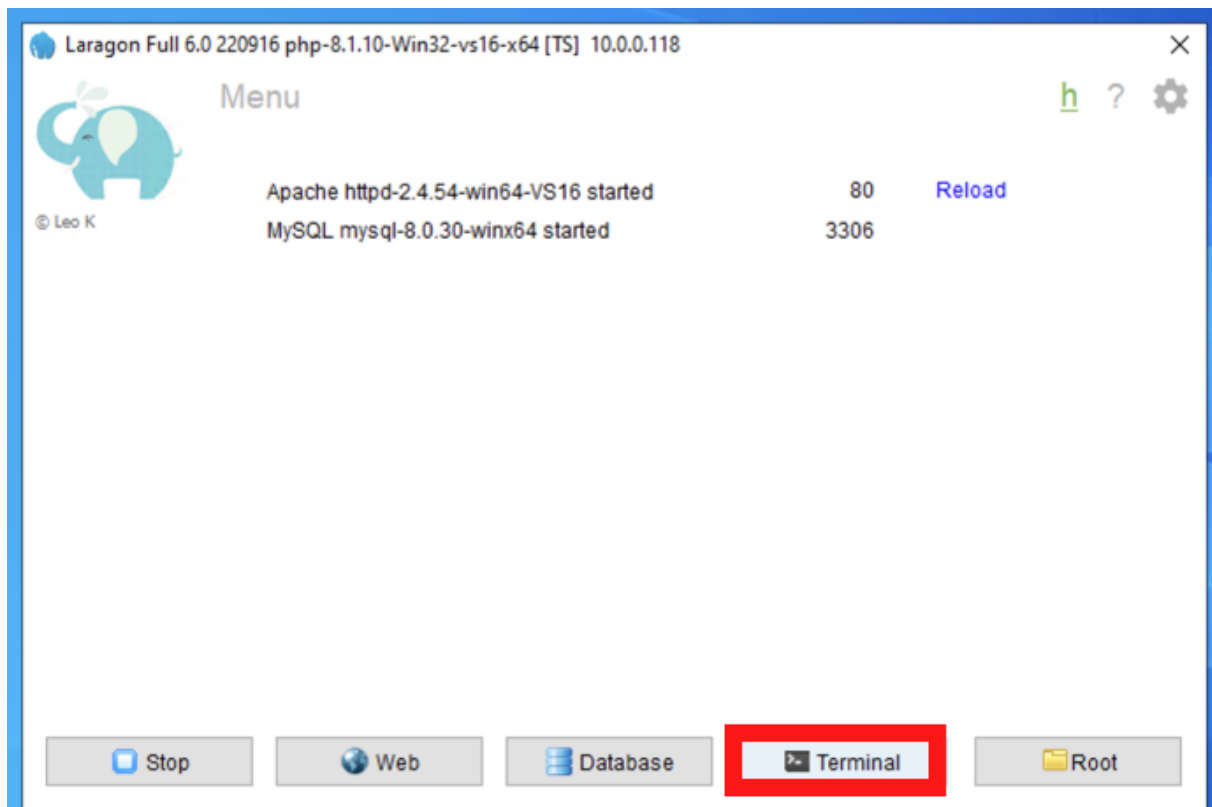

4. Open the Laragon terminal.
5. In the Laragon terminal load the database by running the following commands (ensure, if you copy and past the commands, there are no spaces - it's a good idea to type them out):
 1. Navigate the the MySQL bin folder:
 1. `cd C:\laragon\bin\mysql\mysql-8.0.30-winx64\bin`
 2. Read in the SQL script:
 1. `mysql -u root -p < C:\code\lab_10\seeds\university.sql`
 3. You'll be prompted for a password, just press enter.
 4. To check the database has been created:
 1. From the terminal run: `mysql -u root -p`
 2. Again, you'll be prompted for a password, just press enter.
 3. You should now be in the MySQL shell. Run the following command to see the databases: `show databases;`
 4. You should see the `university_web` database listed.

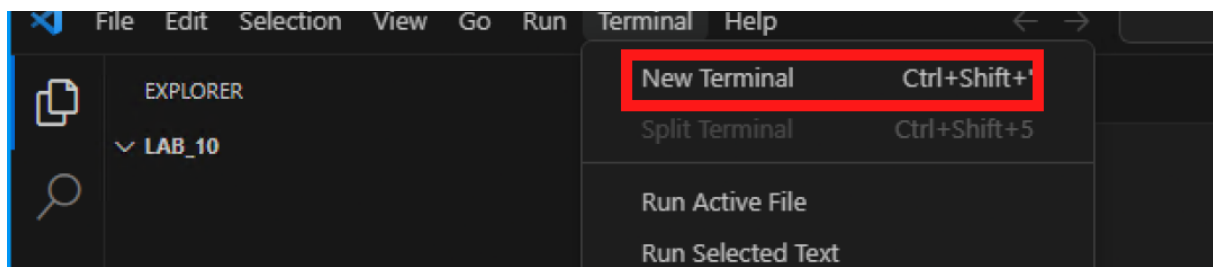

- We are now ready to install our dependencies. Open the terminal in VS Code and run the following command:

```
1 npm install
```


The above command will install all the dependencies listed in the **package.json** file, and place them in the **node_modules** folder (it may take a little bit of time). For now, we have pulled in just three dependencies:

- express**: A web framework for NodeJS.
- ejs**: A templating engine for NodeJS.
- nodemon**: A tool that will automatically restart our server when we make changes to our code.

You'll see in the **node_modules** folder that there are a lot of dependencies. These are the dependencies of the dependencies we have pulled in. This is one of the reasons why we use a package manager like npm. It makes it easy to manage all these dependencies.

- We are now ready to run our application. In the terminal, run the following command: **npm run start**. This will start our server. You should see the following output:

```
1 Example app listening at http://localhost:8000
```

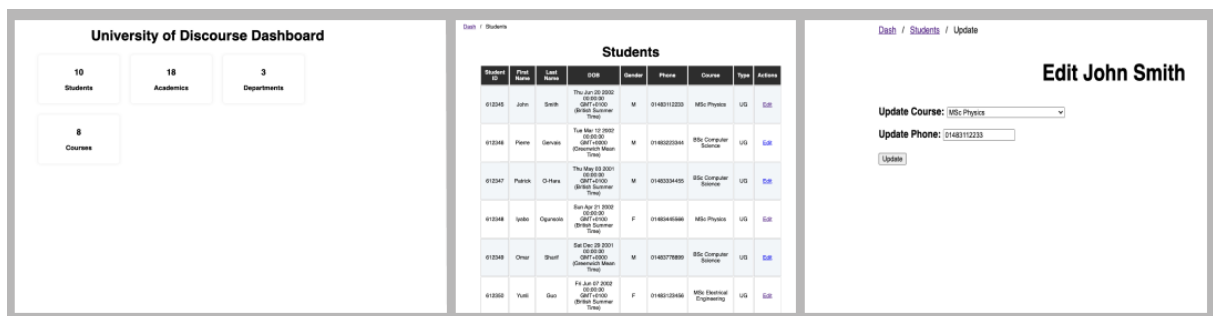

- Open a browser and navigate to **http://localhost:8000**. You should see our University of Discourse homepage. Currently, all of the values are hard-coded. We'll fix this in the next exercises.

Phew! That was a lot of setup. But now we are ready to start adding some dynamic functionality.

1.0 Adding a database connection

In this section, we'll connect to our `university_web` database, this is a fairly simple process. We'll then use this connection to inject data into our views.

Exercise 1.0: Adding a database connection

1. First, we need to install the `mysql` package. This will allow us to connect to our database.



2. Create a new terminal in VS Code by clicking the + icon in the terminal pane.
3. In the VS code terminal, run the following command:

```
1 npm install mysql
```

4. Switch to the terminal running your program - you'll need to check this for errors.
5. Now we need to add the code to connect to our database. Open the `index.js` file. At the top of the file, add the following code to import two dependencies :

```
1 const util = require("util"); // import the util. This is a NodeJS
  package that contains a number of useful functions. We don't need to
  install this, it comes with NodeJS.
2 const mysql = require("mysql"); // import the mysql package we
  installed
```


3. Now we need to create a connection to our database. Add the following code below the const declarations:

```

1 // const PORT = 8001;
2 // const DB_HOST = "localhost";
3 // const DB_USER = "root";    <-- don't copy this section it's already
    defined for you. It's just here so you know where in the file to add
    the code.
4 // const DB_PASSWORD = "";
5 // const DB_NAME = "university_web";
6 // const DB_PORT = 3306;
7
8 // ->> create a connection to our database - the const values are
    already defined for you.
9
10 // set the connection parameters
11 var connection = mysql.createConnection({
12   host: DB_HOST,
13   user: DB_USER,
14   password: DB_PASSWORD,
15   database: DB_NAME,
16   port: DB_PORT,
17 });
18
19 // we do this to use async await with mysql (see: https://stackoverflow
    .com/questions/50093144/using-async-await-with-a-mysql-database)
20 connection.query = util.promisify(connection.query).bind(connection);
21
22 // connect to the database
23 connection.connect(function (err) {
24   if (err) {
25     console.error("error connecting: " + err.stack);
26     return;
27   }
28   console.log("Booom! You are connected");
29 });

```

Connecting to the database.

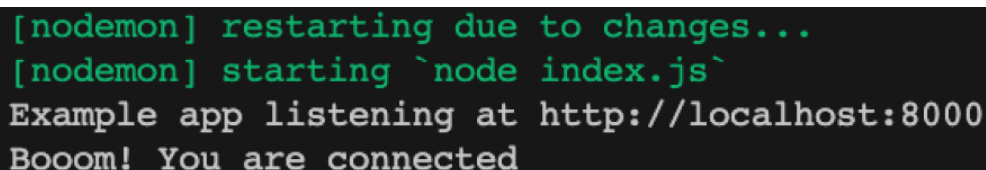

```

[nodemon] restarting due to changes...
[nodemon] starting `node index.js`
Example app listening at http://localhost:8000
Booom! You are connected

```

4. If all has worked correctly, you should see the following message in the terminal: **Booom! You are connected**. If you see an error, check the database name, username, and password are correct. If you are still having problems, ask for help.


Click here to see the solutions

2.0 Injecting data into our views

In this section, we'll learn how to inject data into our EJS views. We'll start by considering our home page.

Exercise 2.0: Injecting data into the home view

1. Navigate to `localhost:8000` in your browser. You should see the following page:

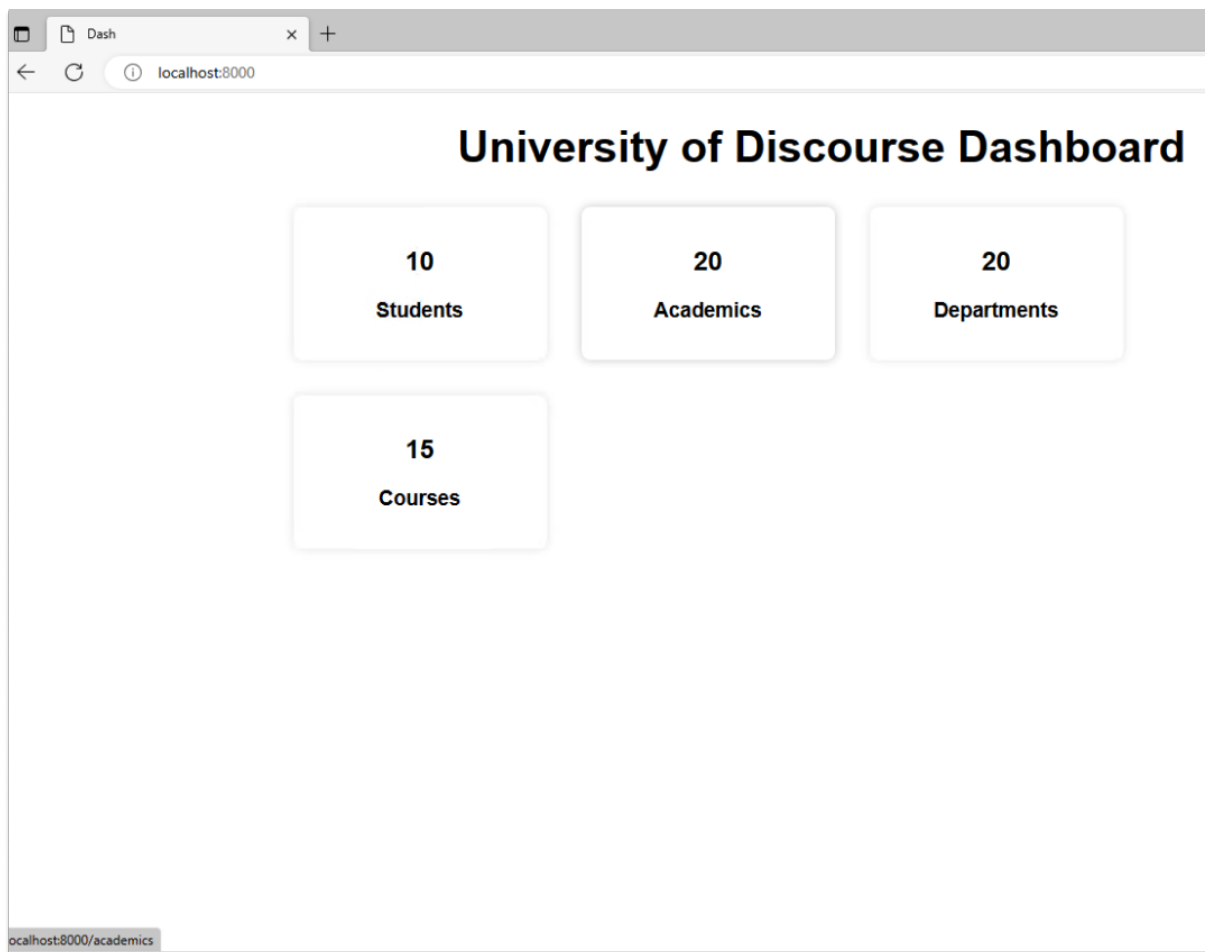

If you recall from last week, we use express to create routes. These routes are responsible for handling requests from the browser. In the `index.js` file, you should see the following code:

```
1 app.get("/", async (req, res) => {
2   res.render("index", {
3     studentCount: 10,
4     academicCount: 20,
5     departmentCount: 20,
6     courseCount: 15,
7   });
8 });
```

The above code, creates a route for the / path (this is the entry point of our website). Notice how we then call the `render` function. This function takes two parameters: the first is the ejs template we want to render ("index"). The second is an object containing the data we want to inject into the view. In this case, we are injecting four values: `studentCount`, `academicCount`, `departmentCount`, and `courseCount`. The curly braces `{ }` are used to create an object. For now, just think of an object as a collection of key-value pairs and understand that we are hard-coding the values of these variables. Try changing some of the numbers and refreshing the page. You should see the values change on the page.

We can access these values in our view by using the following syntax: `<%= studentCount %>`. The `<%=` and `%>` are special tags that tell EJS to inject the value of the variable into the view. Open `views/index.ejs` and take a look at the code. You should see the following:

```
1 <div class="row">
2   <div class="col-3">
3     <div class="card">
4       <div class="card-body">
5         <h5 class="card-title">Students</h5>
6         <p class="card-text"><%= studentCount %></p>
7         <a href="/students" class="btn btn-primary">View</a>
8       </div>
9     </div>
10  </div>
11 </div>
```

Notice how, we are using the `<%= studentCount %>` syntax to inject the value of the `studentCount` variable into the view. Try changing the value of the variable in the `index.js` file and refreshing the page. You should see the value change on the page.

1. Now we know how to inject data into our views, we can start to make our application dynamic. Let's consider our `university_web` database. We have a number of tables:

```
1
2 +-----+
3 | Tables_in_university_web |
4 +-----+
5 | Academic                 |
6 | Course                   |
7 | Department               |
8 | Postgraduate             |
9 | Student                  |
10 | Student_Email            |
11 | Undergraduate            |
12 +-----+
```

Using a standard SQL query, we can get the number of rows in a table. For example, to get the number of students, we can run the following query:

```
1 SELECT COUNT(*) FROM Student; // this will return the number of rows in
  the Student table.
```

Since we are using the mysql package, we can run this query in our code. Open the `index.js` file and add the following code in your `/ route`:

```
1 ...
2 app.get('/', async (req, res) => {
3   // add this line
4   const studentCount = await connection.query('SELECT COUNT(*) as
5     count FROM Student');
6   res.render('index', {
7     studentCount: studentCount[0].count, // <--- update here
8     academicCount: 20,
9     departmentCount: 20,
10    courseCount: 15
11  });
12 ...
```

index.js

Above, we run the query and store the result in a variable called `studentCount`. Notice how we use the `await` keyword. This is because the `connection.query` function is asynchronous. This means that it will take some time to run. We use the `await` keyword to tell NodeJS to wait until the query has finished running before continuing. `StudentCount` will be an array of objects. In this case, it will be an array with one object:

```
1 [
2   {
3     count: 10,
4   },
5 ];
```

We access the count value by using the following syntax: `studentCount[0].count`. The `[0]` is used to access the first element in the array. The `.count` is used to access the count property of the object.

2. To finish this task replace the remaining hard coded values (`academicCount`, `departmentCount`, and `courseCount`) with the output of SQL queries.

Click here to see the solutions

3.0 Working with more complex data

So far, we have only injected simple, singular, values into our views. However, we can also inject more complex data. For example, we can inject an array of objects. Let's consider the `/students` route. You can fire this route by visiting `localhost:8000/students`. You should see the following page:

[Dash](#) / [Students](#)

| Students | | | | | | | | |
|------------|------------|-----------|------------|--------|-------------|----------------------|------|----------------------|
| Student ID | First Name | Last Name | DOB | Gender | Phone | Course | Type | Actions |
| 123 | Jane | Doe | 11/09/2020 | F | 07986836918 | BSc Computer Science | UG | Edit |

Currently, there is no dynamic data on this page. Take a look at `views/students.ejs`. You should see a bog standard html table. Let's see if we can make this view dynamic.

Exercise 3.0: Dynamic multiple values

1. Open the `index.js` file. You should see the following code:

```
1 app.get("/students", async (req, res) => {
2   res.render("students", { students: [] });
3 });
```

Above, we are rendering the `students` view and injecting an empty array into the view. We can access this array in the view by using the following syntax: `<%= students[0] %>` (this will grab our first student). Let's see if we can inject some data into this array. Update your code so instead of an empty array we are injecting database values:

```
1 app.get("/students", async (req, res) => {
2   const students = await connection.query(
3     "SELECT * FROM Student INNER JOIN Course ON student.Stu_Course =
      course.Crs_Code"
4   );
5   res.render("students", { students: students });
6 });
```

Notice how we use an inner join. This is because we want to get the course name. If we did not have this we would just have to display the course code (this would not mean much to an end user).

Now we have injected the data into the view, we need to display it. Open the `views/students.ejs` file. The great thing about EJS is that we can use JavaScript in our views. This means we can use loops to iterate over our data. For example we can use the following code to iterate over our students array and output a table row for each student:

```
1 <% students.forEach(student=> { %>
2 <tr>
3   <td><%= student.URN %></td>
4   <td><%= student.Stu_FName %></td>
5   <td><%= student.Stu_LName %></td>
6   <td><%= student.Stu_DOB %></td>
7   <td><%= student.Stu_Gender %></td>
8   <td><%= student.Stu_Phone %></td>
9   <td><%= student.Crs_Title %></td>
10  <td><%= student.Stu_Type %></td>
11  <td><a href="/students/edit/<%= student.URN %>"> Edit </a></td>
12 </tr>
13 <% }) %>
```


Notice how we use the `<% %>` tags to tell EJS that we are using JavaScript. We then use the `forEach` function to iterate over the students array. For each student, we output a table row. Further, we create a link to the edit page (`<a href="/students/edit/<%= student.URN %>"> Edit `). We'll create this page in the next exercise.

2. To complete this exercise, see if you can update `views/students.ejs` to dynamically display our students.

Click here to see the solutions

4.0 Updating data

So far, we have only displayed data. However, we can also update data. Let's consider the `/students/edit` route. You can fire this route by visiting `localhost:8000/students/edit/1`. You should see the following page:

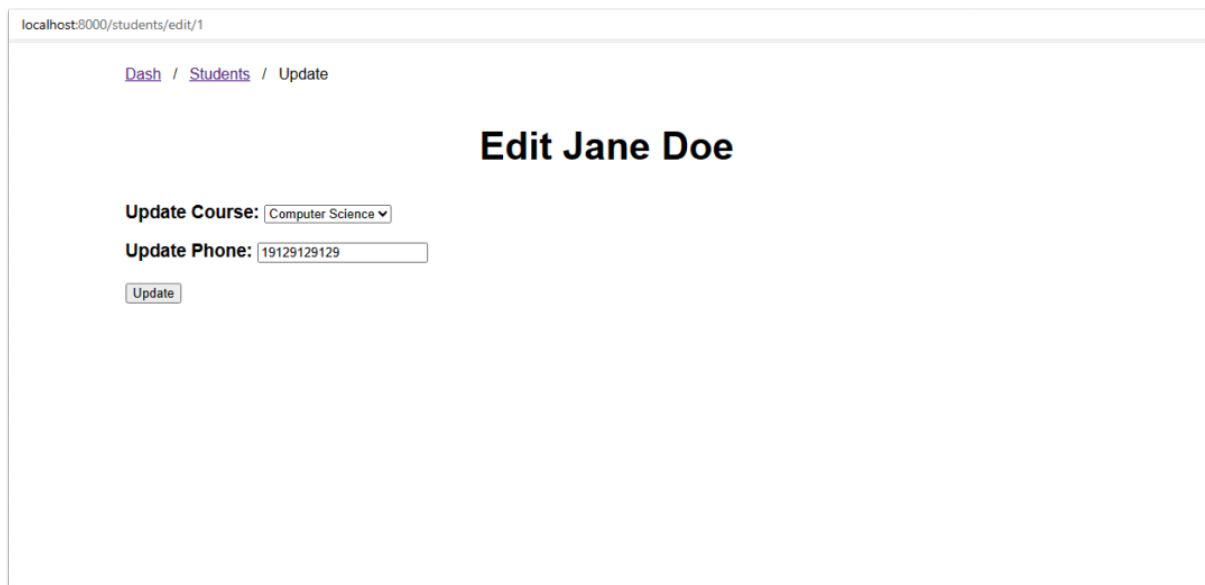

The screenshot shows a web browser window with the address bar displaying `localhost:8000/students/edit/1`. The page has a breadcrumb trail: [Dash](#) / [Students](#) / Update. The main heading is 'Edit Jane Doe'. Below this, there are two form fields: 'Update Course:' with a dropdown menu showing 'Computer Science' and 'Update Phone:' with a text input containing '19129129129'. At the bottom left of the form is an 'Update' button.

You've probably guessed, the values in this page are hard coded. Let's see if we can make this view dynamic. The first thing we need to consider is how we are going to get the data for the student we want to edit. We can do this by using a URL parameter. For example, if we visit `localhost:8000/students/edit/1`, we can get the value of the `URN` parameter (1 in this case) by using the following code:

```
1 app.get("/students/edit/:id", async (req, res) => {
2   const URN = req.params.id;
3   res.render("student_edit", { student: {}, courses: [], message: "" });
4 });
```

Above we are using the `req.params.urn` syntax to get the value of the `URN` parameter. We can then use this value in our SQL query to get the student we want to edit:

```
1 app.get("/students/edit/:id", async (req, res) => {
2   const student = await connection.query(
3     "SELECT * FROM Student WHERE URN = ?",
4     [req.params.id]
5   );
6   res.render("student_edit", {
7     student: student[0],
8     courses: [],
9     message: "",
10  });
11 });
```

Above, we are using the `?` syntax to tell MySQL that we want to use a parameterised query. We then pass the value of the URN parameter as the second parameter of the `query` function. We then inject the student object into the view. We can then access the student object in the view by using the following syntax: `<%= student.<FieldName> %>`.

Exercise 4.0: Accessing URL parameters

1. Use the above examples to update `index.js`'s `"/students/edit/:id"` route to inject the student object into the view.
2. To test your above update has worked. Navigate to `localhost:8000/students` and click edit on one of the student records. Next, update `views/student_edit.ejs` and replace "Jane Doe" with `<h1> Edit <%= student.Stu_FName %> <%= student.Stu_LName %> </h1>` and refresh the page. You should see the student's name appear on the page.

Click here to see the solutions

4.1 Injecting values into a form

So far, we have been managing HTTP GET requests. Perhaps you've started to get a feel for how Express handles these requests through simple pattern matching. For instance, if I type "http://localhost:8000/students/edit/612345" into the browser and press enter, a get request is sent and matched with the route `app.get("/students/edit/:id" . . .)`. To this point, the communication has consisted of sending the data back to the browser (otherwise known as the client); however, to complete our application, we must enable the client to send user controlled data to the server.

The most common way for users to send data is through HTML forms - you probably already know this. Let's consider how we can update `views/student_edit.ejs` and `index.js` to process a form

update.

Exercise 4.1: Injecting values into a form

1. First, use the browser navigate to the route: “http://localhost:8000/students/edit/612345”; you should see John Smith’s record. Currently, the form has hard coded data! Let’s consider how we can update this. In VS code, open `views/student_edit.ejs`.
2. Navigate to the `<form>` element there are two things we need to consider:
 1. The first is the `method` attribute in the form tag: `<form method="post" class="edit_form">` in this instance it is post. This tells the browser that we want to send a POST request to the server. We could add an optional, `action` attribute to the form tag. This tells the browser where to send the request. If we don’t specify an action, the browser will send the request to the current route. In this case, it will send the request to `/students/edit/612345`, the current url.
 2. The second is how we embed values into the form. Consider the following: `<input type="tel" value="19129129129" name="Stu_Phone" required>`. There are some important things to note here:
 - The `value` attribute is used to set the value of the input. In this case, we are hard coding the value.
 - The `name` attribute is used to give the input a name. The name should match the name of the field in the database. In this case, we are using the `Stu_Phone` field.
 - The `required` attribute is used to tell the browser that the input is required. If the user tries to submit the form without filling in the input, the browser will display an error message.
3. Use the `<%= %>` syntax to inject a value from our view. For example, we could use the following code: `<input type="tel" value="<%= student.Stu_Phone %>" name="Stu_Phone" required>`. This would inject the student’s phone number into the input.

Ok, so we’ve managed to inject the student’s phone number into the form; however, we now need to consider the course they are taking this is a little more tricky. You’ll notice the course the student is taking is a foreign key (e.g, 211). This key relates to the course code in the course table. Since we don’t want to just display a course number to the user, we need to get the course name from the course table. You’ll notice we are currently just passing in a blank array (`[]`) to the view.

```

1 app.get("/students/edit/:id", async (req, res) => {
2   const student = await connection.query(
3     "SELECT * FROM Student WHERE URN = ?",
4     [req.params.id]
5   );
6   res.render("student_edit", { student: student[0], courses: [],
7     message: "" });
7 });

```

4. Update the above section to pass in the courses. You'll need to use a SQL query to get the courses. You can use the following query as a starting point: `const courses = await connection.query('SELECT * FROM Course');`.

Now we have the courses in the view, we need to display them in the form. To do this we need to construct a loop to iterate over the courses array. For each course, we need to create an option tag. For example, we could use the following code:

```

1
2 <% courses.forEach( course=> { %>
3   <option value="<%= course.Crs_Code %>"
4     <%=course.Crs_Code===student.Stu_Course
5       ? 'selected'
6       : "" %>>
7     <%= course.Crs_Title %>
8   </option>
9 <% } ) %>

```

Notice how we use the `<%= %>` syntax to inject the course code and course title into the option tag. We also use a ternary operator (`<%=course.Crs_Code===student.Stu_Course ? 'selected' : ""%>`) to check if the course code matches the student's course code. If it does, we add the `selected` attribute to the option tag. This tells the browser to select the option.

5. Update the `views/student_edit.ejs` file to display the courses in the form. Once you've done this, the correct course should be selected when you visit the edit page for any student.

Note, make sure you remove the currently hard coded courses.

Click here to see the solutions

4.2: Processing a Post request

We are nearly there! We can now display the data in the form. The final step is to process the form when the user submits it.

Exercise 4.2: Processing a Post request

1. First, we need to add a route to handle the post request. Open the `index.js` file and add the following code:

```
1 app.post("/students/edit/:id", async (req, res) => {
2   console.log(req);
3 });
```

`index.js`

2. Use the above example to update `index.js` to handle a post request from the form.
3. Submit the form (press the update button on the update page), and check the terminal. You'll see a long list of values; however, no `Stu_Phone` or `Stu_Course`! This is because we need to tell Express to parse the form values and attach them to the HTTP request. To do this we first need to install the `body-parser` package.

4. In the terminal, run the following command:

```
1 npm install body-parser
```

5. Next, we need to tell Express to use the `body-parser` package. Open the `index.js` file and add the following code:

```
1 // at the top of the file
2 const bodyParser = require('body-parser');
3
4 ...
5 // below the other use statements
6 app.use(bodyParser.urlencoded({ extended: false }));
```

`index.js`

6. Now update your `post` route to print out the request body, and you should see the form values in the terminal when you submit the form:

```
1 app.post("/students/edit/:id", async (req, res) => {
2   console.log(req.body);
3 });
```

Click here to see the solutions

Exercise 4.3: Updating the database

We are now ready to update the database with the form values. The flow will look something like this:

1. The browser sends a POST request to the server.
2. The server parses the body of the request and gets the form values.
3. The server updates the database.
4. The server re-renders the edit page with the updated student.

Let's get going!

We can update the database, and re-render the edit view, by using the following code:

```
1 app.post("/students/edit/:id", async (req, res) => {
2   await connection.query("UPDATE Student SET ? WHERE URN = ?", [
3     req.body,
4     req.params.id,
5   ]);
6   const student = await connection.query(
7     "SELECT * FROM Student WHERE URN = ?",
8     [req.params.id]
9   );
10  const courses = await connection.query("SELECT * FROM Course");
11  res.render("student_edit", {
12    student: student[0],
13    courses: courses,
14    message: "student updated",
15  });
16 });
```

index.js

Above we are using the `?` syntax to tell MySQL that we want to use a parameterised query. We then pass the value of the URN parameter (`req.params.id`) as the second parameter of the `query` function. Next, we gather the updated student and list of courses to populate our view. Finally, we re-render the view with a message to tell the user the student has been updated.

1. Use the code above to add the update functionality to your application. Once you've done this, you should be able to update the student's details and see the updated details on the edit page.
2. Finally, let's add some basic validation. We've already done this client side by adding the `required` attribute to the form inputs. However, it's normally a good idea to add some server-side validation. Let's consider how we might do this:

```
1 app.post("/students/edit/:id", async (req, res) => {
2   var message = "";
3
4   if (isNaN(req.body.Stu_Phone) || req.body.Stu_Phone.length !== 11) {
5     message = "Please enter a valid phone number";
6   } else {
7     await connection.query("UPDATE Student SET ? WHERE URN = ?", [
8       req.body,
9       req.params.id,
10    ]);
11    message = "Student updated";
12  }
13  const student = await connection.query(
14    "SELECT * FROM Student WHERE URN = ?",
15    [req.params.id]
16  );
17  const courses = await connection.query("SELECT * FROM Course");
18  res.render("student_edit", {
19    student: student[0],
20    courses: courses,
21    message: message,
22  });
23 });
```

index.js

Above, we are using the `isNaN` function to check if the phone number is a number. We are also checking the length of the phone number. If the phone number is not a number, or the length is not 11, we set the message to “Please enter a valid phone number”. Notice how we are using the `||` operator to check if either of the conditions.

3. To finish the lab, add the above code to your application. Once you’ve done this, try updating a student’s phone number to a non-number. You should see the message “Please enter a valid phone number” appear on the edit page.

Stretch Tasks

1. Add the ability to add a new student to the database. You’ll need to create a new route, and a new view. You’ll also need to add a link to the new student page on the students page. You can use the edit page as a starting point.
2. Can you add create, read, and update functionality for another table in the database (e.g., course, department, academic, etc.)?

-
3. Can you add delete functionality to the application? In the case of a student, this would mean adding a delete link next to the existing edit link. When the user clicks the delete link, the student should be deleted from the database.
-