

VSD-MOEA: A Novel Dominance-Based Multi-Objective Evolutionary Algorithm with Explicit Variable Space Diversity Management

Joel Chacón Castillo, Carlos Segura, *Member, IEEE*, and Carlos A. Coello Coello, *Fellow, IEEE*,

Abstract—Most state-of-the-art Multi-objective Evolutionary Algorithms (MOEAs) promote the preservation of the diversity in the objective space, whereas the information about the diversity in the decision variables is almost neglected. However, in the case of single-objective optimization, it has been shown that explicitly managing the diversity in the decision variables usually leads to higher quality solutions. In this paper, the Variable-Space-Diversity based MOEA (VSD-MOEA) is presented. VSD-MOEA is a dominance-based MOEA whose main novelty is that it explicitly considers the diversity in the variable space. Note that the diversity in the objective space is also taken into account. The simultaneous use of information of both spaces allows to properly adapt the balance between exploration and intensification. Particularly, at the initial stages, the decisions taken by the approach are more biased by the information of the diversity in the decision variables, whereas in the last stages decisions are based on the information of the objective space. The new method is compared with state-of-art MOEAs using several benchmarks. The novel proposal attains quite better results showing a more stable and robust behaviour. Additionally, a scalability study in the decision variable reports important benefits of the novel proposal.

I. INTRODUCTION

MULTI-OBJECTIVE Optimization Problems (MOPs) involve the simultaneous optimization of several objective functions that are usually in conflict [1]. A continuous box-constrained minimization MOP, which is the kind of problem addressed in this paper, can be defined as follows:

$$\begin{aligned} & \text{minimize} \quad \vec{F} = [f_1(\vec{x}), f_2(\vec{x}), \dots, f_M(\vec{x})] \\ & \text{subject to} \quad x_i^{(L)} \leq x_i \leq x_i^{(U)}, \quad i = 1, 2, \dots, n. \end{aligned} \quad (1)$$

where n corresponds to the dimension of the variable space, \vec{x} is a vector of n decision variables $\vec{x} = (x_1, \dots, x_n) \in R^n$, which are constrained by $x_i^{(L)}$ and $x_i^{(U)}$, i.e. the lower bound and upper bound, and M is the number of objective functions to optimize. The feasible space bounded by $x_i^{(L)}$ and $x_i^{(U)}$ is denoted by Ω , each solution is mapped to the objective space with the function $F : \Omega \rightarrow R^M$, which consist of M real-valued objective functions and R^M is called the *objective space*.

J. Chacón, and C. Segura are with the Center for Research in Mathematics (CIMAT), Computer Science Department, Callejón Jalisco s/n, Mineral de Valenciana, Guanajuato, Guanajuato 36240, Mexico (e-mail: joel.chacon@ciamat.mx; carlos.segura@ciamat.mx)

C. A. Coello Coello is with the Evolutionary Computation Group, Computer Science Department, CINVESTAV-IPN, Mexico City 07300, Mexico (e-mail: ccoello@cs.cinvestav.mx).

Digital Object Identifier xxx

Manuscript received XX, XX 2017; revised XX XX, XX.

Given two solutions $\vec{x}, \vec{y} \in \Omega$, \vec{x} dominates \vec{y} , mathematically denoted by $\vec{x} \prec \vec{y}$, iff $\forall m \in 1, 2, \dots, M : f_m(\vec{x}) \leq f_m(\vec{y})$ and $\exists m \in 1, 2, \dots, M : f_m(\vec{x}) < f_m(\vec{y})$. The best solutions of a MOP are those whose objective vectors are not dominated by any other feasible vector. These solutions are known as the Pareto optimal solutions. The Pareto set is the set of all Pareto optimal solutions, and the Pareto front are the images of the Pareto set. The goal of multi-objective optimization approaches is to obtain a proper approximation of the Pareto front, i.e., a set of well distributed solutions that are close to the Pareto front.

One of the most popular metaheuristics used to deal with MOPs is the Evolutionary Algorithm (EA). In single-objective EAs, it has been shown that taking into account the diversity of the variable space to properly balance between exploration and exploitation is highly important to attain high quality solutions [2]. Diversity can be taken into account in the design of several components such as in the variation stage [3], [4], replacement phase [5] and/or population model [6]. The explicit consideration of diversity leads to improvements in terms of premature convergence avoidance, meaning that taking into account the diversity in the design of EAs is specially important when dealing with long-term executions. Recently, some diversity management algorithms that combine the information of diversity, stopping criterion and elapsed generations have been devised. They have allowed to provide a gradual loss of diversity that depends on the time or evaluations granted to the execution [5]. Particularly the aim of such methodology is to promote exploration in the initial generations and gradually alter the behaviour towards intensification. These schemes have provided really promising results. For instance, new best-known solutions for some well-known variants of the frequency assignment problem [7], and for a two-dimensional packing problem [5] have been attained using such methodology. Additionally, this principle guided the design of the winning strategy of the Second Wind Farm Layout Optimization Competition¹, which was held in the Genetic and Evolutionary Computation Conference. Thus, the benefits of such methodology have been shown in several different single-objective optimization problems.

One of the goals in the design of Multi-objective Evolutionary Algorithms (MOEAs) is to obtain a well-spread set of solutions in the objective space. The maintenance of some degree of diversity in the objective space implies that complete

¹<https://www.irit.fr/wind-competition/>

convergence does not appear in the variable space [8]. In some way, the variable space inherits some degree of diversity due to the way in which the objective space is taken into account. However, this is just an indirect way of preserving the diversity in the variable space, so in some cases the level of diversity might not be large enough to ensure a high degree of exploration. For instance, it has been shown that with some of the WFG benchmarks, in most of the state-of-the-art MOEAs the distance parameters quickly converge, meaning that the approach focuses just on optimizing the position parameters for a long period of the optimization process [8]. Thus, while some degree of diversity is maintained, a similar situation to premature convergence is presented meaning that genetic operators might not be able to generate better trade-offs.

Attending to the differences between state-of-the-art single-objective EAs and MOEAs, this paper proposes a novel MOEA, the Variable-Space-Diversity based MOEA (VSD-MOEA), that is based on controlling the amount of diversity in the variable space in an explicit way. Similarly to the successful methodology applied in single-objective optimization, the stopping criterion and the amount of evaluations performed are used to vary the amount of desired diversity. The main difference with respect to the single-objective case is that the objective space is simultaneously considered. Particularly, the approach grants more importance to the diversity of the variable space in the initial stages, whereas as the generations evolve, it gradually grants more importance to the diversity of the objective space. In fact, at the end of the execution, the diversity of the variable space is neglected, so in the last phases the proposal is similar to current state-of-the-art approaches. To our knowledge, this is the first MOEA whose design follows this principle. Since there exist currently a quite large amount of different MOEAs [9], three popular schemes have been selected to validate our proposal. This validation has been performed with several well-known benchmarks and proper quality metrics. The important benefits of properly taking into account the diversity of the variable space is clearly shown in this paper. Particularly, the advantages are clearer in the most complex problems. Note that this is consistent with the single-objective case, where the most important benefits have been obtained in complex multi-modal cases [7].

The rest of this paper is organized as follows. Section II provides a review of related papers. Several critical components that are highly related with diversity, and the VSD-MOEA proposal are detailed in section III. Section IV is devoted to the experimental validation of the novel proposal. Finally, conclusions and some lines of future work are given in Section V. Note also that some supplementary materials are given. They include details of the experimental results with additional metrics as well as some explanatory videos.

II. LITERATURE REVIEW

This section is devoted to review some of the most important papers that are closely related with the trend dealt by our proposal. First, some of the most popular ways of managing diversity in EAs are presented. Then, a brief explanation related to the state-of-the-art in MOEAs is showed.

A. Diversity Management in Evolutionary Algorithms

The proper balance between exploration and exploitation is one of the keys to success in the design of EAs. In the single-objective domain it is known that properly managing the diversity in the variable space is a way to control such balance, and as a consequence, a large amount of diversity management techniques have been devised [10]. Particularly, these methods are classified depending on the component(s) of the EA that is modified to alter the amount of maintained diversity. A popular taxonomy identifies the following groups [11]: *selection-based*, *population-based*, *crossover/mutation-based*, *fitness-based*, and *replacement-based*. Additionally, the methods are referred to as *uniprocess-driven* when a single component is altered, whereas the term *multiprocess-driven* is used to refer to those methods that act on more than one component.

Among the previous proposals, the replacement-based methods have attained very high-quality results in last years [7], so this alternative was selected with the aim of designing a novel MOEA incorporating an explicit way to control the diversity in the variable space. The basic principle of these methods is to manage the level of exploration in successive generations by controlling the diversity of the survivors of the population [7]. Since the most common problem is the premature convergence, the modifications are usually performed with the aim of slowing down the convergence. One of the most popular proposals belonging to this group is the *crowding* method which is based on the principle that offspring should replace similar individuals from the previous generation [12]. Several replacement strategies that do not rely on crowding have also been devised. In some methods, diversity is considered as an objective. For instance, in the hybrid genetic search with adaptive diversity control (HGSADC) [13], individuals are sorted by their contribution to diversity and by their original cost. Then, the rankings of the individuals are used in the fitness assignment phase. A more recent proposal [7] incorporates a penalty approach to alter gradually the amount of diversity maintained in the population. Particularly, initial phases preserve a larger amount of diversity than the final phases of the optimization. This last method has inspired the design of the novel proposal put forth in this paper for multi-objective optimization.

Its important to remark that in the case of multi-objective optimization, few works related to the maintenance of diversity in the variable space have been developed. The following section reviews some of the most important MOEAs and introduces some of the works that consider the maintenance of diversity in the variable space.

B. Multi-objective Evolutionary Algorithms

In recent decades, several MOEAs have been proposed. While the purpose of most of them is to provide a well-spread set of solutions close to the Pareto front, several ways of facing this purpose have been devised. Therefore, several taxonomies have been proposed with the aim of better classifying the different schemes [14]. Particularly, a MOEA can be designed based on Pareto dominance, indicators and/or decomposition [15]. Since none of the groups has a remarkable

superiority over the others, in this work all of them are taken into account to validate our proposal. This section introduces the three types of schemes and some of the most popular approaches belonging to each category. Thus, at least one MOEA of each category is selected to carry out the validation of VSD-MOEA.

The dominance-based category includes those schemes where the Pareto dominance relation is used to guide the design of some of its components such as the fitness assignment, parent selection and replacement phase. The dominance relation does not inherently promotes the preservation of diversity in the objective space, therefore additional techniques such as niching, crowding and/or clustering are usually integrated with the aim of obtaining a proper spread and convergence to the Pareto front. The most popular dominance-based MOEA is the Non-Dominated Sorting Genetic Algorithm II (NSGA-II) [16].

In order to assess the performance of MOEAs, several quality indicators have been devised. In the indicator-based MOEAs, the use of the Pareto dominance relation is substituted by some quality indicators to guide the decisions performed by the MOEA. An advantage of indicator-based algorithms is that the indicators usually take into account both the quality and diversity in objective space, so incorporating additional mechanisms to promote diversity in the objective space is not required. Among the different indicators, hypervolume is a widely accepted Pareto-compliance quality indicator. The Indicator-Based Evolutionary Algorithm (IBEA) [17] was the first method belonging to this category. A more recent one is the R2-Indicator-Based Evolutionary Multi-objective Algorithm (R2-EMOA) [18], which has reported a quite promising performance in multi-objective problems. Its most important feature is the use of the R2 indicator, which compute the mean difference in utilities through a set of weight vectors.

Finally, decomposition-based MOEAs [19] are based on transforming the MOP into a set of single-objective optimization problems that are tackled simultaneously. This transformation can be performed in several ways, e.g. with a linear weighted sum or with a weighted Tchebycheff function. Given a set of weights to establish different single-objective functions, the MOEA searches for a single high-quality solution for each of them. The weight vectors should be selected with the aim of obtaining a well-spread set of solutions [1]. The Multi-objective Evolutionary Algorithm Based on Decomposition (MOEA/D) [20] is the most popular decomposition-based MOEA. Its main principles include problem decomposition, weighted aggregation of objectives and mating restrictions through the use of neighborhoods. Different ways of aggregating the objectives have been tested with MOEA/D. Among them, the use of the Tchebycheff approach is quite popular.

It is important to stand out that none of the most popular algorithms in the multi-objective field introduce special mechanisms to promote diversity in variable space. However, some efforts have been dedicated to this principle. A popular approach to promote the diversity in the decision space is the application of fitness sharing [21] in a similar way than in single-objective optimization. Although, fitness sharing might be used to promote diversity both in objective and decision variable space, most popular variants consider only distances

in the objective space. Another MOEA designed to promote diversity in both the decision and the objective space is the Genetic Diversity Evolutionary Algorithm (GDEA) [22]. In this case, each individual is assigned with a diversity-based objective which is calculated as the Euclidean distance in the genotype space to the remaining individuals in the population. Then, a ranking that considers both the original objectives and the diversity objective is used to sort individuals. Another somewhat popular approach is to calculate distances between candidate solutions by taking into account both the objective and variable space [23], [24] with the aim of promoting diversity in both spaces. A different proposal combines the use of two selection operators [25]. The first one promotes diversity and quality in the objective space whereas the second one promotes diversity in the decision space. In the same line, modifying the hypervolume to integrate the decision space diversity in a single metric was proposed in [26]. In this approach, the proposed metric is used to guide the selection in the MOEA. Finally, some indirect mechanisms that might affect the diversity have also been introduced in some schemes. Probably, the most popular one is the use of mating restrictions [27], [19].

Attending to the analyses of the previous approaches, it is clear that they might bring benefits to decision makers because the final solutions obtained by these methods present a larger decision space diversity than the ones obtained by traditional approaches [23], [28]. Thus, while clear improvements are obtained when taking into account metrics related to the Pareto Set, the benefits in terms of the obtained Pareto front are not so clear. We claim that one of the reasons of this behaviour might be that the diversity in the variable space is considered in the whole optimization process. However, in a similar way that in the single objective domain, reducing the importance granted to the diversity in the decision space as the generations progress is really important [5]. Currently, no MOEA considers this idea, so this principle has guided the design of our novel MOEA.

III. PROPOSAL

This section is devoted to explain our proposal, whose main contributions rely in the replacement phase procedure and the density estimator, the latter is considered in the objective space. VSD-MOEA is based on the principle of considering the diversity and the stopping criterion explicitly. Thus, the optimization search capabilities are altered gradually provoking a balance from exploration to exploitation. This principle might be incorporated with any of the three categories of MOEAs. In this paper, our decision was to incorporate it in a dominance-based approach. Particularly, our proposal considers the application of the *fast-non-dominated-sort* procedure, so it might be considered as an extension of NSGA-II [16]. Also, it takes into account a more advanced way to control the diversity in the objective space. Overall, VSD-MOEA is a dominance-based MOEA in which a novel replacement phase is provided, i.e. no novel components are incorporated in the parent selection and variation stages.

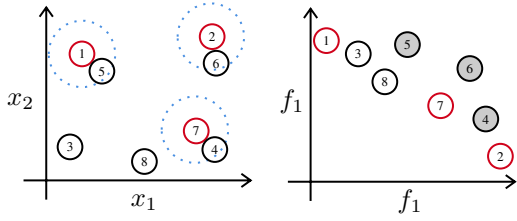


Fig. 1. Replacement Phase - The left side represents the variables space and the right side the respectively objective space of the individuals.

A. Replacement Phase of VSD-MOEA

The methodology used in the replacement phase considers several principles that were provided in the development of replacement phases in the single-objective domain [5]. In these approaches, at the begin of each generation the parents and offspring are joined. Then, N individuals must be selected to survive. In order to take into account the diversity in the decision space, the Distance to Closest Neighbor (DCN) is used. In each step, this normalized distance (Eqn. 2) is calculated with respect to those individuals that have already been selected to survive.

$$Distance(A, B) = \left(\frac{1}{n} \sum_{i=1}^n \left(\frac{A_i - B_i}{x_i^{(U)} - x_i^{(L)}} \right)^2 \right)^{1/2} \quad (2)$$

Thus, individuals with large DCN values are those that contribute in a significant way to preserve exploration in different regions of the search space. In order to avoid an excessive decrease of the exploration degree, individuals with a DCN value lower than a threshold value are penalized, however they can be selected if non-penalized individual exist. In order to better visualize this principle, it can be considered that in each selection of a survivor, a hypersphere centered in such survivor is created. Then, all the individuals that are inside a hypersphere are penalized. One of the key novelties of the methodology is that the radius of the hyperspheres are modified dynamically by taking into account the stopping criterion and elapsed generations. Particularly, the radius is decreased in a linear way, therefore it alters the behaviour from exploration towards intensification. Note that, this method requires a parameter which is the initial radius of the hyperspheres which is denoted as D_I . Particularly, setting this parameter with a large value might provokes the penalization of the whole set of individuals, thus enough non-useful diversity might be maintained in the initial generations. However, too small values might not penalize to all the individuals, therefore this approach might behave as a traditional non-diversity based approach. Thus, this parameter depends of each MOP.

In order to better describe the principle of the replacement phase, we denote the individuals in the following way. The *reference individuals* are those that have been selected to survive as parents of the next generation. The remaining ones are classified in *penalized individuals* and *candidate individuals*. A representation of this scheme can be visualized in Fig. 1, where the decision and objective space are showed (left and right sides). The reference individuals are marked

Algorithm 1 Replacement Phase of VSD-MOEA

```

1: Input:  $P_t$  (Population of current generation),  $Q_t$  (Offspring of current Generation)
2: Output:  $P_{t+1}$ 
3:  $R_t = P_t \cup Q_t$ 
4:  $P_{t+1} = \emptyset$ 
5:  $Penalized = \emptyset$ 
6:  $D_t = D_I - D_I * \frac{G_{Elapsed}}{0.9 * G_{End}}$ 
7: move( $R_t$ ,  $P_{t+1}$ , Best in each objective according the AASF)
8: while  $|P_{t+1}| \leq N$  do
9:   Compute Diversity_Variable_Space ( $R_t$ ,  $P_{t+1}$ )
10:  move( $R_t$ ,  $Penalized$ , Variable space diversity  $< D_t$ )
11:  if  $R_t$  is empty then
12:    Compute Diversity_Variable_Space ( $Penalized$ ,  $P_{t+1}$ )
13:    move( $Penalized$ ,  $R_t$ , Largest variable space diversity)
14:  conditionally - non - dominated - sort( $R_t \cup P_{t+1}$ )
15:  Compute Diversity_Objective_Space( $R_t$ ,  $P_{t+1}$ )
16: return  $P_{t+1}$ 

```

with a red border. It can be visualized that each one of them is surrounded by a blue dash circle with radius D_t . Following this principle, a larger dimension of this circle would be a hypersphere. Then, any candidate individual that is inside of this circle is penalized. In this figure the penalized individuals are shown with gray background in the right side. Once that the individuals are penalized, any of the typical approaches that are used to select survivors might be taken into account without considering the penalized individuals.

The specific pseudocode of the replacement phase that is used in VSD-MOEA is shown in Algorithm 1. Basically, it is the approach previously described, it is integrated with a sophisticated density estimator, which qualifies the contribution of each individual in the objective space. In each step, the candidate individual with lowest rank is selected. In case of tie is selected the one with the largest contribution to the diversity in the objective space. In each generation, the first step (line 3) consists in joining the parents (P_t) and the offspring (Q_t) individuals denoted by R_t . Thereafter, the set of penalized individuals and the parents of the next generation (P_{t+1}) are emptied (lines 4 and 5). Additionally, the minimum threshold value or radius (D_t) is updated (line 6). Note that the symbol D_I denotes the initial radius or minimum threshold value, the amount of generations that have been evolved is indicated with $G_{Elapsed}$, and G_{End} is the stopping criterion, i.e. the number of generations that are to be evolved in the execution of VSD-MOEA. It is clear that after the 90% of the generations, the D_t value is lower than 0, meaning that no penalties are performed. This means that in the first 90% of the generations, more exploration than in traditional MOEAs is induced, whereas in the final stages, a traditional MOEA is applied. The reason to induce such behaviour is that, we are not interested in obtaining a diverse set of solutions in the decision space –if it is not required by the problem– at the end of the run. Maintaining diverse solutions in the initial stages is just a way to promote exploration which results in better approximations to the Pareto front at the end of the execution. Finally, the next population is filled with the boundary solutions (line 7), i.e. for each k -objective the best candidate solution is selected to survive is indicated by the *Augmented Achievement Scalarizing Function* (AASF) [29].

Then, until N individuals are selected (line 8), the following steps are carried out. First, the DCN value of each individual that has not been selected is calculated (line 9). Then, those

individuals with a DCN value lower than D_t are penalized (line 10). If all the candidate individuals are penalized (line 11), it means that the amount of exploration is lower than expected. Thus, the individual with largest DCN values is recovered, i.e. moved to the non-penalized individuals set (lines 12 and 13). Finally, the objective space is taken into account. Specifically, the candidate individuals and the reference set are joined. Then, the *fast-non-dominated-sort* procedure is executed with such a set, stopping as soon as a front with a candidate individual is found (line 14). Then, for each candidate individual that belongs to the lowest front, the individual with higher contribution to the diversity in the objective space is selected (line 15). The specific way in which the diversity in the objective space is measured is described in the next section.

Note also that, as part of the diversity calculation of the variable space, a metric should be selected. Since our experimental validation is performed with a continuous domain, the normalized Euclidean distance is used. However, in discrete domains other distance metrics such as the Manhattan, or the Hamming distance might be considered, and the definition of such distance might affect the performance of the approach [7].

B. A Sophisticated Density Estimator for the Objective Space

Since the dominance definition is not related to the preservation of diversity in the objective space, dominance-based MOEAs incorporate special procedures to maintain diverse solutions, such as clustering and/or crowding. In this paper, we define a novel distance metric, and an iteratively heuristic selection approach, which selects an individual of the best front and with the largest defined distance. Specifically, the novel distance is called “Improvement Distance” (ID) and it follows the same principles that guided the design of both indicators the IGD+ and $I_{\epsilon+}$ [30], [17], [31]. The main idea is to prefer those individuals whose quality in all objectives is similarly preserved. Particularly, a non-dominated individual can be very distant to the Pareto Front due that such individual could be the best in one objective but meaningfully deteriorated in the rest of objectives, so as result it has high diversity in objective space. In fact, high improvements in one objective value are related to larger selection probabilities and not the opposite, so this behaviour should be avoided.

The key idea takes into account the dominance relation between the candidate and reference individuals. Consequently, the reference and the candidate individuals are compared. If the reference individual is dominated by the candidate individual, then the euclidean distance with no modification is implemented. However if they are non-dominated with each other, then is calculated the minimum distance from the reference individual to the dominated region by the candidate individual. Additionally, if the candidate individual is dominated by the reference individual, then is computed the I_{ϵ} indicator, that gives the minimum distance by which the candidate individual needs to or can be translated in each dimension in objective space such that the reference individual is dominated. Therefore, this distance can be viewed as an amount of inferiority of the solution in comparison with the reference individual. The improvement distance is defined in

Equation (3) which incorporates the I_{ϵ} indicator (Equation 4) where R and C are the reference and candidate solutions respectively.

$$ID(R, C) = \left(\sum_{i=1}^M (\max(0, R_i - C_i))^2 \right)^{1/2} - I_{\epsilon}(R, C) \quad (3)$$

$$I_{\epsilon}(R, C) = \begin{cases} \min_{\epsilon} \{f_i(C) - \epsilon \leq f_i(R)\} & R \preceq C \\ 0 & \text{otherwise} \end{cases} \quad (4)$$

Specifically, this distance is considered as a Weakly Pareto Compliant Indicator. In addition, this metric relaxes some difficulties encountered when the number of objectives is increased, given that the solutions in many objectives are usually non-dominated with each other by using the Pareto dominance relation. This means a very low selection pressure toward the Pareto front in Pareto-dominance-based MOEAs [32]. Principally, the improvement distance is effective with over-prioritization of dominance-resist solutions i.e., solutions with exceptional performance in one objective and extremely poor performance in many others [33].

Given that the design of this MOEA is considered for long-term executions, the algorithm 1 is implemented efficiently. Thus, the distances are pre-computed and are updated in each iteration, the same for the dominance count information that is used in the *conditionally-non-dominated-sort*. In fact, the worst case complexity of this algorithm is $O((3N)^2 \times n)$, since that the dimension of the decision variable space is usually bigger than the number of objectives.

IV. EXPERIMENTAL VALIDATION

In this section the experimental validation is carried out, showing that controlling the diversity in the variable space is a way to improve further some of the results obtained by the state-of-art-MOEAs. At the beginning, several technical specifications taken into account in our comparison outline are explained. Thereafter, to have a broad perception of the VSD-MOEA some experiments are driven. Between them an analyzes which is designed to test the scalability in the decision variable space of each MOEA. This analyzes is narrowed through some specific and well known problems. In the same line, with the intention to have a better understanding of the critical parameter that induces the initial amount of diversity is taken into account. This is carried out through several settings and with all the test-problems. Finally, since that the mechanism imposed in our proposal, which avoid the premature convergence, highly depends on the elapsed time, we reported the benefits of it considering both short, and long term executions. The latter experiments shows that the VSD-MOEA has a decent performance in short-term executions too.

To validate the proposed MOEA in this work are considered some of the most popular benchmark in the multi-objective field. Particularly, the WFG [34], DTLZ [35], and UF [36] test problems have been used for our purpose. Additionally, our experimental validation includes the VSD-MOEA, as well as three well-known state-of-the-art algorithms. Given that all of them are stochastic algorithms, each execution was repeated 35 times with different seeds. The common configuration in

TABLE I
PARAMETERIZATION OF EACH MOEA CONSIDERED

Algorithm	Configuration
MOEA/D	Max. updates by sub-problem (η_r) = 2, tour selection = 10, neighbour size = 10, period utility updating = 30 generations probability local selection (δ) = 0.9,
VSD-MOEA	$D_I = 0.4$
R2-EMOA	$\rho = 1$, offspring by iteration = 1

all of them was the following: the stopping criterion was set to 250,000 generations, the population size was fixed to 100, the WFG test problems were configured with two and three objectives, which are set to 24 parameters, where 20 of them are distance parameters, and 4 are position parameters. Additionally, in the DTLZ test instances, the number of decision variables is set to $n = M + r - 1$, where $r = \{5, 10, 20\}$ for DTLZ1, DTLZ2 to DTLZ6 and DTLZ7 respectively, as is suggested by the authors [35]. The UF benchmark is composed of ten test instances, which is categorized in two groups that are based in the number of objective functions to solve, thus the first seven consists of two objectives, and the remaining of three, also the number of decision variables taken into account in each one is $n = 30$. In general, the crossover and mutation operators are the Simulated Binary Crossover (SBX), and polynomial [37], [38], which probabilities are set to 0.9 and $1/n$ respectively. Also, the crossover and mutation distribution indexes were assigned to 20 and 50 respectively. The extra-parameterization of each algorithm is showed in the table I.

Despite the fact that the MOEA/D, and R2-EMOA can be employed with the same utility function—in this case the Tchebycheff function—each one of them is designed through a notorious dissimilar paradigm. Thus, the weight vectors taken into consideration for each one of them were different. The main reason of this, is that the R2-EMOA can be configured with a different population size than the number of weight vectors without been significantly affected on its performance. Particularly, the R2-EMOA employs 501 and 496 weight vectors for two and three objectives respectively. Contrarily, in the MOEA/D each weight vector is identified as a subproblem, therefore the population should correspond to the number of weight vectors. Also, the weight vectors used in the MOEA/D should be uniformly scattered on the unit-simplex, however it can be a complication since that the number of vectors required for this task increases non-linearly according the number of objectives. Therefore, in this version is applied the method proposed in [39], [40] where the uniform design (UD) [41] and good lattice point (GLP) are combined. In this way, the number of weight vectors that is required by this MOEA is not affected by the number of objectives.

Mainly, the experimental analyzes is carried out considering the hypervolume indicator (HV). The HV metric measures the size of the objective space dominated by the approximated solutions given a reference point, so the solutions dominated by the reference point are not considered. Particularly, the reference point is chosen to be a vector which values are slightly larger (ten percent) than the nadir point as is suggested

in [42]. Similarly that in [43], and to have a fair comparison the normalized HV is taken into account. Specifically, the HV reported is obtained as the division between the HV reached by a set of solutions and the HV of the optimal Pareto Front. In this way, the more approximate to unity this metric is, the more a MOEA reaches to the Pareto Front.

In order to statistically compare the HV results, a similar guideline than the proposed in [44] was used. First a Shapiro-Wilk test was performed to check whatever or not the values of the results followed a Gaussian distribution. If, so, the Levene test was used to check for the homogeneity of the variances. If samples had equal variance, an ANOVA test was done; if not, a Welch test was performed. For non-Gaussian distributions, the nonparametric Kruskal-Wallis test was used to test whether samples are drawn from the same distribution. An algorithm X is said to win algorithm Y when the differences between them are statistically significant, if the mean and median obtained by X are higher than the mean and median achieved by Y .

In the tables II, III are showed the normalized hypervolume with two and three objectives respectively. From this empirical results, it is clear that the VSD-MOEA obtained the highest general mean HV with both two and three objectives. Even more, the standard deviation is the lowest in almost all the problems, thus this MOEA shows to be stable, meaning that reach similar results with different seeds. The best general mean (last row) considering two objectives is achieved by the VSD-MOEA with 0.955. Also, the second general mean is obtained by the NSGA-II with 0.886. It is important to remark that the general mean can be unsteady, this mean that very low HV values could affect highly this measurement. However, all the state-of-the-art-MOEAs achieved a general mean of 0.88 considering two objectives, whilst the VSD-MOEA obtained 0.95. Considering three objectives the performance of the NSGA-II is highly affected, this might occurs since that density estimator employed in the NSGA-II highly depends on the dominance-relation, thus in some problems (e.g. multi-frontal problems UF10) the solutions do not converge adequately to the Pareto front. In the same line, the VSD-MOEA achieved the best HV values in almost all the problems, in fact such values that are higher than 0.9 are close enough to the Pareto Front. The second best MOEA based in the general mean is the R2-EMOA with 0.855, despite that it adopts the same utility function that the MOEA/D, the latter is slightly lower with 0.835, this might occurs given that the MOEA/D has several parameters to be tuned, and the selected configuration could be insufficient to long-term executions.

In the tables IV and V are showed the statistical tests with two and three objectives respectively. In the column tagged “Diff” is computed the difference between the mean of each algorithm and the best mean achieved. Taking into account two objectives the VSD-MOEA achieved 52 wins, in comparison the R2-EMOA has 34 wins. In spite that the NSGA-II achieved a better general mean, it won less times than the remaining MOEAs. Meaning that the NSGA-II obtains values close enough than the best MOEA, this can be viewed in the last row where is computed the total sum of all the problems. Generally speaking, the best results are obtained by the VSD-MOEA, since that the total sum of the “Diff” column is 0.061, thus when this

algorithm does not achieved the best results, it obtained near solutions to the best results. Furthermore, the algorithms R2-EMOA and MOEA/D achieved a similar total “Diff” values. Particularly, the worst “Diff” value achieved by the VSD-MOEA is in the problem WFG6. This problem is unimodal and non-separable, and this occurs since that the initial factor distance is very high, in fact through other experimental analyzes this instance was correctly solved with $D_I = 0.1$ which mean achieved in this problem was of 0.917 and 0.868 for two and three objectives respectively. In addition, inspecting three objectives (table V) it can be seen similar results, notably the VSD-MOEA improves its performance respectively to the remaining MOEAs. Particularly, the most complicated problems are better solved by the VSD-MOEA as are UF3, UF4, UF5, and UF6 in two objectives, and UF9, UF10 in three objectives. The UF5 is considered as one of the most difficult problems since that the optimal Pareto front is conformed by 21 points, also it has several suboptimal regions where the solutions can be stuck. Nevertheless, since that it is a disconnected front, the MOEAs that considers weight vectors have more chances to get stuck. It is showed, since that the NSGA-II has a lower “Diff” value (0.048) than the MOEA/D and R2-EMOA (0.205 and 0.122). Diversely, the UF10 is a multi-frontal problem, this means that there exists different optimal non-dominated fronts that correspond to different locally optimal values [45], this characteristic increases the difficultness of the problem as the number of objectives increases. Indeed, the latter problem has notably converged better in VSD-MOEA than the remaining MOEAs.

A. Decision Variable Scalability Experiments

The scalability of each MOEA is also evaluated respect with the number of decision variables [46]. The figures 2 and 3 show the mean of HV attained with 50, 100, 250, 500, and 1000 variables respectively. The scalability study was taken into consideration with some problems conformed by easy and difficult characteristics. Particularly, the problems considered in this analyzes were the DTLZ4, UF5 which are conformed by two objectives, and DTLZ4, UF10 with three objectives. In addition, each selected problem was repeated 35 times, thus the mean of all the HV values are reported. The VSD-MOEA attained the best results in two objectives with both problems, however its remarkable to notice that HV value reported by the NSGA-II improves as the number of variables decision is increased. Specifically, the DTLZ4 is uni-modal, and its Pareto shape is concave, also it has a polynomial bias. This interesting behaviour is also showed by the R2-EMOA, and can be explained as follows. The probability to get stuck in certain sub-optimal regions can be avoided increasing the decision variables space. This highly depends in the operators taken into account (in this case the SBX), thus in some circumstances the more bigger the variable decision space is, the better quality solutions are reached. This can be lightly seen in the MOEA/D after 250 variables, however we believe that this MOEA is highly parameter-sensitive. Contrarily, as the decision variable space is increased in the UF5 the performance of the MOEAs is highly affected,

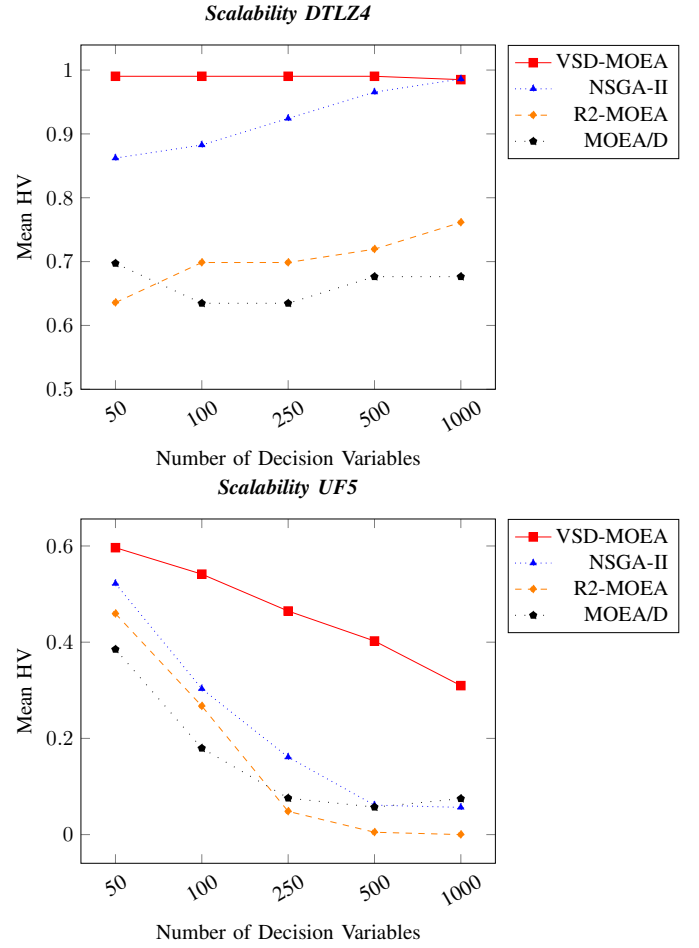


Fig. 2. Mean of the HV (35 runs) considering two objectives.

in spite of this the VSD-MOEA still attained the best HV values. However, the VSD-MOEA is not the best MOEA, it can be seen considering three objectives (figure 3). Specifically, where the number of variables is increased to one thousand in both problems (DTLZ4 and UF10). This might occur for several reasons, perhaps the most important is related with the distance employed in the variable space (Euclidean distance), this is *The Curse of Dimensionality* [47], [48]. This drawback means that under certain broad conditions, as dimensionality increases, the distance to the nearest neighbor approaches the distance to the farthest neighbor. In other words, the contrast in distances to different data points becomes nonexistent. The remaining MOEAs show a similar behavior with the DTLZ4 with two and three objectives. As previously mentioned the performance of VSD-MOEA is seriously deteriorated, however it is still better than the NSGA-II. Also, the R2-EMOA seems to be enough stable with three objectives in the problems DTLZ4 and UF10.

B. Analyzes of the Initial Factor Distance

The VSD-MOEA induces the diversity of the decision variable space through the initial distance factor (D_I), such parameter is decreased as the number of generations elapses. Given that this parameter influences the performance of the

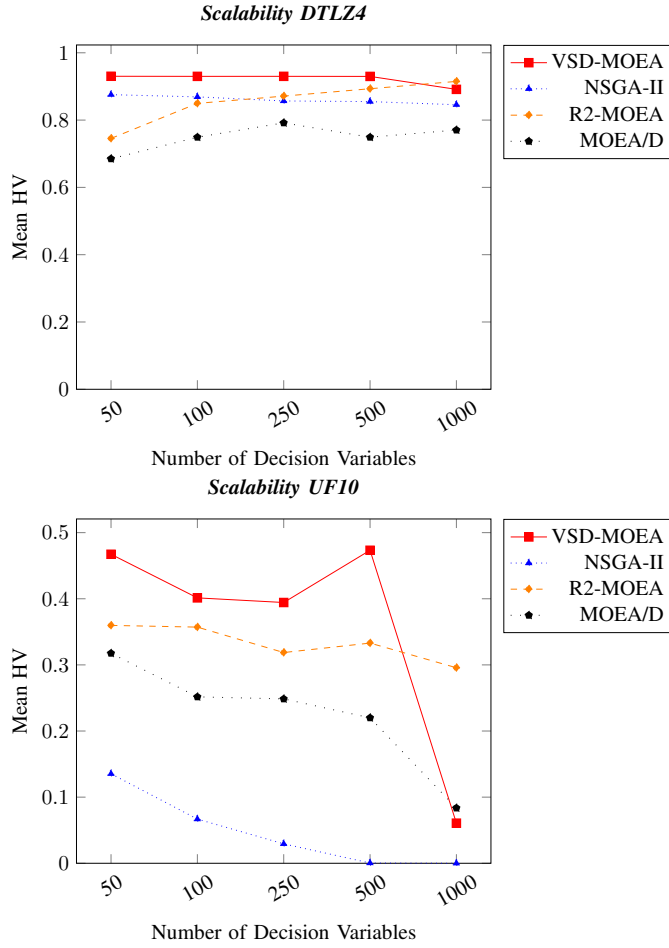


Fig. 3. Mean of the HV (35 runs) considering three objectives.

algorithm, a detailed empirical analyzes is taken into account as follows. Since that this parameter is computed as a fraction of the main normalized diagonal which belong to the unitary hypercube, the portions considered are $D_I = \{0.0, 0.1, 0.2, 0.3, 0.4, 0.5, 0.6, 0.7, 0.8, 0.9\}$. In the figure 4 is shown the general mean of the HV for each configuration with two and three objectives respectively. Particularly, the initial parameter $D_I = 0.0$, which does not promote diversity, should have a similar performance than a classic MOEA. In spite that none diversity is promoted, the VSD-MOEA achieves better general mean values than the remaining MOEAs, those values are 0.905, 0.895 for two and three objectives respectively. Even more, the benefits of promoting diversity are outstanding. It seems that such benefits are more notorius with two objectives than with three. This might occurs given that the population size could not been enough to cover the entire objective space. Giving this empirical results, the most suitable parameter configuration should be setted with $D_I = 0.4$.

C. Diversity of the MOEAs Through Generations

In order, to have a better understanding of the diversity behaviour some WFG problems have been selected. The WFG problems divide the decision variables in two kinds of parameter: the distance parameters and the position parameters. A

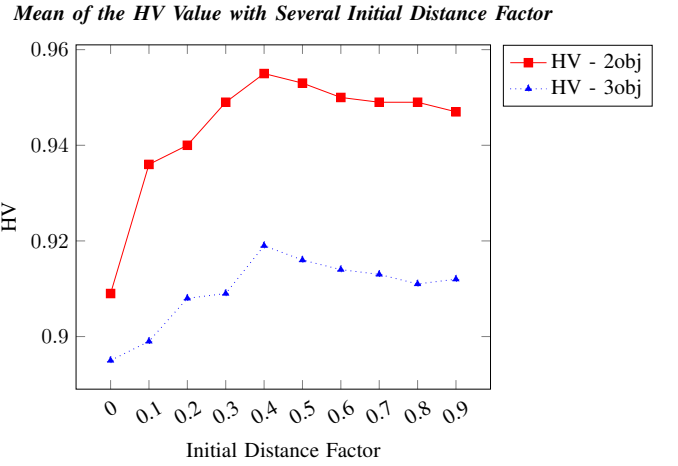


Fig. 4. Mean of Indicator Considering All Instances with Several Initial Distance Factors

parameter x_i is a distance parameter when for all parameter vectors \mathbf{a} , modifying x_i in \mathbf{a} results in a parameter vector that dominates \mathbf{a} , is equivalent to \mathbf{a} , or is dominated by \mathbf{a} . However, if x_i is a position parameter, modifying x_i in \mathbf{a} always results in a vector that is incomparable or equivalent to \mathbf{a} [49].

In this section we show that state-of-the-art-MOEAs do not always maintain high enough diversity. Particularly, the selected problems are used to show that premature convergence appears in the set of distance parameters. Consequently, the operators involved lose its exploratory strength. We select the WFG1, WFG5, and WFG6 problems, because they have simple definition, but most MOEAs faces difficulties with them. In addition, those problems were taken into account given that the WFG1 and WFG5 were better solved by the VSD-MOEA. Generally speaking, the WFG1 converged to the Pareto Front with our proposal, this since that the accuracy obtained was of 0.993. In contrast, the WFG5 was still far away of the pareto Front which HV mean was of 0.923. Contrarily, the WFG6 was chosen since that the VSD-MOEA achieved the worst results. Whereas the WFG1 and WFG6 are uni-modal, the WFG5 is a highly deceptive problem. Also, the WFG1 and WFG5 are conformed by separable properties in the objective functions. In fact, the distance parameters values associated to Pareto optimal solutions for WFG1-WFG7 have exactly the same values in the distance parameters. This values is shown as follows:

$$x_{i=k+1:n} = 2i \times 0.35 \quad (5)$$

Taking into account the sochastic behavior of MOEAs, 35 independent executions were run by each selected problem. In all of them, the stopping criterion was set to 250,000 generations. In order to analyze the diversity, the average Euclidean distance among individuals (ADI) is calculated, i.e. the mean value of all pairwise distances among individuals in the population is reported. In the figures 5, 6, and 7 are showed the evolution of diversity of the WFG1, WFG5, and WFG6 respectively. In those figures each MOEA is showed by dashed and solid lines that represents two and three objectives respectively. Particularly, the VSD-MOEA properly maintains

diversity in both kind of parameters, while in the remaining algorithms the diversity in the distance parameters is lost after the 10% (generation 2500) of total generations. Thus, after those MOEAs converges, they are basically modifying the position parameters, so the majority of the time is improving further the diversity in the objectives space and the convergence is neglected. In fact, this diversity issue is also present in the WFG5. However, all the MOEAs have a minimum lower bound of diversity in the position parameters of those selected problems. Contrastively, considering the WFG6 (figure 6) the VSD-MOEA does not converge at all in the distance parameters with three objectives, this might be an effect of promoting too much diversity. Besides this issue, the VSD-MOEA still achieves the best HV values. In addition, this drawback is more notorious in the problem WFG6, in fact both two and three objectives does not converged in the distance parameters, and the position variables are still more diversified as usual.

D. Performance of the MOEAs Related with the Criteria Stop

In spite that the VSD-MOEA is specially designed to attain quality solutions in long-term executions. In this section is showed the performance of the MOEAs varying the criteria stop. Mainly, three ranges of criteria stop were reviewed. Each range was split in ten intervals, such ranges considered were [300, 2500], [2500, 25000] and [25000, 250000] respectively. In the figure 8 are showed the mean HV values attained with each MOEA with two and three objectives respectively. This shows that the VSD-MOEA attains the worst HV values considering only 300 generations. However, as the number of generations increases the HV values are improved significantly, in fact after 2500 generations the VSD-MOEA has a notorious improvement respect to the state-of-the-art-MOEAs in both two and three objectives. It can be seen that as the maximum number of generations is higher than 25000 the remaining MOEAs seems to be stuck, specifically considering two objectives. In spite that in three objectives the R2-EMOA shows an improvement after 100000 generations, it still has lower values than the VSD-MOEA. In addition, taking into account three objectives the best general mean value achieved was above 0.9, there is still possible that increasing the number of generations the VSD-MOEA achieves better results. However, in some situations, as seems to be in the case of two objective, could not be available achieved a better accuracy, and a upper bound could be present. Its significant important to note how the performance of the NSGA-II is degraded in three objectives, differently to the R2-EMOA and the MOEA/D. Even more, the MOEA/D seems to be stuck after 25000 generations, this might occurs for the greedy selection approach that this MOEA has incorporated. In fact the MOEA/D attained better results than the R2-EMOA in short-term executions.

V. CONCLUSION

The evolutionary algorithms have been a most popular approaches to deal with complex optimization problems. Given that the quality of the MOEAs is directly measured in the objective space, the majority of them incorporate sophisticated mechanisms with the aim of attain diverse solutions and well

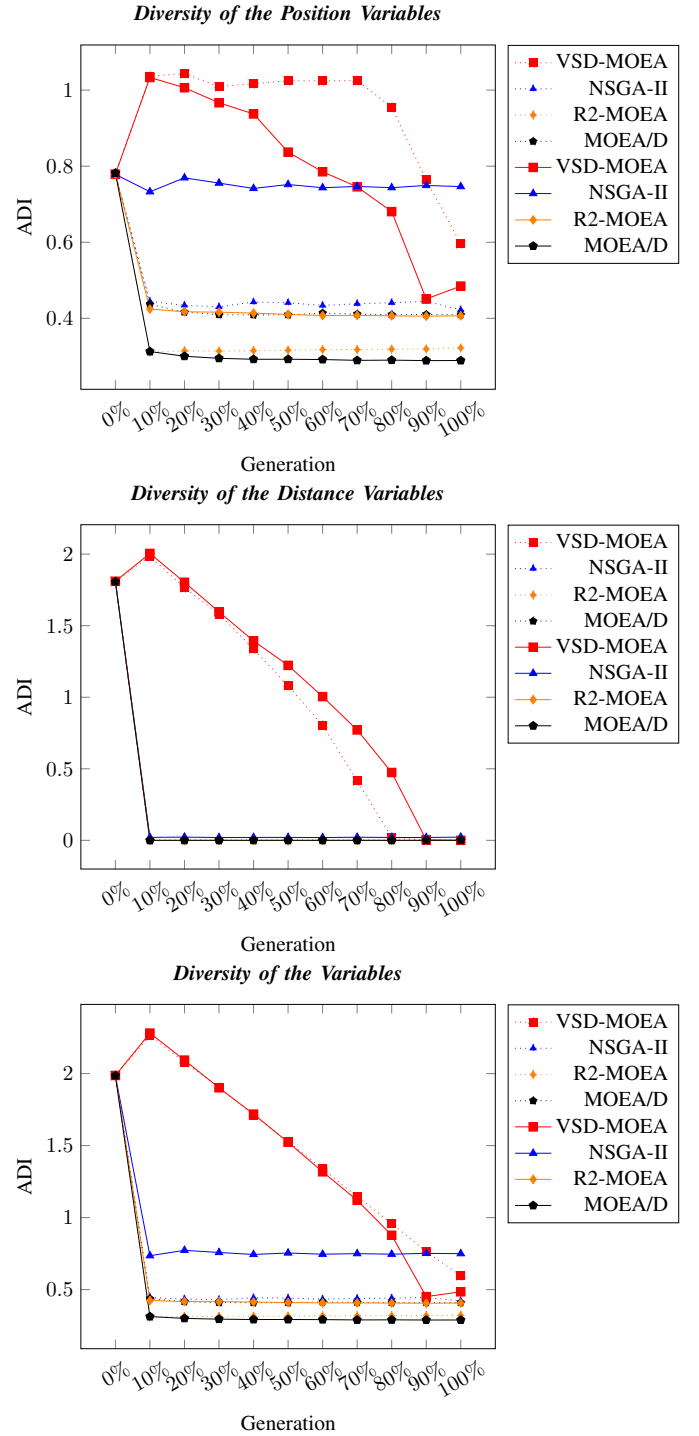


Fig. 5. Evolution of the diversity for the problem WFG1

converged to the Pareto Front. Since this, the diversity in the decision variables tend to be neglected. However, equivalently than in single-objective problems, where the diversity in variable space has a critical role, the multi-objective problems should take into consideration the diversity to avoid premature convergence to sub-optimal regions.

In this work we have provided an algorithm with a particular replacement phase. This phase considers the diversity in both spaces, specifically in the variable space the diversity is based

TABLE II
STATISTICS HV WITH TWO OBJECTIVES

	MOEA/D				NSGA-II				R2-MOEA				VSD-MOEA			
	Min	Max	Mean	Std	Min	Max	Mean	Std	Min	Max	Mean	Std	Min	Max	Mean	Std
WFG1	0.984	0.993	0.992	0.002	0.987	0.993	0.992	0.002	0.946	0.994	0.988	0.012	0.975	0.994	0.993	0.003
WFG2	0.965	0.996	0.967	0.007	0.966	0.998	0.974	0.014	0.965	0.966	0.966	0.000	0.998	0.998	0.998	0.000
WFG3	0.992	0.992	0.992	0.000	0.987	0.988	0.987	0.000	0.991	0.992	0.991	0.000	0.992	0.992	0.992	0.000
WFG4	0.988	0.988	0.988	0.000	0.983	0.987	0.985	0.001	0.991	0.991	0.991	0.000	0.990	0.990	0.990	0.000
WFG5	0.876	0.893	0.882	0.005	0.884	0.899	0.890	0.002	0.886	0.895	0.891	0.003	0.901	0.937	0.923	0.008
WFG6	0.879	0.940	0.914	0.016	0.894	0.942	0.913	0.012	0.875	0.942	0.912	0.015	0.852	0.886	0.868	0.008
WFG7	0.988	0.988	0.988	0.000	0.983	0.987	0.984	0.001	0.991	0.991	0.991	0.000	0.990	0.990	0.990	0.000
WFG8	0.800	0.822	0.811	0.006	0.771	0.801	0.789	0.006	0.803	0.824	0.815	0.005	0.945	0.959	0.953	0.003
WFG9	0.795	0.972	0.883	0.082	0.793	0.966	0.832	0.070	0.797	0.976	0.884	0.079	0.960	0.976	0.969	0.004
DTLZ1	0.993	0.993	0.993	0.000	0.990	0.992	0.991	0.000	0.992	0.992	0.992	0.000	0.992	0.992	0.992	0.000
DTLZ2	0.989	0.989	0.989	0.000	0.986	0.988	0.987	0.000	0.991	0.992	0.992	0.000	0.990	0.990	0.990	0.000
DTLZ3	0.989	0.989	0.989	0.000	0.987	0.989	0.989	0.001	0.991	0.992	0.992	0.000	0.990	0.990	0.990	0.000
DTLZ4	0.259	0.989	0.781	0.330	0.259	0.988	0.863	0.274	0.259	0.992	0.657	0.365	0.990	0.990	0.990	0.000
DTLZ5	0.989	0.989	0.989	0.000	0.986	0.988	0.987	0.000	0.991	0.992	0.992	0.000	0.990	0.990	0.990	0.000
DTLZ6	0.448	0.910	0.700	0.105	0.138	0.511	0.322	0.075	0.510	0.922	0.691	0.107	0.990	0.990	0.990	0.000
DTLZ7	0.996	0.996	0.996	0.000	0.996	0.997	0.996	0.000	0.997	0.997	0.997	0.000	0.996	0.996	0.996	0.000
UF1	0.991	0.993	0.992	0.000	0.986	0.989	0.988	0.000	0.978	0.994	0.990	0.005	0.994	0.995	0.994	0.000
UF2	0.987	0.993	0.991	0.002	0.980	0.983	0.981	0.001	0.984	0.991	0.988	0.002	0.983	0.991	0.988	0.002
UF3	0.481	0.674	0.597	0.043	0.678	0.871	0.784	0.048	0.531	0.704	0.589	0.041	0.822	0.904	0.881	0.015
UF4	0.881	0.917	0.908	0.006	0.875	0.910	0.889	0.008	0.923	0.935	0.929	0.003	0.920	0.931	0.925	0.002
UF5	0.035	0.792	0.484	0.165	0.256	0.766	0.641	0.104	0.123	0.792	0.566	0.192	0.628	0.787	0.688	0.041
UF6	0.255	0.711	0.447	0.114	0.235	0.801	0.635	0.120	0.349	0.767	0.568	0.113	0.813	0.919	0.888	0.022
UF7	0.987	0.991	0.990	0.001	0.980	0.983	0.981	0.001	0.557	0.991	0.910	0.150	0.987	0.992	0.990	0.001
Mean	0.806	0.935	0.881	0.038	0.808	0.927	0.886	0.032	0.801	0.940	0.882	0.048	0.943	0.964	0.955	0.005

TABLE III
STATISTICS HV WITH THREE OBJECTIVES

	MOEA/D				NSGA-II				R2-MOEA				VSD-MOEA			
	Min	Max	Mean	Std	Min	Max	Mean	Std	Min	Max	Mean	Std	Min	Max	Mean	Std
WFG1	0.958	0.969	0.966	0.002	0.925	0.945	0.935	0.005	0.968	0.979	0.975	0.002	0.979	0.984	0.982	0.001
WFG2	0.973	0.978	0.976	0.001	0.959	0.974	0.968	0.004	0.962	0.963	0.963	0.000	0.987	0.991	0.989	0.001
WFG3	0.992	0.992	0.992	0.000	0.976	0.988	0.985	0.002	0.991	0.992	0.992	0.000	0.989	0.989	0.989	0.000
WFG4	0.864	0.865	0.865	0.000	0.854	0.883	0.868	0.007	0.903	0.905	0.904	0.000	0.919	0.921	0.919	0.001
WFG5	0.795	0.804	0.797	0.002	0.806	0.836	0.821	0.008	0.843	0.853	0.848	0.002	0.835	0.859	0.853	0.006
WFG6	0.777	0.832	0.809	0.013	0.788	0.836	0.815	0.011	0.847	0.875	0.857	0.007	0.825	0.856	0.835	0.009
WFG7	0.864	0.865	0.865	0.000	0.858	0.889	0.875	0.008	0.901	0.905	0.904	0.001	0.918	0.920	0.919	0.000
WFG8	0.778	0.785	0.782	0.002	0.697	0.730	0.716	0.008	0.816	0.821	0.819	0.001	0.877	0.910	0.903	0.008
WFG9	0.726	0.851	0.819	0.039	0.720	0.833	0.746	0.027	0.773	0.895	0.872	0.038	0.813	0.881	0.874	0.011
DTLZ1	0.950	0.950	0.950	0.000	0.935	0.950	0.943	0.004	0.939	0.943	0.941	0.001	0.963	0.966	0.964	0.001
DTLZ2	0.899	0.899	0.899	0.000	0.871	0.901	0.886	0.007	0.913	0.916	0.915	0.001	0.929	0.930	0.930	0.000
DTLZ3	0.899	0.899	0.899	0.000	0.876	0.901	0.890	0.006	0.914	0.916	0.915	0.000	0.929	0.930	0.930	0.000
DTLZ4	0.151	0.899	0.813	0.238	0.871	0.904	0.888	0.007	0.151	0.916	0.675	0.298	0.928	0.930	0.930	0.001
DTLZ5	0.978	0.978	0.978	0.000	0.982	0.984	0.983	0.001	0.985	0.986	0.986	0.000	0.986	0.986	0.986	0.000
DTLZ6	0.310	0.889	0.591	0.142	0.183	0.382	0.243	0.056	0.400	0.946	0.672	0.143	0.986	0.986	0.986	0.000
DTLZ7	0.914	0.914	0.914	0.000	0.907	0.935	0.924	0.006	0.837	0.893	0.860	0.014	0.962	0.966	0.964	0.001
UF8	0.151	0.830	0.773	0.107	0.324	0.646	0.463	0.069	0.578	0.917	0.898	0.057	0.905	0.925	0.918	0.006
UF9	0.753	0.916	0.846	0.067	0.368	0.782	0.728	0.096	0.778	0.954	0.844	0.079	0.937	0.975	0.963	0.010
UF10	0.145	0.555	0.341	0.162	0.060	0.391	0.242	0.067	0.143	0.578	0.413	0.166	0.469	0.762	0.627	0.086
Mean	0.730	0.877	0.835	0.041	0.735	0.826	0.785	0.021	0.771	0.903	0.855	0.043	0.902	0.930	0.919	0.007

in a decremental dynamic concept. Thus, at the first stages the diversity in variables space is promoted, as the generations elapses this diversity is gradually reduces, thus at the last stages the replacement phase works as a classic MOEA.

In addition, is suggested a novel density estimator of the objective space, which is based in the IGD+ indicator being considered as waffly Pareto compliant. In the experimental validation carried out, is showed that our proposal not only improves the state-of-the-art-MOEA in long-term execution, also offers a reasonable performance in short-term executions. This validation shows that the VSD-MOEA is able to properly solve several test problems, also it attained better results than

the remaining MOEAs in the problems with the most difficult characteristics. In addition, some scalability experiments with the decision variables are carry out through long-term executions, results indicate the superiority and stability mesured with the hypervolume indicator.

Therefore, is shown the relevance in having a properly managment of the diversity in the variable space, and established a way to preserve the quality and diversity in both decision and objective space.

In future, we plan to develop an adaptive scheme to avoid setting the initial factor distance, even though the VSD-MOEA is not highly sensitive to this parameter adapting this parameter

TABLE IV
STATISTICAL TESTS OF HV WITH TWO OBJECTIVES

	MOEA/D				NSGA-II				R2-MOEA				VSD-MOEA			
	↑	↓	↔	Diff	↑	↓	↔	Diff	↑	↓	↔	Diff	↑	↓	↔	Diff
WFG1	1	1	1	0.000	0	2	1	0.001	0	1	2	0.005	3	0	0	0.000
WFG2	1	2	0	0.032	2	1	0	0.024	0	3	0	0.033	3	0	0	0.000
WFG3	2	1	0	0.001	0	3	0	0.005	1	2	0	0.001	3	0	0	0.000
WFG4	1	2	0	0.003	0	3	0	0.006	3	0	0	0.000	2	1	0	0.001
WFG5	0	3	0	0.041	1	1	1	0.033	1	1	1	0.032	3	0	0	0.000
WFG6	1	0	2	0.000	1	0	2	0.001	1	0	2	0.002	0	3	0	0.046
WFG7	1	2	0	0.003	0	3	0	0.007	3	0	0	0.000	2	1	0	0.001
WFG8	1	2	0	0.141	0	3	0	0.163	2	1	0	0.138	3	0	0	0.000
WFG9	1	1	1	0.086	0	3	0	0.137	1	1	1	0.085	3	0	0	0.000
DTLZ1	3	0	0	0.000	0	3	0	0.002	2	1	0	0.001	1	2	0	0.001
DTLZ2	1	2	0	0.002	0	3	0	0.004	3	0	0	0.000	2	1	0	0.001
DTLZ3	1	2	0	0.002	0	3	0	0.003	3	0	0	0.000	2	1	0	0.001
DTLZ4	0	2	1	0.209	1	1	1	0.128	0	0	3	0.334	2	0	1	0.000
DTLZ5	1	2	0	0.002	0	3	0	0.004	3	0	0	0.000	2	1	0	0.001
DTLZ6	1	1	1	0.291	0	3	0	0.668	1	1	1	0.299	3	0	0	0.000
DTLZ7	0	3	0	0.001	2	1	0	0.001	3	0	0	0.000	1	2	0	0.001
UF1	1	1	1	0.002	0	3	0	0.007	1	1	1	0.004	3	0	0	0.000
UF2	3	0	0	0.000	0	3	0	0.010	1	1	1	0.003	1	1	1	0.003
UF3	0	2	1	0.284	2	1	0	0.097	0	2	1	0.292	3	0	0	0.000
UF4	1	2	0	0.020	0	3	0	0.040	3	0	0	0.000	2	1	0	0.003
UF5	0	3	0	0.205	1	1	1	0.048	1	1	1	0.122	3	0	0	0.000
UF6	0	3	0	0.442	2	1	0	0.253	1	2	0	0.320	3	0	0	0.000
UF7	2	0	1	0.000	1	2	0	0.009	0	3	0	0.079	2	0	1	0.000
Total	23	37	9	1.768	13	50	6	1.649	34	21	14	1.749	52	14	3	0.061

TABLE V
STATISTICAL TESTS OF HV WITH THREE OBJECTIVES

	MOEA/D				NSGA-II				R2-MOEA				VSD-MOEA			
	↑	↓	↔	Diff	↑	↓	↔	Diff	↑	↓	↔	Diff	↑	↓	↔	Diff
WFG1	1	2	0	0.016	0	3	0	0.047	2	1	0	0.007	3	0	0	0.000
WFG2	2	1	0	0.014	1	2	0	0.022	0	3	0	0.027	3	0	0	0.000
WFG3	3	0	0	0.000	0	3	0	0.008	2	1	0	0.001	1	2	0	0.004
WFG4	0	3	0	0.055	1	2	0	0.052	2	1	0	0.015	3	0	0	0.000
WFG5	0	3	0	0.055	1	2	0	0.032	2	1	0	0.005	3	0	0	0.000
WFG6	0	2	1	0.048	0	2	1	0.043	3	0	0	0.000	2	1	0	0.022
WFG7	0	3	0	0.055	1	2	0	0.044	2	1	0	0.016	3	0	0	0.000
WFG8	1	2	0	0.121	0	3	0	0.187	2	1	0	0.084	3	0	0	0.000
WFG9	1	2	0	0.055	0	3	0	0.128	2	1	0	0.002	3	0	0	0.000
DTLZ1	2	1	0	0.014	1	2	0	0.022	0	3	0	0.024	3	0	0	0.000
DTLZ2	1	2	0	0.031	0	3	0	0.044	2	1	0	0.015	3	0	0	0.000
DTLZ3	1	2	0	0.031	0	3	0	0.039	2	1	0	0.015	3	0	0	0.000
DTLZ4	0	2	1	0.117	1	1	1	0.041	0	1	2	0.254	3	0	0	0.000
DTLZ5	0	3	0	0.007	1	2	0	0.003	2	0	1	0.000	2	0	1	0.000
DTLZ6	1	2	0	0.395	0	3	0	0.743	2	1	0	0.314	3	0	0	0.000
DTLZ7	1	2	0	0.050	2	1	0	0.040	0	3	0	0.104	3	0	0	0.000
UF8	1	2	0	0.145	0	3	0	0.455	2	1	0	0.020	3	0	0	0.000
UF9	1	1	1	0.117	0	3	0	0.235	1	1	1	0.119	3	0	0	0.000
UF10	0	2	1	0.287	0	2	1	0.386	2	1	0	0.214	3	0	0	0.000
Total	16	37	4	1.615	9	45	3	2.571	30	23	4	1.237	53	3	1	0.026

could result in a most robust MOEA. In addition, a multi-objective memetic algorithm with this principle should be proposed, since that this approach manages the diversity a local search should provide even better results.

REFERENCES

- [1] K. Deb and D. Kalyanmoy, *Multi-Objective Optimization Using Evolutionary Algorithms*. New York, NY, USA: John Wiley & Sons, Inc., 2001.
- [2] F. Herrera and M. Lozano, "Adaptation of genetic algorithm parameters based on fuzzy logic controllers," in *Genetic Algorithms and Soft Computing*. Physica-Verlag, pp. 95–125.
- [3] —, "Fuzzy adaptive genetic algorithms: design, taxonomy, and future directions," *Soft Computing*, vol. 7, no. 8, pp. 545–562, 2003. [Online]. Available: <http://dx.doi.org/10.1007/s00500-002-0238-y>
- [4] M. Mitchell, *An Introduction to Genetic Algorithms*. Cambridge, MA, USA: MIT Press, 1998.
- [5] C. Segura, C. A. C. Coello, E. Segredo, and A. H. Aguirre, "A Novel Diversity-Based Replacement Strategy for Evolutionary Algorithms," *IEEE Transactions on Cybernetics*, vol. 46, no. 12, pp. 3233–3246, Dec 2016.
- [6] V. Koumoussis and C. Katsaras, "A saw-tooth genetic algorithm combining the effects of variable population size and reinitialization to enhance performance," *IEEE Trans. Evol. Comput.*, vol. 10, no. 1, pp. 19–28, Feb 2006.
- [7] C. Segura, A. Hernández-Aguirre, F. Luna, and E. Alba, "Improving diversity in evolutionary algorithms: New best solutions for frequency assignment," *IEEE Transactions on Evolutionary Computation*, vol. 21, no. 4, pp. 539–553, Aug 2017.
- [8] S. Kukkonen and J. Lampinen, "Performance assessment of generalized differential evolution 3 with a given set of constrained multi-objective

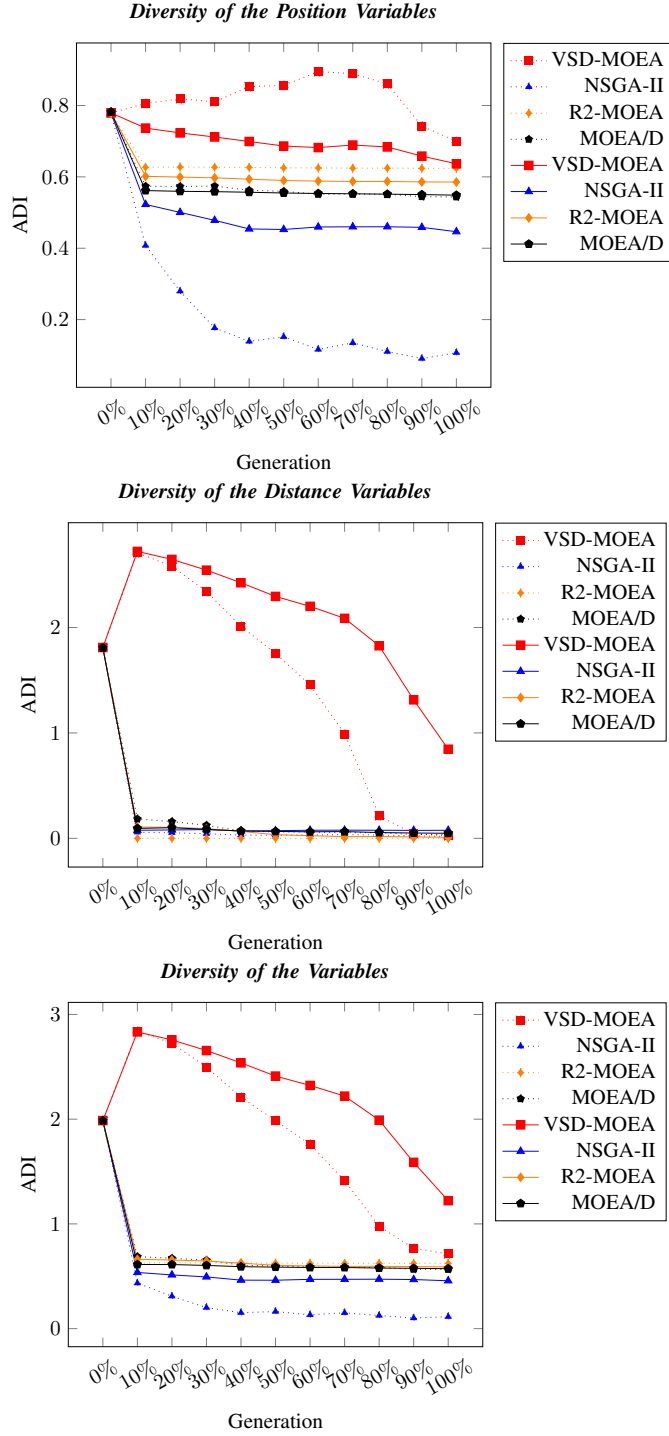


Fig. 6. Evolution of the diversity for the problem WFG5

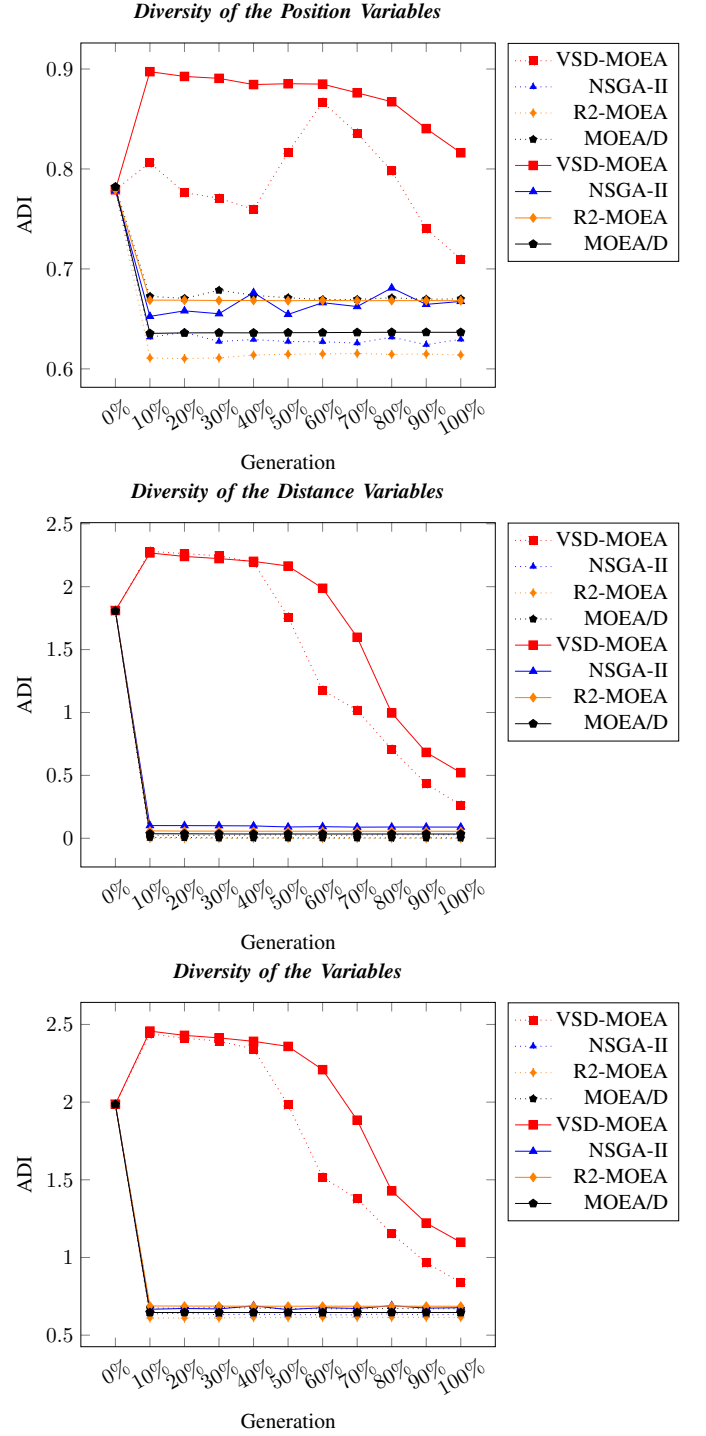


Fig. 7. Evolution of the diversity for the problem WFG6

test problems,” in *Evolutionary Computation, 2009. CEC’09. IEEE Congress on*. IEEE, 2009, pp. 1943–1950.

- [9] K. C. Tan, E. F. Khor, and T. H. Lee, *Multiobjective Evolutionary Algorithms and Applications (Advanced Information and Knowledge Processing)*. Secaucus, NJ, USA: Springer-Verlag New York, Inc., 2005.
- [10] H. M. Pandey, A. Chaudhary, and D. Mehrotra, “A comparative review of approaches to prevent premature convergence in GA,” *Applied Soft Computing*, vol. 24, pp. 1047 – 1077, 2014.
- [11] M. Črepinšek, S.-H. Liu, and M. Mernik, “Exploration and Exploitation in Evolutionary Algorithms: A Survey,” *ACM Computing Surveys*, vol. 45, no. 3, pp. 35:1–35:33, Jul. 2013.

- [12] O. J. Mengshoel, S. F. Galán, and A. de Dios, “Adaptive generalized crowding for genetic algorithms,” *Information Sciences*, vol. 258, pp. 140 – 159, 2014.
- [13] T. Vidal, T. G. Crainic, M. Gendreau, and C. Prins, “A hybrid genetic algorithm with adaptive diversity management for a large class of vehicle routing problems with time-windows,” *Computers & Operations Research*, vol. 40, no. 1, pp. 475 – 489, 2013.
- [14] A. G. Slim Bechikh, Rituparna Datta, *Recent Advances in Evolutionary Multi-objective Optimization*. Springer.
- [15] S. Das and P. N. Suganthan, “Differential Evolution: A Survey of the State-of-the-Art,” *IEEE Transactions on Evolutionary Computation*, vol. 15, no. 1, pp. 4–31, Feb 2011.

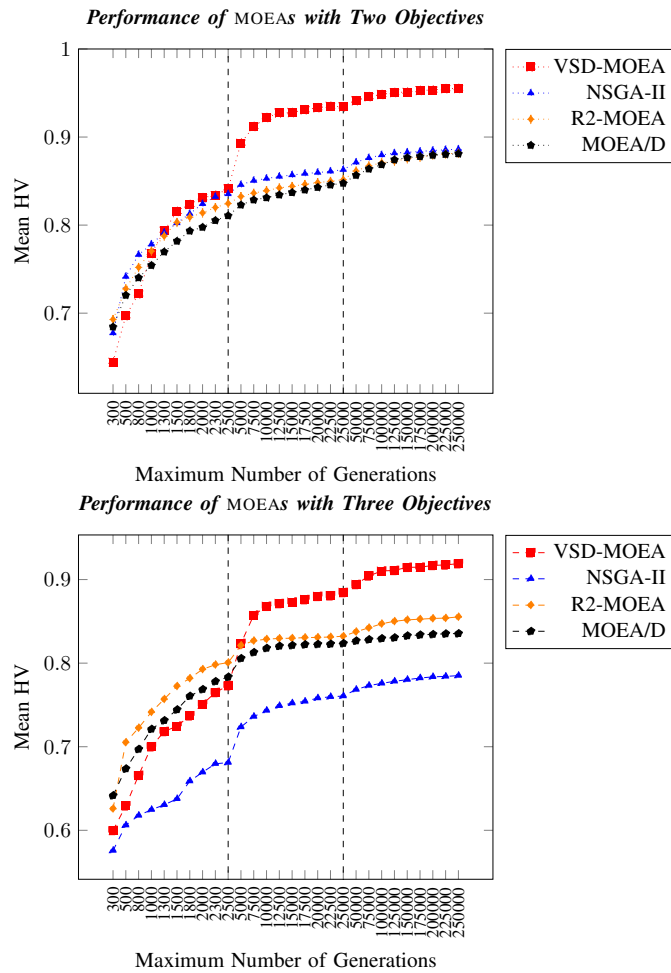


Fig. 8. Performance of the MOEAs considering several maximum number of generations.

- [16] K. Deb, A. Pratap, S. Agarwal, and T. Meyarivan, "A fast and elitist multiobjective genetic algorithm: NSGA-II," *IEEE Transactions on Evolutionary Computation*, vol. 6, no. 2, pp. 182–197, Apr 2002.
- [17] S. S. Bhagavatula, S. G. Sanjeevi, D. Kumar, and C. K. Yadav, "Multi-objective indicator based evolutionary algorithm for portfolio optimization," in *2014 IEEE International Advance Computing Conference (IACC)*, Feb 2014, pp. 1206–1210.
- [18] H. Trautmann, T. Wagner, and D. Brockhoff, "R2-emoa: Focused multiobjective search using r2-indicator-based selection," in *International Conference on Learning and Intelligent Optimization*. Springer, 2013, pp. 70–74.
- [19] T. C. Chiang and Y. P. Lai, "MOEA/D-AMS: Improving MOEA/D by an adaptive mating selection mechanism," in *2011 IEEE Congress of Evolutionary Computation (CEC)*, June 2011, pp. 1473–1480.
- [20] Q. Zhang and H. Li, "MOEA/D: A Multiobjective Evolutionary Algorithm Based on Decomposition," *IEEE Transactions on Evolutionary Computation*, vol. 11, no. 6, pp. 712–731, Dec 2007.
- [21] J. Horn, N. Nafpliotis, and D. E. Goldberg, "A niched Pareto genetic algorithm for multiobjective optimization," in *Proceedings of the First IEEE Conference on Evolutionary Computation. IEEE World Congress on Computational Intelligence*, Jun 1994, pp. 82–87 vol.1.
- [22] A. Toffolo and E. Benini, "Genetic diversity as an objective in multi-objective evolutionary algorithms," *Evolutionary computation*, vol. 11, no. 2, pp. 151–167, 2003.
- [23] K. Deb and S. Tiwari, "Omni-optimizer: A procedure for single and multi-objective optimization," in *EMO*, vol. 3410. Springer, 2005, pp. 47–61.
- [24] O. M. Shir, M. Preuss, B. Naujoks, and M. T. Emmerich, "Enhancing decision space diversity in evolutionary multiobjective algorithms," in *EMO*, vol. 9. Springer, 2009, pp. 95–109.
- [25] K. Chan and T. Ray, "An evolutionary algorithm to maintain diversity in the parametric and the objective space," in *International Conference on Computational Robotics and Autonomous Systems (CIRAS)*, Centre for Intelligent Control, National University of Singapore, 2005.
- [26] T. Ulrich, J. Bader, and E. Zitzler, "Integrating decision space diversity into hypervolume-based multiobjective search," in *Proceedings of the 12th annual conference on Genetic and evolutionary computation*. ACM, 2010, pp. 455–462.
- [27] H. Ishibuchi and Y. Shibata, *An Empirical Study on the Effect of Mating Restriction on the Search Ability of EMO Algorithms*. Berlin, Heidelberg: Springer Berlin Heidelberg, 2003, pp. 433–447.
- [28] G. Rudolph, B. Naujoks, and M. Preuss, "Capabilities of emoa to detect and preserve equivalent pareto subsets," in *Evolutionary Multi-Criterion Optimization*. Springer, 2007, pp. 36–50.
- [29] K. Deb and M. Abouhawwash, "An optimality theory-based proximity measure for set-based multiobjective optimization," *IEEE Transactions on Evolutionary Computation*, vol. 20, no. 4, pp. 515–528, 2016.
- [30] H. Ishibuchi, H. Masuda, Y. Tanigaki, and Y. Nojima, *Modified Distance Calculation in Generational Distance and Inverted Generational Distance*. Cham: Springer International Publishing, 2015, pp. 110–125. [Online]. Available: https://doi.org/10.1007/978-3-319-15892-1_8
- [31] E. Zitzler, L. Thiele, M. Laumanns, C. M. Fonseca, and V. G. Da Fonseca, "Performance assessment of multiobjective optimizers: An analysis and review," *IEEE Transactions on evolutionary computation*, vol. 7, no. 2, pp. 117–132, 2003.
- [32] H. Ishibuchi and Y. Nojima, *Optimization of Scalarizing Functions Through Evolutionary Multiobjective Optimization*. Berlin, Heidelberg: Springer Berlin Heidelberg, 2007, pp. 51–65. [Online]. Available: https://doi.org/10.1007/978-3-540-70928-2_8
- [33] K. Ikeda, H. Kita, and S. Kobayashi, "Failure of pareto-based moeas: Does non-dominated really mean near to optimal?" in *Evolutionary Computation, 2001. Proceedings of the 2001 Congress on*, vol. 2. IEEE, 2001, pp. 957–962.
- [34] S. Huband, L. Barone, L. While, and P. Hingston, *A Scalable Multi-objective Test Problem Toolkit*. Berlin, Heidelberg: Springer Berlin Heidelberg, 2005, pp. 280–295.
- [35] K. Deb, L. Thiele, M. Laumanns, and E. Zitzler, "Scalable test problems for evolutionary multiobjective optimization," *Evolutionary Multiobjective Optimization. Theoretical Advances and Applications*, pp. 105–145, 2005.
- [36] Q. Zhang, A. Zhou, S. Zhao, P. N. Suganthan, W. Liu, and S. Tiwari, "Multiobjective optimization test instances for the cec 2009 special session and competition," *University of Essex, Colchester, UK and Nanyang technological University, Singapore, special session on performance assessment of multi-objective optimization algorithms, technical report*, vol. 264, 2008.
- [37] R. B. Agrawal, K. Deb, K. Deb, and R. B. Agrawal, "Simulated binary crossover for continuous search space," *Tech. Rep.*, 1994.
- [38] K. Deb and M. Goyal, "A combined genetic adaptive search (geneas) for engineering design," *Computer Science and informatics*, vol. 26, pp. 30–45, 1996.
- [39] X. Ma, Y. Qi, L. Li, F. Liu, L. Jiao, and J. Wu, "Moea/d with uniform decomposition measurement for many-objective problems," *Soft Comput.*, vol. 18, no. 12, pp. 2541–2564, Dec. 2014. [Online]. Available: <http://dx.doi.org/10.1007/s00500-014-1234-8>
- [40] J. A. Molinet Berenguer and C. A. Coello Coello, *Evolutionary Many-Objective Optimization Based on Kuhn-Munkres' Algorithm*. Cham: Springer International Publishing, 2015, pp. 3–17. [Online]. Available: https://doi.org/10.1007/978-3-319-15892-1_1
- [41] K. Fang and Y. Wang, *Number-Theoretic Methods in Statistics*, ser. Chapman & Hall/CRC Monographs on Statistics & Applied Probability. Taylor & Francis, 1993. [Online]. Available: https://books.google.com.mx/books?id=Umb-zE_Gcr4C
- [42] H. Ishibuchi, R. Imada, Y. Setoguchi, and Y. Nojima, "Reference point specification in hypervolume calculation for fair comparison and efficient search," in *Proceedings of the Genetic and Evolutionary Computation Conference*. ACM, 2017, pp. 585–592.
- [43] K. Li, K. Deb, Q. Zhang, and S. Kwong, "An evolutionary many-objective optimization algorithm based on dominance and decomposition," *IEEE Trans. Evolutionary Computation*, vol. 19, no. 5, pp. 694–716, 2015.
- [44] J. J. Durillo, A. J. Nebro, C. A. C. Coello, J. Garcia-Nieto, F. Luna, and E. Alba, "A Study of Multiobjective Metaheuristics When Solving Parameter Scalable Problems," *IEEE Transactions on Evolutionary Computation*, vol. 14, no. 4, pp. 618–635, Aug 2010.
- [45] S. Huband, P. Hingston, L. Barone, and L. While, "A review of multiobjective test problems and a scalable test problem toolkit," *IEEE*

Transactions on Evolutionary Computation, vol. 10, no. 5, pp. 477–506, 2006.

- [46] J. Maltese, B. M. Ombuki-Berman, and A. P. Engelbrecht, “A scalability study of many-objective optimization algorithms,” *IEEE Transactions on Evolutionary Computation*, vol. PP, no. 99, pp. 1–1, 2016.
- [47] G. V. Trunk, “A problem of dimensionality: A simple example,” *IEEE Transactions on pattern analysis and machine intelligence*, no. 3, pp. 306–307, 1979.
- [48] K. Beyer, J. Goldstein, R. Ramakrishnan, and U. Shaft, “When is nearest neighbor meaningful?” in *International conference on database theory*. Springer, 1999, pp. 217–235.
- [49] S. Huband, L. Barone, L. While, and P. Hingston, “A scalable multi-objective test problem toolkit,” in *International Conference on Evolutionary Multi-Criterion Optimization*. Springer, 2005, pp. 280–295.



Carlos Segura (M’13) was born in Santa Cruz de Tenerife, Spain, on August 03, 1983. He received the M.S. degree in computer science from the Universidad de La Laguna, in 2009 and the Ph.D. degree in computer science from the Universidad de La Laguna, in 2012.

He has authored and co-authored over 50 technical papers and book chapters, including 15 journal papers. His publications currently report over 300 citations in *Google Scholar* and his h-index is 12. Currently he serves in the editorial board of several international conferences. His main research interests are: design of evolutionary algorithms, diversity management and problem solving paradigms.

Dr. Segura is a *Member* of the IEEE and a member of the ACM. He is currently an Associate Researcher of the Computer Science area at the Centre for Research in Mathematics.



Joel Chacón Biography text here.



Carlos A. Coello Coello received PhD degree in computer science from Tulane University, USA, in 1996. He is currently Professor (CINVESTAV-3F Researcher) and Chair of the Computer Science Department of CINVESTAV-IPN, in Mexico City, México.

Dr. Coello has authored and co-authored over 450 technical papers and book chapters. He has also co-authored the book *Evolutionary Algorithms for Solving Multi-Objective Problems* (Second Edition, Springer, 2007). His publications currently report over 29,000 citations in *Google Scholar* (his h-index is 67). Currently, he is associate editor of the *IEEE Transactions on Evolutionary Computation* and serves in the editorial board of 12 other international journals. His major research interests are: evolutionary multi-objective optimization and constraint-handling techniques for evolutionary algorithms.

He received the 2007 *National Research Award* from the Mexican Academy of Sciences in the area of *Exact Sciences* and the *Medal to the Scientific Merit 2009*, granted by Mexico City’s congress. He is a *Fellow* of the IEEE, and a member of the ACM, Sigma Xi, and the Mexican Academy of Science.