# How useful is information theory in predicting patterns of language use?

Joel C. Wallenberg joel.wallenberg@ncl.ac.uk



August 6, 2019

it's a limited domain of "language use".

## • Shameless trick: I don't really know \*how\* useful, and

- But the results are still very surprising, and at a level of detail that is only rivalled by one or two other results in the field.
- Main idea: speakers unconsciously manipulate linguistic structure so that their utterances are more resistant to "noise" events that could destroy a whole message.
- "noise" is any interference, including: noise, memory, other processing costs, etc.

#### Information Theory

Crash Course Noise resistance simulation

#### Language Change

Synctactic change in English Synctactic change in Icelandic

#### Conclusion

#### Crash course

- The amount of information a sender can theoretically communicate about an event is the uncertainty ("entropy") the receiver has about the event.
- Shannon (1948)'s formula for information in an event with n discrete outcomes with probabilities  $p_1...p_n$ :

$$\sum_{1}^{n} p_{i} log_{2} \frac{1}{p_{i}}$$

• The  $log_2 \frac{1}{n_i}$  part is the information content (or "surprisal") of an outcome.

#### Crash course

- The amount of information in a fair coin toss is 1 bit.
- The amount of information in an unfair coin toss with

$$p = \frac{1}{3}, \frac{2}{3}$$

is less, even though less probable events have higher information content.



## "Uniform Information Density" in language


Speakers spread information content across utterances as uniformly as possible, (possibly) so that utterances are more resistant to noise events (Aylett and Turk, 2004; Jaeger and Levy, 2007; Levy, 2008).

How big is the family [(that) you cook for]? (1)


If that is deleted, more information is carried by you, so information is more dense.

Information Theory


000000

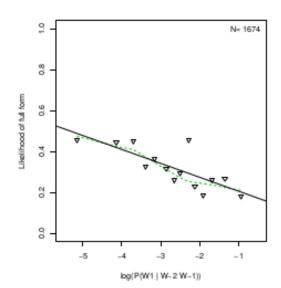

#### UID and noise resistance

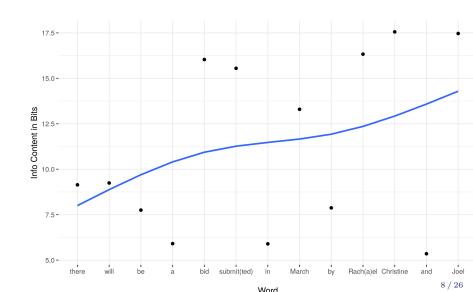


#### UID and noise resistance

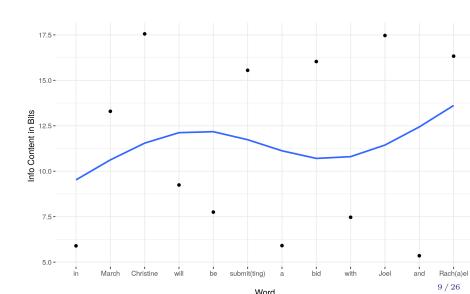

#### Noise resistance simulation

- 1. Generate 10-item sequences of probabilities.
- 2. Order them randomly, by size ("asymmetric"), or hyperdispersed ("optimised").
- 3. A noise event randomly destroys a 3-item sub-sequence.
- 4. See how much information the noise events destroy (over many trials)!


## Noise Resistance Simulation: proportion of bits lost

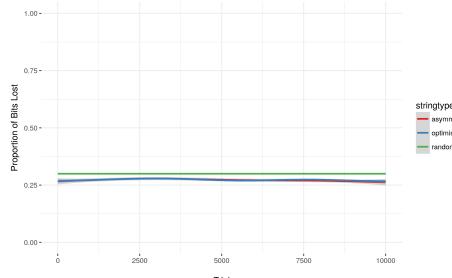

asymn

optimis randor

## Noise Resistance Sim: proportion of "sentences" where bits lost > 50% bits in sentence

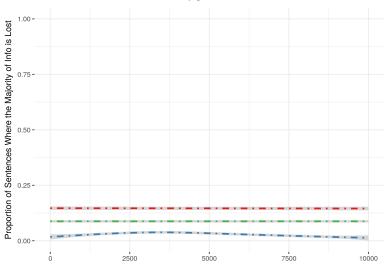


Trial

stringtypes
- asymmetric

optimised random

## Noise Resistance Sim: bits lost and big bit losses

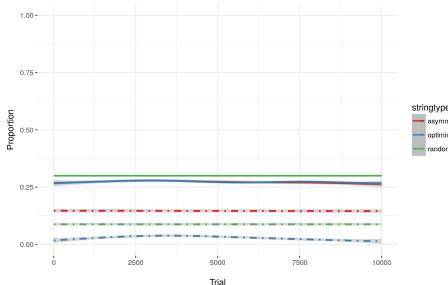


asymn optimis randor

## OV to VO Change in English

- tu mihht ec gastlike laf Onn oberr wise zarrkenn (2)you might also spiritual loaf in another way prepare "In this way, you will let go of your sins." (Ormulum, Lincoln, date: 1200)
- Ne mazz he nohht rihht cnawenn **me** NEG may he not right know me "He may not rightly know me" (Ormulum, Lincoln, date: 1200)

## OV to VO Change in English

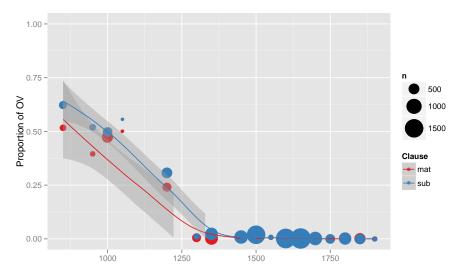


### Some grammatical preliminaries...

- [Matrix] Malvina Reynolds implied [Sub] that you should (4)not like little boxes  $]_{Sub} ]_{Mat}$ .
- (5)Malvina Reynolds implied that you should not like them. (Pronoun Object)
- (6)Malvina Reynolds implied that you should not like any/many/most/both/... (Quantified Object)

Guestimated information content hierarchy: Other nominal Obj or Sbj > Quantified Obj or Sbj , Verbs > Pronoun Obj or Sbj

## Hypotheses

- 1. Pronoun subjects should favour OV more than nominal subjects will, if the object is also nominal: pronSbj-nomObj-V is more uniform in info content than pronSbj-V-nomObj or nomSbj-nomObj-V, and the latter are less uniform than nomSbj-V-nomObj
- 2. Pronoun subjects should do the opposite, i.e. favour more VO, if the Object is also a pronoun: pronSbj-V-pronObj is more uniform than pronSbj-pronObj-V or nomSbj-V-pronObj, and the latter are less uniform than nomSbj-pronObj-V.
- 3. Quantified Objs should be in-between for all effects.
- 4. All of these effects should be larger in sub clauses than mat clauses, because of the pressure that preceding information (in the earlier clause) creates.

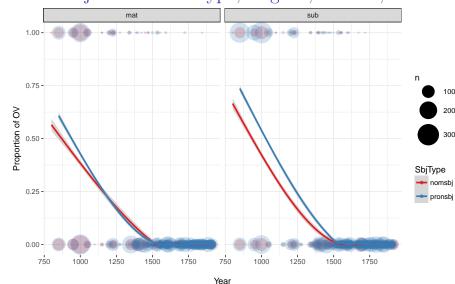

100


200

300


nomsbj

pronsbj

## OV: Subj, Obj and Clause Type, English

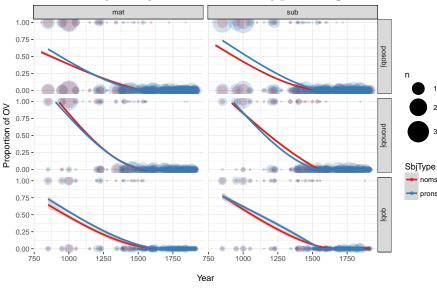

### OV: Subj and Clause Type, Icelandic, N = 1,860

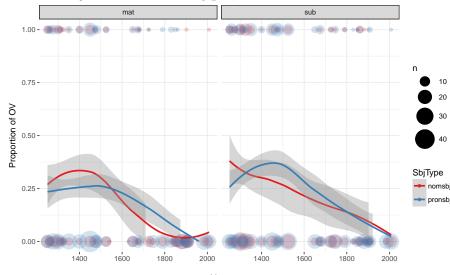


10

20

nomsbj

pronsb

## OV: Subj, Obj and Clause Type, Icelandic

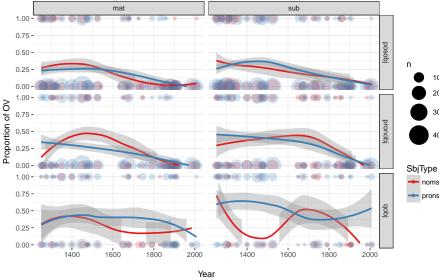

#### Conclusions

Conclusion

- Where speakers have an option, i.e. during language change, their choice responds to the resulting density of the entire utterance.
- Project with Christine Cuskley and Rachael Bailes to find out whether they also respond to hearer and other factors, and whether we can graduate to actual probabilities in the above work.
- MRes student Jack Winter (supervised by Rachael), doing an experiment about rhythm and memory, manipulating information density of symbols in a rhythmic sequence.
- ASD vs. typical speakers

## Acknowledgements

Conclusion

Thanks to Rachael Bailes, Christine Cuskley, Tony Kroch, among others.

https://github.com/joelcw/constantentropy



#### References I

- Aylett, Matthew, and Alice Turk. 2004. The smooth signal redundancy hypothesis: A functional explanation for relationships between redundancy, prosodic prominence, and duration in spontaneous speech. Language and speech 47:31-56.
- Jaeger, T Florian, and Roger P Levy. 2007. Speakers optimize information density through syntactic reduction. In Advances in neural information processing systems, 849–856.
- Kroch, Anthony, Beatrice Santorini, and Lauren Delfs. 2004. Penn-Helsinki Parsed Corpus of Early Modern English, release 3. Size 1.8 Million Words.
- Kroch, Anthony S., Beatrice Santorini, and Ariel Diertani. 2016. Penn Parsed Corpus of Modern British English 2nd edition, release 1. Size  $\sim 2.8$  million words.

#### References II

- Levy, Roger. 2008. A noisy-channel model of rational human sentence comprehension under uncertain input. In Proceedings of the conference on empirical methods in natural language processing, 234–243. Association for Computational Linguistics.
- Shannon, Claude Elwood. 1948. A mathematical theory of communication. Mobile Computing and Communications Review 5:3-55.
- Taylor, Ann, Anthony Warner, Susan Pintzuk, and Frank Beths. 2003. The York-Toronto-Helsinki Parsed Corpus of Old English Prose.
  - http://www-users.york.ac.uk/~lang22/YcoeHome1.htm.

Wallenberg, Joel C., Anton K. Ingason, Einar F. Sigurðsson, and Eiríkur Rögnvaldsson. 2011. Icelandic Parsed Historical Corpus (IcePaHC). Version 0.9. Size: 1 million words. URL http://www.linguist.is/icelandic treebank.