EXPRESS AUTOCARE

MULTI-BRAND CAR SERVICE CENTER

Express Autocare ERP

App Installation & Play Store Guide

Testing the staff app and the customer app on phones,

then publishing them on Google Play.

Version 2 · October 2026 · for the owner and whoever sets up the system · adds fleet drivers, WhatsApp through Interakt and keeping the system up to date

Contents

1. The two apps 3
What this guide covers 3
Already set up on this computer 3
2. Run the system for phones on the workshop Wi-Fi 5
2.1 After every update of the system 6
3. An HTTPS address for testing 7
4. The staff app (EA Workshop): build and install 8
4.1 Build the test app (APK) 8
4.2 Put it on a phone 8
4.3 First start 8
4.4 Changing the server address 9
4.5 Test checklist (staff app) 9
5. The customer app (Express Autocare): test 11
5.1 As a web app (no build needed) 11
5.2 As an Android app (APK for testing) 11
5.3 Test checklist (customer app) 12
5.4 WhatsApp through Interakt (optional) 14
6. Going live: the server 14
7. The signing key (once) 16
Tell the build where the key is 16
8. Release build for Google Play 17
8.1 Before the first upload 17
8.2 Build 17
9. Publishing on the Google Play Store 18
9.1 The developer account 18
9.2 Create the app and the store listing 18
9.3 App access for Google's reviewers 18
9.4 Data safety answers (customer app) 19
9.5 Testing tracks, then production 19
9.6 Updates 19
9.7 The staff app and the Play Store 20
10. Problems and fixes 21

1. The two apps

Express Autocare ERP has two phone apps. Both open the live system, so every change made to the system reaches them at once; a new app file is needed only when the app itself changes (its permissions, icon or name).

	EA Workshop (staff app)	Express Autocare (customer app)
Who	Staff: drivers, home technicians, advisors, managers	Customers, cab-fleet owners and their drivers
What it opens	The whole system (same as the browser)	The customer app at <address>/app
Why an app	Live location keeps going with the screen locked	An icon on the phone, notifications, Play Store presence; for fleet drivers the cab's location on a breakdown report
Server address	Typed on the phone the first time (can be changed)	Built into the app (customers never type it)
How staff / customers get it	An APK file you share (no Play Store needed)	Google Play Store (or the web app until then)
Project folder	mobile/	mobile-customer/
App id	in.expressautocare.erp	in.expressautocare.app

Without any app: both also work in the phone's browser and can be added to the home screen (staff: the system address; customers: the address + /app). The only difference for staff is that the browser shares location only while the app is open.

What this guide covers

- **Part A (sections 2–5): testing on your phones before the system is online**: running the system on this computer, an HTTPS address for the phones, building and installing both apps.
- **Part B (sections 6–9): going live and publishing**: the server, the signing key, release builds and the Google Play Store.
- Section 10: problems and fixes.

Already set up on this computer

Tool	Where	Used for
PHP 8.4, Composer	C:\php	Running the system
MariaDB	C:\Program Files\MariaDB 13.0	The database
Node.js	C:\Program Files\nodejs	Building the screens and the apps

Tool	Where	Used for
JDK 17	C:\Users\JOEL\.jdks\ms-17.0.16	Building Android apps
Android SDK	%LOCALAPPDATA%\Android\Sdk	Building Android apps (platforms 34 and 36)

> **Note** Commands in this guide are typed in **Git Bash** (or a Command Prompt where shown with "set"), from the project folder **C:\Users\JOEL\EAERP** unless it says otherwise.

2. Run the system for phones on the workshop Wi-Fi

While the system is not online, it runs on this computer. Phones on the same Wi-Fi can reach it at the computer's address.

1. Build the screens once (phones cannot use the developer preview):

```
npm run build
del public\hot      (Command Prompt)   or   rm -f public/hot   (Git Bash)
```

2. Start the system so the Wi-Fi can reach it (leave this window open):

```
php artisan serve --host 0.0.0.0 --port 8000
```

3. Find the computer's Wi-Fi address: run **ipconfig** and note the **IPv4 Address** of the Wi-Fi adapter, for example 192.168.1.20.
4. The first time, Windows asks whether to allow PHP on the network: choose **Private networks** and **Allow**. (Or allow port 8000 in Windows Defender Firewall › Advanced settings › Inbound rules.)
5. On a phone on the same Wi-Fi, open **http://192.168.1.20:8000** in Chrome. The sign-in screen should appear.

> **Careful** Also run the scheduler while testing (reminders, live-location clean-up, WhatsApp sending): open a second window and run **php artisan schedule:work**.

> **Note** When you go back to programming on this computer, **npm run dev** recreates public\hot and the phones stop working until you build again.

What the scheduler runs (each can also be run by hand, to test without waiting):

Command	When	What it does
php artisan crm:run	Every 15 minutes	Journey messages, call-back alerts, no-shows, booking reminders, contacts / events to Interakt
php artisan crm:daily	07:00	Service due, insurance due, win-back, pending work; ServiceDue / InsuranceDue events
php artisan whatsapp:send-due	Every 5 minutes	Scheduled WhatsApp messages through Interakt (when on)
php artisan customerapp:reminders	09:30	Customer app inbox reminders (service, insurance, PUC, documents, pending work)
php artisan fleet:daily	09:40	Fleet cabs close to their service km: owner and drivers reminded
php artisan hr:close-attendance	00:30	Yesterday's attendance closed (absent, weekly off, holiday, leave)

Command	When	What it does
php artisan hr:tracking	Every 10 minutes (and --prune at 00:40)	"No signal" for live location; old positions cleared
php artisan crm:interakt-sync --all	By hand, once	Sends every lead and customer to Interakt (first sync)

2.1 After every update of the system

When a new version of the system is copied in (new screens, new features), run these in the project folder, in this order, with the system stopped:

```
composer install
php artisan migrate
php artisan db:seed --class=Phase10FleetPermissionsSeeder
php artisan db:seed --class=Phase11WhatsAppPermissionsSeeder
npm run build
php artisan config:clear
```

> **Note** **migrate** adds the new tables (it never deletes your data). The two **db:seed** lines add the permissions of the newest features (fleet reports, WhatsApp inbox) to the roles without touching anything you changed in Roles & Access. Take a database backup first (section 6, Backups).

3. An HTTPS address for testing

Phone browsers allow **location, the camera, installing as an app and notifications only on https:// addresses** (or on the phone itself). A plain http://192.168.… address is enough to look around, but punching in, live location and the customer app's notifications will not work. A free **Cloudflare quick tunnel** gives this computer a temporary https address that works from any phone, even on mobile data.

1. Download **cloudflared** for Windows (64-bit) from Cloudflare's website (developers.cloudflare.com › Cloudflare Tunnel › Downloads) and put **cloudflared.exe** in C:\Users\JOEL\bin.
2. With the system running (section 2), open another window and run:

```
cloudflared tunnel --url http://localhost:8000
```

3. After a few seconds it prints an address like **https://bright-river-1234.trycloudflare.com**. Open it on a phone: the sign-in screen appears, with a padlock.
4. In the system: **Settings › App Address & Customer App › Public address** = that https address, **Save**. Links sent to customers and the staff-app QR code now use it.
5. Set the same address in **.env** as **APP_URL=https://bright-river-1234.trycloudflare.com** and run **php artisan config:clear**, so photos and files open over https too.

> **Careful** A quick tunnel gets a **new address every time** it starts. Update the public address (and the phones' server address, section 4.4) each time, or create a named Cloudflare tunnel on your own domain for a fixed address. Anyone with the address can reach the sign-in screen: stop the tunnel (Ctrl + C) when you finish testing.

> **Tip** Only for a quick look on one test phone without a tunnel: in Chrome on the phone open **chrome://flags**, search "Insecure origins treated as secure", add http://192.168.1.20:8000, and relaunch Chrome.

4. The staff app (EA Workshop): build and install

4.1 Build the test app (APK)

```
cd C:\Users\JOEL\EAERP\mobile
npm install                    (first time only)
set JAVA_HOME=C:\Users\JOEL\.jdks\ms-17.0.16
npm run build:debug
```

The app file is **mobile\android\app\build\outputs\apk\debug\app-debug.apk** (about 4 MB). Rename it to **EA-Workshop.apk** before sharing.


> **Tip** To have the setup screen already filled in, set the address before building: **set EAERP_APP_URL=https://bright-river-1234.trycloudflare.com**. Staff can still change it.

4.2 Put it on a phone


1. Send **EA-Workshop.apk** to the phone (WhatsApp to yourself, Google Drive, or a USB cable into the phone's Download folder).
2. On the phone, tap the file. If Android says it is blocked, tap **Settings** and allow **Install unknown apps** for WhatsApp / Files / Chrome (whichever opened it), then go back and tap **Install**.
3. If Google Play Protect warns about an unknown developer, tap **More details › Install anyway** (this is normal for apps not from the Play Store).

4.3 First start

1. Open **EA Workshop**. Type the server address (the https tunnel address, or later the live address) and tap **Connect**.
2. Sign in with the phone number or email and password.
3. Punch in: allow **Camera** (selfie), **Location → While using the app** and **Notifications**, then tap **I understand, continue** on the location notice.
4. Phone Settings › Apps › EA Workshop › **Battery › Unrestricted** (on Xiaomi / Redmi also **Autostart: on**; on Oppo / Vivo / Realme "Allow background activity").

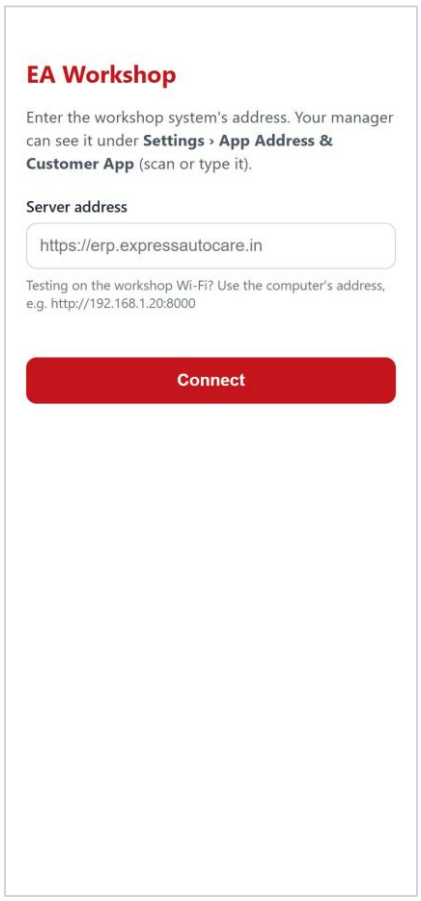

First start: the server address

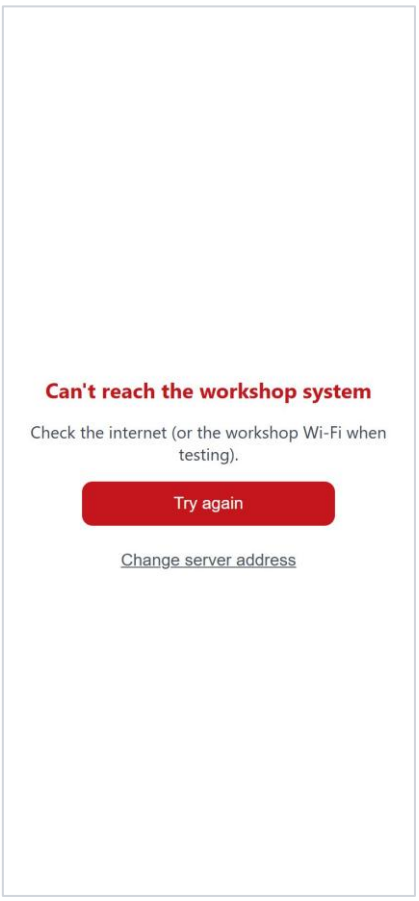

Server not reachable

4.4 Changing the server address

In the app: **Settings** (from the menu) › **Change server address** (tap twice), or on the "Can't reach the workshop system" screen tap **Change server address**. The setup screen opens again.

4.5 Test checklist (staff app)


Check	How	Expected
Sign-in	Sign in as a driver	My Day / My Trips open
Punch with location	Punch in at the workshop	Green line "Sharing your location until you punch out"
Background location	Lock the phone, walk or drive 10 minutes	Owner's Live Staff Map shows the route; battery and "Android app" under the name
Notification	Pull down the notification shade	"EA Workshop is sharing your location"
Punch out	Punch out	Sharing stops; the map shows "Punched out"

Check	How	Expected
Trip	Start a pickup assigned to you	The customer's job page shows you on the way


5. The customer app (Express Autocare): test

5.1 As a web app (no build needed)

1. Open **<https address>/app** on a phone, or scan the customer QR on Settings › App Address & Customer App.
2. Sign in: open a job link sent from a test job (Open in the Express Autocare app), or enter the customer's number and read the code from their page in the system.
3. Install: Chrome menu › **Install app** (Android) or Safari › Share › **Add to Home Screen** (iPhone). Allow notifications when Inbox offers it.

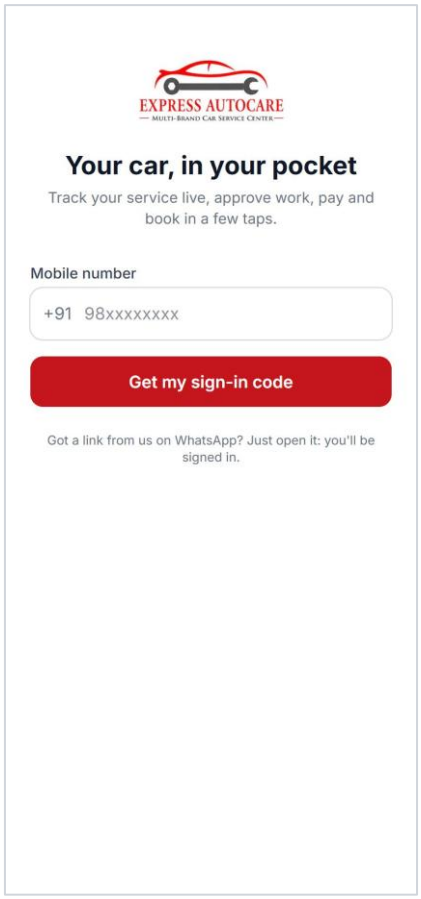

Sign-in

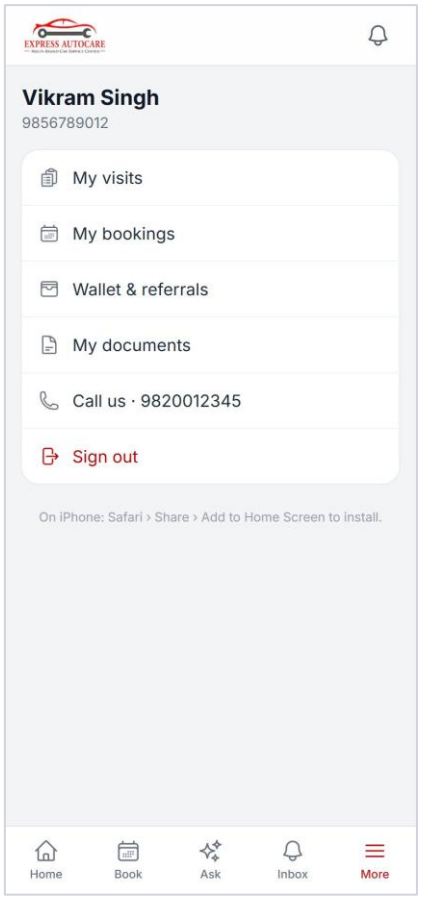

More › Install the app

5.2 As an Android app (APK for testing)

The customer app has the address built in, so build it with the address the test phones will use:


```
cd C:\Users\JOEL\EAERP\mobile-customer
npm install                      (first time only)
set EAERP_APP_URL=https://bright-river-1234.trycloudflare.com
set JAVA_HOME=C:\Users\JOEL\.jdks\ms-17.0.16
npm run build:debug
```

Install **mobile-customer\android\app\build\outputs\apk\debug\app-debug.apk** the same way as the staff app (4.2). It opens straight on the customer sign-in screen.


> **Careful** A test APK made with a tunnel address stops working when the tunnel address changes: rebuild it. The Play Store version is built once with the live address (section 8).
>
> **Careful** Customer app files built **before 22 October 2026** cannot read the phone's location, which fleet drivers need for "Use my location" on a breakdown report. Build a new one (the commands above). Android asks the driver once, only when they tap the button.

5.3 Test checklist (customer app)

Check	Expected
Open a WhatsApp job link › Open in the app	Signed in, that job opens
Sign in with number + code (read out by staff)	Home with their jobs and cars
Approve / decline an item	The advisor sees the answer on the estimate
Pay by UPI › send the reference	Back office sees it in UPI Payments to Confirm; after Confirm the app shows "Received"
Book a service	Appears in CRM › Bookings as "Booked online"
Add a document with an expiry	Shows in Documents and on the customer's page
Driver starts a pickup	The job shows the driver on the map
Inbox › turn on notifications, then move the job to a new stage	A phone notification arrives (needs https)
Fleet driver signs in with their own number	"Driver for <fleet>" on Home; only the cabs linked to them
Driver › Report a problem › Breakdown › Use my location	Android asks for location once; the report reaches Customers › Fleet Reports with a map link
Fleet owner › Fleet dashboard	Every cab: at the workshop or on the road, approvals waiting, money due

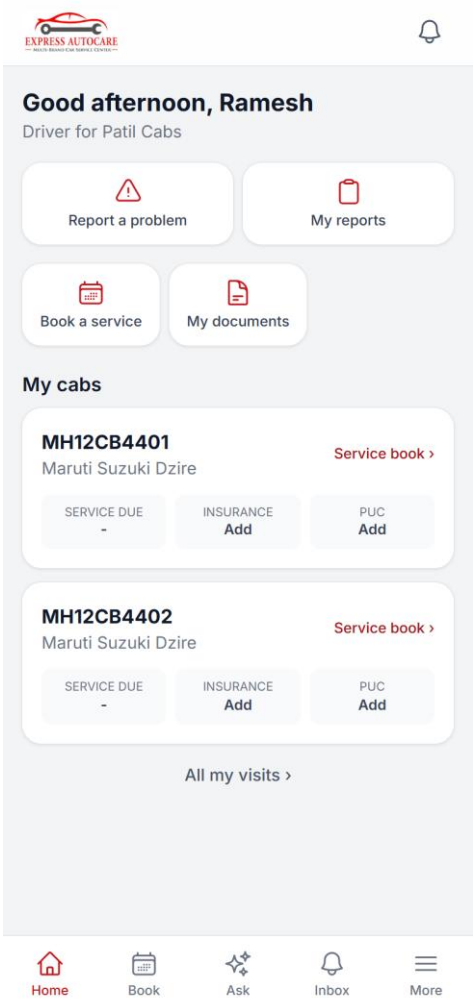

A fleet driver: only their cabs

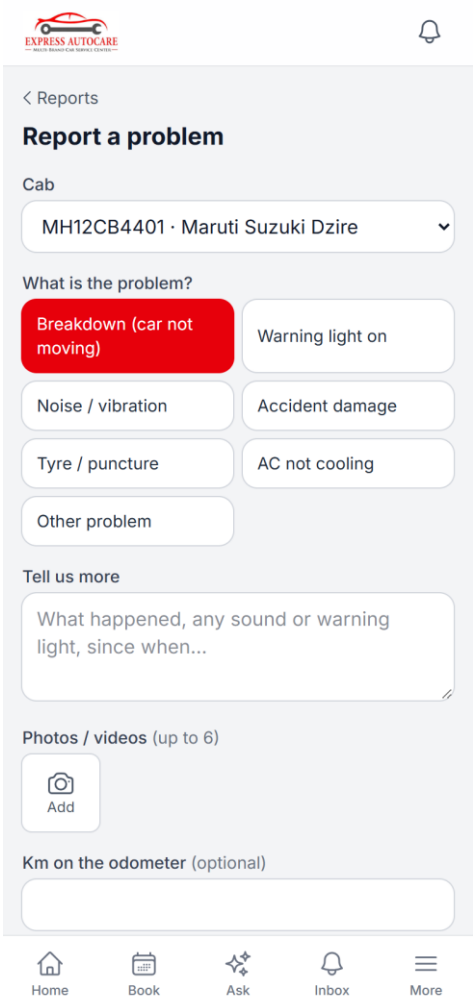

Report a problem (location for a breakdown)

5.4 WhatsApp through Interakt (optional)

With Interakt (WhatsApp Business API) the system sends messages by itself, and customers' WhatsApp messages come into **CRM › WhatsApp Inbox**. For the messages to come in, **Interakt must be able to reach the system at a public https address**: the tunnel (section 3) while testing, the live address later.

1. Interakt account on the **Growth** plan or above (the API). Incoming chats need its higher plan (Advanced): ask Interakt.
2. In the system: **Settings › CRM › WhatsApp & Interakt › Connection**. Paste the **API key** from Interakt › Settings › Developer Settings.
3. Copy the **Webhook URL** shown there. In Interakt › Developer Settings › Webhooks paste it, type a **secret key** of your own, and switch on the events (incoming messages, message status, button clicks, template status). Type the **same secret key** in the system.
4. Choose **Interakt**, **Save**, and **Send a test message** to your own phone. Then send a WhatsApp to the workshop number: it appears in CRM › WhatsApp Inbox, and "What Interakt has sent us" lists it.
5. Templates: follow the user manual, 12.6 (copy the text, get it approved, pick it). First sync of contacts: **php artisan crm:interakt-sync --all**.

> **Careful** The Webhook URL is built from the public address. **Every time the quick tunnel gets a new address, paste the new Webhook URL into Interakt.** Interakt also switches the webhook off by itself after 5 failed calls in 10 minutes (for example while the system is stopped): switch it back on in Interakt's webhook settings.

6. Going live: the server

Before publishing the customer app, the system must be online on its own address with HTTPS. A small cloud server (VPS) with 2 CPUs, 4 GB RAM and 40 GB disk is enough to start.

- **Domain:** for example erp.expressautocare.in, pointing to the server.
- **Software:** PHP 8.4 (with gd, mbstring, openssl, bcmath, curl, zip, pdo_mysql), MariaDB, a web server (nginx), Node.js only for building.
- **HTTPS certificate:** free from Let's Encrypt (certbot), renewed automatically.
- **.env:** APP_ENV=production, APP_DEBUG=false, APP_URL=https://erp.expressautocare.in, the database details.
- **Scheduler:** a cron entry running **php artisan schedule:run** every minute (all the jobs in section 2: CRM, WhatsApp, reminders, fleet, attendance, live location).
- **Backups:** a nightly database dump and the storage folder (photos, documents) copied off the server.

1. Copy the project to the server, then run: **composer install --no-dev**, **npm ci && npm run build**, **php artisan migrate --force**, **php artisan storage:link**, **php artisan config:cache**.
2. Sign in as the owner: **Settings › App Address & Customer App** = https://erp.expressautocare.in; UPI ID; helpline.
3. On staff phones: **Change server address** to the live address (4.4).

1. If Interakt is used: paste the new **Webhook URL** (Settings › CRM › WhatsApp & Interakt) into Interakt's webhook settings (5.4).

> **Note** Moving the data from this computer: dump the database here (mariadb-dump) and load it on the server, and copy storage\app (photos, selfies, documents).

7. The signing key (once)

Every Android app is signed. Google Play keeps its own key for the app; you sign each upload with your **upload key**. Make it once and keep it safe: without it you cannot publish updates (Google can reset it, but it takes days).

```
cd C:\Users\JOEL
"C:\Users\JOEL\.jdks\ms-17.0.16\bin\keytool" -genkey -v -keystore ea-upload.jks
    -keyalg RSA -keysize 2048 -validity 10000 -alias ea-upload
```

It asks for a password (twice), your name and organisation. Then:

- Keep **ea-upload.jks** and its password in two safe places (for example a password manager and an encrypted USB drive). **Never** put it in the project folder or on GitHub.
- Use the same key for both apps, or make a second one for the staff app.

Tell the build where the key is

Create **mobile-customer\android\keystore.properties** (not shared, not committed):

```
storeFile=C:/Users/JOEL/ea-upload.jks
storePassword=<your password>
keyAlias=ea-upload
keyPassword=<your password>
```

Then in **mobile-customer\android\app\build.gradle**, inside **android { … }**, add a signing configuration that reads it and use it for the release build (or use Android Studio: **Build › Generate Signed App Bundle** and pick the key; it does the same).

```
def ks = new Properties(); ks.load(new
FileInputStream(rootProject.file("keystore.properties")))
signingConfigs { release { storeFile file(ks.storeFile); storePassword ks.storePassword
                           keyAlias ks.keyAlias; keyPassword ks.keyPassword } }
buildTypes { release { signingConfig signingConfigs.release; minifyEnabled false } }
```

8. Release build for Google Play

8.1 Before the first upload

- **Target Android version:** Google Play accepts new apps only if they target a recent Android version (API 35 or newer at the time of writing; Play Console shows the current rule). The projects currently target API 34 (Capacitor 6). Raise **targetSdkVersion** and **compileSdkVersion** in **android\variables.gradle** to what Play requires (this computer has Android 36 installed), or upgrade Capacitor, and test again. Ask for this to be done before the first upload.
- **Version:** in **android\app\build.gradle** set **versionName** (what users see, e.g. "1.0.0") and **versionCode** (a number that must go up with every upload: 1, 2, 3 …).
- **Icon and name:** the icon is the Express Autocare logo already; the name is "Express Autocare".

8.2 Build

```
cd C:\Users\JOEL\EAERP\mobile-customer
set EAERP_APP_URL=https://erp.expressautocare.in
set JAVA_HOME=C:\Users\JOEL\.jdks\ms-17.0.16
npm run build:release
```

The file to upload is **android\app\build\outputs\bundle\release\app-release.aab** (an "Android App Bundle"; Play makes the phone-specific APKs from it).

> **Careful** Build the Play version **only with the live https address**. A tunnel or Wi-Fi address would stop working for every customer.

9. Publishing on the Google Play Store

9.1 The developer account

1. Go to **play.google.com/console** and sign in with a Google account the business will keep (not a staff member's personal one).
2. Choose **Organisation** as the account type if you can (needs a D-U-N-S number for Express Autocare, free from Dun & Bradstreet, takes a few days). An organisation account can publish straight to production; a new **personal** account must first run a closed test with at least 12 testers for 14 days.
3. Pay the one-time registration fee (US$25) and complete identity verification (ID, address, phone; a few days).

9.2 Create the app and the store listing

1. **Create app**: name "Express Autocare", default language English (India), App, Free; accept the declarations.
2. **Main store listing**: short description (up to 80 characters), full description, app icon 512 × 512 PNG, feature graphic 1024 × 500, and at least 2 phone screenshots (Home, Job, Book, Ask work well; take them on a phone or use the ones in the User Manual).
3. **Privacy policy**: a page on your website saying what the app stores (name, phone, cars, service history, documents and photos the customer adds, UPI references they send), why, and how to ask for deletion. Put its address in App content › Privacy policy.
4. **App content** forms: Ads (no), App access (see 9.3), Content rating questionnaire (no violence etc. → Everyone), Target audience (18+), Data safety (see 9.4), News app (no), Government app (no), Financial features (it does not process payments itself; it opens UPI apps).

Store text	Example
Short description	Track your car's service live, approve work, pay by UPI and book in a few taps.
Full description (start)	The official app of Express Autocare, multi-brand car service. See your car's service live with photos and videos, approve or decline extra work, pay by UPI, keep your car's service book, insurance and PUC, book pickup & drop or home service, and ask our assistant what that noise is.

9.3 App access for Google's reviewers

Reviewers must be able to sign in. Create a **test customer** with a car and a job, and in App content › App access give: "Sign in with mobile number 9xxxxxxxxx; the code is shown to staff — please use this sign-in link instead: https://erp.expressautocare.in/j/… (opens the app signed in)". Keep that test job open while the review runs.

9.4 Data safety answers (customer app)

Data	Collected?	Why
Name, phone number	Yes	Account, app functionality
Photos (documents, assistant, UPI screenshot)	Yes, only when the customer adds them	App functionality
Files and documents	Yes (insurance, PUC, RC)	App functionality
Financial info	UPI reference numbers only (no card or bank details)	Payment confirmation
Location	Yes, precise, only when a fleet driver taps "Use my location" on a breakdown report (while using the app; never in the background)	App functionality (sending help to the cab)
Shared with third parties	Questions to the assistant go to Anthropic (AI) when it is switched on	App functionality
Encryption / deletion	Encrypted in transit (https); customers can ask the workshop to delete their data	-

9.5 Testing tracks, then production

1. **Internal testing**: Testing › Internal testing › Create release › upload **app-release.aab** › add testers (email list) › roll out. Testers install from the Play link within minutes. Use this first.
2. **Closed testing** (required for new personal accounts: 12+ testers for 14 days): invite regular customers or staff family; collect feedback.
3. **Production**: Production › Create release › choose the tested bundle › release notes › **Send for review**. The first review usually takes a few days. Choose a staged rollout (for example 20%) if you want to start small.

9.6 Updates

- Changes to screens and features come from the server: **no new app needed**.
- A new app version is needed only for native changes (permissions, plugins, icon, name, target Android version). Increase **versionCode**, build (8.2) and upload a new release.
- The version with the **location permission** for fleet drivers (October 2026) is such a change: increase versionCode, build and upload it. In Play Console › App content › **Location permissions**, say it is used in the foreground only, to send the workshop a broken-down cab's position.

9.7 The staff app and the Play Store

The staff app does not need to be on the Play Store: share the signed APK (build:release in the **mobile** folder gives an .aab; for a shareable APK use Android Studio › Build › Generate Signed APK). If you prefer the Play Store, publish it as **unlisted** or through **Managed Google Play** (private to your organisation). Google then asks for a **foreground service declaration** for location (with a short screen recording showing punch in → "sharing your location" notification → punch out) because it shares location in the background.

> **Note** iPhone App Store: needs a Mac with Xcode and an Apple Developer account (US$99 a year). Until then iPhone users install the web apps from Safari (Add to Home Screen).

10. Problems and fixes

Problem	Fix
Phone shows "This site can't be reached" on http://192.168…	Same Wi-Fi? System started with --host 0.0.0.0? Windows firewall allows PHP / port 8000 (section 2)?
The page loads but is blank or unstyled on the phone	public\hot exists: run npm run build and delete public\hot (section 2).
"Turn on location" although it is on (browser)	The address is not https. Use the tunnel address (section 3).
APK will not install	Allow "Install unknown apps" for the app that opened it; uninstall an older copy signed with a different key first.
Staff app: "Can't reach the workshop system"	The tunnel address changed or the system is stopped: start it and use Change server address.
Location stops after some minutes with the screen locked	Battery: Unrestricted; Xiaomi Autostart on; the app not "cleared" from recent apps.
Photos do not open over the tunnel	APP_URL in .env must be the tunnel https address; then php artisan config:clear.
Customer app notifications never arrive	Needs https and the customer must allow notifications (Inbox). Windows test computers also need OPENSSL_CONF set (see docs/CUSTOMER_APP.md).
Play Console: "targets an old API level"	Raise targetSdkVersion (section 8.1) and upload a new versionCode.
Play Console: "app access" rejection	Give reviewers a working sign-in link and keep the test job open (9.3).
WhatsApp messages from customers do not reach CRM › WhatsApp Inbox	The Webhook URL in Interakt is old (tunnel address changed), the webhook was switched off by Interakt, the secret keys differ, or the plan has no incoming messages. Check "What Interakt has sent us" (5.4).
Messages stay in Messages to Send although Interakt is on	That kind of message has no approved template yet, or Interakt refused it (the reason shows on the message).
Fleet driver: "Use my location" does nothing in the Android app	The customer app file is older than the location permission: build and install a new one (5.2). Or location is off / was denied in the phone settings.
A fleet driver cannot sign in	Settings › Modules: Fleet cabs & drivers on; the customer ticked as a cab fleet; the driver active with the right mobile number.
New screens or menus missing after an update	Run the steps in 2.1 (migrate, the permission seeds, npm run build), then sign out and in again.

> **Note** Technical notes for whoever maintains the system are in the project: docs/ANDROID_APP.md and docs/CUSTOMER_APP.md.