

UC 10

INTERAÇÃO  
COM APIs

RAISSA MORAES

# MÉTODO GET

The screenshot displays a REST client interface with a GET request to `http://localhost:3000/promocoos`. The response is a JSON array of two objects, each representing a promotion. The interface includes tabs for Params, Authorization, Headers (6), Body, Pre-request Script, Tests, and Settings. The Body tab is active, showing the response in Pretty JSON format. The status is 200 OK, with a time of 514 ms and a size of 590 B.

**Query Params**

KEY	VALUE	DESCRIPTION
Key	Value	Description


**Body** | Cookies | Headers (13) | Test Results

Status: 200 OK | Time: 514 ms | Size: 590 B | Save Response



**Pretty** | Raw | Preview | Visualize | JSON

```
1 {
2   {
3     "id": 1,
4     "titulo": "Novidade 1",
5     "descricao": "Descrição da novidade 1."
6   },
7   {
8     "titulo": "Novidade 2",
9     "descricao": "Descrição da novidade 2.",
10    "id": 2
11  }
12 }
```

# MÉTODO POST

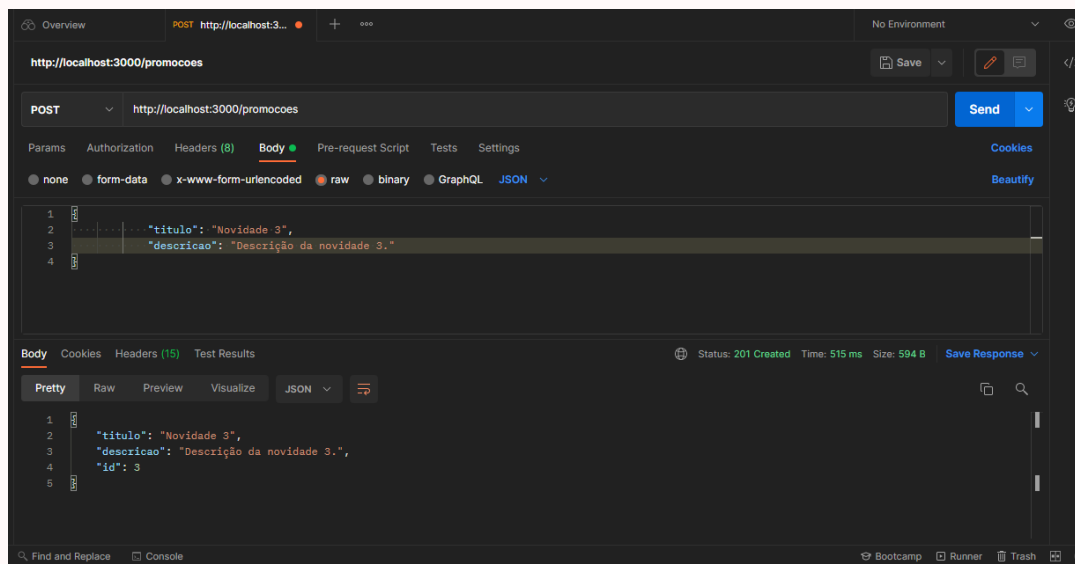

# MÉTODO DELETE

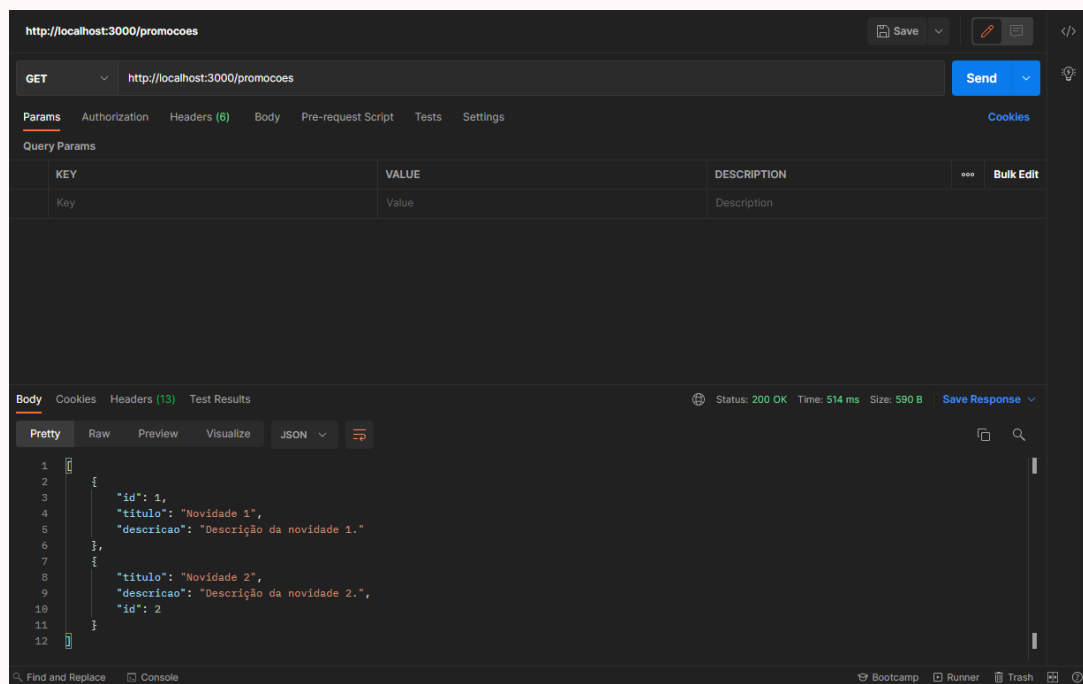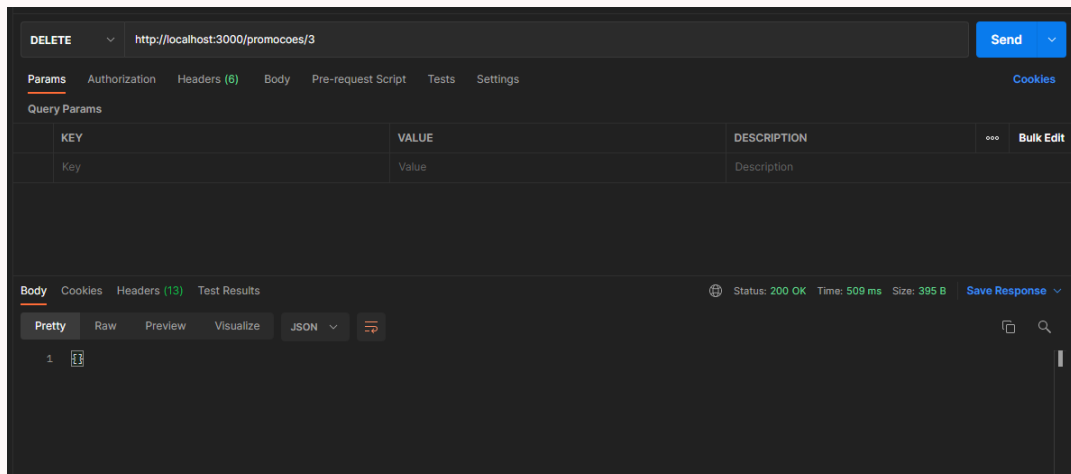

# MÉTODO UPDATE

