


```
joel34@localhost:~/awk/first — vim firstfit.c  🔍 ☰ ✕  
#include<stdio.h>  
int main(){  
    int m,n;  
    int blockSize[m],raf memory block:\n";  
    int processSize[n];  
  
    printf("Enter number of memory block:\n");  
    scanf("%d",&m);  
    printf("Enter size of eah block:\n");  
    scanf("%d",&m);  
    renire("%d",blockSize[i]);  
    resize[i]=blockSize[i];  
}  
printf("Enter number of processes\n");  
scanf("%d",&n);  
int processSize[n];  
printf("Enter size of each process:\n");  
for(int i=0;i<n;i++){  
    scanf("%d",&processSize[i]);  
}  
for(int i=0;i<n;i++){  
    int alloc=0;  
    for(int j=0;j=m;j++){  
        if(resize[j]>=processSize[i]){  
            int frag=resize[j]-processSize[i];  
            1,13      Top
```

```
joel34@localhost:~/awk/first — vim firstfit.c
scanf("%d",&processSize[i]);
}
for(int i=0;i<m;i++){
    int alloc=0;
    for(int j=0;j<m;j++){
        if(sizes[j]>=processSize[i]);
            frag fragesize[j]-processSize[i];
            printf("Process %d of size %d is allocated to block %d of si
e %d with fragment %d\n",i+1,processSize[i],j+1,blockSize[j],frag);
            resz[j]==processSize[i];
            allo=1;
            break;
        }
    }
    if(!allo){
        blk{
            pritt("rocess %d of size %d is not allocated\n",i+1,processSize[
]);
        }
    }
    return 0;
}
-- INSERT --                                     37,1 Bot
```

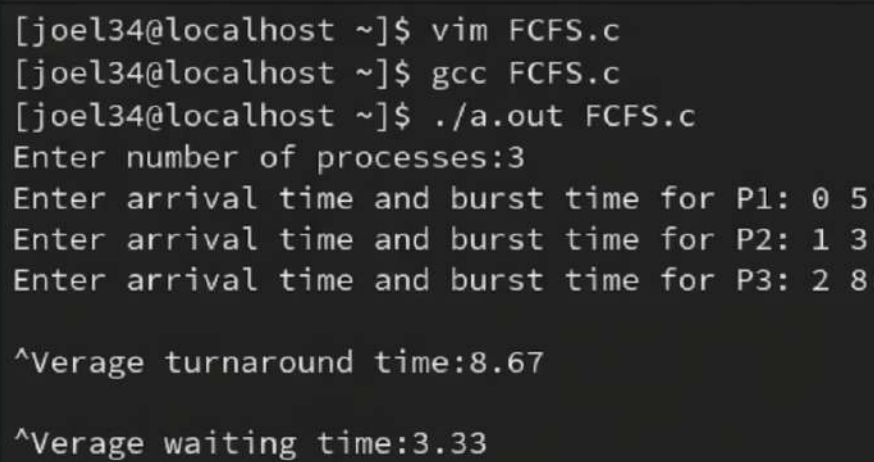

```
[joel34@localhost ~]$ vim FCFS.c
[joel34@localhost ~]$ gcc FCFS.c
[joel34@localhost ~]$ ./a.out FCFS.c
Enter number of processes:3
Enter arrival time and burst time for P1: 0 5
Enter arrival time and burst time for P2: 1 3
Enter arrival time and burst time for P3: 2 8

^Verage turnaround time:8.67

^Verage waiting time:3.33
```

The image shows a terminal window with a dark background. The title bar at the top reads 'joel34@localhost:~'. On the right side of the title bar are three icons: a square, a magnifying glass, and a close button. The terminal content shows the execution of a program named FCFS.c. The user enters the number of processes as 3, and then provides arrival and burst times for three processes: P1 (0, 5), P2 (1, 3), and P3 (2, 8). The program outputs the average turnaround time as 8.67 and the average waiting time as 3.33. The text is displayed in a monospaced font.