



University of St.Gallen

School of Management, Economics, Law, Social Sciences and International Affairs

The effect of Twitter activity on Bitcoin price

Documentation

Software Engineering for Economists
(7,610,1.00)

Dimitrios Koumnakes - 10-613-370

Severin Kranz - 13-606-355

Joël Sonderegger - 11-495-488

Alen Stepic - 11-475-258

Chi Xu - XX-XXX-XXX

Fall Term 2017

Supervisor

Prof. Dr. Philipp ZAHN

Department of Economics

December 28, 2017

Contents

| | | |
|----------|--|-----------|
| 1 | Introduction | 1 |
| 1.1 | Goal of the paper | 1 |
| 1.2 | Methodology | 1 |
| 1.3 | Scope | 1 |
| 2 | Setup | 2 |
| 2.1 | Python Scripts | 2 |
| 2.2 | Stata | 2 |
| 3 | Data Collection | 2 |
| 3.1 | Tweets Data | 2 |
| 3.1.1 | Python Script | 2 |
| 3.1.2 | Hardware Setup | 5 |
| 3.2 | Bitcoin Price Data | 6 |
| 3.2.1 | Execution | 7 |
| 3.2.2 | Output | 7 |
| 3.2.3 | API: Bitcoinaverage.com | 7 |
| 4 | Data Aggregation and Data Wrangling | 8 |
| 4.1 | Process | 8 |
| 4.2 | Execution | 10 |
| 4.3 | Output | 10 |
| 5 | Data Analysis | 10 |

List of Figures

| | | |
|---|--|---|
| 1 | Twitter Keys and Access Tokens, based on Twitter, 2017a. | 3 |
| 2 | Data aggregation and data wrangling process | 9 |

List of Abbreviation

| | |
|----------------|-----------------------------------|
| API | Application Programming Interface |
| ATOKEN | Access Token |
| ASECRET | Access Token Secret |
| CKEY | Consumer Key |
| CSECRET | Consumer Secret |
| JSON | Java Script Object Notation |
| RPI | Raspberry Pi |
| SSH | Secure Shell |
| BPI | Bitcoin Price Index |
| BTC | Bitcoin |
| USD | US Dollar |

1 Introduction

In the academic environment accountability and reproducibility is important. However, the publishing process of papers and journals seem to be outdated as reproducibility is not evaluated by many journals. (**mccullough2013**) New ways of data collection and data processing exist by using computational economics. The usage of algorithms can increase effectiveness and efficiency. Hence, much larger data sets can be processed. However this creates also new problems regarding to traceability and reproducibility. Often cited academic papers exist, where the initial computation is not reproducible (**mccullough2013**). Replicating data or existing results do not provide any new knowledge at all. Nevertheless, the ability to reproduce is key in science and non-reproducible work can not be characterized as science or used as a basis for policy making (**mccullough2013**). This explains why reproduction is of great relevance.

1.1 Goal of the paper

The goal of this documentation is the provision of a description. This description should enable the reader to reproduce the results discussed in the separate paper. Thus, it contains an explanation how the input data have been gathered, stored, aggregated and analysed. In other words, the input data, the model core, the model parameters and the applied math program are explained.

1.2 Methodology

This documentation consists out of four chapters. The first chapter contains a short introduction and provides the reader with an overview about the topic. Furthermore it points out the relevance of documentation. The second chapter discusses the input data. This includes the process of gathering and storing twitter tweets as well as the gathering of the bitcoin price data. The third chapter discusses how the data is aggregated by pointing out the core model and its parameters. Finally the fifth chapter discusses how the analysis has been conducted.

1.3 Scope

The scope of the documentation is the provision of an overview about the different steps which have been conducted to obtain the results in the paper. It does not contain any discussions about the results of the separate paper. It is not a deep description of the code as the code itself as the code is documented separately. Nevertheless, important lines of code are discussed.

2 Setup

2.1 Requirements to run Python scripts

Before you go any further, make sure that at least Python version 3.0.0 available from your command line. You can check this by running:

```
python --version
```

You should get some output like Python 3.7.13. If you do not have at least Python version 3.0.0, please install the latest 3.x version from python.org.

On top you need various packages. We created a the requirements file `requirements.txt`, which contains all required packages to run Python scripts of the project. The list of packages to be installed using pip install like so:

```
pip install -r requirements.txt
```

Now you should be ready to run the Python scripts.

2.2 Stata

(Dimitri's Part: stata version and anything else required to do your calculations)

3 Data Collection

This section contains a detailed description of how the data for the sequential analysis is gathered and stored. This includes two subsections the (1) tweets data and the (2) bitcoin price data.

3.1 Tweets Data

Whit the python script real-time twitter data are streamed and stored. This happens with help of a raspberry pi.

3.1.1 Python Script

Twitter offers different Application Programming Interfaces (API) for collecting data. However, the time frame for gathering data on a freely base with full access is limited to 7 days (Twitter, 2017b). On the other hand, python offers different twitter libraries. Such as the open-source package tweepy. This package has been used for streaming the twitter data as it simplify the

script.

Installing Tweepy

Tweepy is installed very simply by running following commands in the command prompt.

```
pip install tweepy
```

If the previous downloaded python installation package does not contain the tweepy library, the tweepy package has to be downloaded. The package can be downloaded for free from the following link:

<https://pypi.python.org/pypi/tweepy>

Twitter Authentication

To access the twitter data, twitter requests an identification of the user. The identification is assured by different keys and access tokens. Those are the (1) consumer key (CKEY), (2) consumer secret (CSECRET), (3) access token (ATOKEN) and (4) access token secret (ASECRET). (Twitter, 2017c)

To obtain the mentioned keys and tokens a twitter account is needed. Once, a twitter account exist a application has to be created. This has to be conducted by login with the twitter account credentials under the following link:

<https://apps.twitter.com/>

After the creation of a application, the keys and tokens can be extracted. Figure 1 illustrates how to retrieve the keys and tokens.

Twitter Streaming API

By running the python script `collectTwitterData.py` real-time twitter data is pushed in a Java Script Object Notation (JSON) format. Tweets are just pushed in case a tweet contains the defined key word `bitcoin`.

```
$ python collectTwitterData.py
```

From the JSON format the following parameters are decoded:

- created at: Timestamp of the created tweet
- text: Text of the tweet

Application Settings

Keep the "Consumer Secret" a secret. This key should never be human-readable in your application.

| | |
|------------------------------|---|
| Consumer Key (API Key) | |
| Consumer Secret (API Secret) | |
| Access Level | Read and write (modify app permissions) |
| Owner | HSGSoftEngineer |
| Owner ID | 933214447291604992 |

Application Actions

[Regenerate Consumer Key and Secret](#)
[Change App Permissions](#)

Your Access Token

This access token can be used to make API requests on your own account's behalf. Do not share your access token secret with anyone.

| | |
|---------------------|--------------------|
| Access Token | |
| Access Token Secret | |
| Access Level | Read and write |
| Owner | HSGSoftEngineer |
| Owner ID | 933214447291604992 |

Figure 1: Twitter Keys and Access Tokens, based on Twitter, 2017a.

The timestamps are in UTC time.

After a successfully decoding the parameters the data is appended to the `twitterData.csv` file in a new row and saved in the folder `/data`.

An excerpt of an example response looks like the following:

```
[
  {
    "created_at": Tue Dec 19 20:40:48 +0000 2017,
    "text": "RT @WhiteBitcoin: New Bitcoin White. Effective, Flexible,
            Reliable",
  },
  {
    "created_at": Tue Dec 19 20:40:49 +0000 2017 ,
    "text": "As #bitcoin prices surge, #xrp remains affordable and FAST!",
  },
  {
    "created_at": Tue Dec 19 20:40:49 +0000 2017,
    "text": "Singapore issues bitcoin warning after price rise - #BTC #Bitcoin"
```

```
        #Crypto",  
    }  
]
```

Furthermore to ensure a high quality data set an exception has been integrated into the `collectTwitterData.py` script. If an error occurs an email will be sent with the error message. Furthermore the logfile will be appended to `/data/tweet_collection_error_log.csv`.

3.1.2 Hardware Setup

As explained in the previous section the twitter API was used to filter tweets in real time based on the buzzword "bitcoin". The Python program was running for seven days without interruption on a Raspberry Pi 2 (RPI) which was accessed with a Secure Shell (SSH) connection. This approach allowed us to ensure a continuous data stream while being able to access the program output regardless of time and location. Furthermore, due to a low energy consumption of the RPI the method is also the most cost efficient one compared to a personal computer or NAS Server. The following section describes the different steps that have been taken in order to setup the RPI 2, SSH, Git and Python3.

1. Setup of the Raspberry Pi

- (a) Burn image 2017-11-29-raspbian-stretch.zip to micro SD card available from

<https://www.raspberrypi.org/downloads/raspbian/>

- (b) Boot image from micro SD card

- (c) Open SSH session using PuTTY SSH client for Windows available from

<https://www.chiark.greenend.org.uk/~sgtatham/putty/latest.html>

- (d) Login to server with credentials

2. Update system to the newest software

- (a) Update list of applications with the command

`sudo apt-get update`

- (b) Update applications with the command

`sudo apt-get upgrade`

3. Setup Git

- (a) Install Git using the command

```
sudo apt-get install git
```

- (b) Clone Git repository from

```
https://github.com/joelsonderegger/twitterbitcoin.git
```

4. Setup Python3

- (a) Install Python3 using the command: `sudo apt-get install Python3`

- (b) Install the tweepy module for python using the command

```
pip install tweepy
```

5. Collect Twitter Data

- (a) Open a new screen using the command

```
screen -S 'name'
```

- (b) Start Python program using the command

```
python3 collectTwitterData.py
```

- (c) Detach the screen to keep the program running after secure shell connection has been terminated using the commands

```
Ctrl+A
```

```
Ctrl+D
```

- (d) Re-attach the screen to check whether the script is still running using the command

```
screen -r 'name'
```

6. Download the collected data

- (a) Install FileZilla available from

```
https://filezilla-project.org/
```

- (b) Connect to rpi and navigate to data location

- (c) Download data manually

In summary, this approach worked well and ran smoothly. A clean setup is recommended to ensure a continuous data stream over a longer period.

3.2 Bitcoin Price Data

We wrote a Python script which collects Bitcoin price data as there was no preexisting data set that satisfied our needs. The Bitcoin price is best expressed by the Bitcoin Price Index. The Bitcoin price index (BPI) is an index of the exchange rate between the Bitcoin (BTC) and the US dollar (USD) (Kristoufek, 2015). The objective of the script was to gather hourly Bitcoin Price Index data for at least the time period in which we gather the tweets data. We found the an API by bitcoinaverage.com which sufficed our needs. An API description follows later.

3.2.1 Execution

By executing the python script `collectCryptocurrencyData.py` hourly data for the Bitcoin Price Index is retrieved.

```
$ python collectCryptocurrencyData.py
```

3.2.2 Output

After successfully running the python script `CollectCryptocurrencyData.py` the file `bpi.csv` is generated in the folder `/data`. It is important to note that every execution of the script overwrites any existing `bpi.csv` file.

The file `bpi.csv` contains historical Bitcoin Price Index data for one month on an hourly basis. Each data point consists of the following parameters:

- time: Timestamp on an hourly basis in UTC time
- average: Average price (in USD)
- high: Highest price (in USD)
- low: Lowest price (in USD)
- open: Opening price (in USD)

3.2.3 API: Bitcoinaverage.com

Bitcoinaverage.com offers a free API that provides real-time and historical price data for a range of crypto-currencies including Bitcoin. The following requests delivers data for an per

hour monthly sliding window.

Request

The request to get the data for an per hour monthly sliding window looks as follows. This request require authentication that requires registration and the generation of an API key. The registration and generation of an API key is freely available on [bitcoinaverage.com](https://www.bitcoinaverage.com). The `collectCryptocurrencyData.py` already contains the necessary keys. This means that you need no register or generate keys to execute the script `collectCryptocurrencyData.py`.

<https://apiv2.bitcoinaverage.com/indices/global/history/BTCUSD?period=monthly&format=json>

Response An excerpt of an example response looks like the following:

```
[
  {
    "high": 8271.04,
    "average": 8247.83,
    "open": 8242.39,
    "low": 8217.72,
    "time": "2017-11-22 15:00:00"
  },
  {
    "high": 8246.82,
    "average": 8203.19,
    "open": 8203.81,
    "low": 8157.25,
    "time": "2017-11-22 14:00:00"
  },
  {
    "high": 8267.27,
    "average": 8238.62,
    "open": 8248.77,
    "low": 8198.54,
    "time": "2017-11-22 13:00:00"
  }
]
```

4 Data Aggregation and Data Wrangling

After the tweets and BPI data set is generated needs to be aggregated before it can be analyzed. In addition, some data wrangling is necessary to bring the data in a format which than can be

analyzed. The script `aggregateTwitterBpi.py` does all this.

4.1 Process

The process of the script `aggregateTwitterBpi.py` works as follows:

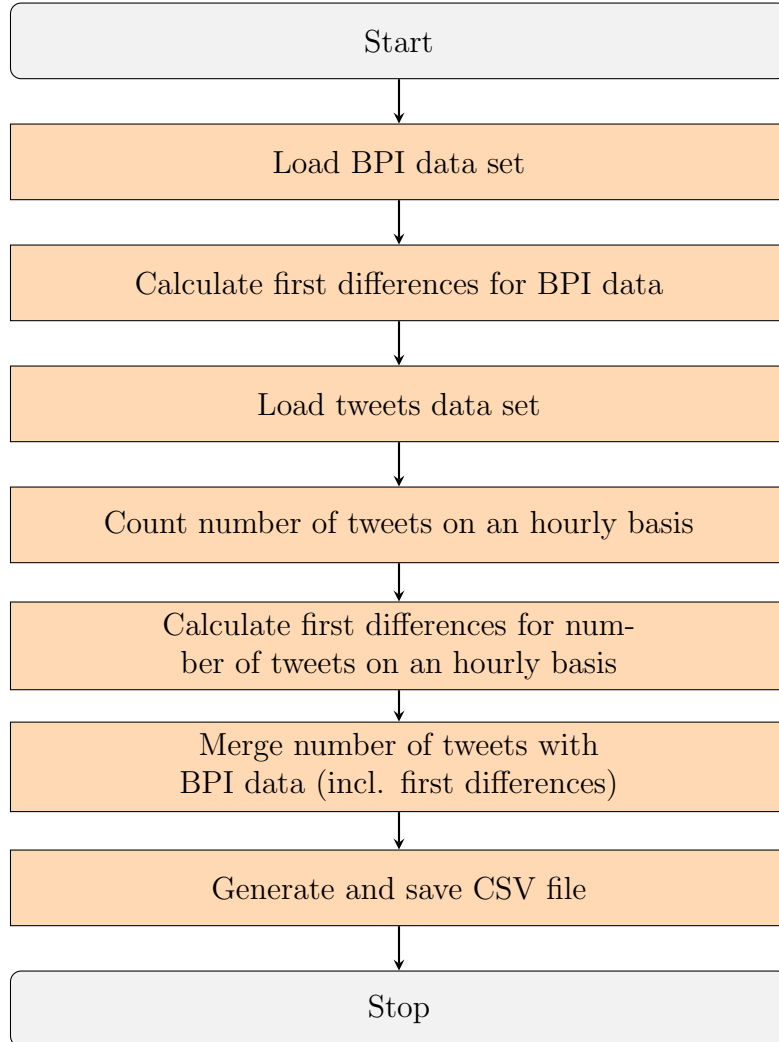


Figure 2: Data aggregation and data wrangling process

Here a short description of what happens at the various steps:

Load BPI data set The script takes the BPI data set that is located at `data/bpi.csv`.

Calculate first differences for BPI data The first differences of the BPI closing prices and the natural logarithm of the first differences of the BPI closing prices are calculated. The reason for calculating these values is given in the data analysis section.

Load tweets data set The script takes the tweets data set that is located at `data/twitterData.csv`.

Count number of tweets on an hourly basis First, groups the tweets by hour. Second,

counts the number of tweets for every hour.

Calculate first differences for number of tweets on an hourly basis The first differences of the number of tweets and the natural logarithm of the first differences of the number of tweets are calculated. Again, the reason for calculating these values is given in the data analysis section.

Merge number of tweets with BPI data (incl. first differences) 

Generate and save CSV file Finally, a CSV file is generated with the merged data.

4.2 Execution

By executing the Python script `aggregateTwitterBpi.py` a aggregated data set that contains number of tweets and Bitcoin Price Index, both on an hourly basis, gets generated.

```
$ python aggregateTwitterBpi.py
```

4.3 Output

After successfully running the Python script `aggregateTwitterBpi.py` the file `nr_of_tweets_bpi_closing` is generated in the folder `/data`. It is important to note that every execution of the script overwrites any existing `nr_of_tweets_bpi_closing_price.csv` file.

The file `aggregateTwitterBpi.csv` contains historical tweets and Bitcoin Price Index data. Each data point consists of the following parameters:

- time: Timestamp on an hourly basis in UTC time
- nr_of_tweets: Sum of tweets
- df_nr_of_tweets: First difference of the sum of tweets
- log_df_nr_of_tweets: Natural logarithm of the first difference of the sum of tweets
- bpi_closing_price: BPI closing price
- df_bpi_closing_price: First difference of the BPI closing price
- log_df_bpi_closing_price: Natural logarithm of the first difference of the BPI closing price

5 Data Analysis

(Dimitri's Part)

References

- Kristoufek, L. (yearmonthday). What are the main drivers of the bitcoin price? evidence from wavelet coherence analysis. *PloS one*, 10(4), e0123923.
- Twitter, I. (yearmonthday). Application management. **retrieved from** <https://apps.twitter.com/>
- Twitter, I. (yearmonthday). Search tweets. **retrieved from** <https://developer.twitter.com/en/docs/tweets/search/overview>
- Twitter, I. (yearmonthday). Twitter terms of service. **retrieved from** <https://twitter.com/en/tos>