

# *SC*

---

## **Service Connector**

**SC Message Protocol V1.0**

**SC\_1\_SCMP-V1.0\_E (Version V2.15)**

---

**This document describes the SC Message Protocol V1.0 (SCMP).**

CONFIDENTIAL

This document is a spiritual ownership of STABILIT Informatik AG, and must not be used or copied without a written allowance of this company. Unauthorized usage is illegal in terms of Chapter 23 / 5 UWG / Swiss law.

The information in this document is subject to change without notice and should not be construed as a commitment by STABILIT Informatik AG.

Copyright © 2010 by STABILIT Informatik AG  
All rights reserved.

All other logos, product names are trademarks of their respective owners.

CONFIDENTIAL

This Document has been created with Microsoft Word 2003 (11) with template file C:\STABILIT\STANDARD\TEMPLATES\S\_REP\_E.DOT and printed at 20 October 2010 16:52.

## Identification

|                            |                                                                                                                              |
|----------------------------|------------------------------------------------------------------------------------------------------------------------------|
| Project:                   | SC                                                                                                                           |
| Title:                     | Service Connector                                                                                                            |
| Subtitle:                  | SC Message Protocol V1.0                                                                                                     |
| Version:                   | V2.15                                                                                                                        |
| Reference:                 | SC_1_SCMP-V1.0_E                                                                                                             |
| Classification:            | Confidential                                                                                                                 |
| Keywords:                  | Concepts, Communication, Protocol                                                                                            |
| Comment:                   | This document describes the SC Message Protocol V1.0 (SCMP).                                                                 |
| Author(s):                 | STABILIT Informatik AG<br>Jan Trnka, Daniel Schmutz, Joel Traber                                                             |
| Approval<br>(Reviewed by): | <div>Signature ..... Jan Trnka</div> <div>Signature ..... Francisco Gonzalez</div> <div>Signature ..... Walter Mörgeli</div> |
| Audience:                  | Project team, Eurex IT management, Review team                                                                               |
| Distribution:              | Project team, SIX development team                                                                                           |
| Filename                   | c:\stabilit\projects\eurex\sc\documents\sc_0_scmp_e.doc                                                                      |

## Revision History

| Date       | Version | Author    | Description                                                                                                                                                                                                                                                                                                                                      |
|------------|---------|-----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 14.06.2009 | D1.0    | Jan Trnka | Initial draft                                                                                                                                                                                                                                                                                                                                    |
| 09.08.2009 | D1.1    | Jan Trnka | Separate specification and architecture documents. Fill information from Daniel into this document.                                                                                                                                                                                                                                              |
| ...        | ...     | Jan Trnka | Many changes in between not tracked                                                                                                                                                                                                                                                                                                              |
| 24.2.2010  | V2.0    | Jan Trnka | Proposal for C-API                                                                                                                                                                                                                                                                                                                               |
| 3.3.2010   | V2.1    | Jan Trnka | Remove SC architecture from this document                                                                                                                                                                                                                                                                                                        |
| 11.4.2010  | V2.2    | Jan Trnka | Prepare for review                                                                                                                                                                                                                                                                                                                               |
| 14.4.2010  | V2.3    | Jan Trnka | Put API into its own document                                                                                                                                                                                                                                                                                                                    |
| 2.6.2010   | V2.4    | Jan Trnka | Multi-Session Server changed, ATTACH instead of CONNECT                                                                                                                                                                                                                                                                                          |
| 15.6.2010  | V2.5    | Jan Trnka | Corrections after SIX workshop and review                                                                                                                                                                                                                                                                                                        |
| 30.6.2010  | V2.6    | Jan Trnka | Cleanup confusion detected by R. Frey<br>Improve keepalive description<br>Attr. <i>authSessionId</i> introduced<br>Attr. <i>noDataInterval</i> introduced<br>Headline format changed<br>Chapter "Subscription monitoring" added<br>Matrix reviewed<br>Last header attr. also terminated with <LF><br>Definition of file services and http proxy. |
| 2.7.2010   | V2.7    | Jan Trnka | Noi attribute changed, omi updated.                                                                                                                                                                                                                                                                                                              |
| 21.7.2010  | V2.8    | Jan Trnka | CLN_CREATE_SESSION,SRV_CREATE_SESSION,CLN_SUBSCRIBE,SRV_SUBSCRIBE,CLN_CHANGE_SUBSCRIPTION,SRV_CHANGE_SUBSCRIPTION may optionally have a body.<br>SRV_ABORT_SESSION change                                                                                                                                                                        |

|            |       |           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|------------|-------|-----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 15.8.2010  | V2.9  | Jan Trnka | "=" or <LF> are not allowed within attribute names and/or values.<br>Unknown header attributes will be forwarded.<br>Large message are not possible for CLN_CREATE_SESSION or CLN_SUBSCRIBE.<br>mid is never set in case of an error.<br>Publishing of large messages possible from one server only.<br>MANAGE message described.<br>Attribute default values introduced.<br>Chapter <i>Restrictions</i> moved to design document.<br>Restructuring of the document.<br>echoTimeout superseded by operationTimeout |
| 23.8.2010  | V2.10 | Jan Trnka | Restrictions added again<br>State and relationship diagrams<br>serviceName limited to 32 chars.<br>DATA message renamed to EXECUTE                                                                                                                                                                                                                                                                                                                                                                                 |
| 6.9.2010   | V2.11 | Jan Trnka | Minor document restructuring<br>Unknown header attributes will ignored, NOT be forwarded.<br>Session monitoring changed. CLN_ECHO replaced by ECHO, SRV_ECHO eliminated, ECHO response sent by SC.<br>State fallback on error added<br>Possible error codes added                                                                                                                                                                                                                                                  |
| 19.9.2010  | V2.12 | Jan Trnka | operationTimeout (oti) is now in milliseconds                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| 22.9.2010  | V2.13 | Jan Trnka | REGISTER_SERVICE renamed to REGISTER_SERVER and analogous DEREGISTER_SERVICE to DEREGISTER_SERVER, MTY remains the same!                                                                                                                                                                                                                                                                                                                                                                                           |
| 13.10.2010 | V2.14 | Jan Trnka | authenticatedSession (asi) removed<br>cascadedMask (cma) introduced<br>Errors in publishing service description and messages corrected.<br>ipAddressList (ipl) required for INSPECT and MANAGE<br>operationTimeout (oti) is in all client requests (sometimes optional)<br>CacheId is unique per service                                                                                                                                                                                                           |
| 20.10.2010 | V2.15 | Jan Trnka | Exceeded operation timeout, SRV_ABORT_SESSION sent.                                                                                                                                                                                                                                                                                                                                                                                                                                                                |

CONFIDENTIAL



# Table of Contents

|       |                                       |    |
|-------|---------------------------------------|----|
| 1     | PREFACE.....                          | 6  |
| 1.1   | Purpose & Scope of this Document..... | 6  |
| 1.2   | Definitions & Abbreviations.....      | 6  |
| 1.3   | External References.....              | 6  |
| 1.4   | Typographical Conventions.....        | 6  |
| 1.5   | Outstanding Issues.....               | 7  |
| 2     | COMMUNICATION SCHEMA.....             | 8  |
| 2.1   | Connection Topology.....              | 8  |
| 2.2   | Network Security.....                 | 9  |
| 2.3   | Network Connection Monitoring.....    | 11 |
| 2.4   | Load balancing.....                   | 12 |
| 2.5   | Failover.....                         | 12 |
| 2.6   | Intrusion and Virus Protection.....   | 12 |
| 3     | SERVICE MODEL.....                    | 13 |
| 3.1   | Session Services.....                 | 13 |
| 3.1.1 | Synchronous message delivery.....     | 13 |
| 3.1.2 | Asynchronous message delivery.....    | 14 |
| 3.1.3 | Large Messages.....                   | 15 |
| 3.1.4 | Single Session Server.....            | 16 |
| 3.1.5 | Multi Session Server.....             | 18 |
| 3.1.6 | Application Server (Tomcat).....      | 21 |
| 3.1.7 | Session Monitoring.....               | 21 |
| 3.1.8 | Server Allocation.....                | 23 |
| 3.1.9 | Message Caching.....                  | 23 |
| 3.2   | Publishing Services.....              | 24 |
| 3.2.1 | Large Messages.....                   | 27 |
| 3.2.2 | Subscription Monitoring.....          | 28 |
| 3.2.3 | Server Allocation.....                | 29 |
| 3.2.4 | Message Fan-Out.....                  | 29 |
| 3.3   | File Services.....                    | 30 |
| 3.4   | HTTP Proxy Services.....              | 31 |
| 4     | PROXY SERVICES.....                   | 33 |
| 4.1   | Service Routing.....                  | 33 |
| 5     | STATE DIAGRAMS.....                   | 34 |
| 5.1   | Client.....                           | 34 |
| 5.2   | Server.....                           | 35 |
| 6     | RELATIONSHIP DIAGRAM.....             | 36 |
| 6.1   | Client.....                           | 36 |
| 6.2   | Server.....                           | 36 |
| 7     | MESSAGE STRUCTURE.....                | 37 |
| 7.1   | Headline.....                         | 37 |
| 7.2   | Header.....                           | 38 |
| 7.3   | Body.....                             | 38 |
| 7.4   | SCMP over TCP/IP.....                 | 38 |
| 7.5   | SCMP over HTTP.....                   | 38 |
| 8     | SCMP MESSAGES.....                    | 40 |
| 8.1   | Keepalive.....                        | 40 |

|      |                                     |    |
|------|-------------------------------------|----|
| 8.2  | ATTACH (ATT).....                   | 40 |
| 8.3  | DETACH (DET).....                   | 40 |
| 8.4  | INSPECT (INS).....                  | 41 |
| 8.5  | MANAGE (MGT).....                   | 41 |
| 8.6  | CLN_CREATE_SESSION (CCS) .....      | 42 |
| 8.7  | SRV_CREATE_SESSION (SCS) .....      | 42 |
| 8.8  | CLN_DELETE_SESSION (CDS).....       | 43 |
| 8.9  | SRV_DELETE_SESSION (SDS) .....      | 43 |
| 8.10 | SRV_ABORT_SESSION (SAS) .....       | 44 |
| 8.11 | REGISTER_SERVER (REG).....          | 44 |
| 8.12 | DEREGISTER_SERVER (DRG).....        | 45 |
| 8.13 | CLN_EXECUTE (CXE).....              | 45 |
| 8.14 | SRV_EXECUTE (SXE).....              | 46 |
| 8.15 | ECHO (ECH) .....                    | 46 |
| 8.16 | CLN_SUBSCRIBE (CSU).....            | 47 |
| 8.17 | SRV_SUBSCRIBE (SSU) .....           | 48 |
| 8.18 | CLN_CHANGE_SUBSCRIPTION (CHS) ..... | 48 |
| 8.19 | SRV_CHANGE_SUBSCRIPTION (SHS) ..... | 49 |
| 8.20 | CLN_UNSUBSCRIBE (CUN) .....         | 49 |
| 8.21 | SRV_UNSUBSCRIBE (SUN).....          | 50 |
| 8.22 | RECEIVE_PUBLICATION (CRP) .....     | 50 |
| 8.23 | PUBLISH (SPU).....                  | 51 |
| 8.24 | FILE_DOWNLOAD (FDO) .....           | 51 |
| 8.25 | FILE_UPLOAD (FUP) .....             | 52 |
| 8.26 | FILE_LIST (FLI) .....               | 52 |
| 9    | SCMP HEADER ATTRIBUTES .....        | 54 |
| 9.1  | appErrorCode (aec).....             | 54 |
| 9.2  | appErrorText (aet) .....            | 54 |
| 9.3  | bodyType (bty) .....                | 54 |
| 9.4  | cacheExpirationDateTime (ced) ..... | 54 |
| 9.5  | cacheId (cid) .....                 | 55 |
| 9.6  | clnRequesterId (crq) .....          | 55 |
| 9.7  | cascadedMask (cma).....             | 55 |
| 9.8  | compression (cmp) .....             | 56 |
| 9.9  | echoInterval (eci).....             | 56 |
| 9.10 | immediateConnect (imc).....         | 56 |
| 9.11 | ipAddressList (ipl) .....           | 56 |
| 9.12 | keepaliveInterval (kpi) .....       | 57 |
| 9.13 | localDateTime (ldt) .....           | 57 |
| 9.14 | messageID (mid) .....               | 57 |
| 9.15 | messageInfo (min).....              | 58 |
| 9.16 | messageType (mty) .....             | 58 |
| 9.17 | mask (msk).....                     | 58 |
| 9.18 | maxConnections (mxc) .....          | 59 |
| 9.19 | maxSessions (mxs).....              | 59 |
| 9.20 | noData (nod) .....                  | 59 |
| 9.21 | noDataInterval (noi) .....          | 59 |
| 9.22 | operationTimeout (oti) .....        | 60 |
| 9.23 | originalMessageID (omi) .....       | 60 |
| 9.24 | portNr (pnr).....                   | 60 |
| 9.25 | rejectSession (rej).....            | 60 |
| 9.26 | remoteFileName (rfn) .....          | 61 |
| 9.27 | scErrorCode (sec).....              | 61 |
| 9.28 | scErrorText (set) .....             | 61 |
| 9.29 | scRequesterId (brq) .....           | 61 |
| 9.30 | scResponderId (brs) .....           | 61 |
| 9.31 | scVersion (ver).....                | 62 |
| 9.32 | serviceName (nam) .....             | 62 |
| 9.33 | sessionId (sid) .....               | 62 |



|      |                                            |    |
|------|--------------------------------------------|----|
| 9.34 | sessionInfo (sin) .....                    | 63 |
| 9.35 | srvRequersterId (srq).....                 | 63 |
| 9.36 | srvResponderId (srs) .....                 | 63 |
| 10   | GLOSSARY .....                             | 64 |
|      | APPENDIX A - MESSAGE HEADER MATRIX .....   | 66 |
|      | APPENDIX B – ERROR CODES AND MESSAGES..... | 67 |
|      | INDEX .....                                | 68 |

## Tables

|                                          |   |
|------------------------------------------|---|
| Table 1 Abbreviations & Definitions..... | 6 |
| Table 2 External references.....         | 6 |
| Table 3 Typographical conventions .....  | 7 |

## Figures

|                                                                   |    |
|-------------------------------------------------------------------|----|
| Figure 1 Communication Layers.....                                | 8  |
| Figure 2 Connection Topology .....                                | 9  |
| Figure 3 Network Security .....                                   | 10 |
| Figure 4 Synchronous Request/Response .....                       | 13 |
| Figure 5 Synchronous Message Exchange.....                        | 14 |
| Figure 6 Asynchronous Request/Response.....                       | 14 |
| Figure 7 Asynchronous Message Exchange.....                       | 15 |
| Figure 8 Large Response.....                                      | 15 |
| Figure 9 Large Request.....                                       | 16 |
| Figure 10 Single Session Server .....                             | 17 |
| Figure 11 Multi Session server (immediateConnect = true). .....   | 19 |
| Figure 12 Multi-Connection server (immediateConnect = false)..... | 20 |
| Figure 13 Execution exceeding operation timeout.....              | 21 |
| Figure 14 Session Monitoring.....                                 | 22 |
| Figure 15 Message Caching .....                                   | 23 |
| Figure 16 Caching rules .....                                     | 24 |
| Figure 17 Subscribe / Publish .....                               | 25 |
| Figure 18 Publishing Service .....                                | 26 |
| Figure 19 Large Published Message .....                           | 28 |
| Figure 20 Subscription Monitoring.....                            | 29 |
| Figure 21 Message Fan-Out.....                                    | 30 |
| Figure 22 File service.....                                       | 30 |
| Figure 23 File upload and download.....                           | 31 |
| Figure 24 HTTP proxy service.....                                 | 31 |
| Figure 25 HTTP proxy.....                                         | 32 |
| Figure 26 Client states for session service .....                 | 34 |
| Figure 27 Client states for publishing service .....              | 34 |
| Figure 28 Server states for session service .....                 | 35 |
| Figure 29 Server states with publishing service.....              | 35 |
| Figure 30 Client relationships .....                              | 36 |
| Figure 31 Single Session Server relationships .....               | 36 |
| Figure 32 Multi Session Server relationships .....                | 36 |
| Figure 33 Message Structure.....                                  | 37 |

|                                           |    |
|-------------------------------------------|----|
| Figure 34 Message Structure Example ..... | 37 |
|-------------------------------------------|----|

CONFIDENTIAL

CONFIDENTIAL

# 1

## Preface

### 1.1 Purpose & Scope of this Document

This document describes the SCMP (**SC** Message **P**rotocol).

The final and approved version of this document serves as base for publication as Open Source.

This document is particularly important to all project team members and serves as communication medium between them.

### 1.2 Definitions & Abbreviations

| Item / Term | Definition / Description                                                               |
|-------------|----------------------------------------------------------------------------------------|
| HTTP        | Hypertext Transport Protocol                                                           |
| HTTPS       | HTTP over SSL, encrypted and authenticated transport protocol                          |
| Java        | Programming language and run-time environment from SUN                                 |
| JDK         | Java Development Kit                                                                   |
| Log4j       | Standard logging tool used in Java                                                     |
| OpenVMS     | HP Operating system                                                                    |
| RMI         | Remote Method Invocation - RPC protocol used in Java                                   |
| RPC         | Remote Procedure Call                                                                  |
| SOAP        | Simple Object Access Protocol                                                          |
| SSL         | Secure Socket Layer – secure communication protocol with encryption and authentication |
| TCP/IP      | Transmission Control Protocol / Internet Protocol                                      |
| SC          | Service Connector                                                                      |
| USP         | Universal Service Processor – predecessor of SC                                        |
| Wireshark   | Open source product to capture and analyze network traffic                             |

**Table 1 Abbreviations & Definitions**

### 1.3 External References

| References | Item / Reference to other Document                                          |
|------------|-----------------------------------------------------------------------------|
| [1]        | SC_0_Specification_E – Requirement and Specifications for Service Connector |
| [2]        |                                                                             |

**Table 2 External references**

### 1.4 Typographical Conventions

| Convention             | Meaning                                                               |
|------------------------|-----------------------------------------------------------------------|
| <i>text in italics</i> | features not implemented in the actual release                        |
| text in Courier font   | code example                                                          |
| [ phrase ]             | In syntax diagrams, indicates that the enclosed values are optional   |
| { phrase1   phrase2 }  | In syntax diagrams, indicates that multiple possibilities exists.     |
| ...                    | In syntax diagrams, indicates a repetition of the previous expression |

### Table 3 Typographical conventions

The terminology used in this document may be somewhat different from other sources. The chapter Glossary includes a list of often used terms with the explanation of their meaning in this document.

## 1.5 Outstanding Issues

Following issues are outstanding at the time of the document release:


1. Describe how list of files is returned by the FILE\_LIST message
2. Describe Proxy Services and routing
3. Description of errors returned by SC

CONFIDENTIAL

## 2


## Communication Schema

The SC supports message exchange between requesting application (client) and another application providing a service (server). The client and the server are the logical communication end-points. The SC never acts as a direct executor of a service. The client can communicate to multiple services at the same time.



Server application can provide one or multiple service. Serving multiple services within one application is possible only for multithreaded or multisession servers. Multiple server applications are running on the same server node, each providing different service. All services are independent on each other. Server application may request another service and so play the client role.

The SC implements peer-to-peer messaging above OSI layer-7 (application) network model between client and server applications. The SC is always in between the communicating partners, controlling the entire message flow.

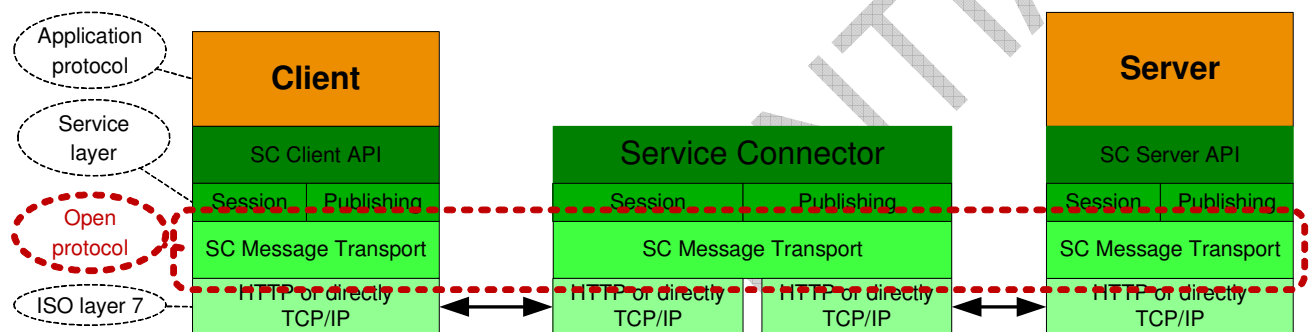


### Figure 1 Communication Layers

The SC acts like a broker, passing messages between the client and the server. The communicating parties must agree on the application protocol i.e. format and content of the message payload.

## 2.1 Connection Topology

Client application, server application and the SC may reside on the same node or on separate nodes. The connection can either utilize HTTP protocol or direct TCP/IP communication. No assumption about the physical network topology is done. Multiple firewalls can be located on the path between the communicating partners. The SC supports following connection topology:

- Client  $\Leftrightarrow$  SC  $\Leftrightarrow$  Server = Direct connection
- Client  $\Leftrightarrow$  SC  $\Leftrightarrow$  SC  $\Leftrightarrow$  Server = Connection via cascaded SC.  
Multiple SC may be placed on the path between the client and service.

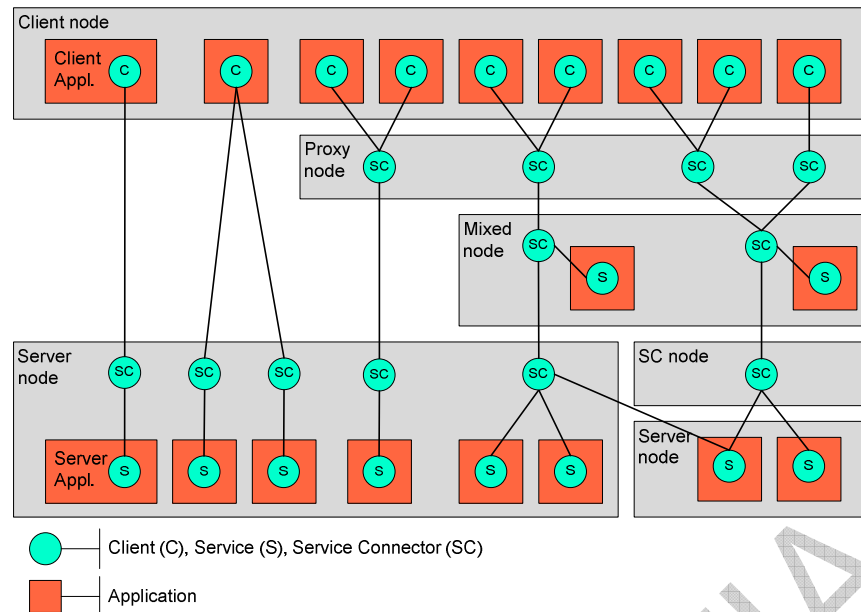

**Figure 2 Connection Topology**

Different connection topology types from left to right:

1. Client connected to one service
2. Client connected simultaneously to SCs and two services
3. Two clients connected to one service via proxy service and cascaded SC
4. Two clients connected to three services via proxy service on different server nodes
5. Complex configuration with three clients connected to three services on different server nodes via cascaded SCs and SC offloaded to its own node. One server can be registered to multiple services and different SCs. However this is possible for multisession servers only.

**Limitation:** The same service can be accessed by one SC only. When the same service should be used on different nodes, it must have a different name (e.g. node suffix).

Two different transport types can be individually configured for each network segment i.e. between the Client  $\leftrightarrow$  SC, SC  $\leftrightarrow$  SC or SC  $\leftrightarrow$  Server.

- a. HTTP  
Such connection may pass screening firewalls and is appropriate for communication within the customer organization e.g. Client  $\leftrightarrow$  SC or SC  $\leftrightarrow$  SC.
- b. TCP/IP  
Such connection would not pass firewalls without explicit security rules. It is useful for connection within the same node e.g. SC  $\leftrightarrow$  Server.


SC cascading is used for performance and/or for security reasons. It is transparent for the application.

## 2.2 Network Security

The SC does not implement any security feature. The environment where SC is used must provide all required authentication, authorization, encryption, tunneling etc. features. Message transport over https will not be supported.

The IP address of the client and the IP of the incoming TCP/IP traffic will be available in the message header and can be evaluated by the server. This can be used to authenticate and authorize the client when VPN tunnel is used. From the security viewpoint, the number of clients or server is not relevant. Meaningful are connections between nodes and security

measures taken to protect legal subjects to which the particular network segment belongs. The following schema shows some possible networks that may be configured to pass SC messages.

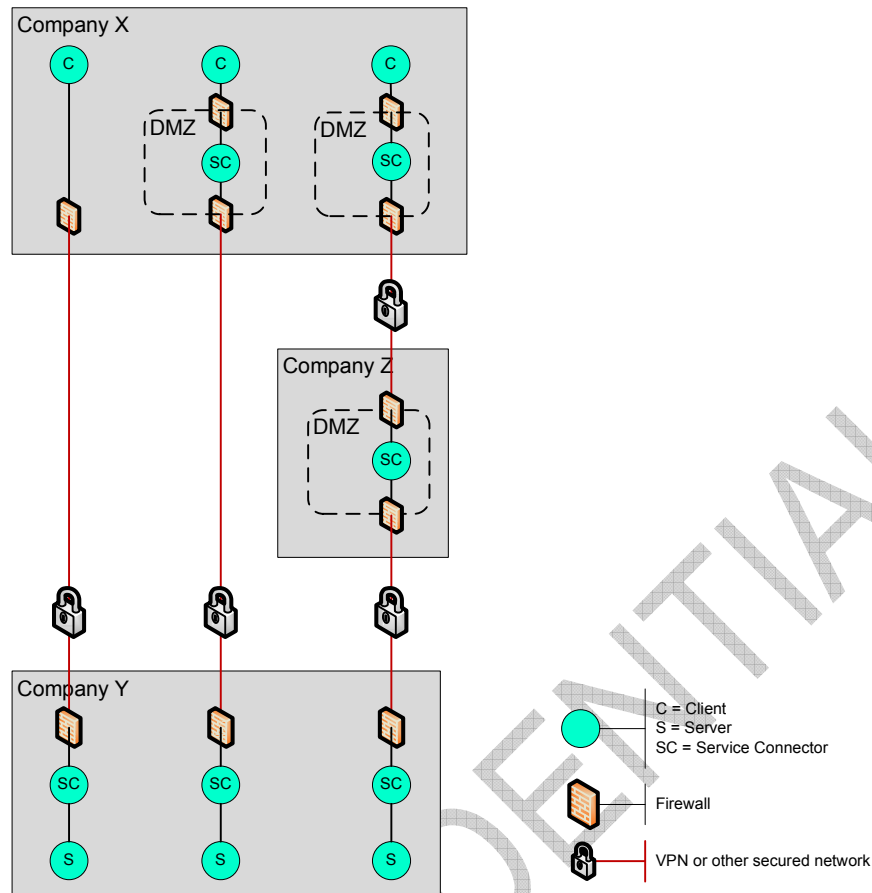

**Figure 3 Network Security**

#### Protocol

The message transport between each of the SC components (green bullet) may be configured as plain TCP/IP or HTTP. The connection is always initiated by the client (top-down in the picture above). The client defines which transport (TCP/IP or HTTP) it will use. The transport protocol between SC and the next downstream component is configured in the SC configuration. TCP/IP is strongly recommended between SCs through VPN tunnels as well as between SC and the Server for performance reasons. HTTP is recommended between the client and SC. For connection between SC and Web Server or Application Server (Tomcat) only HTTP can be used.

#### Firewall

Firewall with a proper configuration may be placed on any path between two SC components. Firewall between SC and the server is possible, but not recommended for performance reasons. For HTTP protocol the firewall can be configured to perform [statefull packet inspection](#) with HTTP filtering. For TCP/IP the appropriate port must be configured in the firewall.

When the message traffic will pass a firewall, HTTP protocol is recommended. In such case the SC can be seen as a regular Web-Server. The firewall can be configured to perform [statefull packet inspection](#) with HTTP filtering. For connection between SC and the server and for communications though VPN tunnels direct TCP/IP is recommended for performance reasons.

When HTTP connection is used and multiple parallel requests are in progress, SC will create multiple connections for each pending request in order to keep them balanced and so satisfy firewall inspection rules. (Statefull inspection rejects two subsequent GET/POST request without response from the server)



*IP address list* Multiple SCs may be placed on the communication path between the client and the server. In order to allow comprehensive authorization all IP addresses are collected and made available to the server as a list. The list contains of IP addresses in the form 999.999.999.999. The order in the list has a dedicated meaning. The list has at least three entries.

1. IP of the client at Company X
2. Incoming IP received by SC = IP of the VPN Tunnel
3. IP of the SC at Company Y

Client connected via cascaded SC placed in company's X DMZ will have the list in the format:

1. IP of the client at Company X
2. Incoming IP received by SC in company's X DMZ.
3. IP of the SC in company's X DMZ
4. Incoming IP received by SC = IP of the VPN Tunnel.
5. IP of the SC at Company Y

If the pairs 1,2 or 3,4 have different values, then the corresponding network segment uses VPN or NAT. As long as there is only one SC behind the VPN, the second last address is always the tunnel IP used for the authentication.

## 2.3 Network Connection Monitoring

The network connections between client  $\leftrightarrow$  SC, SC  $\leftrightarrow$  SC or SC  $\leftrightarrow$  server is managed in a connection pool. New connections are created when necessary and deleted when they are idle for a long time.

Keepalive messages are sent in regular intervals on all idle connections initiated by a network peer. They are not sent on busy connections currently used for message exchange. E.g. while client is waiting for server response, the connection is busy and no keepalive message will be sent. On http connection statefull firewall inspection would reject two subsequent GET/POST request without previous response from the server in such case. Using of keepalive messages can be disabled by setting the *keepaliveInterval* = 0.

The only purpose of keepalive messages is to preserve the connection state in the firewall placed between the communicating peers and resets its internal timeout. Keepalive message is always initiated by the peer who has initiated the connection, because only outbound traffic may refresh the firewall timeout.

Client connections used for session or file services are mostly idle and will utilize the keepalive mechanism. Client connections used for publishing services are mostly busy. The mechanism to refresh the firewall timeout is built in the SCMP layer.

Server connections used for registering server are mostly idle and will utilize the keepalive mechanism. SC connections back to the server are also mostly idle and will utilize the keepalive mechanism.

When a connection breaks down because of an error while sending or receiving a keepalive message, or the response does not timely arrive a log entry is created, the connection is closed and deleted from the pool. **No error is signalled to the server application.**

Broken network connection between the server and SC on which the server has registered to the service is detected in SC and an immediate cleanup is done. This speeds up the detection of lost servers.

The message has only a headline and no attributes and no body. The format is:

KRQ 0000000 00000 1.3

for request and:

KRS 0000000 00000 1.3

for response.

## 2.4 Load balancing

The SC does not provide any load balancing features. Established communication session will not be redirected to another server node during its life time.

## 2.5 Failover

The SC does not provide any failover features. Aborted communication must be re-established by the communicating partners. The client application must find out a service which is alive.

## 2.6 Intrusion and Virus Protection

The entire network where SC is used is assumed to be safe and secure. No virus protection is embedded in SC. The customer may use screening firewall to protect the SC components. It is recommended to use SC within a DMZ.


SC is not designed to withstand network attacks like DOS or SYNC flood, or any other.

CONFIDENTIAL

## 3

## Service Model

The SC supports message exchange between requesting application (client) and another application providing a service (server). The client and the server are the logical communication end-points. The SC never acts as a direct executor of a service. The client can communicate to multiple services at the same time.




Multiple clients may request the same service at the same time. Parallel execution of the service is implemented by starting multiple server instances (multiprocessing), by starting a multisession server (multithreading) or by a combination of both. The server process can provide one or multiple service and decides how many sessions it can serve. Serving multiple services within one server process is possible for multisession servers only.

All services are independent on each other. Server application may request another service and so play the client role.

### 3.1 Session Services

This is a statefull Request/Response service initiated by the client. For session services the client and the server exchange messages in context of a logical session through the SC.



The client controls the creation and deletion of the session and so allocation of the server. The client can have multiple concurrent sessions to the same or to different services. **Because the server execution is always synchronous, from the client perspective only one pending request per session is possible at any time.**

When a session is created SC will choose a free server and pass this and all subsequent requests within this session to the same server. Session information is passed in each message as a part of the message header. Session is deleted intentionally by the client or aborted by SC upon an error.

#### 3.1.1 Synchronous message delivery

The client sends a request to a service that invokes an application code. Upon completion the service sends back a response message. The client waits for the arrival of the response message. The request and response message length are not limited in size.

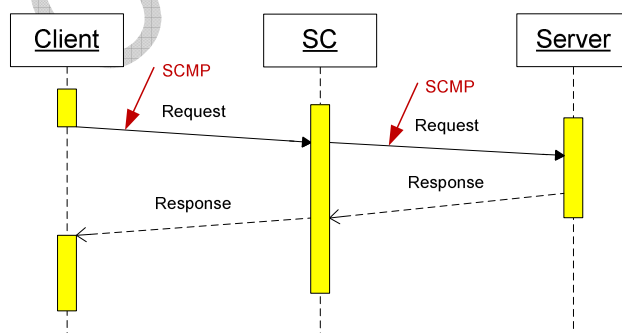


Figure 4 Synchronous Request/Response

This communication style is the most often used for getting data from the server or sending a message that triggers a transaction on the server.

The message flow looks as follows:

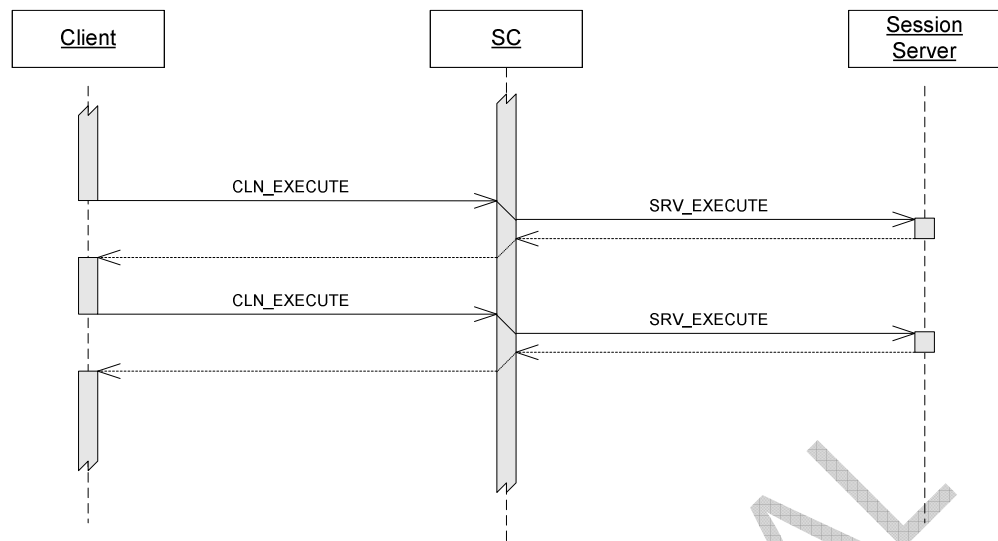


Figure 5 Synchronous Message Exchange.

### 3.1.2 Asynchronous message delivery

Asynchronous execution is functionally equal to the synchronous case with the exception that the client does not wait for the arrival of the response message. Fully asynchronous message exchange is not possible because the server execution is always synchronous. For this reason only the receipt of the server response can be asynchronous.

The client must declare a notification method that is invoked when the response message arrives.

*Note!*

**Only one pending request per session is allowed at any time. Subsequent client request will block until the response for the previous message arrives.**


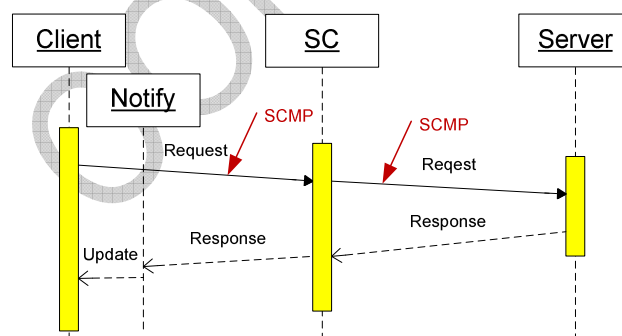


Figure 6 Asynchronous Request/Response


This communication style will be used to load data while other activities are in progress, e.g. to get large amount of static data at startup. It can be also used as fire-and-forget when the response is not meaningful. The message flow looks as follows:

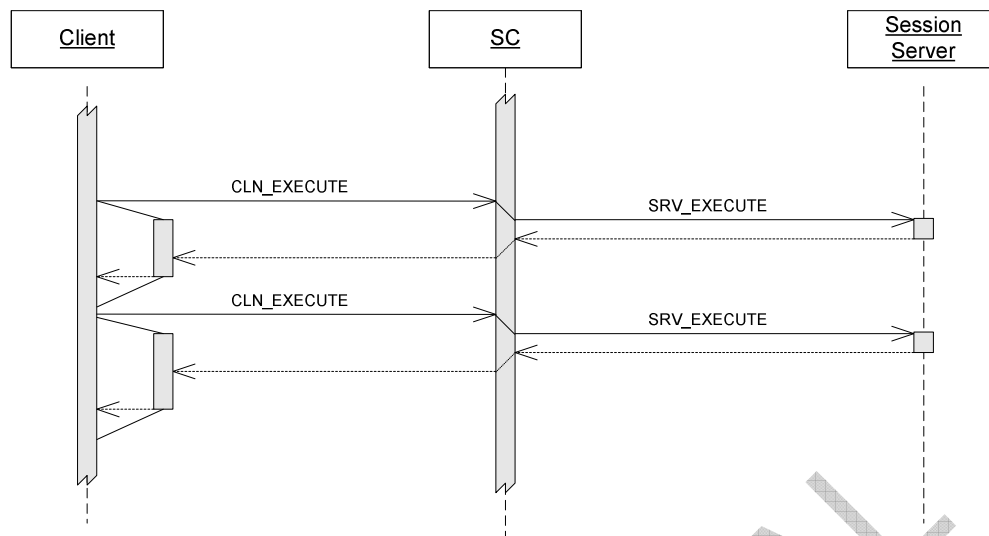

**Figure 7 Asynchronous Message Exchange.**

### 3.1.3 Large Messages


Regular request / response messages have a REQ / RES headerKey in the head line. Large messages are broken into parts with its own headerKey PRQ (part request) and PRS (part response) see 7.1. The message flow looks as follows:

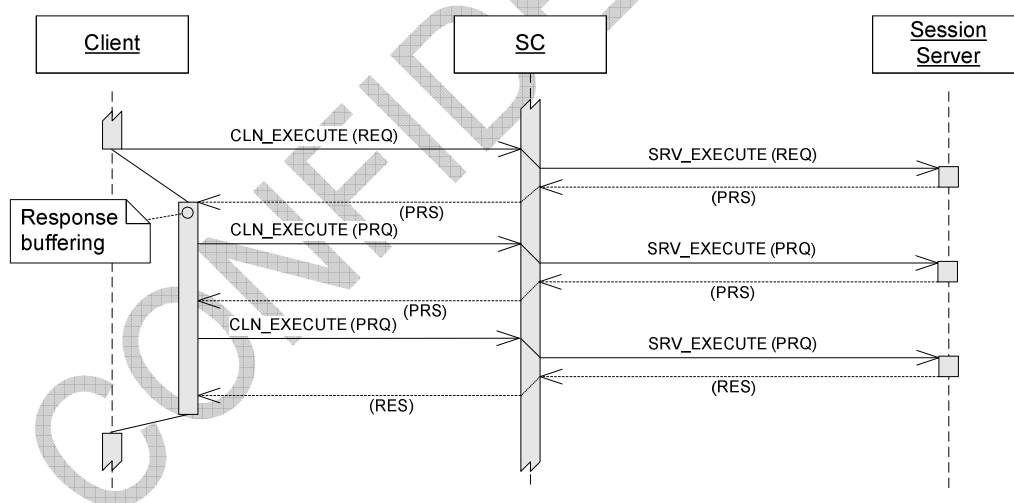

**Figure 8 Large Response.**

1. The client sends a regular request to the service.
2. The server receives the request messages and start producing the response.
3. When it reaches the maximal allowed length then it send the message part (PRS) and waits for the next part (PRQ)
4. At the end the server sends the last message part as a regular response (RES)
5. The message parts are buffered on the client side
6. When the final response arrives, the message is made available to the client.

In order to put together all message parts the server must allocate a unique partId and use it for all parts of one message. The message flow looks as follows:

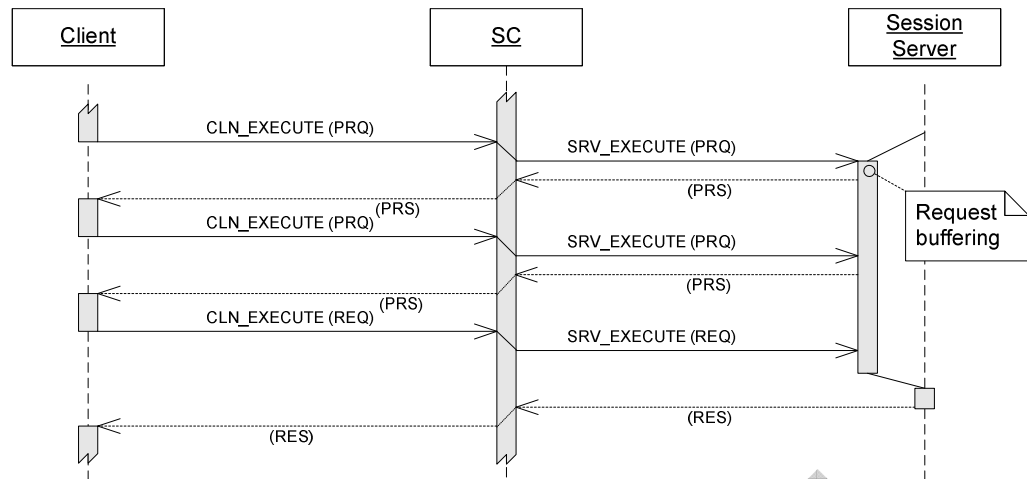

**Figure 9 Large Request.**

1. The client collects the request data and when it reaches the maximal allowed length then it sends the message part (PRQ) to the service.
2. The message part transported to the server and buffered here
3. When the final message part (REQ) arrives, the complete is made available to the server.
4. This will process the message and send back the response message.

Combination of large request and large response is also possible.


For large messages the messageId contains additional counter called part sequence number. This allows putting all message parts together. Message traffic with large request followed by a large response looks like (simplified):

```

REQ .. mid=3
RES .. mid=64
...
PRQ .. mid=4/1
PRS .. mid=65/1
PRQ .. mid=4/2
PRS .. mid=65/2
PRQ .. mid=4/3
PRS .. mid=65/3
REQ .. mid=4/4
PRS .. mid=66/1
PRQ .. mid=5/1
PRS .. mid=66/2
PRQ .. mid=5/2
RES .. mid=66/3
...
REQ .. mid=6
RES .. mid=67
    
```

### 3.1.4 Single Session Server

Single-session server registers itself for one service and may serve only one session at the same time. It must define *maxSession = 1* and *immediateConnect = true*. The required parallelism is reached by starting multiple instances of the same server. The SC keeps track of the registered servers and allocates / de-allocates sessions to them. The following schema shows message flow with single session server.

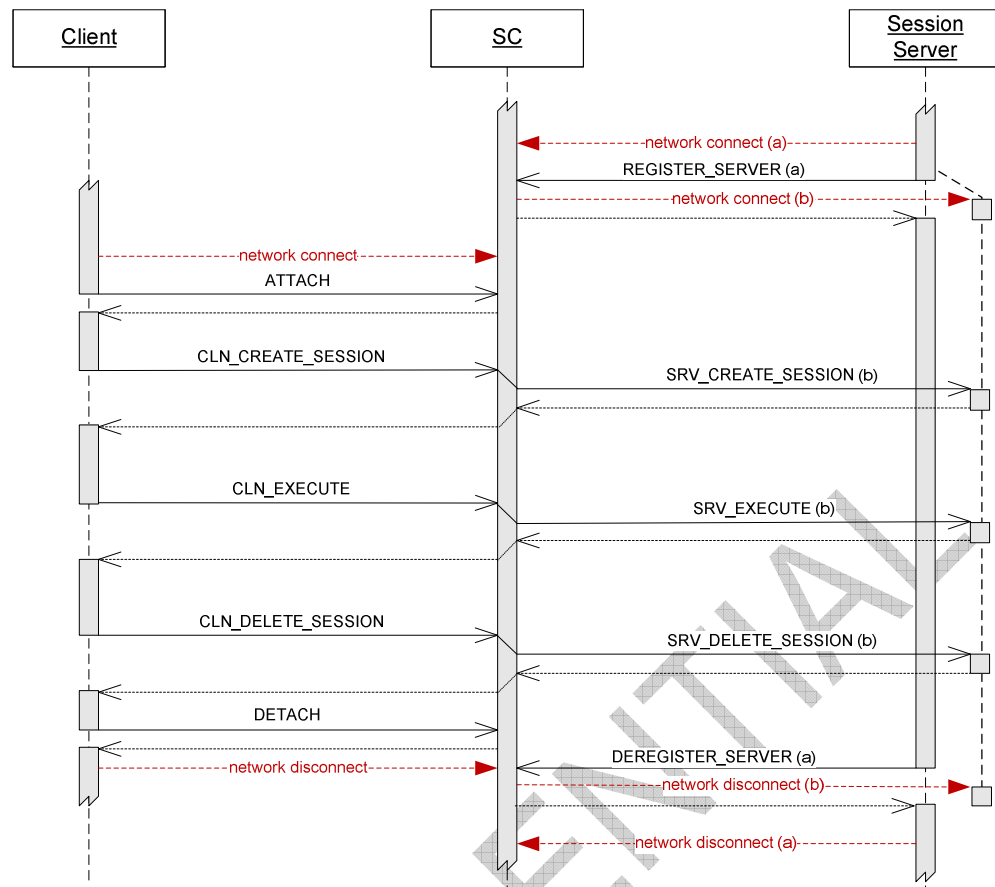

**Figure 10 Single Session Server**

*Client*

1. The client establishes a network connection to SC and starts communication with the ATTACH message.
2. Then it starts a session with a service with the CLN\_CREATE\_SESSION message
1. The SC allocates a server providing this service and notifies it about the session start with the SRV\_CREATE\_SESSION message. It also creates a unique sessionId for this session. If there is no free server instance available to this service, the SC will retry several times and finally returns the error “no free server available”.
3. Then the client can exchange messages with the server via CLN\_EXECUTE messages.
4. When the session with this service is no longer needed, the client will send the CLN\_DELETE\_SESSION message. The server is notified with the SRV\_DELETE\_SESSION message.
5. Before the client terminates, it should send DETACH message and then terminate the network connection to SC.

When session is abnormally terminated, the client is notified and will receive an error message. The reasons for this can be:

- The operation timeout specified by the client expires. The execution took too long.
- Server sends DEREGISTER\_SERVER
- Unexpected server exit
- Underlying communication error (e.g. unreachable node)

*Note*

**The client may have multiple SCs connected at the same time. Per connected SC the client may have multiple active sessions at the same time. For each particular session only one request may be pending at any time.**

*Server*

1. The server establishes a network connection (a) to SC and starts communication and registers itself as an instance of a service with the REGISTER\_SERVER message. At that time it should have a listener that will accept the connection (b) initiated by the SC to this server.
2. The SC registers the server instance and will create network connection (b) back to it. Keepalive messages will also be sent on this connection, depending on the *keepaliveInterval* set in REGISTER\_SERVER.
3. When a client creates a session the server is notified with the SRV\_CREATE\_SESSION message. The message contains additional information about the client and the sessionId. The server can accept or reject the session.
4. The server receives messages from the client as SRV\_EXECUTE and sends them back after execution of the service that it implements.
5. When the client deletes the session, the appropriate server is notified with the SRV\_DELETE\_SESSION message.
6. When the server is no longer needed it sends the message DEREGISTER\_SERVER. From this point the SC will not allocate it for a session and terminates the connection (b) to it. Then it can terminate the network connection (a) to SC.

When the session is abnormally terminated before, the server is notified with the SRV\_ABORT\_SESSION message. The reasons for this can be:

- The operation timeout specified by the client expires. The execution took too long
- Unexpected client exit and the subsequent expiration of the echo timeout
- Underlying communication error (e.g. unreachable node)

The network connection (a) must not be dropped until DEREGISTER\_SERVER message is sent. Otherwise SC will treat this as server termination and clean-up its sessions and its registration.

*Note*

**The server must be active before the client will create a session. Otherwise the client will receive an error message. The server instance may serve single or multiple sessions at the same time as described later. Single session server may have only one SCs connected at the same time. For each particular session only one request may be pending at any time.**

*Note!*

**The execution on the server may take long time. In case the execution takes too long and the operation timeout (set by the client) expires, the SC will clean up the session, send a CLN\_EXECUTE error message back to the client but cannot send the SRV\_ABORT\_SESSION to the server because it is busy. SC will then clean up the server and close all its connections.**


### 3.1.5 Multi Session Server

In opposite to single session server, multi session server may serve multiple sessions at the same time. It uses a dynamic connection pool to exchange messages with the SC. The server registers itself for one or more services and defines reasonable high *maxSession* > 1. Depending on the *immediateConnect* the connection pool to the server is created immediately (*immediateConnect* = true) or when the first session is started (*immediateConnect* = false). The same connection is reused unless it is busy. Connections are closed when they are idle for a long time i.e. several subsequent keep alive messages have been sent. One connection is kept open for all times. When necessary, new connections are created on the fly. When the server deregisters, the connection pool is deleted and all existing connections are closed.

The attribute *maxConnections* specified in service registration tells the SC how many connections should be created and so limits the pool size. This allows network resource optimization when one server serves many rarely used sessions. When all connections in the pool are exhausted, SC will wait for a free connection and finally return an error.

The following schema shows message flow with multi session server with *immediateConnect* = true. The message flow looks as follows:



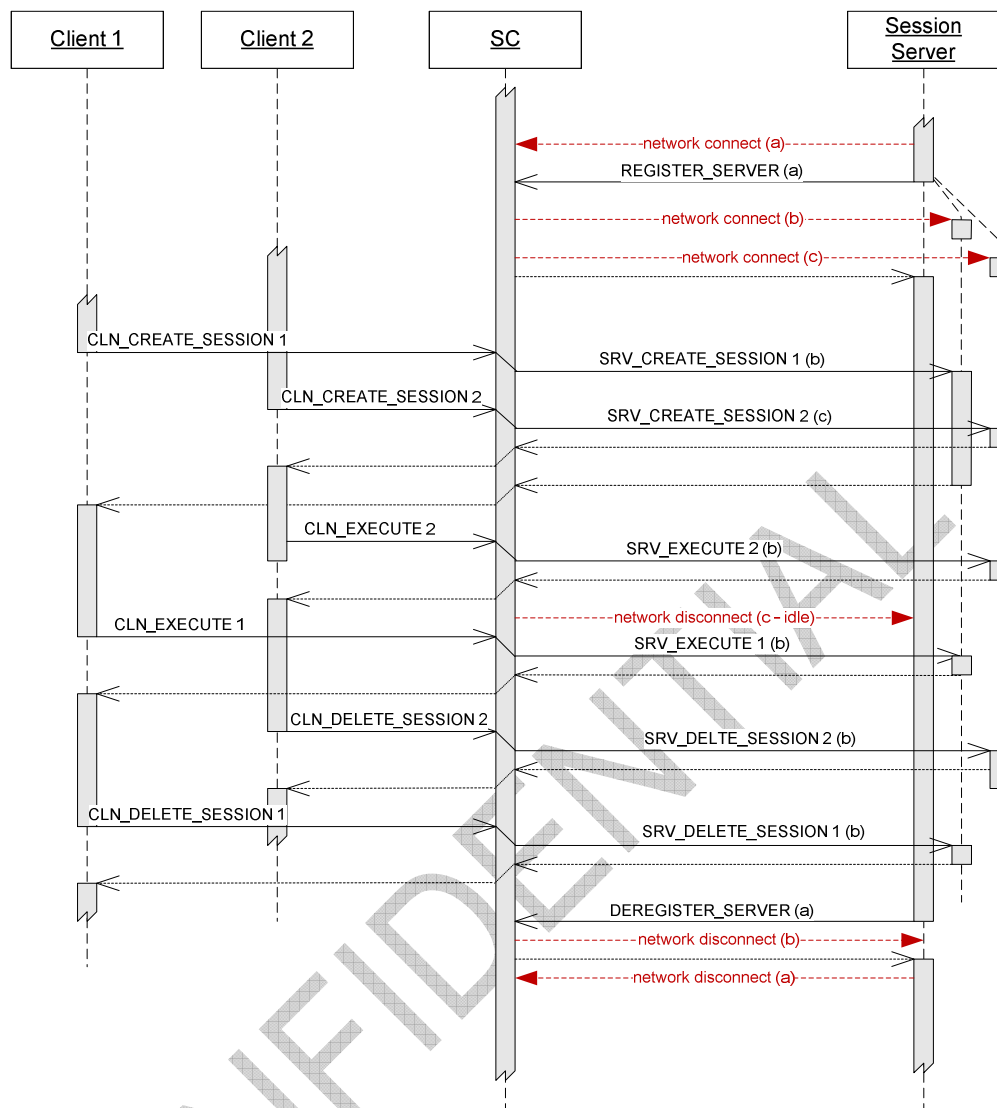


**Figure 11 Multi Session server (*immediateConnect* = true).**

The server receives requests on any of the network connections created by SC. It may use any available technique (e.g. multithreading), but must ensure that all requests are processed in parallel.

With flag *immediateConnect* = false connections are created by SC when the session is started. The same connection is reused unless it is busy. Connections are closed when they are idle for long time. The last active connection is closed when the session is deleted or aborted.

The following schema shows message flow with multi session server with *immediateConnect* = false. The message flow looks as follows:

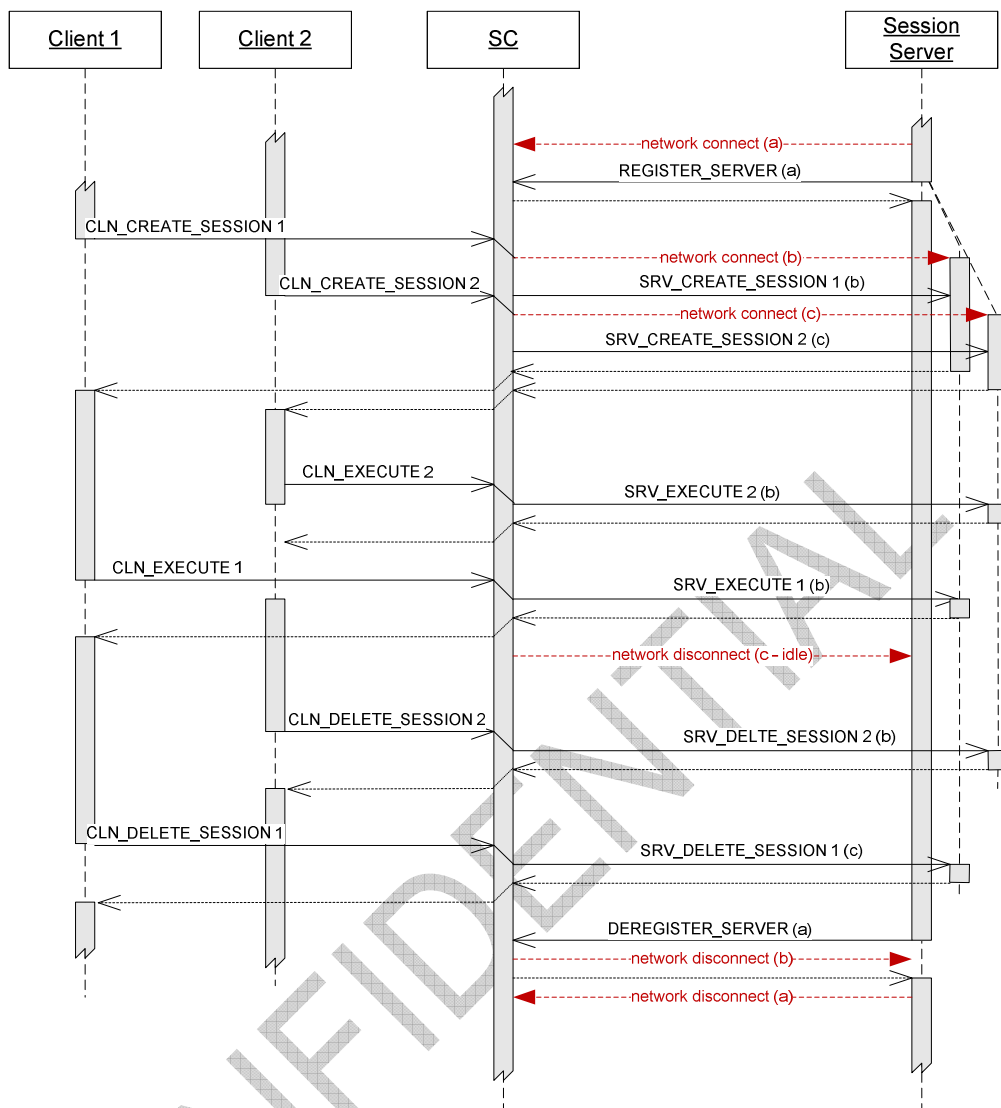


**Figure 12 Multi-Connection server (immediateConnect = false).**

The network connection (a) must not be dropped until DEREGISTER\_SERVER message is sent. Otherwise SC will treat this as server termination and clean-up all its sessions and registration.

**Note!**

The execution on the server may take long time. In case the execution takes too long and the operation timeout (set by the client) expires, the SC will clean-up the session, send CLN\_EXECUTE error message back to the client and send SRV\_ABORT\_SESSION message to the server while the SRV\_EXECUTE is still pending. If the SRV\_ABORT\_SESSION cannot be delivered or the server will not reply to it within a default operation timeout, the server will be cleaned up and all connections to it will be closed.

The message flow looks as follows:

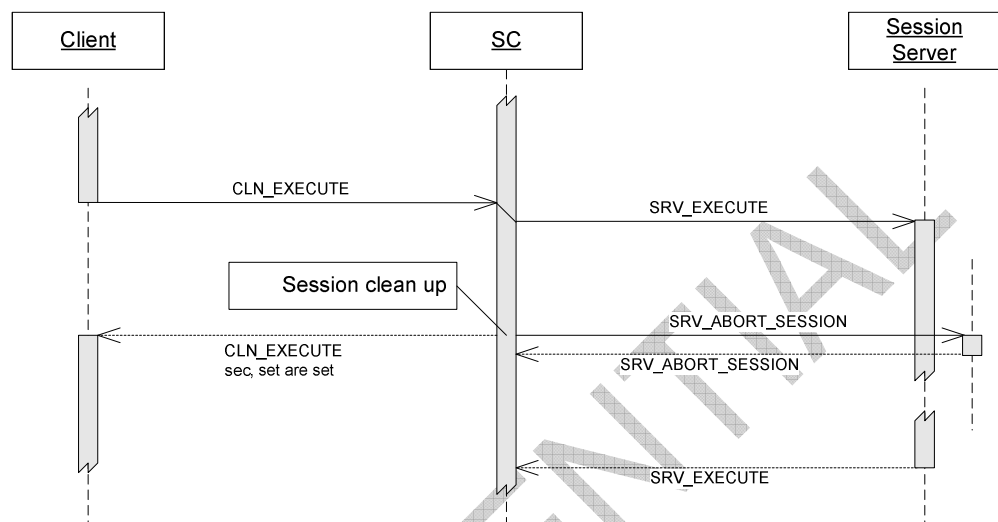

**Figure 13 Execution exceeding operation timeout.**

### 3.1.6 Application Server (Tomcat)


SCMP messaging with an application server (e.g. Tomcat) works exactly like a multi-connection server but utilizes the HTTP protocol between server and SC. The server must register itself for at least one service. It can register for multiple services! It must define reasonable high *maxSession* and *immediateConnect* = false. It is recommended to define also a reasonable high *maxConnections* attribute.

### 3.1.7 Session Monitoring

Session monitoring is based on ECHO messages, exchanged periodically for each active session between the client and the SC and on the network connection breakdown detection between SC and the server. Session monitoring has nothing in common with the keepalive messages exchanged on active network connections.

The client sends ECHO message in predefined intervals for each session service when no other request is in progress. The *echoInterval* is extended by *echoIntervalMultiplier* in order to allow time for network transmission. The client receives a response message back from the SC. The SC monitors the *echoInterval* in which ECHO messages arrive and aborts the session when the interval is exceeded. SRV\_ABORT\_SESSION message is sent to the allocated server in such case.

The SC monitors the network connection to the server, which is assumed to be reliable. When the network connection on which it registers is broken or the SC cannot send a message to the server, server is assumed to be dead and clean up will be performed. This will delete all sessions of the server. When the client send a subsequent ECHO or CLN\_EXECUTE message it will be notified about the deleted session.

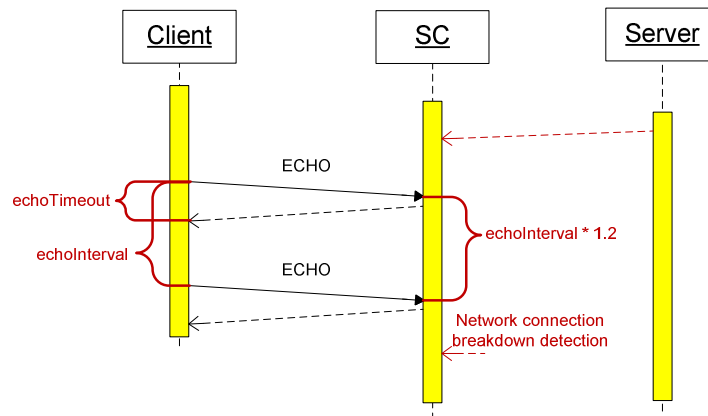

### Figure 14 Session Monitoring

Based on the *operationTimeout* SC monitors the response time of the server for request message sent from client to the server. When this timeout expires for SRV\_EXECUTE, SC will notify the client but will NOT clean up the session. It may still be valid, just the server may be slow. When the timeout expires for SRV\_CREATE\_SESSION, the session is not created. When the operation timeout expires for SRV\_DELETE\_SESSION, or SRV\_ABORT\_SESSION the session is deleted.

The session maintained in SC will be deleted only due to these reasons:

- The client deliberately closes the session by sending CLN\_DELETE\_SESSION
- The SC will not receive ECHO from the client, for longer than the *echoInterval* \* *echoIntervalMultiplier*.
- The operation timeout for the SRV\_EXECUTE will expire.
- The server crashes and loses connection to the SC

### Client Abort

When client aborts its activity abruptly while a request is pending, then SC will not be able to deliver the response. The session will be cleaned and the server will be notified with SRV\_ABORT\_SESSION message when the *echoInterval* is exceeded.

When idling client aborts its activity abruptly, then SC will not detect the session breakdown before the *echoInterval* is exceeded. During this time new sessions can be created by the restarted client. Old sessions may still exist in SC some time until they will expire. Consequently the server may be still allocated and may receive SRV\_ABORT\_SESSION message for the old session after the SRV\_CREATE\_SESSION for the new session.

When idling client loses all connection to SC due to short temporary network unavailability, then the connection may be re-established without loss of the sessions. This is true only if the breakdown is shorter than the *echoInterval*, and no other message is sent to SC in the mean time.

### Server Abort

When server aborts its activity abruptly (without a neat deregister), then SC will detect the connection breakdown immediately (on the connection on which the server registers) and will clean up all its sessions. Subsequent client messages for the deleted sessions may cause the error response “Invalid Session ID”. After server restart, new connections to and from SC will be established. The server can then be allocated to new sessions.

## SC Abort

When SC crashes, client will detect the connection breakdown when a new message is sent. It should perform cleanup followed by a reconnect. The server will detect the connection SC breakdown on the connection on which it listens and should perform a cleanup followed by reconnect and service registration.

After SC restart, new connections will be established. The servers must register before the client starts new session. Otherwise the client gets the errors “no free server available” or “server not available”.

### 3.1.8 Server Allocation

When a session is created SC will choose a free server and allocate it to the session. The SC uses a modified round-robin algorithm to find a free server.

Example:

When 3 server instances A1, A2, A3 have been started and each instance can serve 10 sessions named Ax-y, then the sessions will be allocated in this sequence:

A1-1, A2-1, A3-1, A1-2, A2-2, A3-2, A1-3, A2-3, A3-3, ... A1-10, A2-10, A3-10

Because the session can be deleted in any order, holes in the sequence many emerge and the server load will be not homogenous after a time.

### 3.1.9 Message Caching

Response messages for session services sent by server to clients can be cached within SC. Clients may fetch the message from the SC cache without a server interaction. This feature massively reduces the server load.


In order to insert the message into the cache the server must designate the response message with the attributes *cacheId* and *cacheExpirationDateTime* like the following example:

```
cid=CBCD_SECURITY_MARKET
ced=2010-08-16T20:00:00.000+0000
```

SC passes the message to the requested client and stores it also in a cache under the ID defined by *cacheId*. The *cacheId* is unique per service. If an older message exists in the cache, it will be overwritten. The *cacheExpirationDateTime* controls the cache validation. The server defines the expiration of the cache by using the *cacheExpirationDateTime* attribute. SC looks periodically for cached messages which has already expired and deletes them from the cache.

In order to fetch a message from the cache the client must use the same *cacheId* and the *cacheExpirationDateTime* must be timely before *cacheExpirationDateTime* of the cache. The request message must contain these attributes like the following example:

```
cid=CBCD_SECURITY_MARKET
ced=2010-08-16T17:00:00.000+0000
```

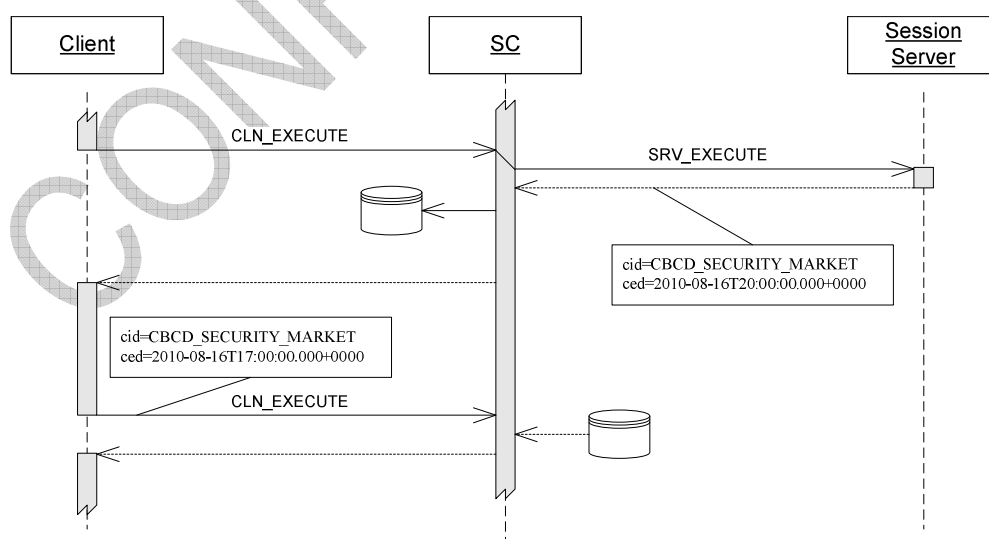


**Figure 15 Message Caching**

If the given *cacheId* is not found or the requested timestamp is timely after the *cacheExpirationDateTime* of the cache, then SC will pass the request to the server. If client doesn't want a cached message he should omit the *cacheId* in the request.

Client and server should agree on *cacheId* which must be unique across all services. In cascaded SC configurations cache is created in all SC nodes along the path from client to the server.

The following picture shows the impact of the *cacheExpirationDateTime* in the messages.

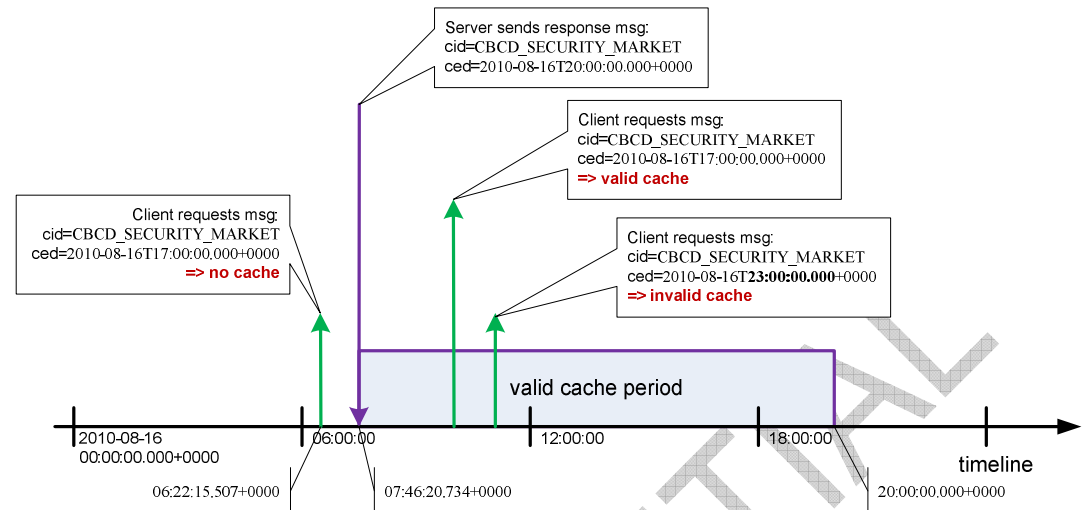

**Figure 16 Caching rules**


While SC is building up the cache, client request may be delayed to await the build completion and to take advantage of the cached message. Caching of large messages is supported.

This mechanism allows using the cache in different time zones. The server can terminate the particular message validity by an absolute date and time. The client can define how long it will use the message and so define its expected validity.


## 3.2 Publishing Services

**Subscribe/Publish** (server initiated communication). Publishing services allows the server to send single message to many clients through the SC.

The client sends a subscription mask to the service, and so declares its interest on certain type of a message. The application service providing the message contents must designate the message with a mask. When the message mask matches the client subscription mask, the message will be sent to the client. Multiple clients may subscribe for the same service at the same time. In such case multiple clients can get the same copy of the message. Message that does not match any client subscription is discarded.



The client must declare a notification method that is invoked when the message arrives. The client may have only one outstanding subscription per service. The message delivery must occur in guaranteed sequence. Messages from the same service will arrive in the sequence in which they have been sent.

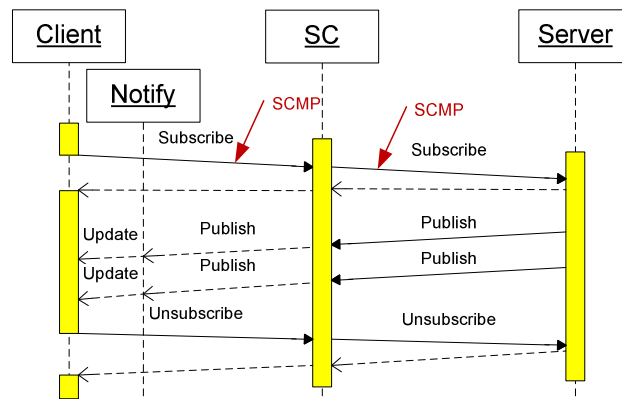


**Figure 17 Subscribe / Publish**

The client may change the subscription mask or unsubscribe. Initial subscription, subscription change or unsubscribe operation is always synchronous, even through a cascaded SCs.

Such communication style is used to get asynchronously events notifications or messages that are initiated on the server without an initial client action. It can be also used to distribute the same information to multiple clients.

The following schema shows message flow with a publishing server.

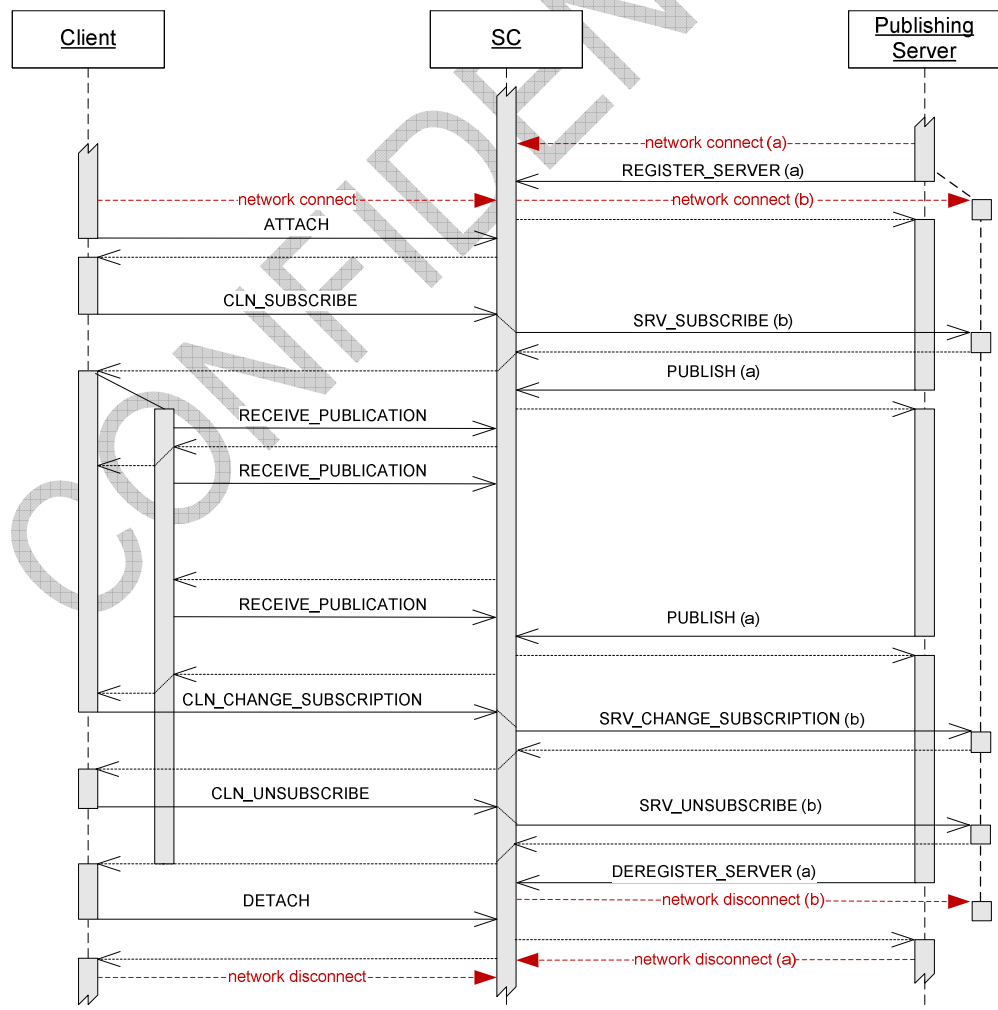

**Figure 18 Publishing Service**

*Client*

2. The client establishes a network connection to SC and starts communication with the ATTACH message. Keepalive messages can be sent on this connection.
3. Then it subscribes to a service with the CLN\_SUBSCRIBE message and starts a listener that will receive the incoming messages.
4. The SC remembers the subscription and also creates a unique sessionId for it. It also notifies the server registered to this service with the SRV\_SUBSCRIBE message. If there is no server, the client gets an error.
5. When a message is published, SC compares the message mask with the subscription mask and based on the matching result delivers the message to the client. The client receives and processes the message and initiates the next receipt with the RECEIVE\_PUBLICATION message.
6. When no message is published within a period of time (defined by *noDataInterval*) then SC sends an empty message to the client and this initiates the next receipt with the RECEIVE\_PUBLICATION message.
7. The client can change the publication mask with the CLN\_CHANGE\_SUBSCRIPTION message or terminate the subscription with CLN\_UNSUBSCRIBE message. In both cases the server is notified with the SRV\_CHANGE\_SUBSCRIPTION or SRV\_UNSUBSCRIBE message. The client should ignore errors resulting from the unavailability of the server when sending CLN\_UNSUBSCRIBE.
8. Before the client terminates, it should send DETACH message and then terminate the network connection to SC.

When the client terminates abnormally, the SC will clear its subscription, discard all messages not delivered yet and notify the server with the SRV\_UNSUBSCRIBE message. The reasons for this can be:

- Unexpected client exit
- Underlying communication error (e.g. unreachable node)

*Note*

**The client may have multiple SCs connected at the same time. Per connected SC the client may have multiple subscriptions to different services at the same time. For each subscription only one receipt request may be pending at any time.**

*Server*

1. The server establishes a network connection to SC and starts communication and registers itself as an instance of a service with the REGISTER\_SERVER message. Keepalive messages can be sent on this connection.
2. The SC registers the server instance and will create network connection (b) back to it. Keepalive messages will also be sent on this connection, depending on the *keepaliveInterval* set in REGISTER\_SERVER.
3. When a client subscribes or changes the subscription the server is notified with the SRV\_SUBSCRIBE or SRV\_CHANGE\_SUBSCRIPTION message. The message contains the subscription mask and additional information about the client. The server can accept or reject the subscription or its change. In opposite to session services the server instance is not allocated for the session, but just processes the notification.
4. Now the server can publish messages to the service. SC immediately responds when the PUBLISH message has been queued. The server does not wait for message delivery to the clients. The published message must have a mask designating its contents.
5. The SC compares the mask with the subscription mask of the clients and delivers the message to them. Messages that do not match any subscription are discarded. The server does not know how many clients did get the message or if any at all.
6. Messages are delivered in the order of their publishing. E.g. in order SC receives them. For this reason they are queued within SC.
7. When the client unsubscribes, the server is notified with the SRV\_UNSUBSCRIBE message.
8. When the server is no longer needed it sends the message DEREGISTER\_SERVER. Then it can terminate the network connection (a) to SC.



When the client terminates abnormally, the server is notified with the SRV\_UNSUBSCRIBE message. In cascaded SC topology the server is notified with the SRV\_CHANGE\_SUBSCRIPTION instead of the SRV\_UNSUBSCRIBE message. This is because of the fan-out within SC.

The reasons for this can be:

- Unexpected client exit
- Underlying communication error (e.g. unreachable node)

**Note**      **The server must be active before the client will subscribe. Otherwise the client will receive an error message.**

When the server terminates timely before the client, the client should ignore the error resulting from the unavailability of the server.

Multiple publishing servers may register to the same service. Also like a session server multiple sessions per server are allowed. SC chooses one server instance which is not busy when a notification must be processed. Unlike a session server the chosen server instance is allocated only for the time of the notification processing (one request).

### 3.2.1 Large Messages

Publishing of large messages works on server like sending a large response and on client like receiving a large response.

The server publishes the messages parts to the service. SC immediately responds when the PUBLISH message part has been queued. All message parts must have the same mask. The server does not wait for message delivery to the clients. The SC delivers the message parts to the subscribed clients in the right sequence like any other message. The message parts are buffered on the client until the final part arrives. Then it is passed to the application.

**Note**      **Publishing of large messages is not possible from multiple servers to the same service. Only one server may publish a large message to a service at the same time.**

The queuing of messages in SC and buffering of message parts in the client is independent. The message flow looks as follows:




Subscription monitoring is based on the `RECEIVE_PUBLICATION` messages, exchanged periodically between the client and the SC for each active subscription and on `SRV_ECHO` messages exchanged periodically between the server and the SC for each registered server. Subscription monitoring is independent on the keepalive messages exchanged on active network connections.

Whenever SC cleans up a subscription it sends a SRV\_UNSUBSCRIBE or SRV\_CHANGE\_SUBSCRIPTION message to the publishing server.

The SC monitors the network connection to the server, which is assumed to be reliable. When the network connection on which it registers is broken or the SC cannot send a message to the server, server is assumed to be dead and clean up will be performed.

**Note: Server clean up has no impact on the client subscriptions! The client may still receive messages from other servers. If no server for the particular service will be available, the client will get error on subsequent CHANGE\_SUBSCRIPTION or unsubscribe operations.**

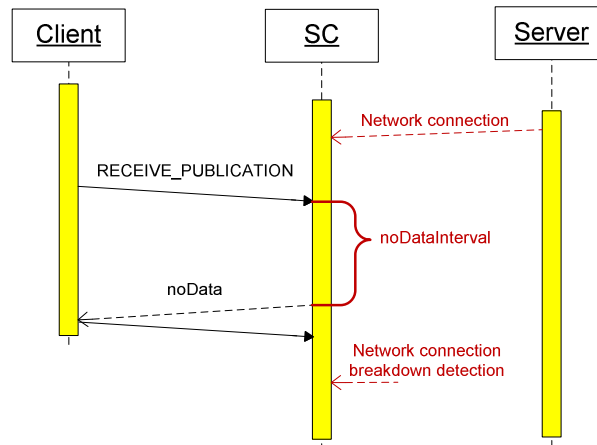

**Figure 20 Subscription Monitoring**

*Client Abort* Client subscribed to a service has always a pending RECEIVE\_PUBLICATION request. When it aborts its activity abruptly the delivery of the response message will fail and the SC will clean up its subscription.

*Server Abort* When a publishing server aborts its activity abruptly (without a neat deregister), then SC will detect the connection breakdown immediately (on the connection on which the server registers) and will clean up all its registration. The subscribed clients are not informed. New server should be started immediately in order to handle incoming client subscriptions. Otherwise the operation will fail.

*SC Abort* When SC crashes, client will detect the connection breakdown immediately, because it has a pending request. It should perform cleanup followed by a reconnect. The server will detect the connection breakdown on the connection on which it listens and should perform a cleanup followed by reconnect and service registration.

After SC restart, new subscriptions will be established. The servers must register before clients will subscribe. Otherwise the client gets the errors “no free server available” or “server not available”.

### 3.2.3 Server Allocation

When a subscription is created SC will choose a free server and pass the request to it. The SC uses a modified round-robin algorithm.

Example:

When 3 server instances A1, A2, A3 have been started and each instance can serve 10 sessions named Ax-y, then the sessions will be allocated in this sequence:  
A1-1, A2-1, A3-1, A1-2, A2-2, A3-2, A1-3, A2-3, A3-3, ... A1-10, A2-10, A3-10


The algorithm looks for next free session in the sequence. Because the subscription does not allocate the server, homogenous load of the servers is guaranteed.

### 3.2.4 Message Fan-Out

Subscription for a publishing service is kept in the SC to which the client is attached. In cascaded SC configurations this is the nearest SC node. The client subscription is combined with subscriptions of all other clients and passed to the next SC node. I.e. the SC behaves itself like a subscribing client.

When a SC receives a published message it will pass it to all clients with matching subscription. So it does also for a cascaded SC that subscribes on behalf of its clients. In this

way only one message is sent to the cascaded SC where it is distributed to all clients according to their mask. This feature massively reduced outbound network traffic to the clients.

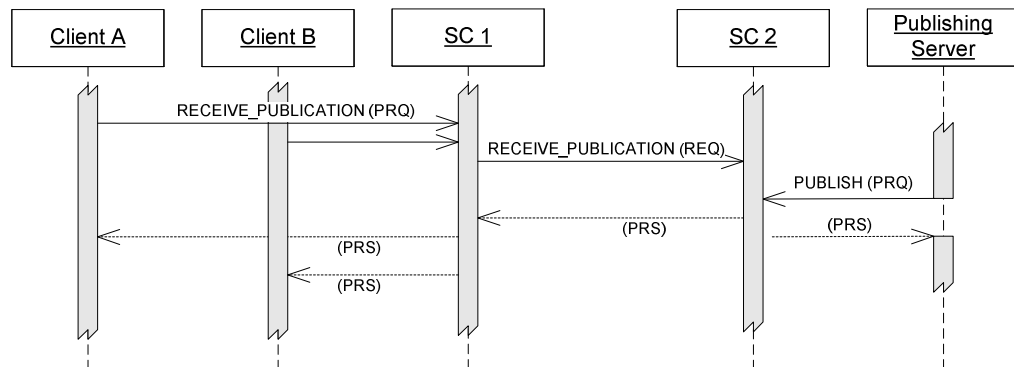


**Figure 21 Message Fan-Out**

Because the SC1 subscribes on behalf of its clients, it propagates new subscriptions or deletion of a subscription as subscription change on the SC2.

### 3.3 File Services

This SC service provides API for these file operations:

- Download file from the web server to the client.
- Upload file from the client to the web server.
- List files in a file repository on the web server.

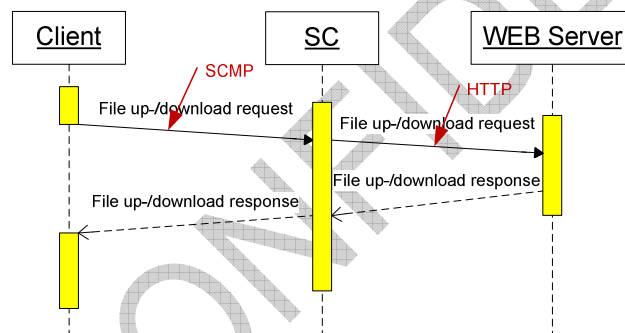

**Figure 22 File service**


This SC service provides API for these file operations:

- Download file from the web server to the client.
- Upload file from the client to the web server.
- List files in a file repository on the web server.

The SC configuration maps a service name to a directory on the web server (virtual host). The client initiates the upload or download of the file for a service. Session context is not required for the file transfer. In this way the client may upload or download file in different server locations. Directory structures (tree) are not supported. No security checks are done. The upload must be enabled in the web server. See <http://commons.apache.org/fileupload/>

List of files is provided as *ibid.*

The Web Server is not registered to the service. It is configured to allow file upload, download and directory browsing for the specific directories (virtual hosts). The message flow looks as follows:

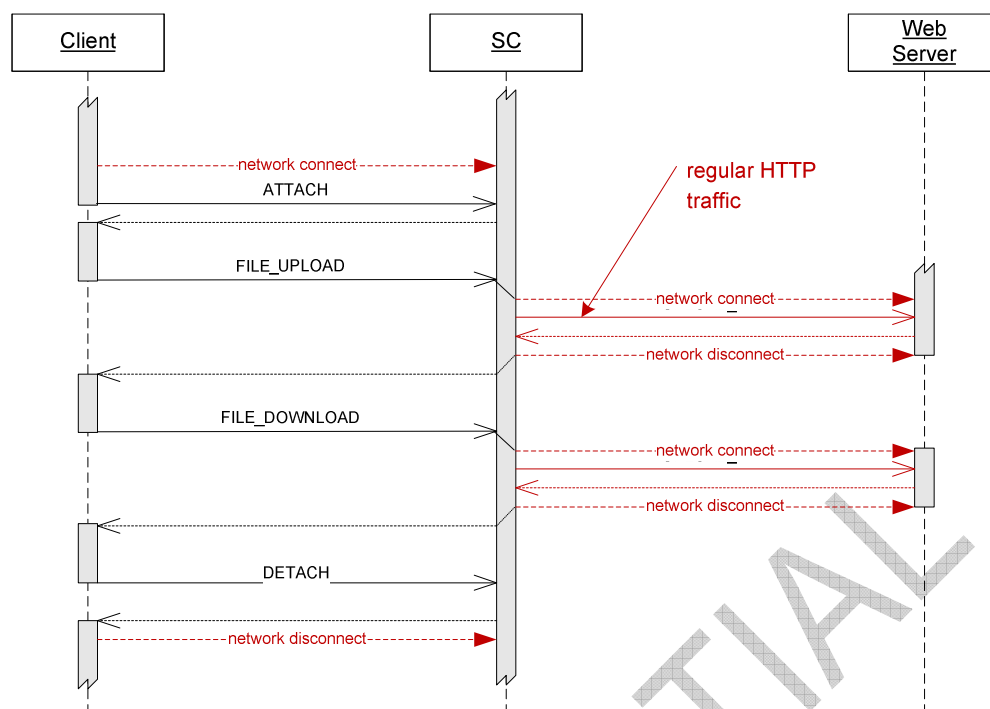


**Figure 23 File upload and download.**

The network connections are dynamically created from SC to the server when they are needed. Multiple HTTP requests can be pending at the same time, each one using one network connection. The limitation of 64kB for SCMP messages does not apply for traffic to and from the Web Server. Cascaded SCs on the path to the web server are transparent for the client.


### 3.4 HTTP Proxy Services

The SC supports redirecting of regular HTTP traffic to another server. It is acting like normal HTTP proxy without caching.

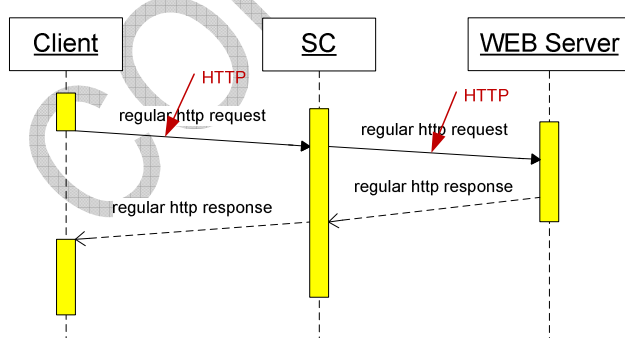

**Figure 24 HTTP proxy service**

HTTP traffic through the SC is possible without a service and session context. SC receives the http requests on a dedicated port and passes all HTTP traffic to the configured server. It acts like a HTTP proxy. The requested url must be resolved (dns) by the underlying network infrastructure. SC does not provide any name resolution. The message flow looks as follows:

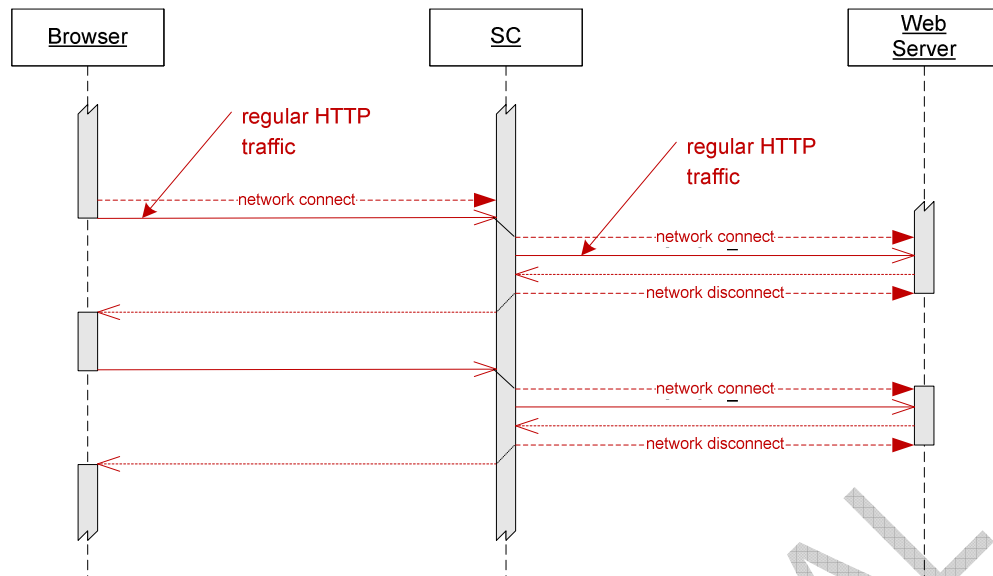

**Figure 25 HTTP proxy**

The Web Server is not registered to any service. The SC configuration has one destination (node + port) for redirection of the HTTP traffic. The network connections are dynamically created from SC to the server when they are needed. Multiple HTTP requests can be pending at the same time, each one using one network connection.

The limitation of 64kB for SCMP messages does not apply for traffic to and from Web Server.

## 4

## Proxy Services

Tbd.

### 4.1 Service Routing

Tbd.

CONFIDENTIAL


## 5

## State Diagrams

The following chapter shows state diagrams for the client and the server.

### 5.1 Client

#### Session Service

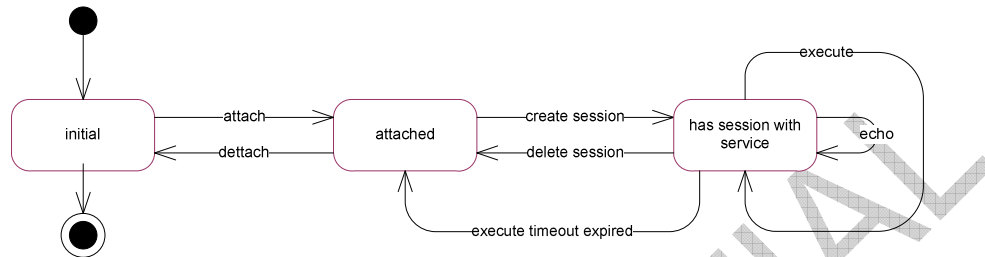


**Figure 26 Client states for session service**

Message exchange is only possible within a session. File services are available in attached state. On error the following state is established:

- Error in ATTACH results in *initial* state
- Error in DETACH results in *initial* state
- Error in CLN\_CREATE\_SESSION results in *attached* state
- Error in CLN\_DELETE\_SESSION results in *attached* state
- Error in CLN\_EXECUTE results in *has session with service* state. Except in case the message contains sessionId which is no longer valid.
- Operation timeout expiration in CLN\_EXECUTE results in *attached* state. The session is deleted.
- Error in ECHO results in *attached* state

Client getting error on CLN\_EXECUTE must issue CLN\_DELETE\_SESSION.

#### Publishing Service

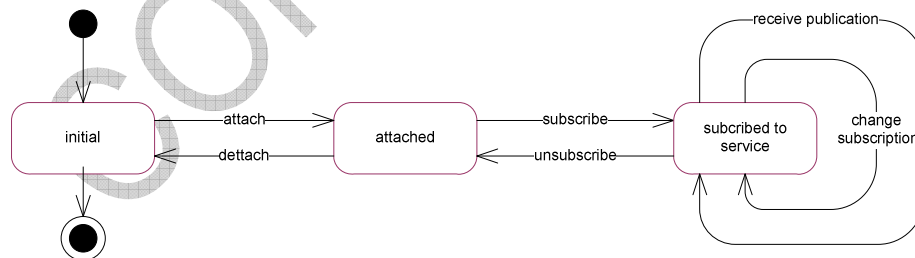

**Figure 27 Client states for publishing service**

On error the following state is established:


- Error in ATTACH results in *initial* state
- Error in DETACH results in *initial* state
- Error in CLN\_SUBSCRIBE results in *attached* state
- Error in CLN\_UNSUBSCRIBE results in *attached* state
- Error in CLN\_CHANGE\_PUBLICATION results in *subscribed to service* state
- Error in RECEIVE\_PUBLICATION results in *subscribed to service* state

Client getting error on RECEIVE\_PUBLICATION must issue CLN\_UNSUBSCRIBE.



## 5.2 Server

### Session Service

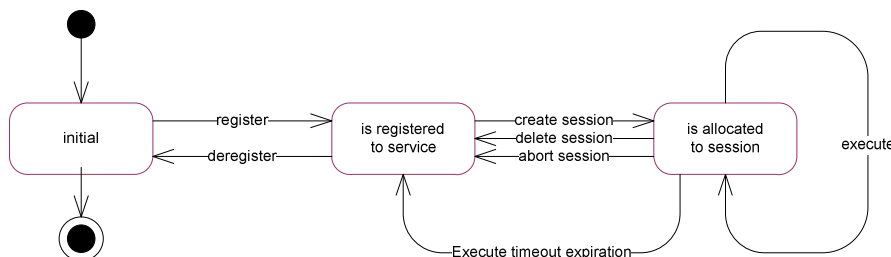


**Figure 28 Server states for session service**

The de-allocation of the server may happen either due to a regular client action (delete session) or die to an error handled by SC (abort session). On error the following state is established:

- Error in REGISTER\_SERVER results in *initial* state
- Error in Deregister\_SERVER results in *initial* state
- Error in SRV\_CREATE\_SESSION results in *is registered to service* state
- Error in SRV\_DELETE\_SESSION results in *initial* state. The server is deregistered.
- Error in SRV\_ABORT\_SESSION results in *initial* state. The server is deregistered.
- Error in SRV\_EXECUTE results in *is allocated to session* state.
- Operation timeout expiration in SRV\_EXECUTE results in *attached* state. The server is informed via SRV\_ABORT\_SESSION and the session is deleted.

### Publishing Service

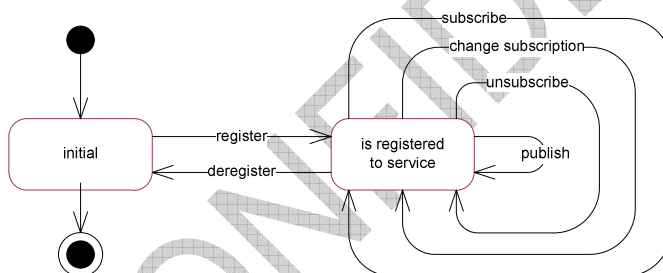

**Figure 29 Server states with publishing service**

Publishing server gets short requests to verify the subscribing client when it subscribes, unsubscribes or changes its subscription. No durable session is created. On error the following state is established:

- Error in REGISTER\_SERVER results in *initial* state
- Error in Deregister\_SERVER results in *initial* state
- Error in SRV\_SUBSCRIBE results in *is registered to service* state
- Error in SRV\_CHANGE\_PUBLICATION results in *is registered to service* state
- Error in SRV\_UNSUBSCRIBE results in *initial* state. The server is deregistered.
- Error in PUBLISH results in *is registered to service* state.

## 6

## Relationship Diagram

The following chapter explains the relationship between the SC entities.

### 6.1 Client

Client may have one or more concurrent connections to SC instances. For one SC connection client may have one or more concurrent sessions or subscriptions to services. Multiple sessions or subscriptions to the same service are possible.

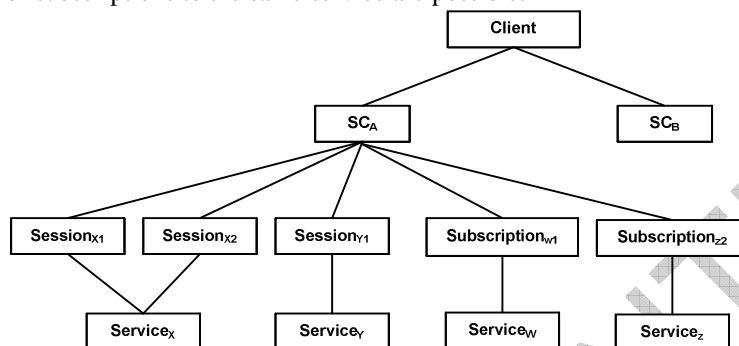


Figure 30 Client relationships

### 6.2 Server

#### Single Session Server

Single session server may have only one concurrent connection to a SC. It may register for only one service and only one session.




Figure 31 Single Session Server relationships

#### Multi Session Server

Multi session server may have multiple concurrent connections to SC instances. Within one connection it may register to serve multiple sessions of the same service. When it will serve multiple services, it can use the same connection to SC.


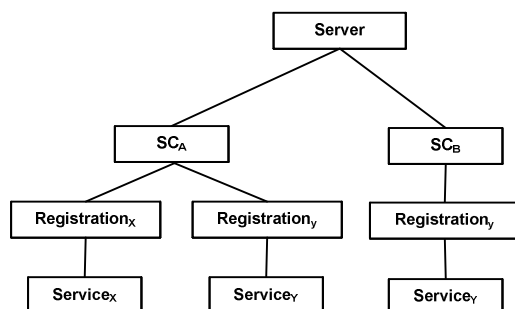


Figure 32 Multi Session Server relationships

# 7


## Message Structure

The Service Connector Message Protocol (SCMP) uses a simple header – body structure.

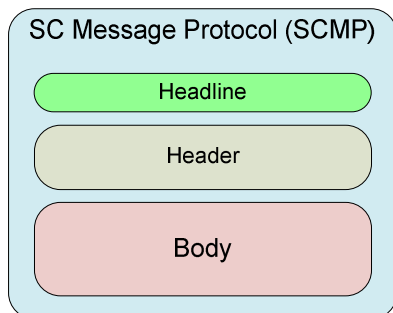

**Figure 33 Message Structure**

Message example as visible with Wireshark:

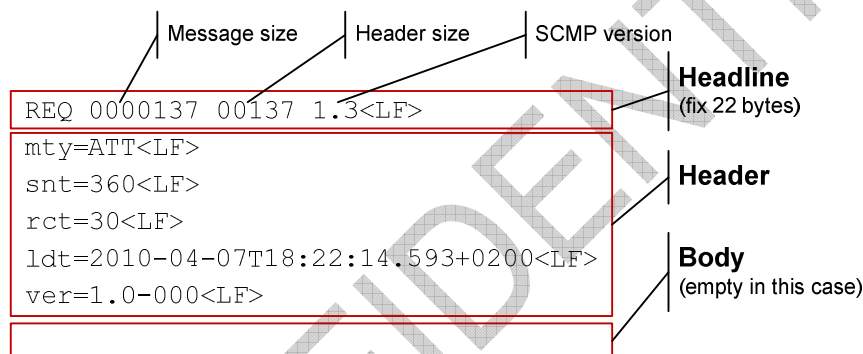

**Figure 34 Message Structure Example**

### 7.1 Headline

The fix size (22 bytes) headline defines the header key, the total size of the message, size of the header and the SCMP version. It is encoded in ISO-8859-1 (Latin 1) and terminated by <LF>.

#### HeaderKey

The header key defines the purpose of the message and can be:

- REQ – Request from client or server to SC or request from SC to server
- RES – Response from server to SC or SC to client or to server
- PRQ – Large request part from client or server to SC or part request from SC to server
- PRS – Large response part from server to SC or SC to client
- KRQ – Keepalive request
- KRS – Keepalive response
- EXC – Exception returned after REQ, PRQ or KRQ in case of an error

#### Message size

The complete size of the message in bytes counted from the beginning of the header until the end of the message body. The number is 7 bytes long and has leading zeros. (The maximal allowed message size on OpenVMS platform is 64kB. On other platforms the limit is 9\*999\*999 bytes.)

#### Header Size

The size of the message header in bytes counted from the beginning of the header until the end of the message header. The number is 5 bytes long and has leading zeros.

### Version

The SCMP version is the version of the **protocol specification** to which this message adheres. It has fixed format 9.9 and it ensures that the receiver knows how this message is structured. The version number (e.g. 2.5) means: 2 = Release number, 5 = Version number.

The receiver may implement multiple protocol versions, thus “understand” older versions. The following matching rule applies:

- Message: 2.5 + receiver implements: 2.5 => compatible
- Message: 2.5 + receiver implements: 2.6 => compatible
- Message: 2.7 + receiver implements: 2.5 => not compatible (message may have new headers unknown to the receiver)
- Message: 1.4 + receiver implements: 2.5 => not compatible (old message structure and possibly not understood here)
- Message: 2.5+ receiver implements: 1.8 => not compatible (new message structure and surely not understood here)

## 7.2 Header

Message header has variable length and contains attributes of variable number and length. Each attribute is on a separate line e.g. delimited by <LF>. Attributes and values are encoded in ISO-8859-1 (Latin 1) character set.

### Note:

“=” or <LF> characters are not allowed within attribute names and/or values.

Example:

```
mty=ATT
kpt=10
ldt=2010-04-07T18:22:14.593+0200
```

Unknown header attributes will be ignored and **not** forwarded. The sequence order of the attributes is meaningless.

## 7.3 Body

The message body has variable length and contains binary data or ISO-8859-1 (Latin 1) encoded text. The attribute *bodyType* defines the format. It is under control of the applications. When compression is enabled, body is ZIP-compressed during transmission.

## 7.4 SCMP over TCP/IP

For direct transport over TCP/IP the headline, messages header and the body is directly written to the network connection.

## 7.5 SCMP over HTTP

For transport over HTTP the headline and messages header have content type **text/plain** and the message body is multipart, the content type **application/octet-stream**.

The request uses method POST to send the request. The response is regular HTTP response.

In order to distinguish regular (plain) HTTP traffic from SCMP over HTTP, the following HTTP headers are used for request and response:

```
Pragma: SCMP
Cache-Control: no-cache
```

Actually chunked transfer encoding and pipelining are not used.

Wireshark example:

POST / HTTP/1.1  
Content-Length: 178  
Content-Type: text/plain  
Host: 192.234.123.33  
Pragma: SCMP  
Cache-Control: no-cache

REQ 0000081 00081 1.3  
mty=ATT  
kpt=10  
ldt=2010-04-07T18:22:14.593+0200

HTTP/1.1 200 OK  
Content-Length: 74  
Content-Type: text/plain  
Pragma: SCMP  
Cache-Control: no-cache

RES 0000041 00041 1.3  
mty=ATT  
ldt=2010-04-07T18:22:14.593+0200

CONFIDENTIAL

## 8

## SCMP Messages

Server may play the role of a client and consume other services. In such configuration message which belong to the client and to the server must have different types. For this reason messages initiated by the client have CLN\_ prefix and messages sent to the server the SRV\_ prefix.

### 8.1 Keepalive

Keepalive messages are sent in regular intervals on all idle connections initiated by a network peer. The only purpose of keepalive messages is to preserve the connection state in the firewall placed between the communicating peers and resets its internal timeout. See also Chapter 2.3

Using of keepalive messages can be disabled with the *keepaliveInterval (kpi)* attribute. The message has only a headline and no attributes and no body. The format is:

KRQ 0000000 00000 1.3

for request and

KRS 0000000 00000 1.3

for response.

### 8.2 ATTACH (ATT)

This message is sent from the client to SC in order to initiate the communication. The message has no body and contains these attributes:

mty=ATT  
ver=1.0-023  
ldt=1997-07-16T19:20:30.064+0100  
oti=2000

SC receives the message and sends back the response:

mty=ATT  
ldt=1997-07-16T19:20:34.044+0200

When an SC error occurs the response message contains the attributes:

mty=ATT  
ldt=1997-07-16T19:20:30.453+0100  
sec=3000  
set=SCMP version mismatch (Received=1.0-23, Required 1.1.-34)

Actually this message is only used to check the availability of the SC and to check the compatibility of the communicating partners.

### 8.3 DETACH (DET)

This message is sent from the client to SC in order to terminate the communication. The message has no body and contains these attributes:

mty=DET  
oti=2000

SC receives the message and sends back the response:

mty=DET

## 8.4 INSPECT (INS)

This message is sent from the client to SC in order to get internal information from the SC. The message has body of type *text* and contains these attributes:

mty=INS  
bty=txt  
ipl=10.0.4.32  
oti=2000

The message returned by SC has a body of type *text* and contains these attributes:

mty=INS  
bty=txt  
ipl=10.0.4.32

The request and response message body has the format according to the following table:

| Request format        | Response format            | Comment                                                                                                                            |
|-----------------------|----------------------------|------------------------------------------------------------------------------------------------------------------------------------|
| <i>state</i> =name    | <i>state</i> =state        | Shows the state of a service identified by name. Returns <i>enabled</i> or <i>disabled</i> according to the current service state. |
| <i>sessions</i> =name | <i>sessions</i> =9999/9999 | Shows the sessions available and allocated for the service. Returns <i>available</i> / <i>allocated</i> count of sessions.         |

When an SC error occurs the response message contains no body and the attributes:

mty=INS  
sec=370  
set=Unkown service: P01\_RTXS\_RPRWS3

## 8.5 MANAGE (MGT)

This message is sent from the client to SC in order to change the SC behaviour. The message has body of type *text* and has these attributes:

mty=MGT  
bty=txt  
ipl=10.0.4.32  
oti=2000

The request message body has the format according to the following table:

| Request format       | Comment                                                                                                                                                                                                                                                    |
|----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <i>disable</i> =name | Disables the service identified by name. When service is disabled, clients cannot create new sessions or subscriptions. Existing sessions or subscriptions are not aborted. The initial (default) state of the service is defined in the SC configuration. |
| <i>enable</i> =name  | Enables the service identified by name                                                                                                                                                                                                                     |
| <i>kill</i>          | Terminates the SC. The will immediately exit without any cleanup action. <b><u>The SC will perform this request only if the IP address in ipl is equal to the IP address of the local node.</u></b>                                                        |

The message returned by SC has no body and contains these attribute:

mty=MGT  
ipl=10.0.4.32

When an SC error occurs the response message contains no body and the attributes:

mty=MGT  
sec=370

set=Unkown service: P01\_RTXS\_RPRWS3

## 8.6 CLN\_CREATE\_SESSION (CCS)

This message is sent from the client to SC in order to create a new session for a service. The message has optional a body and contains these attributes (as seen by the SC):

mty=CCS  
mid=1  
nam=P01\_RTXS\_RPRWS1  
ipl=10.0.4.32/10.0.4.32  
sin=SNBZHP - TradingClientGUI 10.2.7  
eci=300  
oti=10000

SC receives the message and does these actions:

1. Generates a unique session id
2. Chooses a free server instance from the list of available servers serving the requested service.
3. Allocates the server instance to this session
4. Sends the message SRV\_CREATE\_SESSION to the allocated server and awaits the server response.
5. If the response message does not contain the attribute rejectFlag, the SC keeps the session and sends back to client the message with the following attributes:

mty=CCS  
mid=1  
nam=P01\_RTXS\_RPRWS1  
sid=cdc50b36-1fc4-4f9e-8430-d2e3d7284d9d

6. If the response message contains the attribute rejectFlag, the SC deletes the session, de-allocates the server and sends back to client the message with the following attributes:

mty=CCS  
mid=1  
nam=P01\_RTXS\_RPRWS1  
rej  
aec=4334591  
aet=%RTXS-E-NOPARTICIPANT, Authorization error – Unknown participant

When an SC error occurs the response message contains the attributes:

mty=CCS  
sec=330  
set=Unkown service: P01\_RTXS\_RPRWS3

If SC cannot allocate a free server instance for the session it will respond with the error set=No free server available for service: P01\_RTXS\_RPRWS3.

Large messages are not supported in this context.

## 8.7 SRV\_CREATE\_SESSION (SCS)

This message is sent from the SC to the server when a server instance has been be allocated to a session. The message has optional a body and contains these attributes:

mty=SCS  
mid=1  
nam=P01\_RTXS\_RPRWS1  
sid=cdc50b36-1fc4-4f9e-8430-d2e3d7284d9d



```
sin=SNBZHP - TradingClientGUI 10.2.7  
ipl=10.0.4.32/10.0.4.32/10.2.54.12  
oti=10000
```

The server receives the message and must decide to accept or reject this request. If it accepts, then it must return a message with the following attributes:

```
mty=SCS  
mid=1  
nam=P01_RTXS_RPRWS1  
sid=cdc50b36-1fc4-4f9e-8430-d2e3d7284d9d
```

If it rejects the session, then it must return a message with the following attributes:

```
mty=SCS  
mid=1  
nam=P01_RTXS_RPRWS1  
sid=cdc50b36-1fc4-4f9e-8430-d2e3d7284d9d  
rej  
aec=4334591  
aet=%RTXS-E-NOPARTICIPANT, Authorization error – Unknown participant
```

The *aec* / *aet* attributes should contain readable information describing the rejection reason.

## 8.8 CLN\_DELETE\_SESSION (CDS)

This message CLN\_DELETE\_SESSION is sent from the client to SC in order to terminate an existing session. The message has no body and contains these attributes:

```
mty=CDS  
mid=974834  
nam=P01_RTXS_RPRWS1  
sid=cdc50b36-1fc4-4f9e-8430-d2e3d7284d9d  
oti=10000
```

SC receives the message and does these actions:

1. Finds the server allocated to this session
2. Sends the message SRV\_DELETE\_SESSION to the allocated sever and awaits its response.
3. De-allocates the server instance from this session
4. Sends back the message CLN\_DELETE\_SESSION with the following attributes:

```
mty=CSD  
mid=974834  
nam=P01_RTXS_RPRWS1  
sid=cdc50b36-1fc4-4f9e-8430-d2e3d7284d9d
```

Due to timing issues the client may send a delete session request to a non existing session or to session that has no allocated server. The SC handles such situations and responds with a appropriate error message.

When an SC error occurs the response message contains the attributes:

```
mty=CDS  
sec=330  
set=Session does not exist
```

## 8.9 SRV\_DELETE\_SESSION (SDS)

This message is sent from the SC to the server when the session will be deleted by the client and the server instance will no longer be bound to it. The message has no body and contains these attributes:

```
mty=SDS
```

```
mid=974834
nam=P01_RTXS_RPRWS1
sid=cdc50b36-1fc4-4f9e-8430-d2e3d7284d9d
oti=10000
```

The server must return a message with the following attributes:

```
mty=SDS
mid=974834
nam=P01_RTXS_RPRWS1
sid=cdc50b36-1fc4-4f9e-8430-d2e3d7284d9d
```

In case the server does not respond within the given operation timeout (oti) the SC will abort the session, deregister the server and close all connections to the server.

After this message the server will not receive any data requests until the next session is started.

## 8.10 SRV\_ABORT\_SESSION (SAS)

This message is sent from the SC to the server when the session is aborted due to errors or other unexpected event. The message has no body and contains these attributes:

```
mty=SAS
nam=P01_RTXS_RPRWS1
sid=cdc50b36-1fc4-4f9e-8430-d2e3d7284d9d
sec=302
set=Session timeout exceeded
oti=2000
```

The server must return a message with the following attributes:

```
mty=SAS
nam=P01_RTXS_RPRWS1
sid=cdc50b36-1fc4-4f9e-8430-d2e3d7284d9d
```

In case the server does not respond within the configured operation timeout (oti) the SC will abort the session, deregister the server and close all connections to the server.

After this message the server will not receive any data requests until the next session is started.

## 8.11 REGISTER\_SERVER (REG)

This message is sent from the server instance to SC in order to tell the SC which service it serves. The message has no body and contains these attributes:

```
mty=REG
nam=P01_RTXS_RPRWS1
mxs=10
mxc=5
imc
pnr=9100
ver=1.0-023
ldt=1997-07-16T19:20:30.064+0100
kpi=360
oti=2000
```

SC receives the message and performs these actions:

1. Registers the server for this service.
2. Creates the requested number of connection to the server on port that was specified.
3. Starts monitoring the connection based on keep alive interval value
4. Sends back a message with the following attributes:

```
mty=REG
```

nam=P01\_RTXS\_RPRWS1  
ldt=1997-07-16T19:20:30.064+0100

When an SC error occurs the response message contains the attributes:

mty=REG  
sec=330  
set=Service name=P01\_RTXS\_RPRWS5 not found

## 8.12 DEREGISTER\_SERVER (DRG)

This message is sent from the server instance to SC in order to tell the SC that the server will no longer provide the service. The message has no body and contains these attributes:

mty=DRG  
nam=P01\_RTXS\_RPRWS1  
oti=2000

SC receives the message and does these actions:

1. Finds the server and performs a cleanup by aborting and de-allocation all sessions of this server. If the server has allocated sessions the SC will first send the SRV\_ABORT\_SESSION to it.
2. Terminates all connections that have been established from SC to this server.
3. Sends back message with the following attributes:  
mty=DRG  
nam=P01\_RTXS\_RPRWS1

When an SC error occurs the response message contains the attributes:

mty=DRG  
sec=330  
set=Server is not registered

After this message the server may close disconnect from the SC.

## 8.13 CLN\_EXECUTE (CXE)

This message is sent from the client to SC in order exchange information with the allocated server. The client may send this message only in scope of a session. The message has a body and contains these attributes:

mty=CXE  
nam=P01\_RTXS\_RPRWS1  
sid=cdc50b36-1fc4-4f9e-8430-d2e3d7284d9d  
mid=974833  
min=SECURITY\_MARKET\_QUERY  
oti=60000

Optionally these attributes can also be set when the client wants to fetch the message from the SC cache:

cid=CBCD\_SECURITY\_MARKET  
ced=1997-08-16T19:20:34.237+0200

SC receives the message and finds the server allocated to this session.

It sends the message SRV\_EXECUTE to the server it and awaits the response. Then it sends back a message with a body and the following attributes:

mty=CXE  
nam=P01\_RTXS\_RPRWS1  
sid=cdc50b36-1fc4-4f9e-8430-d2e3d7284d9d  
mid=974834  
min=SECURITY\_MARKET\_RESULT

Optionally these attributes can also be set when the server wants to store the message in the SC cache:

cid=CBCD\_SECURITY\_MARKET  
ced=1997-08-16T17:00:00.000+0100

In case of an application error these attributes can also be set.

aec=4334591  
aet=%RDB-F-NOTXT, no transaction open

In case the server does not respond within the given operation timeout (oti) the SC will abort the session, send CLN\_EXECUTE response with the error "timeout expired" back to the client and send the SRV\_ABORT\_SESSION to the server.

When an SC error occurs the response message contains the attributes:

mty=CXE  
sec=330  
set=Session does not exist

Large messages are supported in this context.

## 8.14 SRV\_EXECUTE (SXE)

This message is sent from the SC to the server allocated to this session in order to execute the request. The SC will send this message only in scope of a session. The message has a body and contains these attributes:

mty=SXE  
nam=P01\_RTXS\_RPRWS1  
sid=cdc50b36-1fc4-4f9e-8430-d2e3d7284d9d  
mid=974833  
min=SECURITY\_MARKET\_QUERY  
oti=18000

The server receives the message extracts the body and executes the application code. It must send back a message with a body and the following attributes:

mty=SXE  
nam=P01\_RTXS\_RPRWS1  
sid=cdc50b36-1fc4-4f9e-8430-d2e3d7284d9d  
mid=34834  
min=SECURITY\_MARKET\_RESULT

Optionally these attributes can also be set when the server wants to insert the message into the SC cache:

cid=CBCD\_SECURITY\_MARKET  
ced=1997-08-16T17:00:00.000+0100

In case of an application error these attributes can also be set.

aes=4334591  
aet=%RDB-F-NOTXT, no transaction open

## 8.15 ECHO (ECH)

This message is sent from the client to SC in order to verify the session consistency. The client must send this message in periodic intervals in scope of every session. The message has no body and contains these attributes:

mty=ECH  
nam=P01\_RTXS\_RPRWS1  
sid=cdc50b36-1fc4-4f9e-8430-d2e3d7284d9d  
mid=974833

crq=122.42.3.64:314  
oti=2000

SC receives the message and verifies the allocated session. Then it sends back a message without body and the following attributes:

mty=ECH  
nam=P01\_RTXS\_RPRWS1  
sid=cdc50b36-1fc4-4f9e-8430-d2e3d7284d9d  
mid=974834  
brs=10.0.3.3:31464

When an SC error occurs the response message contains the attributes:

mty= ECH  
sec=330  
set=Session does not exist

## 8.16 CLN\_SUBSCRIBE (CSU)

This message is sent from the client to SC in order to subscribe for a publishing service. The message has optional a body and contains these attributes (as seen by the SC):

mty=CSU  
mid=1  
nam=P01\_BCST\_CH\_RPRWS2  
msk=000012100012832102FADF-----  
ipl=10.0.4.32/10.0.4.32  
sin=SNBZHP - TradingClientGUI 10.2.7  
noi=300  
oti=20000

SC receives the message and does these actions:

1. Generates a unique session id
2. Sends the message SRV\_SUBSCRIBE to the server registered for this service and awaits the server response.
3. If the server response message does not contain the attribute rejectFlag, the SC remembers the subscription mask of the client for this service and sends back to client the message with the following attributes:

mty=CSU  
mid=1  
nam=P01\_BCST\_CH\_RPRWS2  
sid=cdc50b36-1fc4-4f9e-8430-d2e3d7284d9d

4. If the server response message contains the attribute rejectFlag, the SC deletes the session, and sends back to client the message with the following attributes:

mty=CSU  
mid=1  
nam=P01\_BCST\_CH\_RPRWS2  
rej  
aec=4334591  
aet=%RTXS-E-NOPARTICIPANT, Authorization error – Unknown participant

When an SC error occurs the response message contains the attributes:

mty=CSU  
sec=400  
set=Unkown service: P01\_BCST\_CH\_RPRWS2

The subscription is synchronous operation. The client gets control when all SC components on the path to the publishing server are aware of the subscription.

If SC cannot find server registered for this service it will respond with the error set=No server available for service: P01\_BCST\_CH\_RPRWS2.

Large messages are not supported in this context.

## 8.17 SRV\_SUBSCRIBE (SSU)

This message is sent from the SC to the server in order to process the client subscription (e.g. perform authentication). The message has optional a body and contains these attributes:

```
mty=SSU
mid=1
nam=P01_BCST_CH_RPRWS2
sid=cdc50b36-1fc4-4f9e-8430-d2e3d7284d9d
msk=000012100012832102FADF-----
ipl=10.0.4.32/10.0.4.32/10.2.54.12
sin=SNBZHP - TradingClientGUI 10.2.7
oti=10000
```

The server receives the message and must decide to accept or reject this request. If it accepts, then it must return a message with the following attributes:

```
mty=SSU
mid=1
nam=P01_BCST_CH_RPRWS2
sid=cdc50b36-1fc4-4f9e-8430-d2e3d7284d9d
```

If it rejects the session, then it must return a message with the following attributes:

```
mty=SSU
mid=1
nam=P01_BCST_CH_RPRWS2
sid=cdc50b36-1fc4-4f9e-8430-d2e3d7284d9d
rej
aec=4334591
aet=%RTXS-E-NOPARTICIPANT, Authorization error – Unknown participant
```

## 8.18 CLN\_CHANGE\_SUBSCRIPTION (CHS)

This message is sent from the client to SC in order to change the subscription for a publishing service. The message has optional a body and contains these attributes (as seen by the SC):

```
mty=CHS
mid=53834
nam=P01_BCST_CH_RPRWS2
sid=cdc50b36-1fc4-4f9e-8430-d2e3d7284d9d
msk=000012100012832102FADF-----
ipl=10.0.4.32/10.0.4.32
sin=SNBZHP - TradingClientGUI 10.2.7
oti=10000
```

SC receives the message and does these actions:

1. Sends the message SRV\_CHANGE\_SUBSCRIPTION to the server registered for this service and awaits the server response.
2. If the server response message does not contain the attribute rejectFlag, the SC changes the subscription mask of the client for this service and sends back to client the message with the following attributes:

```
mty=CHS
mid=974834
nam=P01_BCST_CH_RPRWS2
sid=cdc50b36-1fc4-4f9e-8430-d2e3d7284d9d
```

3. If the server response message contains the attribute rejectFlag, the SC keeps the previous subscription and sends back to client the message with the following attributes:  
mty=CHS  
mid=974834  
nam=P01\_BCST\_CH\_RPRWS2  
sid=cdc50b36-1fc4-4f9e-8430-d2e3d7284d9d  
rej  
aec=4334591  
aet=%RTXS-E-NOPARTICIPANT, Authorization error – Unknown participant

When an SC error occurs the response message contains the attributes:

mty=CHS  
sec=320  
set=Client is not subscribed

The change of the subscription is synchronous operation. The client gets control when all SC components on the path to the publishing server are aware of the new subscription. If SC cannot find server registered for this service it will respond with the error set=No server available for service: P01\_BCST\_CH\_RPRWS2.

Large messages are not supported in this context.

## 8.19 SRV\_CHANGE\_SUBSCRIPTION (SHS)

This message is sent from SC to the server in order to delete the client subscription. The message has optional a body and contains these attributes:

mty=SHS  
mid=53834  
nam=P01\_BCST\_CH\_RPRWS2  
sid=cdc50b36-1fc4-4f9e-8430-d2e3d7284d9d  
oti=10000

The server receives the message and must decide to accept or reject this request. If it accepts, then it must return a message with the following attributes:

mty=SHS  
mid=1  
nam=P01\_BCST\_CH\_RPRWS2  
sid=cdc50b36-1fc4-4f9e-8430-d2e3d7284d9d

If it rejects the session, then it must return a message with the following attributes:

mty=SHS  
mid=1  
nam=P01\_BCST\_CH\_RPRWS2  
sid=cdc50b36-1fc4-4f9e-8430-d2e3d7284d9d  
rej  
aec=4334591  
aet=%RTXS-E-NOPARTICIPANT, Authorization error – Unknown participant

## 8.20 CLN\_UNSUBSCRIBE (CUN)

This message is sent from the client to SC in order to delete the subscription for a publishing service. The message has no body and contains these attributes:

mty=CUN  
mid=53834  
nam=P01\_BCST\_CH\_RPRWS2  
sid=cdc50b36-1fc4-4f9e-8430-d2e3d7284d9d

oti=10000

SC receives the message and sends the message SRV\_UNSUBSCRIBE to the server registered for this service and awaits the server response. Then it sends back to client the message with the following attributes:

mty=CUN  
mid=1  
nam=P01\_BCST\_CH\_RPRWS2  
sid=cdc50b36-1fc4-4f9e-8430-d2e3d7284d9d

When an SC error occurs the response message contains the attributes:

mty=CUN  
sec=230  
set=Client is not subscribed

This operation is synchronous. The client gets control when all SC components on the path to the publishing server have deleted the subscription. If SC cannot find server registered for this service it will respond with the error set=No server registered for service: P01\_BCST\_CH\_RPRWS2.

## 8.21 SRV\_UNSUBSCRIBE (SUN)

This message is sent from the SC to the server in order to remove the client subscription (e.g. delete the session). The message has no body and contains these attributes:

mty=SUN  
mid=53834  
nam=P01\_BCST\_CH\_RPRWS2  
sid=cdc50b36-1fc4-4f9e-8430-d2e3d7284d9d  
oti=10000

The server must return a message with the following attributes:

mty=SUN  
mid=974834  
nam=P01\_BCST\_CH\_RPRWS2  
sid=cdc50b36-1fc4-4f9e-8430-d2e3d7284d9d

## 8.22 RECEIVE\_PUBLICATION (CRP)

This message is sent from the client to SC in order to get data published by a server. The client may send this message only in scope of a subscription session. The message has no body and contains these attributes:

mty=CRP  
sid=cdc50b36-1fc4-4f9e-8430-d2e3d7284d9d  
nam=P01\_BCST\_CH\_RPRWS2  
mid=974833  
oti=2000

SC receives the message and does these actions:

1. Finds the client subscription
2. Creates a timer monitoring the response delivery
3. Waits until one of these two events occurs:
  - a. A message that matches the client subscription arrives. Then it sends back a message with the body and the following attributes:

mty=CRP  
sid=cdc50b36-1fc4-4f9e-8430-d2e3d7284d9d  
nam=P01\_BCST\_CH\_RPRWS2  
mid=974834  
omi=533



min=CH\_AUCTION  
msk=%%%%%%%%%%%%%%%X%%  
%%%%%%%%%

- b. The *noDataInterval* (*noi*) timeout expires. Then it sends back a message with the no body and the following attributes:
- mty=CRP
  - sid=cdc50b36-1fc4-4f9e-8430-d2e3d7284d9d
  - nam=P01\_BCST\_CH\_RPRWS2
  - mid=974834
  - nod

When an SC error occurs the response message contains the attributes:

mty=CRP  
sec=130  
set=Client is not subscribed to service: P01\_BCST\_CH\_RPRWS2

## 8.23 PUBLISH (SPU)

This message is sent from the publishing server to SC in order to send this message to the subscribed clients. The message has a body and contains these attributes:

mty=SPU  
nam=P01\_BCST\_CH\_RPRWS2  
mid=65411  
min=CH\_AUCTION\_IOI  
msk=%%%%%%%%%%%%%%%X%%  
%%%%%%%%%  
oti=2000

SC receives the message and does the following steps:

1. It inserts the message on top of the message queue for this service
2. Sends back to the server a message with the following attributes:
  - mty=SPU
  - nam=P01\_BCST\_CH\_RPRWS2
  - mid=65412
3. Starts distribution of the message to the subscribed clients based on their subscription mask and the mask of the message.

When an SC error occurs the response message contains the attributes:

mty=SPU  
sec=100  
set=Service P01\_BCST\_CH\_RPRWS2 does not exist

## 8.24 FILE\_DOWNLOAD (FDO)

This message is used to download file from a web server. The message has no body and contains these attributes:

mty=FDO  
nam=P01\_LOGGING  
rfn=LSC TradingClientGUI\_20100115\_07h28m59s.log  
oti=2000

The SC takes the message and initiates a download from the web server configured for this service. The requesting URL is constructed according to the configuration and the given remote file name. The response message has a body containing the file and has these attributes:

mty=FDO  
bty=bin  
nam=P01\_LOGGING

rfn=LSC TradingClientGUI\_20100115\_07h28m59s.log

The maximal message length may exceed the 64kB limit.

On Error the SC may return message a response message contains the attributes:

mty=FDO  
nam=P01\_LOGGING  
rfn=LSC TradingClientGUI\_20100115\_07h28m59s.log  
sec=40  
set=404 Not found

See <http://www.w3.org/Protocols/rfc2616/rfc2616-sec6.html#sec6.1.1> for possible status codes and reasons.

## 8.25 FILE\_UPLOAD (FUP)

This message is used to upload file to a web server. The message has a body containing the file and has these attributes:

mty=FUP  
bty=bin  
nam=P01\_CONFIGURATION  
rfn=SCconfig-P01-V3.3-433.properties  
oti=2000

The SC takes the message and initiates an upload to the web server configured for this service. The requesting URL is constructed according to the configuration and the given remote file name. The response message has no body and has these attributes:

mty=FUP  
nam=P01\_LOGGING  
rfn=SCconfig-P01-V3.3-433.properties

The maximal message length may exceed the 64kB limit. On Error the SC may return message a response message contains the attributes:

mty=FUP  
nam=P01\_LOGGING  
rfn=SCconfig-P01-V3.3-433.properties  
sec=40  
set=406 Not Acceptable

See <http://www.w3.org/Protocols/rfc2616/rfc2616-sec6.html#sec6.1.1> for possible status codes and reasons.

## 8.26 FILE\_LIST (FLI)

This message is used to get list of files on web server. The Web Server must allow the directory browsing. The message has no body and these attributes:

mty=FLI  
nam=P01\_CONFIGURATION  
oti=2000

The SC takes the message and creates an URL to explore the location on the web server corresponding to the service. The response message has body and has these attributes:

mty=FLI  
bty=txt  
nam=P01\_CONFIGURATION

The response message body has the following format:

File name1  
File name2

File name3

No header or footer is used. Each file name is on a separate line terminated by <CR><LF>  
Filenames appear as they are stored on disk. Upper / lowercase is depending on the operating system used. No file attributes like date or size is provided. The list order is not predictable. The physical location corresponding to the service is not disclosed.

The maximal message length may exceed the 64kB limit. On Error the SC may return message a response message contains the attributes:

mty=FLI  
nam=P01\_ CONFIGURATION  
sec=40  
set=403 Forbidden

See <http://www.w3.org/Protocols/rfc2616/rfc2616-sec6.html#sec6.1.1> for possible status codes and reasons.

CONFIDENTIAL

## 9 SCMP Header Attributes

The following is a list of all possible attributes in a SC message header in alphabetical order. All attributes and their values are ASCII, encoded as ISO 8859-1 (Latin-1). “=” or <LF> are not allowed within attribute names and/or values. Unknown attributes will be ignored.

You can find the matrix describing which attribute is used in which message at the end of this document.

### 9.1 appErrorCode (aec)

|             |                                                                                                               |
|-------------|---------------------------------------------------------------------------------------------------------------|
| Name        | appErrorCode                                                                                                  |
| Code        | aec                                                                                                           |
| Description | Numeric value passed between server and the client used to implement error protocol on the application level. |
| Validation  | Numeric value $\geq 0$                                                                                        |
| Comment     | This can be used by the client to check a specific server error.                                              |
| Example     | aec=4334591                                                                                                   |

### 9.2 appErrorText (aet)

|             |                                                                                                                                                                                 |
|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Name        | appErrorText                                                                                                                                                                    |
| Code        | aet                                                                                                                                                                             |
| Description | Textual value passed between server and the client used to implement error protocol on the application level. It can be the textual interpretation of the <i>appErrorCode</i> . |
| Validation  | Any printable character, length $> 0$ and $\leq 256$ Byte                                                                                                                       |
| Comment     | This can be used by the client to display or log an error that occurred on the server and so get the user better understanding what happened.                                   |
| Example     | aet=%RDB-F-NOTXT, no transaction open                                                                                                                                           |

### 9.3 bodyType (bty)

|             |                                                                                                                                                                                                                        |
|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Name        | bodyType                                                                                                                                                                                                               |
| Code        | bty                                                                                                                                                                                                                    |
| Description | Type of the message body                                                                                                                                                                                               |
| Validation  | Enumeration, 3 characters, fixed: <ul style="list-style-type: none"><li>• txt – message body is ISO-8859-1 (Latin 1) encoded text</li><li>• bin – binary data</li><li>• xml – XML data (not implemented yet)</li></ul> |
| Default     | bin                                                                                                                                                                                                                    |
| Comment     | When http transport is used, the content-type header is set according to this attribute.                                                                                                                               |
| Example     | bty=txt                                                                                                                                                                                                                |

### 9.4 cacheExpirationDateTime (ced)

|             |                                                                                  |
|-------------|----------------------------------------------------------------------------------|
| Name        | cacheExpirationDateTime                                                          |
| Code        | ced                                                                              |
| Description | When sent by the server then it represents the absolute expiration date and time |

### 9.5 cacheId (cid)

## 9.6 clnRequesterId (crq)

### 9.7 cascadedMask (cma)

Confidential  
Copyright © 2010 by STABILIT Informatik AG

## 9.8 compression (cmp)

|             |                                                                         |
|-------------|-------------------------------------------------------------------------|
| Name        | compression                                                             |
| Code        | cmp                                                                     |
| Description | Flag true or false describing if the message body is compressed or not. |
| Validation  | True is present, false is missing                                       |
| Default     | true                                                                    |
| Comment     | The compression can be enabled or disabled on message level.            |
| Example     | cmp                                                                     |

## 9.9 echoInterval (eci)

|             |                                                                                                                                                                                                                          |
|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Name        | echoInterval                                                                                                                                                                                                             |
| Code        | eci                                                                                                                                                                                                                      |
| Description | Interval in seconds between two subsequent ECHO messages sent by the client.                                                                                                                                             |
| Validation  | Number $\geq 1$ and $\leq 3600$                                                                                                                                                                                          |
| Default     | 300                                                                                                                                                                                                                      |
| Comment     | This is used by the SC to detect a broken session. The value should be set with respect to the throughput of the network connection. If this interval expires then the session is treated as dead and a cleanup is done. |
| Example     | eci=300                                                                                                                                                                                                                  |

## 9.10 immediateConnect (imc)

|             |                                                                                                                                                                                                                                                                                                                                                                                                             |
|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Name        | immediateConnect                                                                                                                                                                                                                                                                                                                                                                                            |
| Code        | imc                                                                                                                                                                                                                                                                                                                                                                                                         |
| Description | Flag true or false to tell SC when connection to the server should be created.                                                                                                                                                                                                                                                                                                                              |
| Validation  | True is present, false is missing                                                                                                                                                                                                                                                                                                                                                                           |
| Default     | true                                                                                                                                                                                                                                                                                                                                                                                                        |
| Comment     | After server registers to a service SC will create as many connections to it as defined by <i>maxSession</i> . When <i>immediateConnect</i> = true SC will create the connections immediately and keep the session until DEREGISTER_SERVER is done. When <i>immediateConnect</i> = false SC will create the connections before a session is allocated and close the connection when the session is deleted. |
| Example     | imc                                                                                                                                                                                                                                                                                                                                                                                                         |

## 9.11 ipAddressList (ipl)

|             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Name        | ipAddressList                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Code        | ipl                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Description | List of IP addresses on the network path between the client and the session server. The list contains IP addresses in the form 999.999.999.999                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Validation  | List in format {999.999.999.999/999.999.999.999}...                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Comment     | <p>The list has at least three entries.</p> <ol style="list-style-type: none"> <li>1. IP of the client,</li> <li>2. Incoming IP received by SC (IP of the VPN Tunnel)</li> <li>3. IP of the SC</li> </ol> <p>Client connected via cascaded SC placed in a customer DMZ will have the list in the format:</p> <ol style="list-style-type: none"> <li>1. IP of the client,</li> <li>2. Incoming IP received by SC in customer DMZ.</li> <li>3. IP of the SC in customer DMZ</li> <li>4. Incoming IP received by SC (IP of the VPN Tunnel)</li> <li>5. IP of the SC</li> </ol> <p>If any of the pairs at position 1-2 or 3-4 has different values, then in this network</p> |

|         |                                                                                                                                                  |
|---------|--------------------------------------------------------------------------------------------------------------------------------------------------|
|         | segment NAT occurs. As long as there is only one SC behind the VPN, the second last address is always the tunnel IP used for the authentication. |
| Example | ipl=10.0.4.32/10.2.54.12/192.243.43.1                                                                                                            |

## 9.12 keepaliveInterval (kpi)

|             |                                                                                                                                                                                                                                                                                     |
|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Name        | keepaliveInterval                                                                                                                                                                                                                                                                   |
| Code        | kpi                                                                                                                                                                                                                                                                                 |
| Description | Interval in seconds between two subsequent keepalive requests (KRQ).<br>The keepalive message is solely used to refresh the firewall timeout on the network path. Keepalive message is only sent on an idle connection.<br>The value = 0 means no keep alive messages will be sent. |
| Validation  | Number $\geq 0$ and $\leq 3600$                                                                                                                                                                                                                                                     |
| Default     | 60                                                                                                                                                                                                                                                                                  |
| Comment     | The keepaliveInterval is exchanged at the beginning of the communication.<br><br>In REGISTER_SERVER the <i>keepaliveInterval</i> defines how often the SC will sent keepalive messages to the server.                                                                               |
| Example     | kpi=360                                                                                                                                                                                                                                                                             |

## 9.13 localDateTime (ldt)

|             |                                                                                                                                                                                                                                        |
|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Name        | localDateTime                                                                                                                                                                                                                          |
| Code        | ldt                                                                                                                                                                                                                                    |
| Description | String value describing the actual local date and time.                                                                                                                                                                                |
| Validation  | YYYY-MM-DDThh:mm:ss.fff+hhmm<br>It is local date time plus zone information.<br>The fff are seconds fractions and time zone offset is at the end after the + sign.                                                                     |
| Comment     | The local date time is exchanged at the beginning of the communication (ATTACH, REGISTER_SERVER). It is used to calculate the time difference between the communicating parties and to harmonize the log for troubleshooting purposes. |
| Example     | ldt=1997-07-16T19:20:30.064+0100                                                                                                                                                                                                       |

## 9.14 messageID (mid)

|             |                                                                                                                                                                                                                                                                                                                                                                                                              |
|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Name        | messageId                                                                                                                                                                                                                                                                                                                                                                                                    |
| Code        | mid                                                                                                                                                                                                                                                                                                                                                                                                          |
| Description | Identification generated by the sender of a message in order to identify and track it during a session. The sessionId + the messageId uniquely identify the message. Request and response messages are treated as independent. Error messages generated by SC never contain a messageId.                                                                                                                     |
| Validation  | Composite identification in format 9[/9]<br>First is a message sequence number optionally followed by delimiter "/" and a part sequence number to count parts of large messages. Both numbers > 0.                                                                                                                                                                                                           |
| Comment     | For normal messages only message sequence is used. For large messages the message sequence number is extended with a part sequence number.<br><br>The message sequence number is reset at begin of the session and is steadily increasing, incremented by the sender. The part sequence number is reset for every regular message and steadily increasing, incremented by the sender for every message part. |
| Example     | REQ .. mid=3<br>RES .. mid=64<br>...<br>PRQ .. mid=4/1                                                                                                                                                                                                                                                                                                                                                       |

|  |                        |
|--|------------------------|
|  | PRS .. mid=65/1        |
|  | PRQ .. mid=4/2         |
|  | PRS .. mid=65/2        |
|  | PRQ .. mid=4/3         |
|  | PRS .. mid=65/3        |
|  | <b>REQ .. mid=4/4</b>  |
|  | PRS .. mid=66/1        |
|  | PRQ .. mid=5/1         |
|  | PRS .. mid=66/2        |
|  | PRQ .. mid=5/2         |
|  | <b>RES .. mid=66/3</b> |
|  | ...                    |
|  | <b>REQ .. mid=6</b>    |
|  | <b>RES .. mid=67</b>   |

## 9.15 messageInfo (min)

|             |                                                                                                                                                                                                                                       |
|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Name        | messageInfo                                                                                                                                                                                                                           |
| Code        | min                                                                                                                                                                                                                                   |
| Description | Optional information passed together with the message body that helps to identify the message content without investigating the body.                                                                                                 |
| Validation  | Any printable character, length $\geq 0$ and $\leq 256$ Byte                                                                                                                                                                          |
| Comment     | This can be set by the sender and evaluated by the receiver of the message to simplify decision how the message should be processed. It can also be used for troubleshooting to identify the message during the message transmission. |
| Example     | min=SECURITY_MARKET_QUERY                                                                                                                                                                                                             |

## 9.16 messageType (mty)

|             |                                                                                                          |
|-------------|----------------------------------------------------------------------------------------------------------|
| Name        | messageType                                                                                              |
| Code        | mty                                                                                                      |
| Description | Unique message type                                                                                      |
| Validation  | 3 characters, fixed, uppercase, list of known message types                                              |
| Comment     | Message type that represents a certain command. The direction of the message is visible in the headline. |
| Example     | mty=ATT                                                                                                  |

## 9.17 mask (msk)

|             |                                                                                                                                                                                                                                                                                                                                              |
|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Name        | mask                                                                                                                                                                                                                                                                                                                                         |
| Code        | msk                                                                                                                                                                                                                                                                                                                                          |
| Description | The mask is used in SUBSCRIBE or CHANGE_SUBSCRIPTION to express the client interest and in PUBLISH to designate the message contents. Only printable characters are allowed.                                                                                                                                                                 |
| Validation  | Any printable character, length $\leq 256$ Byte<br>Client may not subscribe with mask containing “%” character.                                                                                                                                                                                                                              |
| Comment     | If the message mask matches the subscription mask, the client will get this message.<br>The matching rules: <ul style="list-style-type: none"> <li>• masks of unequal length <u>do not</u> match</li> <li>• % - matches any single character at this position</li> <li>• All other characters must exactly match (case sensitive)</li> </ul> |
| Example     | Subscription mask:<br>msk=000012100012832102FADF-----X-----<br><br>Matching examples of message masks:<br>msk=000012100012832102FADF-----X-----<br>msk=0000121%%%%%%%%%%%%%-----X-----                                                                                                                                                       |



|  |                                                                                                                                   |
|--|-----------------------------------------------------------------------------------------------------------------------------------|
|  | <p><u>Not</u> matching examples of message masks:</p> <p>msk=000012100012832102FADF-----</p> <p>msk=0000121%*****%-----X-----</p> |
|--|-----------------------------------------------------------------------------------------------------------------------------------|

## 9.18 maxConnections (mxc)

|             |                                                                                                                                                                                                                                                                                                                                                         |
|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Name        | maxConnections                                                                                                                                                                                                                                                                                                                                          |
| Code        | mxc                                                                                                                                                                                                                                                                                                                                                     |
| Description | Number of connections (pool size) SC will create initially to communicate with the server.                                                                                                                                                                                                                                                              |
| Validation  | Number > 0 and $\leq 1024$ $mxc \leq mxs$                                                                                                                                                                                                                                                                                                               |
| Default     | mxs                                                                                                                                                                                                                                                                                                                                                     |
| Comment     | <p>When a server registers to a service it must tell the SC how many connections it can handle.</p> <p>In case all connections are busy, SC will not start a new connection but keep trying to get a free connection until the <i>operationTimeout</i> defined in the message expires. Then it will return an error “no free connection available”.</p> |
| Example     | mxc=10                                                                                                                                                                                                                                                                                                                                                  |

## 9.19 maxSessions (mxs)

|             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Name        | maxSessions                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Code        | mxs                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Description | Number of sessions this server instance can serve.                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Validation  | Number > 0                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Comment     | <p>When a server registers to a service it must tell the SC how many sessions it can serve. This is necessary to know in order to maintain the count of free/busy servers in SC.</p> <p>The value 1 means single session server. Value &gt; 1 means multi-connection server. See also <i>immediateConnect</i> flag.</p> <p>In case all servers are busy, SC will keep trying to get a free server until the <i>operationTimeout</i> defined in the message expires. Then it will return an error “no free server available”.</p> |
| Example     | mxs=10                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |

## 9.20 noData (nod)

|             |                                                                                                                                                                                                   |
|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Name        | noData                                                                                                                                                                                            |
| Code        | nod                                                                                                                                                                                               |
| Description | NoData flag is used in RECEIVE_PUBLICATION to tell the subscribed client, that no data for publishing exists. The client must immediately send another RECEIVE_PUBLICATION to renew the interest. |
| Validation  | True if present, false if missing                                                                                                                                                                 |
| Comment     |                                                                                                                                                                                                   |
| Example     | nod                                                                                                                                                                                               |

## 9.21 noDataInterval (noi)

|             |                                                                     |
|-------------|---------------------------------------------------------------------|
| Name        | noDataInterval                                                      |
| Code        | noi                                                                 |
| Description | Interval in seconds the SC will wait to deliver RECEIVE_PUBLICATION |

|            |                                                                                                              |
|------------|--------------------------------------------------------------------------------------------------------------|
|            | response with <i>noData</i> flag set.                                                                        |
| Validation | Number > 0 and ≤ 3600                                                                                        |
| Default    | 300                                                                                                          |
| Comment    | The receiving client monitors the interval and treats the subscription as broken when this time is exceeded. |
| Example    | noi=60                                                                                                       |

## 9.22 operationTimeout (oti)

|             |                                                                                                                                                                               |
|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Name        | operationTimeout                                                                                                                                                              |
| Code        | oti                                                                                                                                                                           |
| Description | Maximal response time in milliseconds allowed for an operation (measured in the client). The client should set the value according to the expected duration of the operation. |
| Validation  | Number ≥ 1000 and ≤ 3600000                                                                                                                                                   |
| Default     | 60000                                                                                                                                                                         |
| Comment     | This is used by to make any operation non-blocking. When this timeout expires, while a session is pending, the session is treated as dead and cleaned up.                     |
| Example     | oti=10000                                                                                                                                                                     |

## 9.23 originalMessageID (omi)

|             |                                                                                                                                                                                                    |
|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Name        | Original message ID                                                                                                                                                                                |
| Code        | omi                                                                                                                                                                                                |
| Description | Original message ID used by the publishing server to send the message.                                                                                                                             |
| Validation  | Composite identification in format 9[/9]<br>First is a message sequence number optionally followed by delimiter “/” and a part sequence number to count parts of large messages. Both numbers > 0. |
| Comment     | This is used in RECEIVE_PUBLICATION messages as reference to the original message. It is required for troubleshooting of the message fan-out.                                                      |
| Example     | omi=355/2                                                                                                                                                                                          |

## 9.24 portNr (pnr)

|             |                                                                                                                                                                                                                               |
|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Name        | portNr                                                                                                                                                                                                                        |
| Code        | pnr                                                                                                                                                                                                                           |
| Description | Number of the TCP/IP port the session server accepts the connection(s).                                                                                                                                                       |
| Validation  | Number > 0 and ≤ 65535                                                                                                                                                                                                        |
| Comment     | When a session server registers to a service, SC will create a connection to this server on the IP address of the server and the given port number. Multiple connections are created to the same port. The value must be > 1. |
| Example     | pnr=9100                                                                                                                                                                                                                      |

## 9.25 rejectSession (rej)

|             |                                                                                                             |
|-------------|-------------------------------------------------------------------------------------------------------------|
| Name        | rejectSession                                                                                               |
| Code        | rej                                                                                                         |
| Description | Flag in SRV_CREATE_SESSION response message set by the server when it rejects the session.                  |
| Validation  | True if present, false if missing                                                                           |
| Default     | false                                                                                                       |
| Comment     | The server should also set the <i>appErrorCode</i> and <i>appErrorText</i> to explain the rejection reason. |

|         |     |
|---------|-----|
| Example | rej |
|---------|-----|

## 9.26 remoteFileName (rfn)

|             |                                                                                                                                   |
|-------------|-----------------------------------------------------------------------------------------------------------------------------------|
| Name        | remoteFileName                                                                                                                    |
| Code        | rfn                                                                                                                               |
| Description | Name used in FILE_UPLOAD to store the file on the web server or name used in FILE_DOWNLOAD to identify the file to be downloaded. |
| Validation  | Any printable character allowed as filename, length $\leq$ 256Byte                                                                |
| Comment     |                                                                                                                                   |
| Example     | rfn=LSC TradingClientGUI_20100115_07h28m59s.log                                                                                   |

## 9.27 scErrorCode (sec)

|             |                                                                                                                                           |
|-------------|-------------------------------------------------------------------------------------------------------------------------------------------|
| Name        | scErrorCode                                                                                                                               |
| Code        | sec                                                                                                                                       |
| Description | Numeric error code set by SC in order to inform the communication partner about an error. List of possible error codes will be published. |
| Validation  | Number $> 0$ and $< 1000$                                                                                                                 |
| Comment     | This is used to handle the SC error. The message must have EXC key in the headline.                                                       |
| Example     | sec=453                                                                                                                                   |

## 9.28 scErrorText (set)

|             |                                                                                                                                     |
|-------------|-------------------------------------------------------------------------------------------------------------------------------------|
| Name        | scErrorText                                                                                                                         |
| Code        | set                                                                                                                                 |
| Description | English text set by the SC in order to describe the error signalled as <i>scErrorCode</i> . Precise error description must be here. |
| Validation  | Any printable character, length $> 0$ and $\leq$ 256Byte                                                                            |
| Comment     | This is used to log or display the SC error. The message must have EXC key in the headline.                                         |
| Example     | set=Unknow service name: P01_RT XR_RPRWS4                                                                                           |

## 9.29 scRequesterId (brq)

|             |                                                                 |
|-------------|-----------------------------------------------------------------|
| Name        | scRequesterId                                                   |
| Code        | brq                                                             |
| Description | Unique identification of the SC requester                       |
| Validation  | Any printable character, length $> 0$ and $\leq$ 256Byte        |
| Comment     | Concatenation of IP address and port. Used for troubleshooting. |
| Example     | brq=128.45.3.12:1244                                            |

## 9.30 scResponderId (brs)

|             |                                                                 |
|-------------|-----------------------------------------------------------------|
| Name        | scResponderId                                                   |
| Code        | brs                                                             |
| Description | Unique identification of the SC responder                       |
| Validation  | Any printable character, length $> 0$ and $\leq$ 256Byte        |
| Comment     | Concatenation of IP address and port. Used for troubleshooting. |
| Example     | brs=128.45.3.12:1244                                            |

### 9.31 scVersion (ver)

|             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Name        | scVersion                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Code        | ver                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Description | Software version number of the producer of this message.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Validation  | String format 9.9-999                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Comment     | <p>This version number is sent in ATTACH or REGISTER_SERVER and checked by the receiver against its own SC version number. This ensures that only compatible components can communicate to each other. The value is hard coded in the communication components like API or SC. The version number looks like 3.2-023:</p> <ul style="list-style-type: none"> <li>• 3 = Release number</li> <li>• 2 = Version number</li> <li>• 023 = Revision number</li> </ul> <p>The matching rules are:</p> <ul style="list-style-type: none"> <li>• Request: 3.2-023 + own: 3.2-023 =&gt; compatible</li> <li>• Request: 3.2-021 + own: 3.2-023 =&gt; compatible</li> <li>• Request: 3.1-006 + own: 3.2-023 =&gt; compatible</li> <li>• Request: 3.2-025 + own: 3.2-023 =&gt; <u>not</u> compatible (requestor may utilize new features unknown here)</li> <li>• Request: 3.3-005 + own: 3.2-023 =&gt; <u>not</u> compatible (requestor uses new functions unknown here)</li> <li>• Request: 2.2-023 + own: 3.2-023 =&gt; <u>not</u> compatible (possibly other incompatible interface)</li> <li>• Request: 4.0-007 + own: 3.2-023 =&gt; <u>not</u> compatible (possibly other incompatible interface)</li> </ul> |
| Example     | ver=3.2-023                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |

### 9.32 serviceName (nam)

|             |                                                                                                                                                                                                                                                                                    |
|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Name        | serviceName                                                                                                                                                                                                                                                                        |
| Code        | nam                                                                                                                                                                                                                                                                                |
| Description | Name of the service                                                                                                                                                                                                                                                                |
| Validation  | Any printable character, length > 0 and ≤ 32Byte.                                                                                                                                                                                                                                  |
| Comment     | The service name is an abstract name and represents the logical address of the service. In order to allow message routing the name must be unique in scope of the entire SC network. Service names must be agreed at the application level and are stored in the SC configuration. |
| Example     | nam=P01_RTXS_RPRWS1                                                                                                                                                                                                                                                                |

### 9.33 sessionId (sid)

|             |                                                                                                                                                                                                                                                                                                                                                                           |
|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Name        | sessionId                                                                                                                                                                                                                                                                                                                                                                 |
| Code        | sid                                                                                                                                                                                                                                                                                                                                                                       |
| Description | Unique identification of the session                                                                                                                                                                                                                                                                                                                                      |
| Validation  | Known session, length ≥ 0 and ≤ 256Byte                                                                                                                                                                                                                                                                                                                                   |
| Comment     | <p>The sessionId is allocated by SC to which the client is connected when it sends the request CLN_CREATE_SESSION. The sessionId is universally unique because multiple SC may exist in the same network. The client must set the sessionId in each message during the session.</p> <p>For publishing services the sessionId is allocated by SC to the client when it</p> |

|         |                                                                                       |
|---------|---------------------------------------------------------------------------------------|
|         | sends the request SUBSCRIBE message. Subscription is internally treated as a session. |
| Example | sid=cdc50b36-1fc4-4f9e-8430-d2e3d7284d9d                                              |

### 9.34 sessionInfo (sin)

|             |                                                                                          |
|-------------|------------------------------------------------------------------------------------------|
| Name        | sessionInfo                                                                              |
| Code        | sin                                                                                      |
| Description | Optional information passed by the client to the session server when the session starts. |
| Validation  | Any printable character, length $\geq 0$ and $\leq 256$ Byte                             |
| Comment     | This is used to pass additional authentication or authorization data to the server.      |
| Example     | sin=SNBZHP - TradingClientGUI 10.2.7                                                     |

### 9.35 srvRequersterId (srq)

|             |                                                                 |
|-------------|-----------------------------------------------------------------|
| Name        | srvReqId                                                        |
| Code        | srq                                                             |
| Description | Unique identification of the server requester                   |
| Validation  | Any printable character, length $> 0$ and $\leq 256$ Byte       |
| Comment     | Concatenation of IP address and port. Used for troubleshooting. |
| Example     | srq=128.45.3.12:1244                                            |

### 9.36 srvResponderId (srs)

|             |                                                                 |
|-------------|-----------------------------------------------------------------|
| Name        | srvResponderId                                                  |
| Code        | srs                                                             |
| Description | Unique identification of the server responder                   |
| Validation  | Any printable character, length $> 0$ and $\leq 256$ Byte       |
| Comment     | Concatenation of IP address and port. Used for troubleshooting. |
| Example     | srs=128.45.3.12:1244                                            |

## 10 Glossary

|                     |                                                                                                                                                                                                      |
|---------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Client</b>       | Piece of an application consuming services and initiating actions.                                                                                                                                   |
| <b>Server</b>       | Piece of an application providing services to clients.                                                                                                                                               |
| <b>Service</b>      | Abstract unit of work provided by the server and delivered to the client in order to implement a specific functionality. SC supports session, publishing and file services.                          |
| <b>Session</b>      | Temporary allocation of a dedicated server to a client. Session ensures information flow between a client and the allocated server. SC supports request/response sessions and subscription sessions. |
| <b>Call</b>         | A call represents a pair of a request and response.                                                                                                                                                  |
| <b>Command</b>      | A command dispatches specific actions on a server according to the incoming request.                                                                                                                 |
| <b>Request</b>      | Data structure created by the Client or SC in order to initiate an information exchange. It may contain one or more messages.                                                                        |
| <b>Response</b>     | Data structure created by the Server or SC in order to deliver the requested information. It may contain one or more messages.                                                                       |
| <b>Message</b>      | Basic transport instrument to exchange information between client, SC and the server. It belongs to a request or to a response.                                                                      |
| <b>Message Part</b> | Message part is a piece of a large message. Large message is splitted into parts.                                                                                                                    |
| <b>Composite</b>    | Data structure prepared to hold all message parts of a large message                                                                                                                                 |
| <b>Registry</b>     | Common list of known objects that ensures their uniqueness, organized in a way to find them easily.                                                                                                  |
| <b>Requester</b>    | Piece of code in SC or client initiating the information exchange                                                                                                                                    |
| <b>Responder</b>    | Piece of code in SC or server delivering the requested information                                                                                                                                   |
| <b>Connection</b>   | Network communication between client and SC or SC and the server                                                                                                                                     |

**Endpoint**

Network communication part on SC or server

CONFIDENTIAL

## Appendix A - Message Header Matrix

|                         |         | appErrorCode (aec) | appErrorText (aet) | bodyType (bty) | cacheId (cid) | cacheExpirationDateTime (ced) | clnRequesterId (crq) | cascadedMask (cma) | compression (cmp) | echoInterval (eci) | operationTimeout (oti) | immediateConnect (imc) | ipAddressList (ipl) | keepaliveInterval (kpl) | localDateTime (ldt) | messageId (mid) | messageInfo (min) | messageType (mty) | mask (msk) | maxConnections (mxc) | maxSessions (mxs) | noData (nod) | noDataInterval (noi) | originalMessageId (oml) | portNr (pnr) | rejectSession (rej) | remoteFileName (rfn) | scErrorCode (sec) | scErrorText (set) | scRequesterId (brq) | scResponderId (brs) | scVersion (ver) | serviceName (nam) | sessionId (sid) | sessionInfo (sin) | srvRequesterId (srq) | srvResponderId (srs) |   |
|-------------------------|---------|--------------------|--------------------|----------------|---------------|-------------------------------|----------------------|--------------------|-------------------|--------------------|------------------------|------------------------|---------------------|-------------------------|---------------------|-----------------|-------------------|-------------------|------------|----------------------|-------------------|--------------|----------------------|-------------------------|--------------|---------------------|----------------------|-------------------|-------------------|---------------------|---------------------|-----------------|-------------------|-----------------|-------------------|----------------------|----------------------|---|
| ATTACH                  | REQ     |                    |                    |                |               |                               | O                    |                    |                   |                    | O                      |                        |                     |                         | X                   |                 | X                 |                   |            |                      |                   |              |                      |                         |              |                     |                      |                   |                   |                     |                     |                 |                   |                 |                   |                      |                      |   |
|                         | RES     |                    |                    |                |               |                               |                      |                    |                   |                    |                        |                        |                     |                         |                     |                 | X                 |                   |            |                      |                   |              |                      |                         |              |                     |                      |                   |                   |                     |                     |                 |                   |                 |                   |                      |                      |   |
| DETACH                  | REQ     |                    |                    |                |               |                               | O                    |                    |                   |                    | O                      |                        |                     |                         | X                   |                 |                   | X                 |            |                      |                   |              |                      |                         |              |                     |                      |                   |                   |                     |                     |                 |                   |                 |                   |                      |                      |   |
|                         | RES     |                    |                    |                |               |                               |                      |                    |                   |                    |                        |                        |                     |                         |                     |                 | X                 |                   |            |                      |                   |              |                      |                         |              |                     |                      |                   |                   |                     |                     |                 |                   |                 |                   |                      |                      |   |
| INSPECT                 | REQ     |                    |                    | X              |               |                               |                      |                    | O                 |                    | O                      |                        | X                   |                         |                     |                 |                   | X                 |            |                      |                   |              |                      |                         |              |                     |                      |                   |                   |                     |                     |                 |                   |                 |                   |                      |                      |   |
|                         | RES     |                    |                    | X              |               |                               |                      |                    | O                 |                    |                        |                        | X                   |                         |                     |                 |                   | X                 |            |                      |                   |              |                      |                         |              |                     |                      |                   |                   |                     |                     |                 |                   |                 |                   |                      |                      |   |
| MANAGE                  | REQ     |                    |                    | X              |               |                               |                      |                    | O                 |                    | O                      |                        | X                   |                         |                     |                 |                   | X                 |            |                      |                   |              |                      |                         |              |                     |                      |                   |                   |                     |                     |                 |                   |                 |                   |                      |                      |   |
|                         | RES     |                    |                    | X              |               |                               |                      |                    | O                 |                    |                        |                        | X                   |                         |                     |                 |                   | X                 |            |                      |                   |              |                      |                         |              |                     |                      |                   |                   |                     |                     |                 |                   |                 |                   |                      |                      |   |
| CLN_CREATE_SESSION      | REQ     |                    |                    | O              |               |                               | O                    |                    | O                 | X                  | X                      |                        | X                   |                         |                     | X               |                   | X                 |            |                      |                   |              |                      |                         |              |                     |                      |                   |                   |                     |                     |                 |                   |                 | X                 |                      | O                    |   |
|                         | RES     | O                  | O                  | O              |               |                               |                      |                    | O                 |                    |                        |                        |                     |                         |                     | X               |                   | X                 |            |                      |                   |              |                      |                         |              |                     | O                    |                   |                   |                     |                     |                 |                   |                 | I                 | X                    |                      |   |
| SRV_CREATE_SESSION      | REQ     |                    |                    | O              |               |                               |                      |                    | O                 |                    | X                      |                        | X                   |                         |                     | X               |                   | X                 |            |                      |                   |              |                      |                         |              |                     |                      |                   |                   |                     |                     | O               |                   |                 | X                 | X                    | O                    |   |
|                         | RES     | O                  | O                  | O              |               |                               |                      |                    | O                 |                    |                        |                        |                     |                         |                     | X               |                   | X                 |            |                      |                   |              |                      |                         |              |                     |                      |                   |                   |                     |                     |                 |                   |                 | I                 | X                    |                      |   |
| CLN_DELETE_SESSION      | REQ     |                    |                    |                |               |                               | O                    |                    |                   |                    | X                      |                        |                     |                         |                     | X               |                   | X                 |            |                      |                   |              |                      |                         |              |                     |                      |                   |                   |                     |                     |                 |                   |                 | X                 | X                    |                      |   |
|                         | RES     |                    |                    |                |               |                               |                      |                    |                   |                    |                        |                        |                     |                         |                     | X               |                   | X                 |            |                      |                   |              |                      |                         |              |                     |                      |                   |                   |                     |                     |                 |                   |                 | I                 | X                    |                      |   |
| SRV_DELETE_SESSION      | REQ     |                    |                    |                |               |                               |                      |                    |                   |                    | X                      |                        |                     |                         |                     | X               |                   | X                 |            |                      |                   |              |                      |                         |              |                     |                      |                   |                   |                     |                     |                 |                   |                 | I                 | X                    |                      |   |
|                         | RES     |                    |                    |                |               |                               |                      |                    |                   |                    |                        |                        |                     |                         |                     | X               |                   | X                 |            |                      |                   |              |                      |                         |              |                     |                      |                   |                   |                     |                     |                 |                   |                 | I                 | X                    |                      |   |
| SRV_ABORT_SESSION       | REQ     |                    |                    |                |               |                               |                      |                    |                   |                    | X                      |                        |                     |                         |                     |                 |                   | X                 |            |                      |                   |              |                      |                         |              |                     |                      | X                 | X                 | O                   |                     |                 |                   |                 | I                 | X                    |                      |   |
|                         | RES     |                    |                    |                |               |                               |                      |                    |                   |                    |                        |                        |                     |                         |                     |                 |                   | X                 |            |                      |                   |              |                      |                         |              |                     |                      |                   |                   |                     |                     |                 |                   |                 | I                 | X                    |                      |   |
| REGISTER_SERVER         | REQ     |                    |                    |                |               |                               |                      |                    |                   |                    | O                      | O                      |                     | X                       | X                   |                 |                   | X                 |            |                      | O                 | X            |                      |                         |              |                     | X                    |                   |                   |                     |                     |                 |                   | X               | X                 |                      | O                    |   |
|                         | RES     |                    |                    |                |               |                               |                      |                    |                   |                    |                        |                        |                     |                         | X                   |                 |                   | X                 |            |                      |                   |              |                      |                         |              |                     |                      |                   |                   |                     |                     |                 |                   |                 | I                 |                      |                      |   |
| DEREGISTER_SERVER       | REQ     |                    |                    |                |               |                               |                      |                    |                   |                    | O                      |                        |                     |                         |                     |                 |                   | X                 |            |                      |                   |              |                      |                         |              |                     |                      |                   |                   |                     |                     |                 |                   |                 | X                 |                      | O                    |   |
|                         | RES     |                    |                    |                |               |                               |                      |                    |                   |                    |                        |                        |                     |                         |                     |                 |                   | X                 |            |                      |                   |              |                      |                         |              |                     |                      |                   |                   |                     |                     |                 |                   |                 | I                 |                      |                      |   |
| CLN_EXECUTE             | REQ/PRQ |                    |                    | O              | O             | O                             | O                    |                    | O                 |                    | X                      |                        |                     |                         |                     | X               | O                 | X                 |            |                      |                   |              |                      |                         |              |                     |                      |                   |                   |                     |                     |                 |                   |                 | X                 | X                    |                      |   |
|                         | RES/PRS | O                  | O                  | O              | O             | O                             |                      |                    | O                 |                    |                        |                        |                     |                         |                     | X               | O                 | X                 |            |                      |                   |              |                      |                         |              |                     |                      |                   |                   |                     |                     |                 |                   |                 | X                 | X                    |                      |   |
| SRV_EXECUTE             | REQ/PRQ |                    |                    | O              | O             | O                             |                      |                    | O                 |                    | X                      |                        |                     |                         |                     | X               | O                 | X                 |            |                      |                   |              |                      |                         |              |                     |                      |                   |                   |                     |                     | O               |                   |                 | X                 | X                    |                      |   |
|                         | RES/PRS | O                  | O                  | O              |               |                               |                      |                    | O                 |                    |                        |                        |                     |                         |                     | X               | O                 | X                 |            |                      |                   |              |                      |                         |              |                     |                      |                   |                   |                     |                     |                 |                   |                 | X                 | X                    |                      | O |
| ECHO                    | REQ     |                    |                    |                |               |                               | O                    |                    |                   |                    | X                      |                        |                     |                         |                     | X               |                   | X                 |            |                      |                   |              |                      |                         |              |                     |                      |                   |                   |                     |                     |                 |                   |                 | X                 | X                    |                      |   |
|                         | RES     |                    |                    |                |               |                               |                      |                    |                   |                    |                        |                        |                     |                         |                     | X               |                   | X                 |            |                      |                   |              |                      |                         |              |                     |                      |                   |                   |                     |                     |                 |                   |                 | X                 | X                    |                      |   |
| FILE_DOWNLOAD (FDO)     | REQ     |                    |                    |                |               |                               | O                    |                    |                   |                    | X                      |                        |                     |                         |                     |                 |                   | X                 |            |                      |                   |              |                      |                         |              |                     | X                    |                   |                   |                     |                     |                 |                   |                 | X                 |                      |                      |   |
|                         | RES     |                    |                    |                |               |                               |                      |                    | O                 |                    |                        |                        |                     |                         |                     |                 |                   | X                 |            |                      |                   |              |                      |                         |              |                     | X                    | E                 | E                 |                     |                     | O               |                   |                 | X                 |                      |                      |   |
| FILE_UPLOAD (FUP)       | REQ     |                    |                    |                |               |                               | O                    |                    | O                 |                    | X                      |                        |                     |                         |                     |                 |                   | X                 |            |                      |                   |              |                      |                         |              |                     | X                    |                   |                   |                     |                     |                 |                   |                 | X                 |                      |                      |   |
|                         | RES     |                    |                    |                |               |                               |                      |                    |                   |                    |                        |                        |                     |                         |                     |                 |                   | X                 |            |                      |                   |              |                      |                         |              |                     | X                    | E                 | E                 |                     |                     |                 |                   | X               |                   |                      |                      |   |
| FILE_LIST (FLI)         | REQ     |                    |                    |                |               |                               | O                    |                    |                   |                    | X                      |                        |                     |                         |                     |                 |                   | X                 |            |                      |                   |              |                      |                         |              |                     |                      |                   |                   |                     |                     |                 |                   |                 | X                 |                      |                      |   |
|                         | RES     |                    |                    |                |               |                               |                      |                    | O                 |                    |                        |                        |                     |                         |                     |                 |                   | X                 |            |                      |                   |              |                      |                         |              |                     |                      |                   |                   |                     |                     |                 |                   |                 | X                 |                      |                      |   |
| CLN_SUBSCRIBE           | REQ     |                    |                    |                |               |                               | O                    | O                  |                   |                    | X                      |                        | X                   |                         |                     |                 | X                 | X                 | X          |                      |                   |              | X                    |                         |              |                     |                      |                   |                   |                     |                     |                 |                   | X               |                   | O                    |                      |   |
|                         | RES     |                    |                    |                |               |                               |                      |                    | O                 |                    |                        |                        |                     |                         |                     |                 | X                 | X                 | X          |                      |                   |              |                      |                         |              |                     |                      | O                 |                   |                     |                     |                 |                   |                 | I                 | X                    |                      |   |
| SRV_SUBSCRIBE           | REQ     |                    |                    |                |               |                               |                      |                    | O                 |                    | X                      |                        | X                   |                         |                     |                 | X                 | X                 | X          |                      |                   |              |                      |                         |              |                     |                      |                   |                   |                     |                     |                 |                   |                 | X                 | X                    | O                    |   |
|                         | RES     | O                  | O                  |                |               |                               |                      |                    | O                 |                    |                        |                        |                     |                         |                     |                 | X                 | X                 | X          |                      |                   |              |                      |                         |              |                     |                      |                   |                   |                     |                     |                 |                   |                 | I                 | X                    |                      | O |
| CLN_CHANGE_SUBSCRIPTION | REQ     |                    |                    |                |               |                               | O                    | O                  |                   |                    | X                      |                        | X                   |                         |                     |                 | X                 | X                 | X          |                      |                   |              |                      |                         |              |                     |                      |                   |                   |                     |                     |                 |                   |                 | I                 | X                    | O                    |   |
|                         | RES     |                    |                    |                |               |                               |                      |                    | O                 |                    |                        |                        |                     |                         |                     |                 | X                 | X                 |            |                      |                   |              |                      |                         |              |                     |                      |                   |                   |                     |                     |                 |                   |                 | I                 | X                    |                      |   |
| SRV_CHANGE_SUBSCRIPTION | REQ     |                    |                    |                |               |                               |                      |                    | O                 |                    | X                      |                        | X                   |                         |                     |                 | X                 | X                 | X          |                      |                   |              |                      |                         |              |                     |                      |                   |                   |                     |                     |                 |                   |                 | I                 | X                    | O                    |   |
|                         | RES     | O                  | O                  | O              |               |                               |                      |                    |                   |                    |                        |                        |                     |                         |                     |                 | X                 | X                 |            |                      |                   |              |                      |                         |              |                     |                      |                   |                   |                     |                     |                 |                   |                 | I                 | X                    |                      | O |
| CLN_UNSUBSCRIBE         | REQ     |                    |                    |                |               |                               | O                    |                    |                   |                    | X                      |                        |                     |                         |                     |                 | X                 | X                 |            |                      |                   |              |                      |                         |              |                     |                      |                   |                   |                     |                     |                 |                   |                 | I                 | X                    |                      |   |
|                         | RES     |                    |                    |                |               |                               |                      |                    |                   |                    |                        |                        |                     |                         |                     |                 | X                 | X                 |            |                      |                   |              |                      |                         |              |                     |                      |                   |                   |                     |                     |                 |                   |                 | I                 | X                    |                      |   |
| SRV_UNSUBSCRIBE         | REQ     |                    |                    |                |               |                               |                      |                    |                   |                    | X                      |                        |                     |                         |                     |                 | X                 | X                 |            |                      |                   |              |                      |                         |              |                     |                      |                   |                   |                     |                     |                 |                   |                 | I                 | X                    |                      |   |
|                         | RES     |                    |                    |                |               |                               |                      |                    |                   |                    |                        |                        |                     |                         |                     |                 | X                 | X                 |            |                      |                   |              |                      |                         |              |                     |                      |                   |                   |                     |                     |                 |                   |                 | I                 | X                    |                      |   |
| RECEIVE_PUBLICATION     | REQ/PRQ |                    |                    |                |               |                               |                      |                    |                   |                    | O                      |                        |                     |                         |                     |                 | X                 | X                 |            |                      |                   |              |                      |                         |              |                     |                      |                   |                   |                     |                     |                 |                   |                 | X                 | X                    |                      |   |
|                         | RES/PRS |                    |                    | O              |               |                               |                      |                    | O                 |                    |                        |                        |                     |                         |                     |                 | X                 | O                 | X          | I                    |                   |              | O                    | X                       |              |                     |                      |                   |                   |                     |                     |                 |                   |                 | I                 | X                    |                      |   |
| PUBLISH                 | REQ/PRQ |                    |                    |                |               |                               |                      |                    | O                 |                    | O                      |                        |                     |                         |                     |                 | X                 | O                 | X          | X                    |                   |              |                      |                         |              |                     |                      |                   |                   |                     |                     |                 |                   |                 | X                 |                      | O                    |   |
|                         | RES/PRS |                    |                    |                |               |                               |                      |                    |                   |                    |                        |                        |                     |                         |                     |                 | X                 | X                 |            |                      |                   |              |                      |                         |              |                     |                      |                   |                   |                     |                     |                 |                   |                 | I                 |                      |                      |   |

Legend:  
X => required attribute  
O => optional attribute  
I => informational only  
E => EXC exception message only

Headline Keys:  
REQ => request  
RES => response  
PRQ => part request (large message)  
PRS => part response (large message)  
KRQ => keepalive request  
KRS => keepalive response  
EXC => exception



## Appendix B – Error Codes and Messages

Code ranges:

- 400 – 499 => Client
- 500 – 599 => Server
- 600 – 699 => ServiceConnector

Errors are derived from HTTP error codes definitions. (<http://www.w3.org/Protocols/rfc2616/rfc2616-sec10.html>)

| Code | Internal Mnemonic            | Text                                                                                                                                              |
|------|------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------|
| 400  | BAD_REQUEST                  | Bad request. The request could not be understood by the server due to malformed syntax.                                                           |
| 404  | NOT_FOUND                    | Not found.                                                                                                                                        |
| 408  | REQUEST_TIMEOUT              | Request Timeout. The client did not produce a request within the time that the server was prepared to wait.                                       |
| 420  | HV_ERROR                     | Validation error occurred.                                                                                                                        |
|      | HV_WRONG_SC_VERSION_FORMAT   | Invalid sc version format.                                                                                                                        |
|      | HV_WRONG_SC_RELEASE_NR       | Invalid sc release nr.                                                                                                                            |
|      | HV_WRONG_SC_REVISION_NR      | Invalid sc revision nr.                                                                                                                           |
|      | HV_WRONG_SCMP_VERSION_FORMAT | Invalid scmp version format.                                                                                                                      |
|      | HV_WRONG_SCMP_VERSION_NR     | Invalid scmp version nr.                                                                                                                          |
|      | HV_WRONG_SCMP_RELEASE_NR     | Invalid scmp release nr.                                                                                                                          |
|      | HV_WRONG_LDT                 | Parsing localDateTime failed.                                                                                                                     |
|      | HV_WRONG_SCMP_RELEASE_NR     | Invalid scmp release nr.                                                                                                                          |
|      | HV_WRONG_LDT                 | Parsing localDateTime failed.                                                                                                                     |
|      | HV_WRONG_IPLIST_FORMAT       | Invalid iplist format.                                                                                                                            |
|      | HV_WRONG_MAX_SESSIONS        | Invalid maxSessions field.                                                                                                                        |
|      | HV_WRONG_ECHO_TIMEOUT        | Invalid echoTimeout field.                                                                                                                        |
|      | HV_WRONG_ECHO_INTERVAL       | Invalid echoInterval field.                                                                                                                       |
|      | HV_WRONG_PORTNR              | Invalid portNr field.                                                                                                                             |
|      | HV_WRONG_KEEPALIVE_INTERVAL  | Invalid keepalive interval field.                                                                                                                 |
|      | HV_WRONG_NODATA_INTERVAL     | Invalid not data interval field.                                                                                                                  |
|      | HV_WRONG_MASK                | Invalid mask.                                                                                                                                     |
|      | HV_WRONG_SESSION_INFO        | Invalid session info field.                                                                                                                       |
|      | HV_WRONG_SERVICE_NAME        | Invalid service name field.                                                                                                                       |
|      | HV_WRONG_MESSAGE_INFO        | Invalid message info field.                                                                                                                       |
|      | HV_WRONG_MESSAGE_ID          | Invalid message id field.                                                                                                                         |
|      | HV_WRONG_SESSION_ID          | Invalid session id field.                                                                                                                         |
|      | HV_WRONG_SC_ERROR_CODE       | Invalid sc error code field.                                                                                                                      |
|      | HV_WRONG_SC_ERROR_TEXT       | Invalid sc error text field.                                                                                                                      |
|      | V_WRONG_CONFIGURATION_FILE   | Invalid configuration file.                                                                                                                       |
|      |                              |                                                                                                                                                   |
| 500  | SERVER_ERROR                 | Server error.                                                                                                                                     |
| 504  | GATEWAY_TIMEOUT              | Gateway Timeout. The server, while acting as a gateway or proxy, did not receive a timely response from the upstream server specified by the URI. |
|      |                              |                                                                                                                                                   |
| 600  | SC_ERROR                     | Service Connector error.                                                                                                                          |
| 601  | NO_FREE_SERVER               | No free server.                                                                                                                                   |
| 602  | SERVER_ALREADY_REGISTERED    | Server already registered for the service.                                                                                                        |
| 606  | FRAME_DECODER                | Not possible to decode frame, scmp header line wrong.                                                                                             |
| 610  | CONNECTION_EXCEPTION         | Connection error.                                                                                                                                 |

# Index

No index entries found.

CONFIDENTIAL