Berlin Blues BBS - program flowcharts (PAP, DIN 66001 / ISO 5807)


Atari XL + FujiNet, cc65 - single line telnet BBS. Pages: 1 main 2 call 3 login 4 menu 5 input/sysop



Terminal: start / end / return



Process (operation)

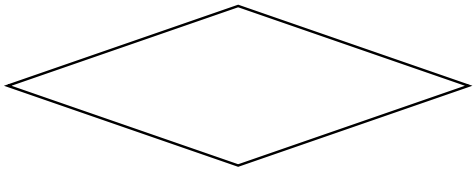

Decision (branch)



Input / output (caller terminal or Atari console)



Subroutine call (detail on another page or in code)




Connector: the flow continues at the circle with the same letter

Every wait for a caller key (page 5) also serves the sysop console:
A = sysop present, C = chat, K = kick caller, L = local login, Q = quit BBS.
All times use ELAPSED() so the RTCLOK wrap every 3.9 days is harmless.


1 Main program main()

src/bbs.c - boot, SD wait, listener, idle loop

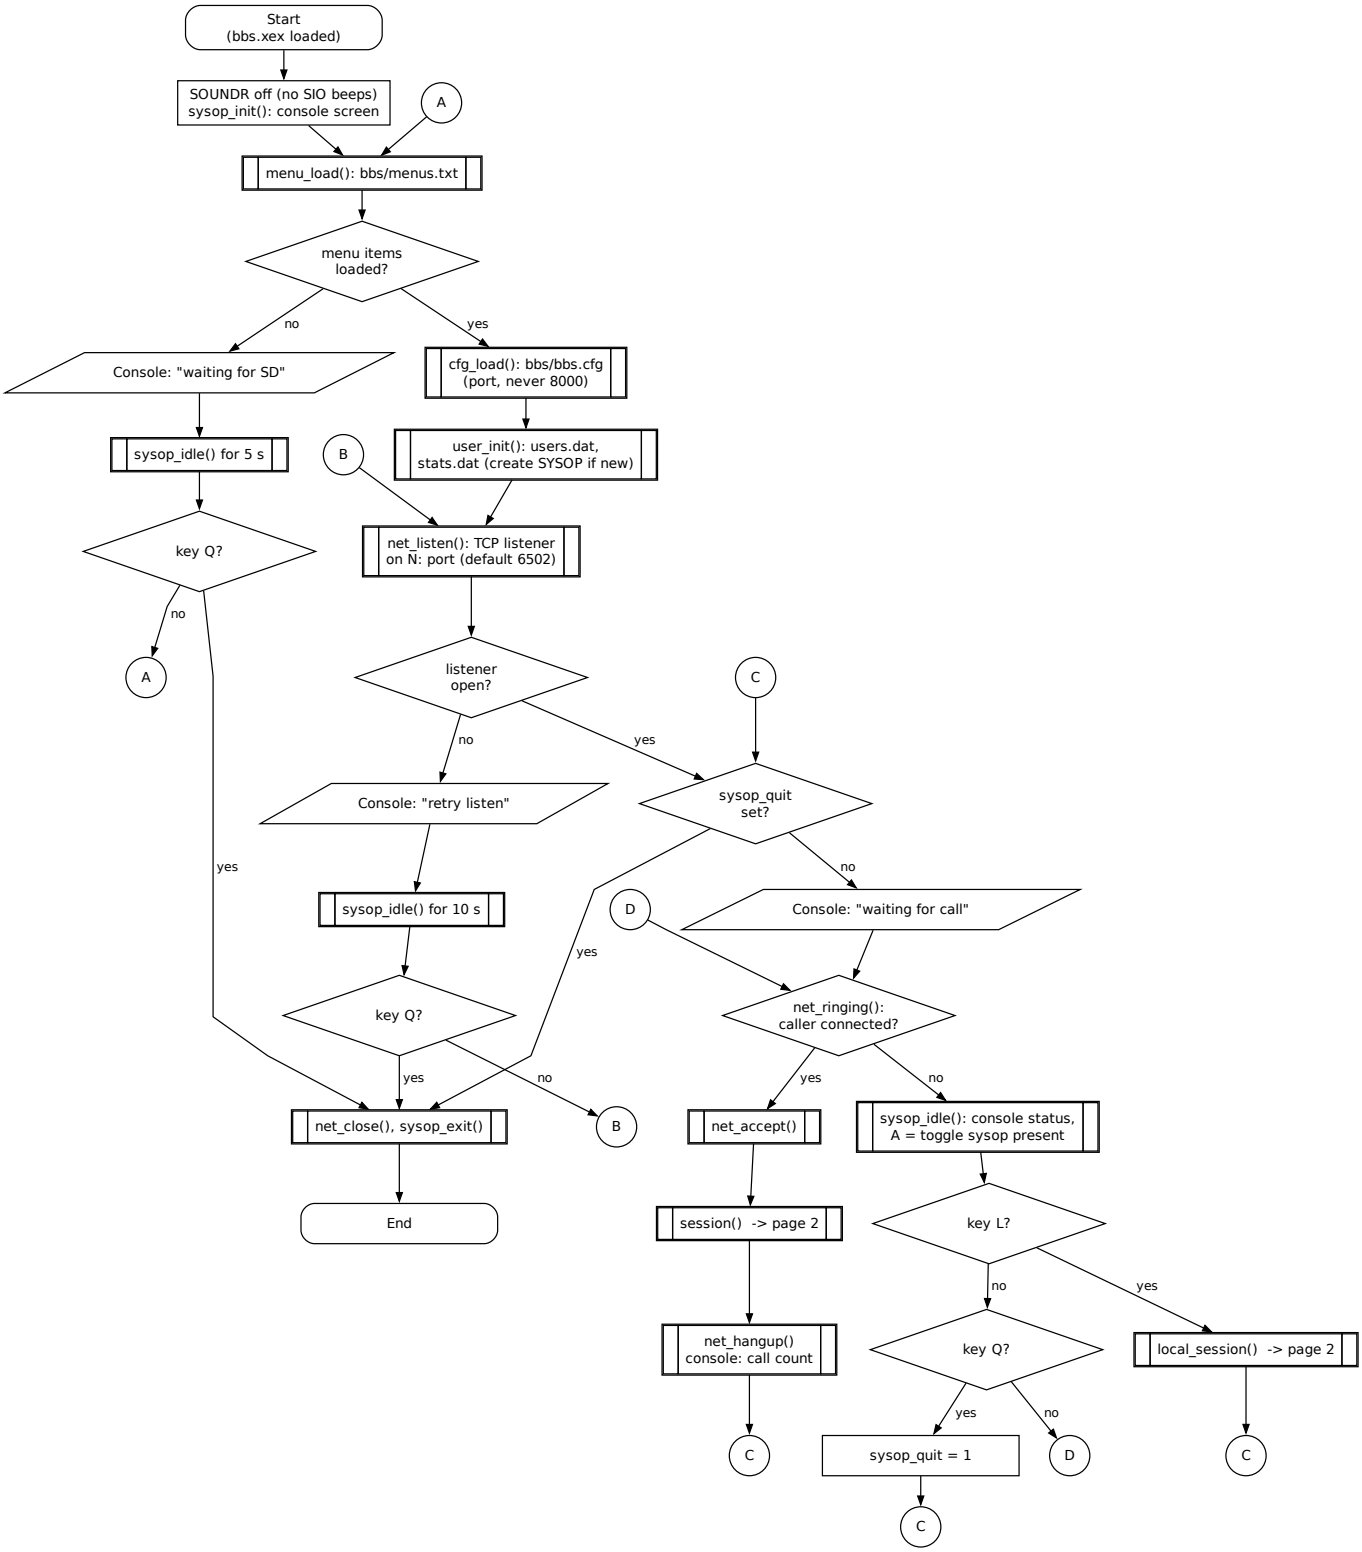


2 Call session() / local_session()

src/bbs.c, term.c, user.c, pm.c, board.c

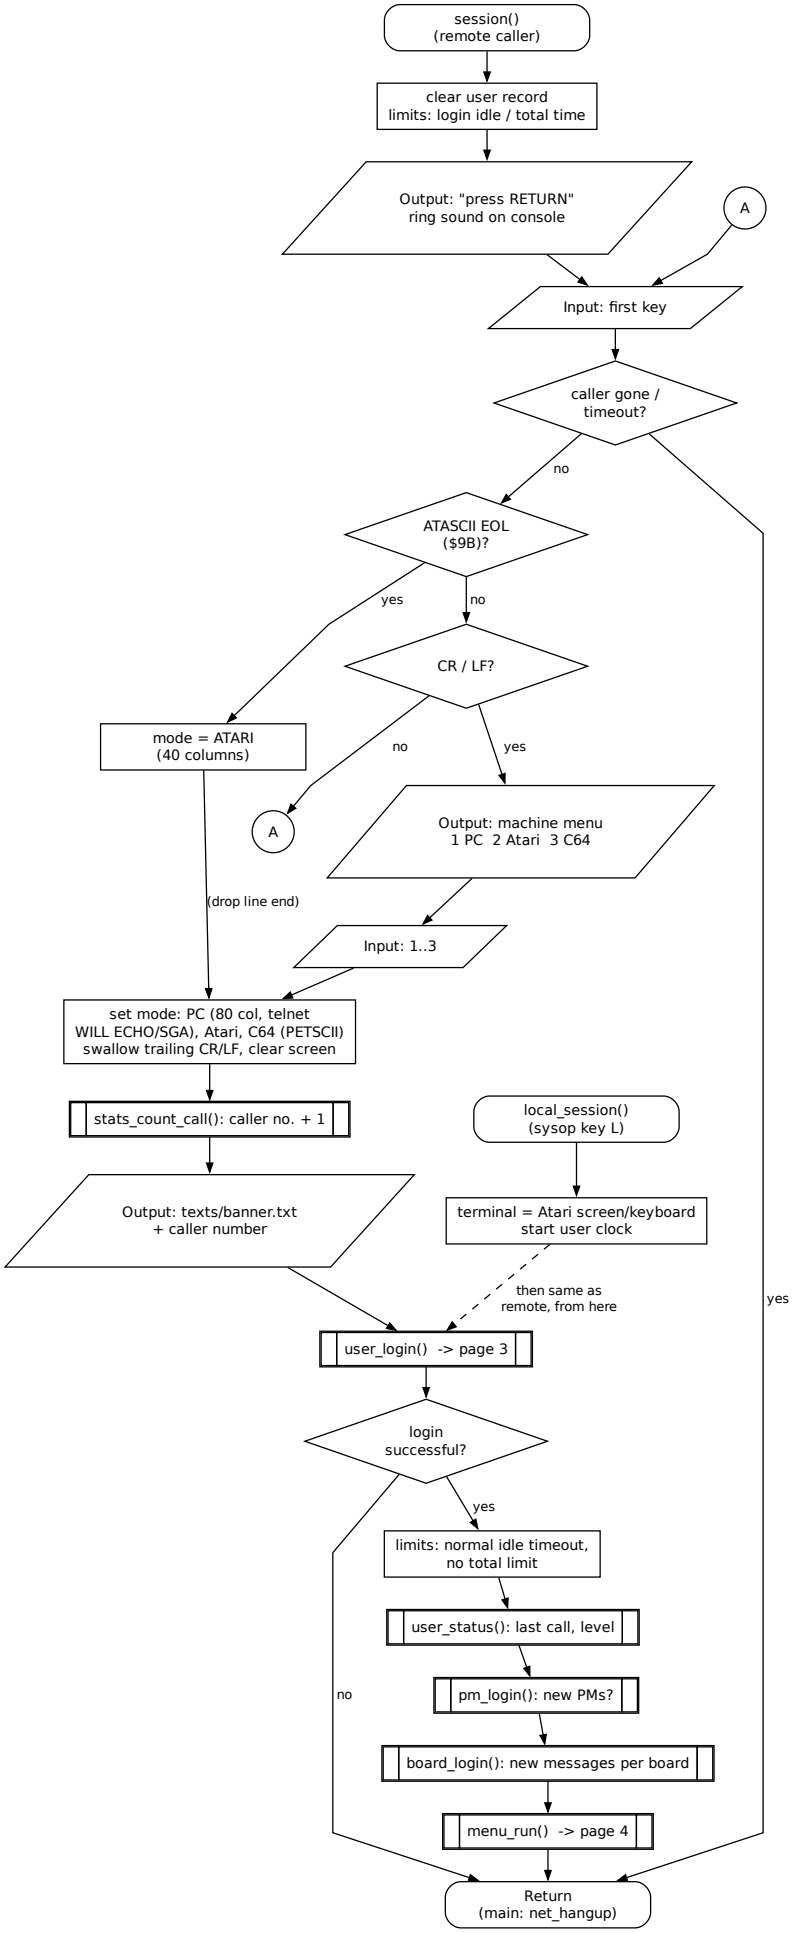


3 Login user_login()

src/user.c

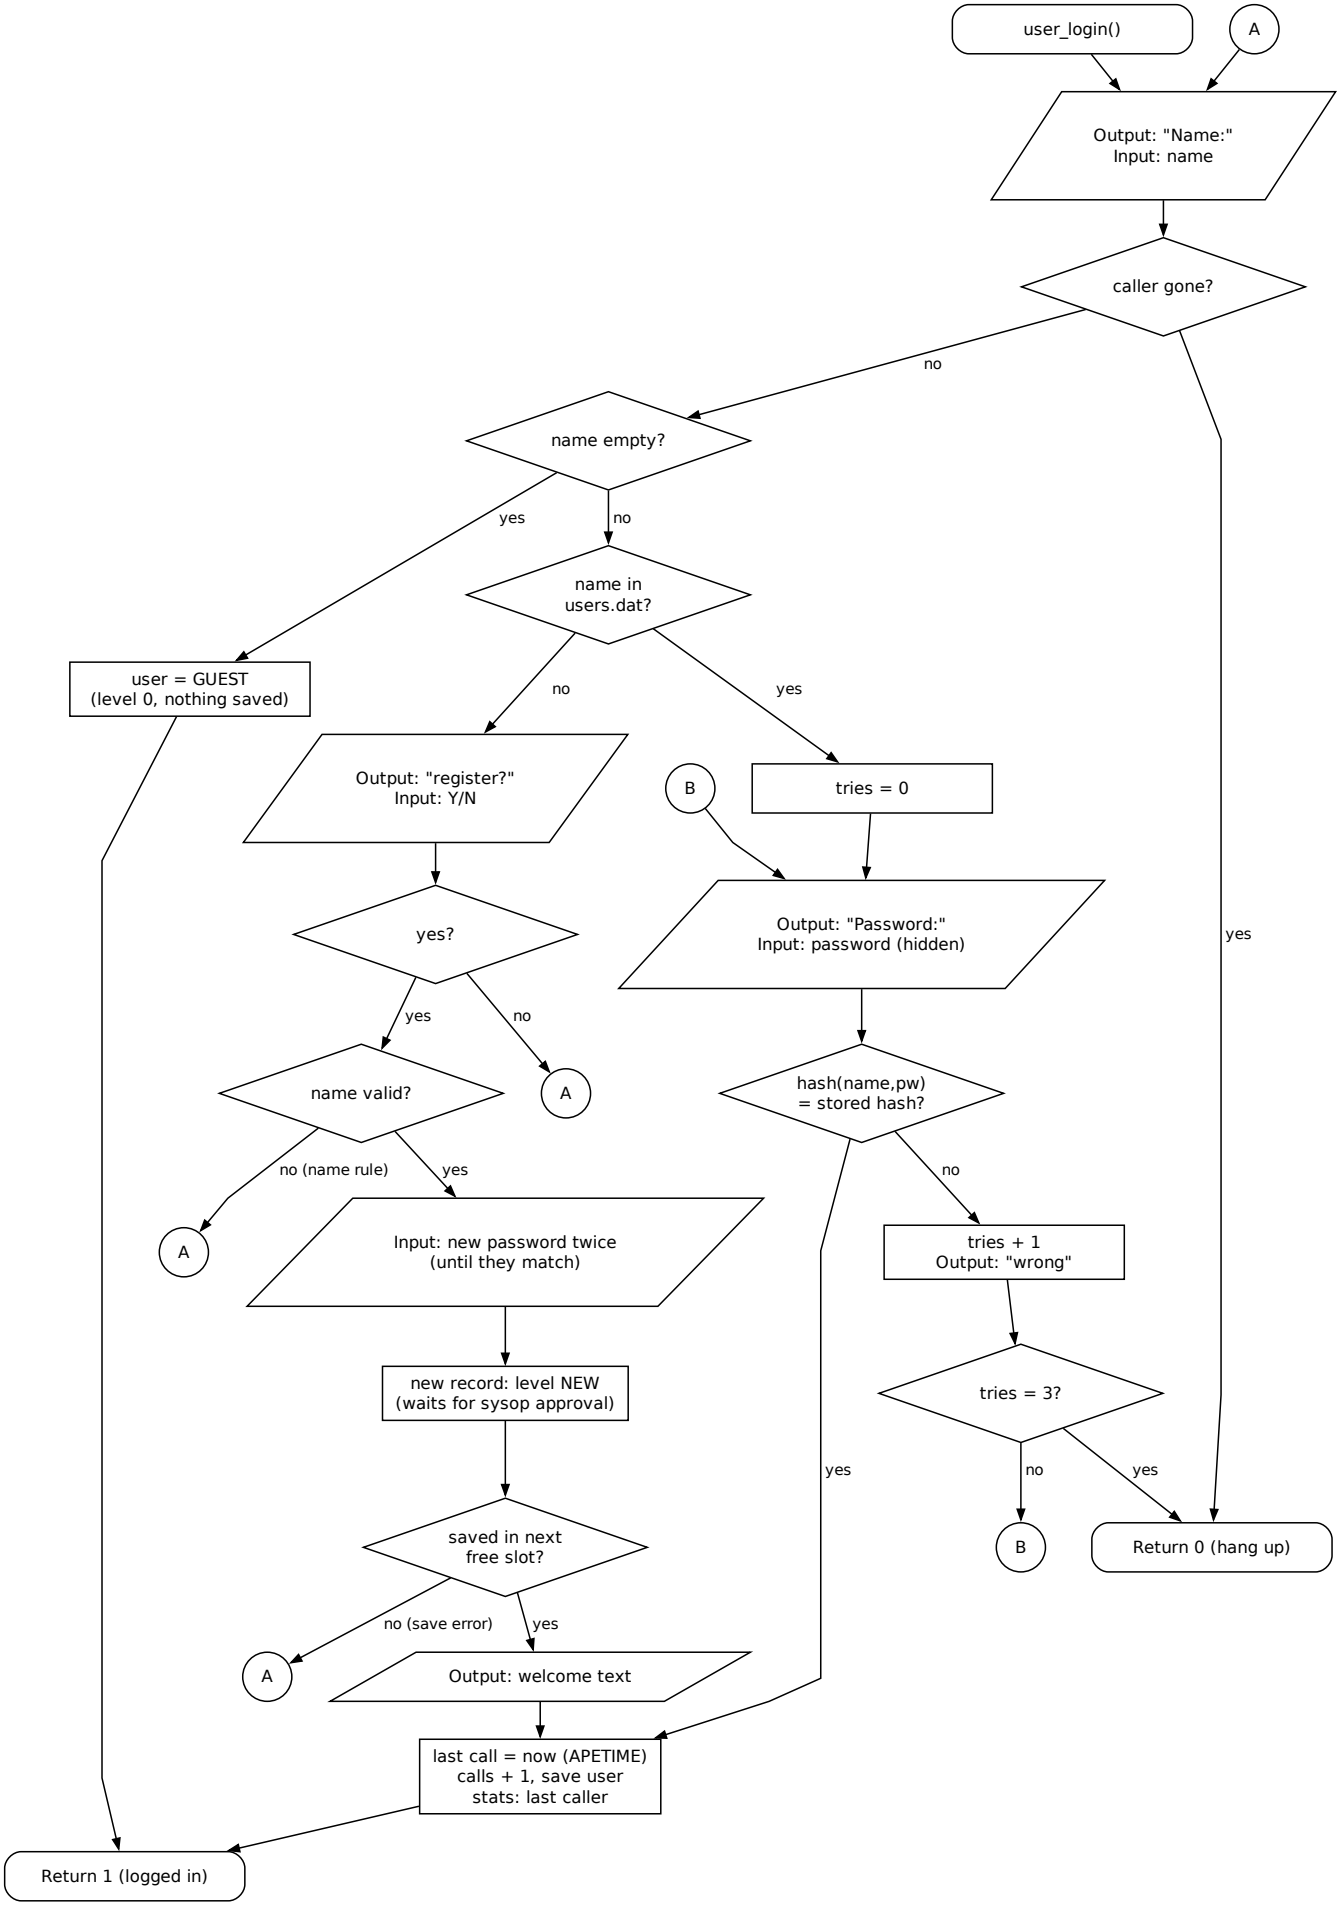

4 Menu navigation menu_run()

src/menu.c, board.c - digits select, * = main menu, RETURN = back, 0 = logoff; chains like *42 work

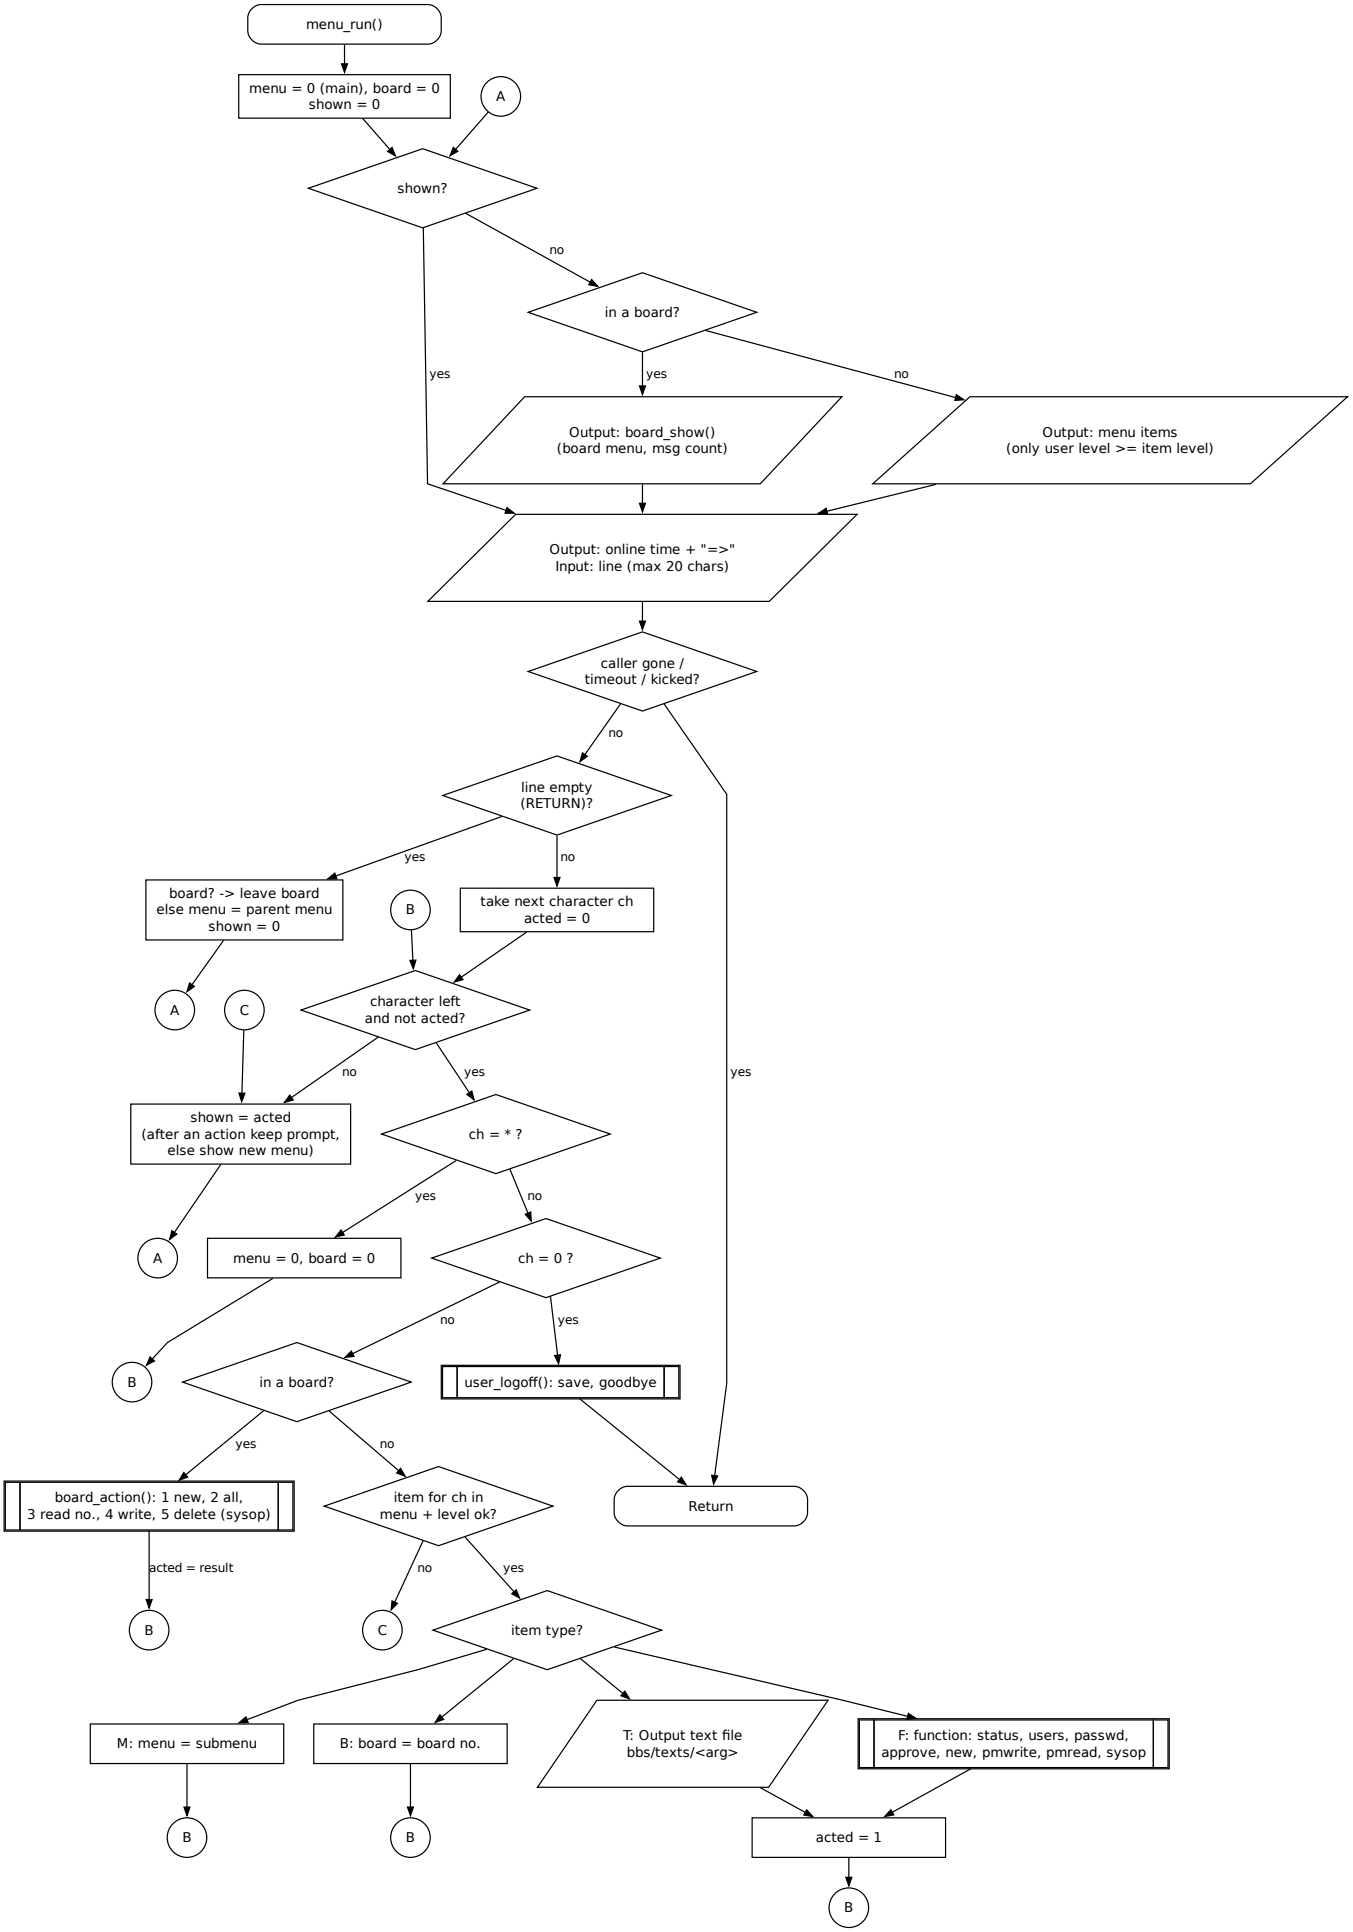

5 Key input with timeout and sysop console raw_getc() / sysop_poll()

src/term.c, sysop.c - every wait for a caller key also serves the sysop console

