

```
C:\Users\josem>docker ps
```

CONTAINER ID	IMAGE	COMMAND	CREATED	STATUS	PORTS	NAMES
C:\Users\josem>docker pull mysql:8.0						
8.0: Pulling from library/mysql						
4f7cfd23b111: Pull complete						
fe997c72f3e9: Pull complete						
62f1cc0a64ca: Pull complete						
38fe0e0986de: Pull complete						
caa784df8611: Pull complete						
c689d1836928: Pull complete						
a0db31010df3: Pull complete						
b723faee7585: Pull complete						
139627f60883: Pull complete						
09b552d72653: Pull complete						
5ea08437b3cf: Download complete						
cc9a862b4c10: Download complete						
Digest: sha256:d0304ed9fdb64a3f6c7ad11a5fb4f13abfc10e6dfa3f288d652e7320c34df7f9						
Status: Downloaded newer image for mysql:8.0						
docker.io/library/mysql:8.0						

What's next:
View a summary of image vulnerabilities and recommendations → [docker scout quickview mysql:8.0](#)

```
C:\Users\josem>docker run --name mysql-sin-volumen -e MYSQL_ROOT_PASSWORD=root1234 -e MYSQL_DATABASE=tienda -e MYSQL_USER=usuario -e MYSQL_PASSWORD=pass1234 -p 3306:3306 -d mysql:8.0
857f8272471e9b77643aa5508c73c102065caeeaf74f3d7b010531c22ecf9a6
```

CONTAINER ID	IMAGE	COMMAND	CREATED	STATUS	PORTS	NAMES
857f8272471e	mysql:8.0	"docker-entrypoint.s..."	9 seconds ago	Up 5 seconds	0.0.0.0:3306->3306/tcp, [::]:3306->3306/tcp	mysql-sin-volumen

C:\Users\josem>

```
C:\Users\josem> docker exec -it mysql-sin-volumen mysql -u root -proot1234
mysql: [Warning] Using a password on the command line interface can be insecure.
Welcome to the MySQL monitor.  Commands end with ; or \g.
Your MySQL connection id is 8
Server version: 8.0.46 MySQL Community Server - GPL

Copyright (c) 2000, 2026, Oracle and/or its affiliates.

Oracle is a registered trademark of Oracle Corporation and/or its
affiliates. Other names may be trademarks of their respective
owners.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

mysql>
```

```
mysql> SELECT user FROM mysql.user WHERE user = 'usuario';
+-----+
| user |
+-----+
| usuario |
+-----+
1 row in set (0.03 sec)


mysql> GRANT ALL PRIVILEGES ON tienda.* TO 'usuario'@'%';
Query OK, 0 rows affected (0.08 sec)

mysql> FLUSH PRIVILEGES;
Query OK, 0 rows affected (0.04 sec)

mysql> EXIT;
Bye

What's next:
  Try Docker Debug for seamless, persistent debugging tools in any container or image → docker debug mysql-sin-volumen
  Learn more at https://docs.docker.com/go/debug-cli/

C:\Users\josem>
```

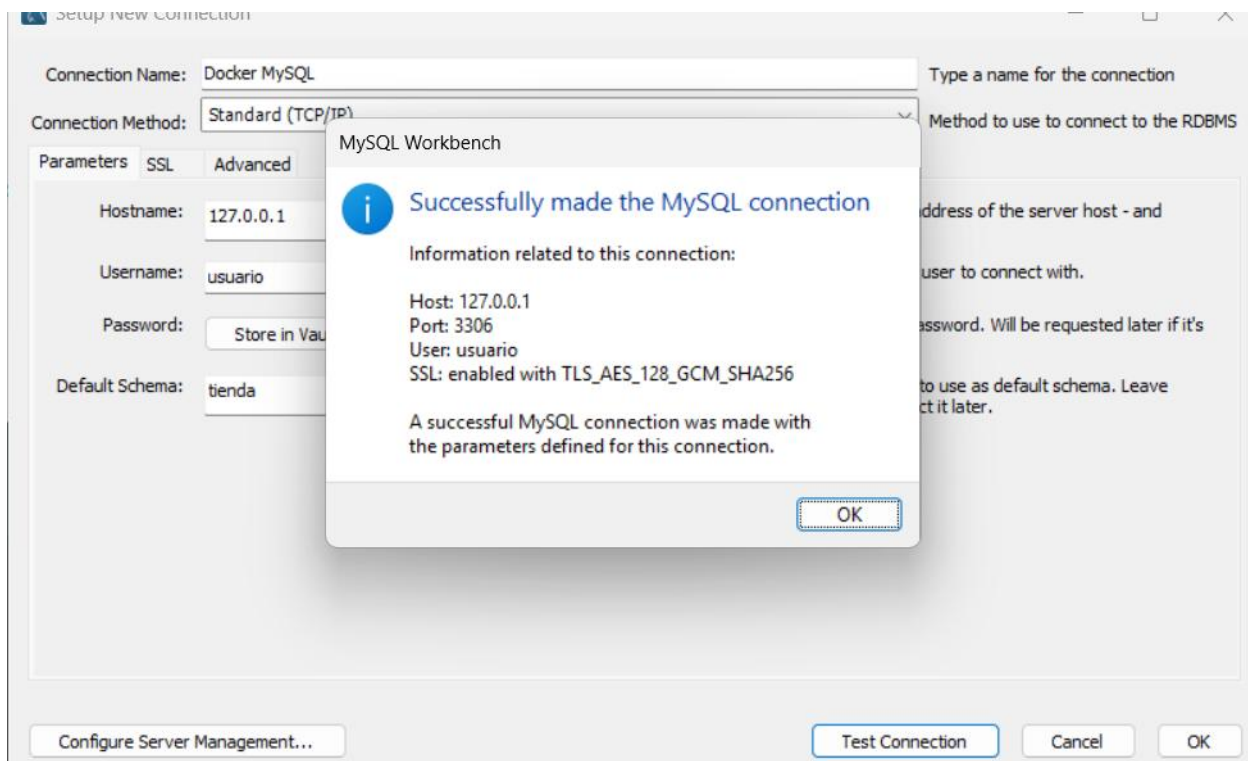

Query 1

```
1 USE tienda;
2
3 CREATE TABLE productos (
4     id INT AUTO_INCREMENT PRIMARY KEY,
5     nombre VARCHAR(100) NOT NULL,
6     precio DECIMAL(10,2),
7     stock INT DEFAULT 0
8 )
```

Result Grid

	id	nombre	precio	stock
1		Laptop	850.00	10
2		Teclado	45.50	50
3		Mouse	22.00	75
*	NULL	NULL	NULL	NULL

productos 1 x


Output

#	Time	Action	Message	Duration / Fetch
1	12:21:34	USE tienda	0 row(s) affected	0.016 sec
2	12:21:34	CREATE TABLE productos (id INT AUTO_INCREMENT PRIMARY KEY, nombre VARCHAR(100) NOT N...	0 row(s) affected	0.203 sec
3	12:21:35	INSERT INTO productos (nombre, precio, stock) VALUES ('Laptop', 850.00, 10), ('Teclado', 45.50, 50), ('Mouse'...	3 row(s) affected Records: 3 Duplicates: 0 Warnings: 0	0.063 sec
4	12:21:35	SELECT * FROM productos LIMIT 0, 1000	3 row(s) returned	0.016 sec / 0.000 sec

```
C:\Users\josem> docker stop mysql-sin-volumen
mysql-sin-volumen
```

```
C:\Users\josem> docker rm mysql-sin-volumen
mysql-sin-volumen
```

```
C:\Users\josem>
```

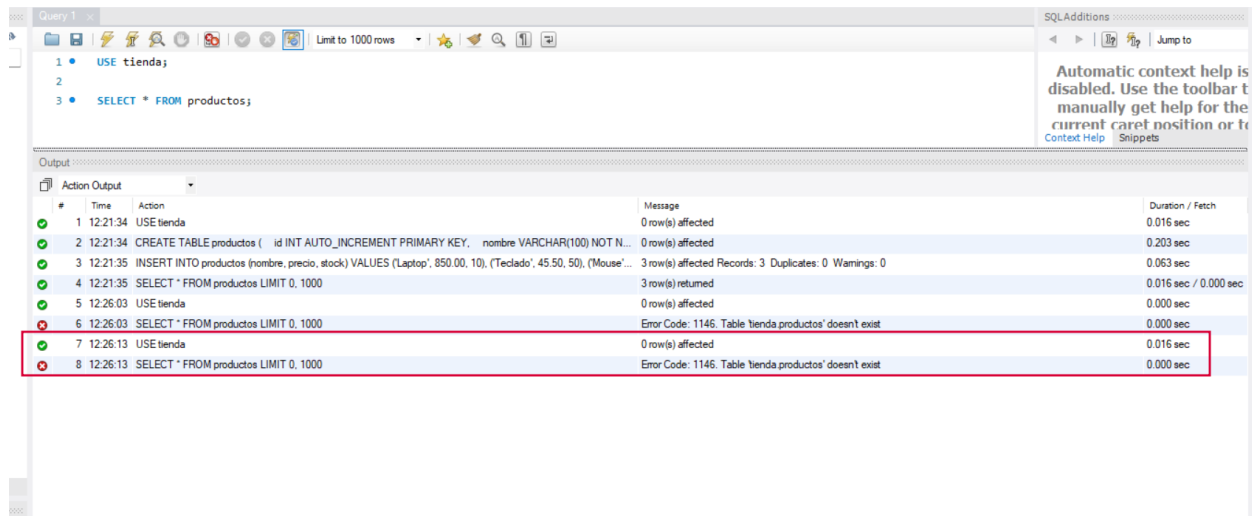

```
C:\Users\josem>docker stop mysql-sin-volumen
mysql-sin-volumen
```

```
C:\Users\josem>docker rm mysql-sin-volumen
mysql-sin-volumen
```

```
C:\Users\josem>cls
```

```
C:\Users\josem> docker volume create mysql_datos
mysql_datos
```

```
C:\Users\josem>docker volumen ls
docker: unknown command: docker volumen
```

Run 'docker --help' for more information

```
C:\Users\josem>docker volume ls
DRIVER      VOLUME NAME
local       1d5cef87275614f0c75dd501a645b2709af82879815ac058958f91ffaa703e6f
local       2ac57fdd2d64c28b08e445036b9c2a6a273a6ff0a4dedbc90b719ae4e32409ca
local       9891e58777489cf8f3272a15cf84d2b0f4ba8523d8af2737290d815cc1aa3784
local       c03c99d099a77cf16ff01d98c97800d174d179bc257dcefb50ef378bf5227b9
local       e0853b6dc2a47481a1fee45bf4969288871ed13965bd26634ad6cb32ccae3dfd
local       fb19c1fac8608784c7a67260e98e2ba28bcf4346ba155d314d165b7c09679cfd
local       mysql_datos
```

```
C:\Users\josem>
```



```
C:\Users\josem> docker run --name mysql-con-volumen -e MYSQL_ROOT_PASSWORD=root1234 -e MYSQL_DATABASE=tienda -e MYSQL_USER=usuario -e MYSQL_PASSWORD=pass1234 -p 3306:3306 -v mysql_datos:/var/lib/mysql -d mysql:8.0
0c383872df09ce7a8d6b74e5aec98b0489e3cbd51636c8fba51797ef71172049
```

```
mysql> CREATE USER 'usuario'@'%' IDENTIFIED WITH mysql_native_password BY 'pass1234';
ERROR 1396 (HY000): Operation CREATE USER failed for 'usuario'@'%'
mysql> GRANT ALL PRIVILEGES ON tienda.* TO 'usuario'@'>';
Query OK, 0 rows affected (0.13 sec)
```


```
mysql> FLUSH PRIVILEGES;
Query OK, 0 rows affected (0.04 sec)
```

```
mysql> EXIT;
Bye
```

What's next:

Try Docker Debug for seamless, persistent debugging tools in any container or image → [docker debug mysql-con-volumen](https://docs.docker.com/go/debug-cli/)
Learn more at <https://docs.docker.com/go/debug-cli/>

```
C:\Users\josem>
```

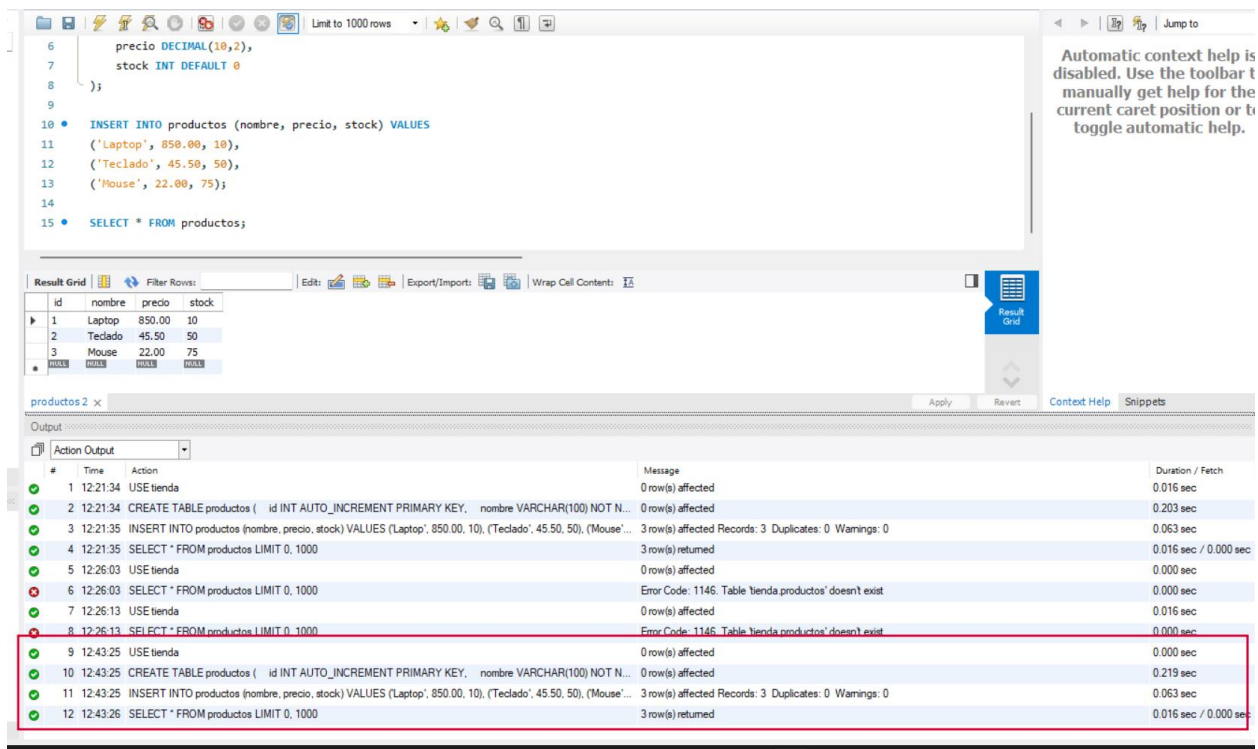

Automatic context help is disabled. Use the toolbar to manually get help for the current caret position or to toggle automatic help.

```
6  precio DECIMAL(10,2),
7  stock INT DEFAULT 0
8  );
9
10 • INSERT INTO productos (nombre, precio, stock) VALUES
11  ('Laptop', 850.00, 10),
12  ('Teclado', 45.50, 50),
13  ('Mouse', 22.00, 75);
14
15 • SELECT * FROM productos;
```

id	nombre	precio	stock
1	Laptop	850.00	10
2	Teclado	45.50	50
3	Mouse	22.00	75

productos 2 x

Output

#	Time	Action	Message	Duration / Fetch
1	12:21:34	USE tienda	0 row(s) affected	0.016 sec
2	12:21:34	CREATE TABLE productos (id INT AUTO_INCREMENT PRIMARY KEY, nombre VARCHAR(100) NOT N...	0 row(s) affected	0.203 sec
3	12:21:35	INSERT INTO productos (nombre, precio, stock) VALUES ('Laptop', 850.00, 10), ('Teclado', 45.50, 50), ('Mouse'...	3 row(s) affected Records: 3 Duplicates: 0 Warnings: 0	0.063 sec
4	12:21:35	SELECT * FROM productos LIMIT 0, 1000	3 row(s) returned	0.016 sec / 0.000 sec
5	12:26:03	USE tienda	0 row(s) affected	0.000 sec
6	12:26:03	SELECT * FROM productos LIMIT 0, 1000	Error Code: 1146. Table 'tienda.productos' doesn't exist	0.000 sec
7	12:26:13	USE tienda	0 row(s) affected	0.016 sec
8	12:26:13	SELECT * FROM productos LIMIT 0, 1000	Error Code: 1146. Table 'tienda.productos' doesn't exist	0.000 sec
9	12:43:25	USE tienda	0 row(s) affected	0.000 sec
10	12:43:25	CREATE TABLE productos (id INT AUTO_INCREMENT PRIMARY KEY, nombre VARCHAR(100) NOT N...	0 row(s) affected	0.219 sec
11	12:43:25	INSERT INTO productos (nombre, precio, stock) VALUES ('Laptop', 850.00, 10), ('Teclado', 45.50, 50), ('Mouse'...	3 row(s) affected Records: 3 Duplicates: 0 Warnings: 0	0.063 sec
12	12:43:26	SELECT * FROM productos LIMIT 0, 1000	3 row(s) returned	0.016 sec / 0.000 sec

```
C:\Users\josem>docker stop mysql-con-volumen
mysql-con-volumen
```

```
C:\Users\josem>docker rm mysql-con-volumen
mysql-con-volumen
```

```
C:\Users\josem>docker ls
docker: unknown command: docker ls
```

Run 'docker --help' for more information

```
C:\Users\josem>docker volume ls
DRIVER      VOLUME NAME
local       1d5cef87275614f0c75dd501a645b2709af82879815ac058958f91ffaa703e6f
local       2ac57fdd2d64c28b08e445036b9c2a6a273a6ff0a4dedbc90b719ae4e32409ca
local       9891e58777489cf8f3272a15cf84d2b0f4ba8523d8af2737290d815cc1aa3784
local       c03c99d099a77cf16ff01d98c97800d174d179bc257dcefb50ef378bf5227b9
local       e0853b6dc2a47481a1fee45bf4969288871ed13965bd26634ad6cb32ccae3dfd
local       fb19c1fac8608784c7a67260e98e2ba28bcf4346ba155d314d165b7c09679cfd
local       mysql_datos
```

```
C:\Users\josem>
```

```
C:\Users\josem>docker run --name mysql-con-volumen -e MYSQL_ROOT_PASSWORD=root1234 -e MYSQL_DATABASE=tienda -e MYSQL_USER=usuario -e MYSQL_PASSWORD=pass1234 -p 3306:3306 -v mysql_datos:/var/lib/mysql -d mysql:8.0
28bbabc367e834031db30eb481781e20ced01bd445da3b92ca9295b632e7244d
```

The screenshot shows a MySQL client interface with a query result grid and an action output log. The query result grid displays the following data:

id	nombre	precio	stock
1	Laptop	850.00	10
2	Teclado	45.50	50

The action output log shows the following actions and messages:

#	Time	Action	Message	Duration / Fetch
1	12:21:34	USE tienda;	0 row(s) affected	0.016 sec
2	12:21:34	CREATE TABLE productos (id INT AUTO_INCREMENT PRIMARY KEY, nombre VARCHAR(100) NOT N...	0 row(s) affected	0.203 sec
3	12:21:35	INSERT INTO productos (nombre, precio, stock) VALUES ('Laptop', 850.00, 10), ('Teclado', 45.50, 50), ('Mouse'...	3 row(s) affected Records: 3 Duplicates: 0 Warnings: 0	0.063 sec
4	12:21:35	SELECT * FROM productos LIMIT 0, 1000	3 row(s) returned	0.016 sec / 0.000 sec
5	12:26:03	USE tienda	0 row(s) affected	0.000 sec
6	12:26:03	SELECT * FROM productos LIMIT 0, 1000	Error Code: 1146. Table 'tienda.productos' doesn't exist	0.000 sec
7	12:26:13	USE tienda	0 row(s) affected	0.016 sec
8	12:26:13	SELECT * FROM productos LIMIT 0, 1000	Error Code: 1146. Table 'tienda.productos' doesn't exist	0.000 sec
9	12:43:25	USE tienda	0 row(s) affected	0.000 sec
10	12:43:25	CREATE TABLE productos (id INT AUTO_INCREMENT PRIMARY KEY, nombre VARCHAR(100) NOT N...	0 row(s) affected	0.219 sec
11	12:43:25	INSERT INTO productos (nombre, precio, stock) VALUES ('Laptop', 850.00, 10), ('Teclado', 45.50, 50), ('Mouse'...	3 row(s) affected Records: 3 Duplicates: 0 Warnings: 0	0.053 sec
12	12:43:26	SELECT * FROM productos LIMIT 0, 1000	3 row(s) returned	0.016 sec / 0.000 sec
13	12:46:35	USE tienda	0 row(s) affected	0.015 sec
14	12:46:35	SELECT * FROM productos LIMIT 0, 1000	3 row(s) returned	0.015 sec / 0.000 sec

```
docker run --name mysql-con-volumen -e MYSQL_ROOT_PASSWORD=root1234 -e
MYSQL_DATABASE=tienda -e MYSQL_USER=usuario -e MYSQL_PASSWORD=pass1234 -p 3306:3306 -v
mysql_datos:/var/lib/mysql -d mysql:8.0
```

