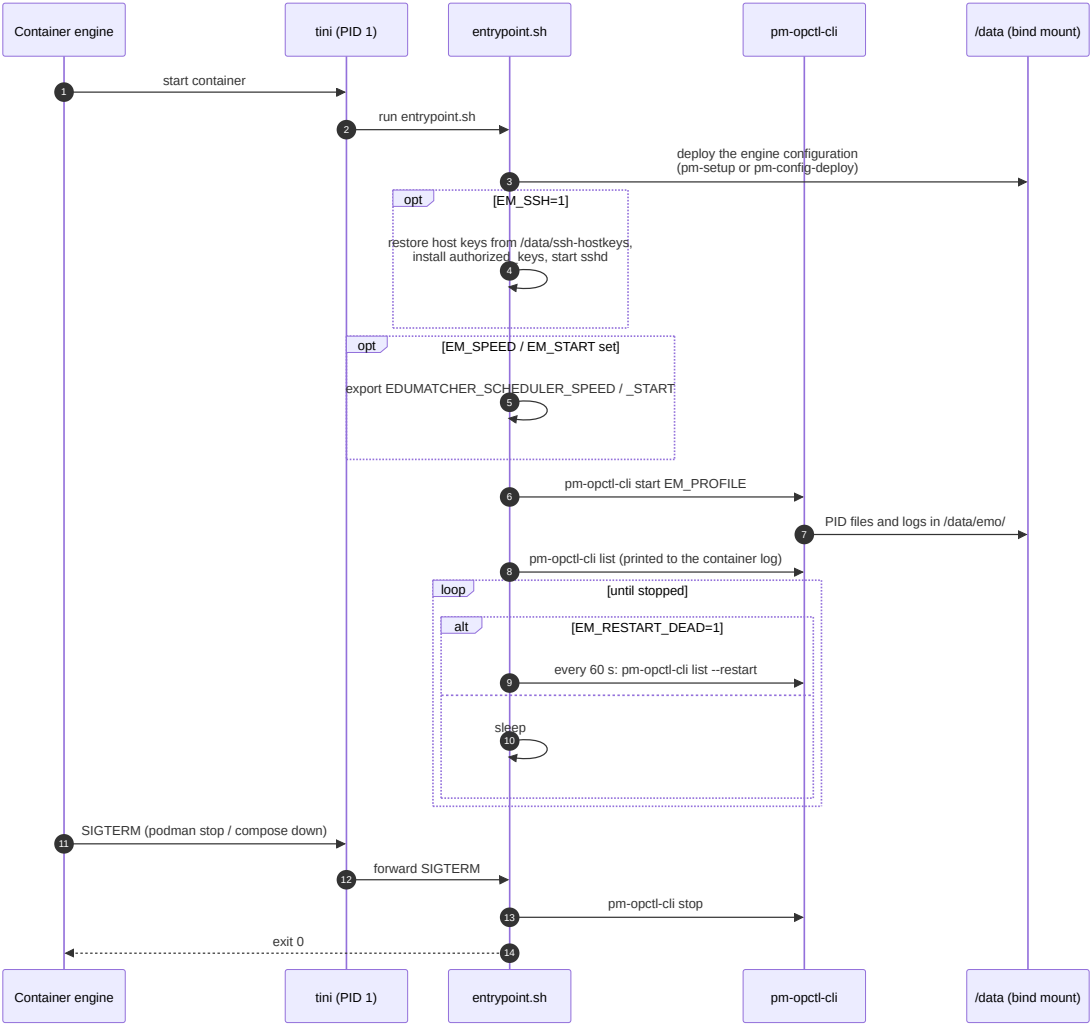
Container engine
tini (PID 1)
entrypoint.sh
pm-opctl-cli
/data (bind mount)
1
start container
2
run entrypoint.sh
3
deploy the engine configuration
(pm-setup or pm-config-deploy)
opt
[EM_SSH=1]
restore host keys from /data/ssh-hostkeys,
install authorized_keys, start sshd
4
opt
[EM_SPEED / EM_START set]
export EDUMATCHER_SCHEDULER_SPEED / _START
5
6
pm-opctl-cli start EM_PROFILE
7
PID files and logs in /data/emo/
8
pm-opctl-cli list (printed to the container log)
loop
[until stopped]
alt
[EM_RESTART_DEAD=1]
9
every 60 s: pm-opctl-cli list --restart
sleep
10
11
SIGTERM (podman stop / compose down)
12
forward SIGTERM
13
pm-opctl-cli stop
14
exit 0
Container engine
tini (PID 1)
entrypoint.sh
pm-opctl-cli
/data (bind mount)