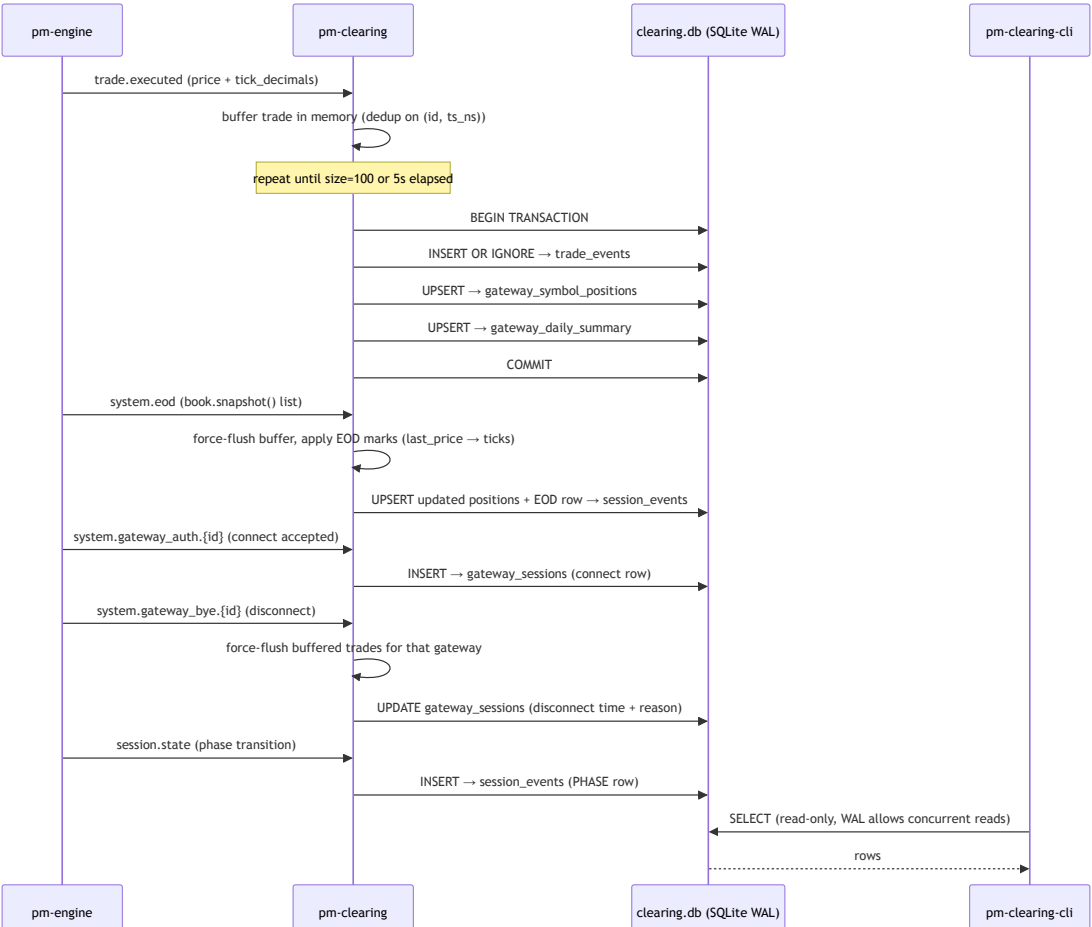
pm-engine
pm-clearing
clearing.db (SQLite WAL)
pm-clearing-cli
trade.executed (price + tick_decimals)
buffer trade in memory (dedup on (id, ts_ns))
repeat until size=100 or 5s elapsed
BEGIN TRANSACTION
INSERT OR IGNORE → trade_events
UPSERT → gateway_symbol_positions
UPSERT → gateway_daily_summary
COMMIT
system.eod (book.snapshot() list)
force-flush buffer, apply EOD marks (last_price → ticks)
UPSERT updated positions + EOD row → session_events
system.gateway_auth.{id} (connect accepted)
INSERT → gateway_sessions (connect row)
system.gateway_bye.{id} (disconnect)
force-flush buffered trades for that gateway
UPDATE gateway_sessions (disconnect time + reason)
session.state (phase transition)
INSERT → session_events (PHASE row)
SELECT (read-only, WAL allows concurrent reads)
rows
pm-engine
pm-clearing
clearing.db (SQLite WAL)
pm-clearing-cli