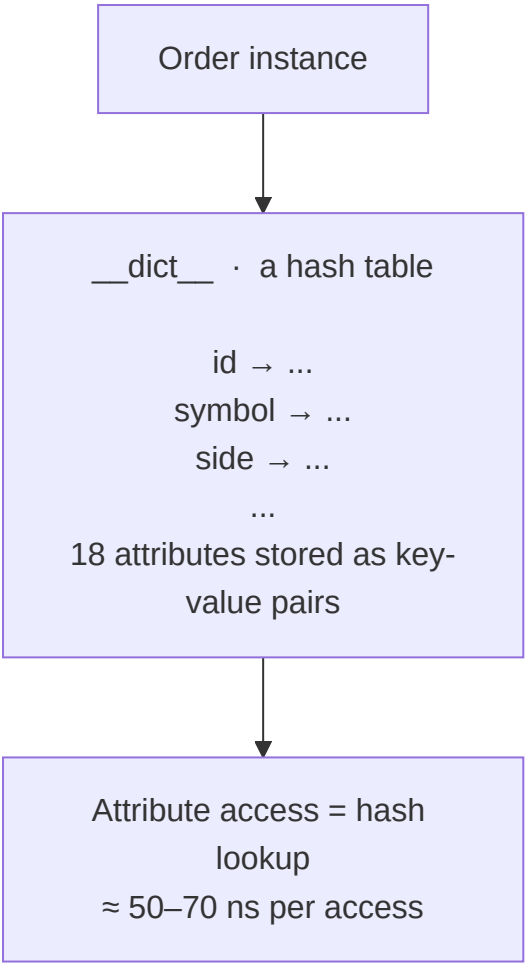
Order instance
__dict__ · a hash table
id → ...
symbol → ...
side → ...
...
18 attributes stored as key-value pairs
Attribute access = hash lookup
≈ 50–70 ns per access