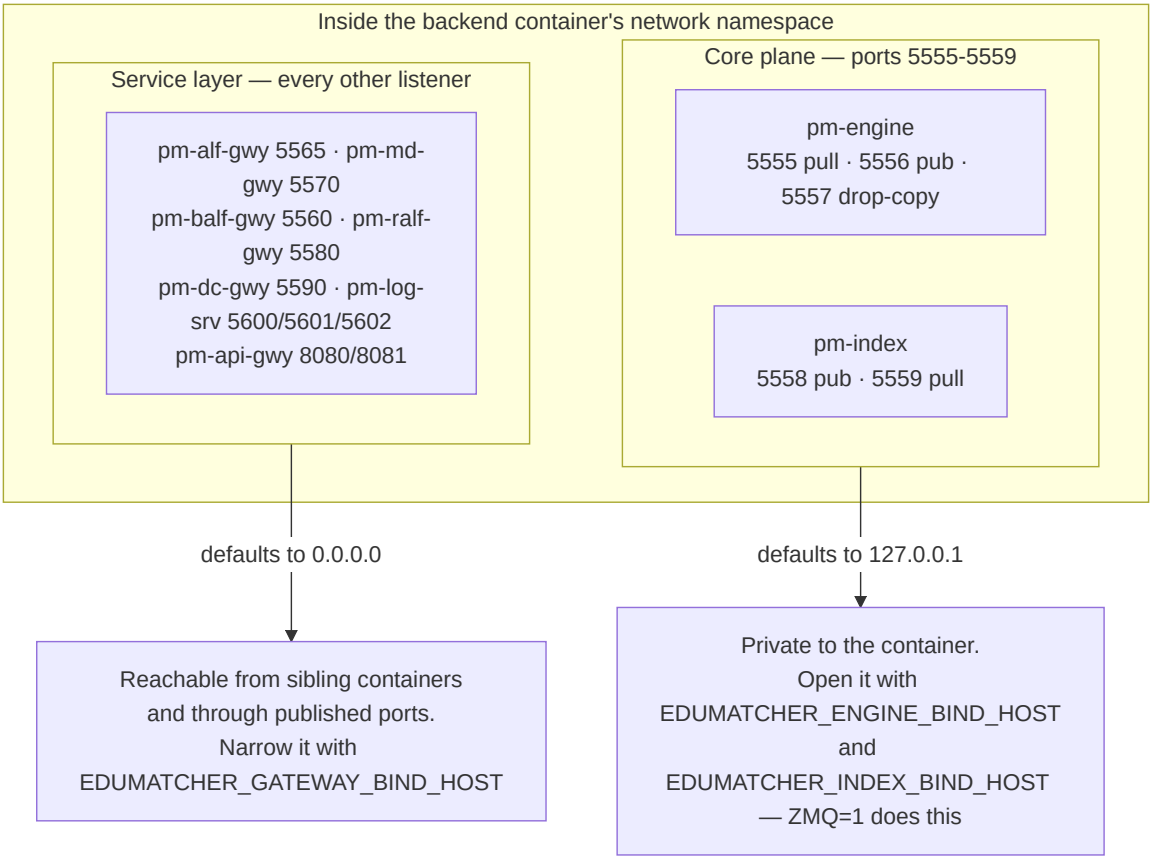
Inside the backend container's network namespace
Service layer — every other listener
pm-alf-gwy 5565 · pm-md-gwy 5570
pm-balf-gwy 5560 · pm-ralf-gwy 5580
pm-dc-gwy 5590 · pm-log-srv 5600/5601/5602
pm-api-gwy 8080/8081
Core plane — ports 5555-5559
pm-engine
5555 pull · 5556 pub ·
5557 drop-copy
pm-index
5558 pub · 5559 pull
defaults to 0.0.0.0
defaults to 127.0.0.1
Reachable from sibling containers
and through published ports.
Narrow it with
EDUMATCHER_GATEWAY_BIND_HOST
Private to the container.
Open it with
EDUMATCHER_ENGINE_BIND_HOST
and
EDUMATCHER_INDEX_BIND_HOST
— ZMQ=1 does this