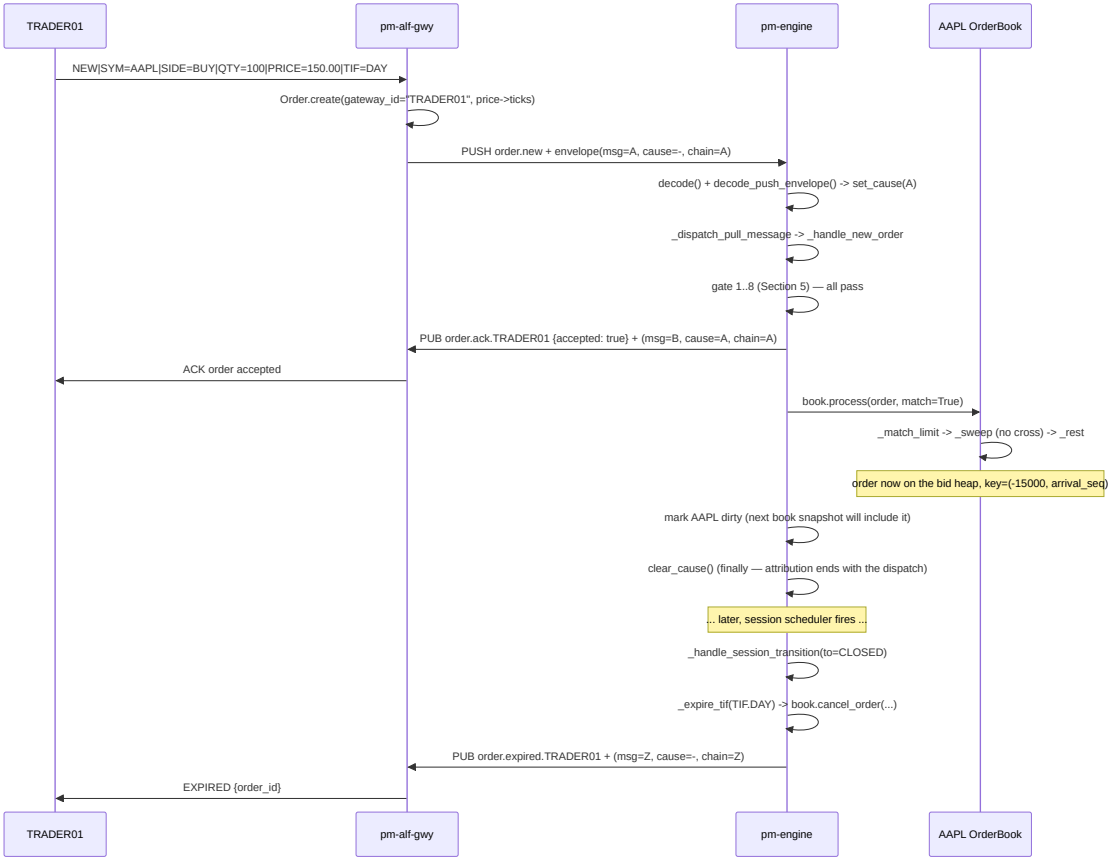
TRADER01
pm-alf-gwy
pm-engine
AAPL OrderBook
NEW|SYM=AAPL|SIDE=BUY|QTY=100|PRICE=150.00|TIF=DAY
Order.create(gateway_id="TRADER01", price->ticks)
PUSH order.new + envelope(msg=A, cause=-, chain=A)
decode() + decode_push_envelope() -> set_cause(A)
_dispatch_pull_message -> _handle_new_order
gate 1..8 (Section 5) — all pass
PUB order.ack.TRADER01 {accepted: true} + (msg=B, cause=A, chain=A)
ACK order accepted
book.process(order, match=True)
_match_limit -> _sweep (no cross) -> _rest
order now on the bid heap, key=(-15000, arrival_seq)
mark AAPL dirty (next book snapshot will include it)
clear_cause() (finally — attribution ends with the dispatch)
... later, session scheduler fires ...
_handle_session_transition(to=CLOSED)
_expire_tif(TIF.DAY) -> book.cancel_order(...)
PUB order.expired.TRADER01 + (msg=Z, cause=-, chain=Z)
EXPIRED {order_id}
TRADER01
pm-alf-gwy
pm-engine
AAPL OrderBook