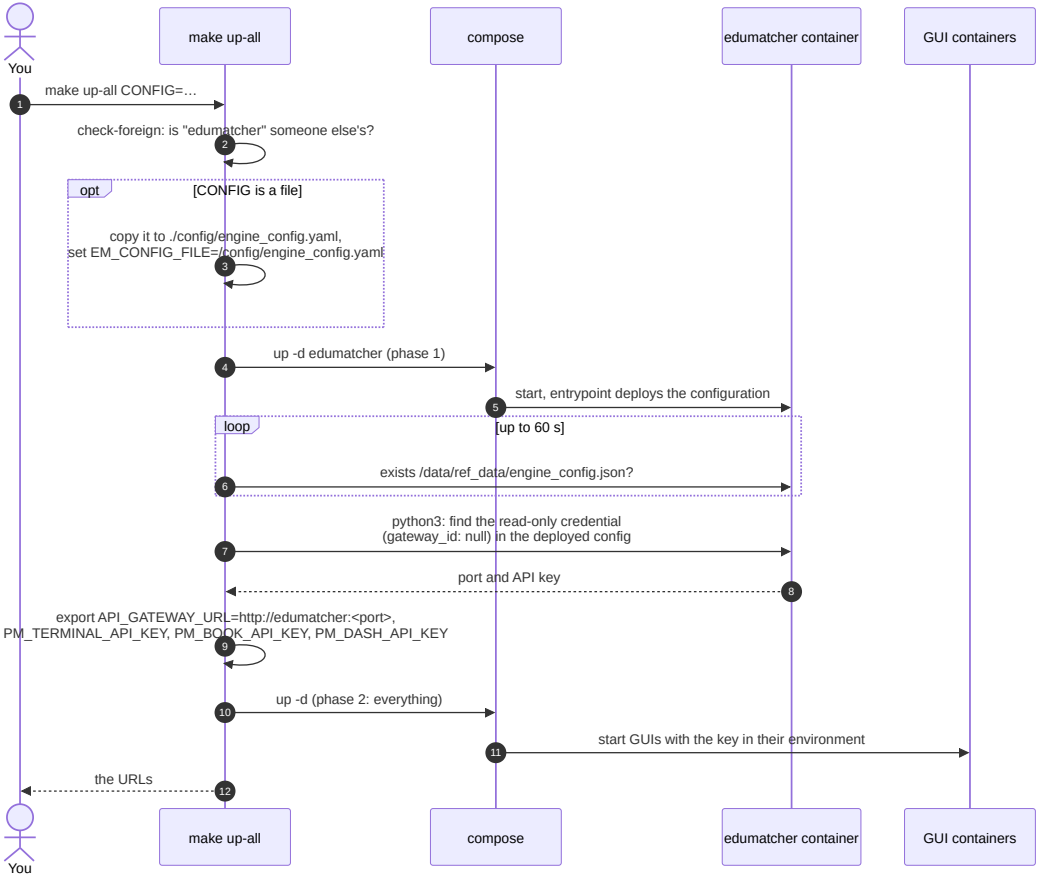
You
make up-all
compose
edumatcher container
GUI containers
make up-all CONFIG=…
1
check-foreign: is "edumatcher" someone else's?
2
opt
[CONFIG is a file]
copy it to ./config/engine_config.yaml,
set EM_CONFIG_FILE=/config/engine_config.yaml
3
up -d edumatcher (phase 1)
4
start, entrypoint deploys the configuration
5
loop
[up to 60 s]
exists /data/ref_data/engine_config.json?
6
python3: find the read-only credential
(gateway_id: null) in the deployed config
7
port and API key
8
export API_GATEWAY_URL=http://edumatcher:<port>,
PM_TERMINAL_API_KEY, PM_BOOK_API_KEY, PM_DASH_API_KEY
9
up -d (phase 2: everything)
10
start GUIs with the key in their environment
11
the URLs
12
make up-all
compose
edumatcher container
GUI containers
You