
Stopped systematic campaign: figure atlas

11 September 2026

Partial results; campaign cancelled at the requested stopping point.


No unmeasured results are imputed. PPML has pilot evidence only and is tabulated in the discussion report. Each panel is a separate vector PDF combined through LaTeX subcaption. Observation panels use either four cores or maximum program capacity. Core panels hold N at 983,040.

Figure 1: OLS One FE: stata, maximum capacity

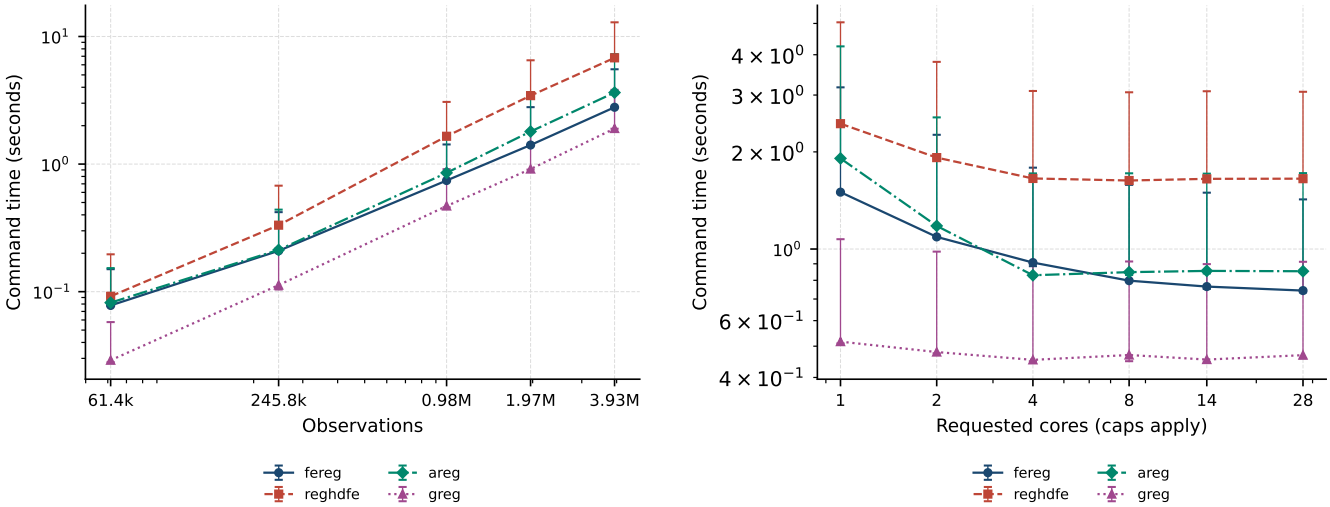

(a) Time by observations

(b) Time by requested cores

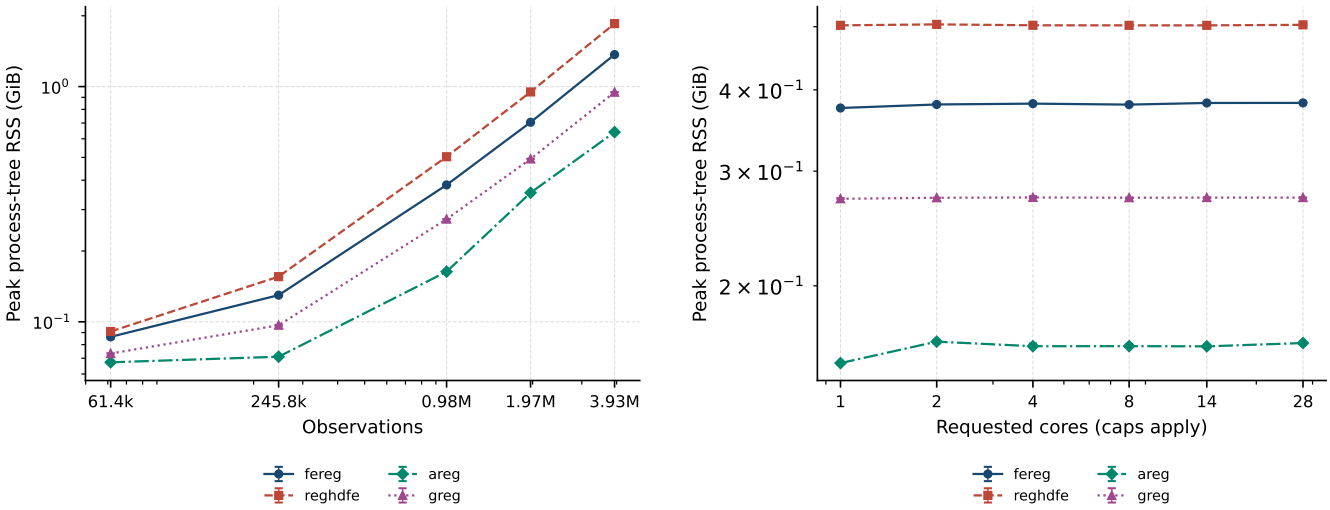


(c) RSS by observations

(d) RSS by requested cores


Partial campaign. Points require all six valid warm repetitions; bars show IQR, not confidence intervals. Crosses mark missing or unvalidated points. Both axes are logarithmic. Every task reserves 28 cores; Stata-controlled computation is capped at four. OLS IID inference, ten controls. See runs.csv for exclusions.

Figure 2: OLS One FE: stata, fixed capacity

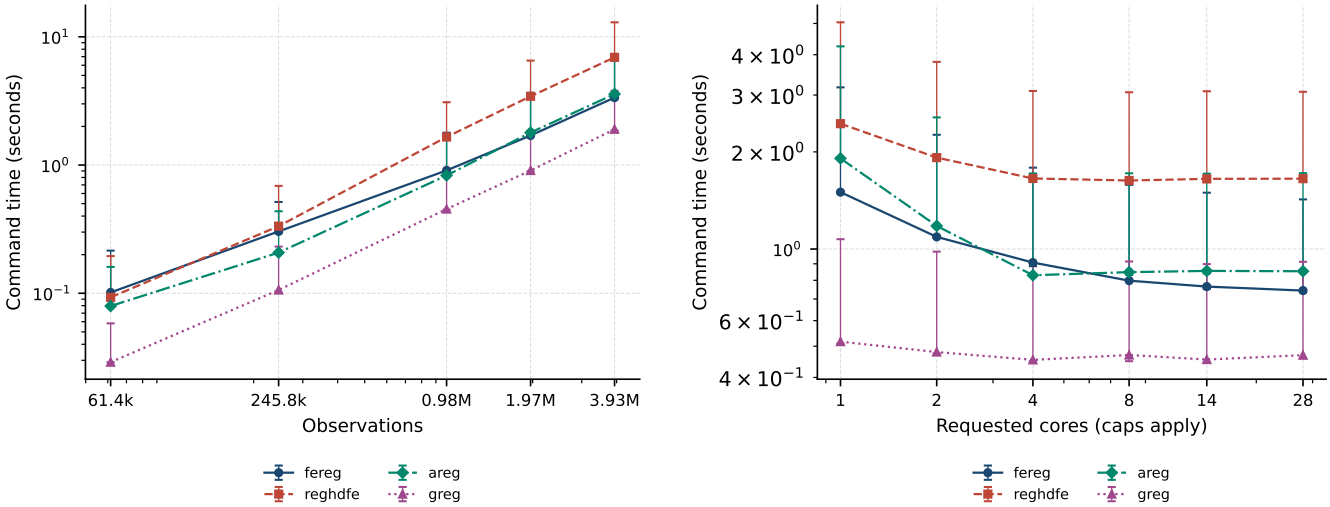

(a) Time by observations

(b) Time by requested cores

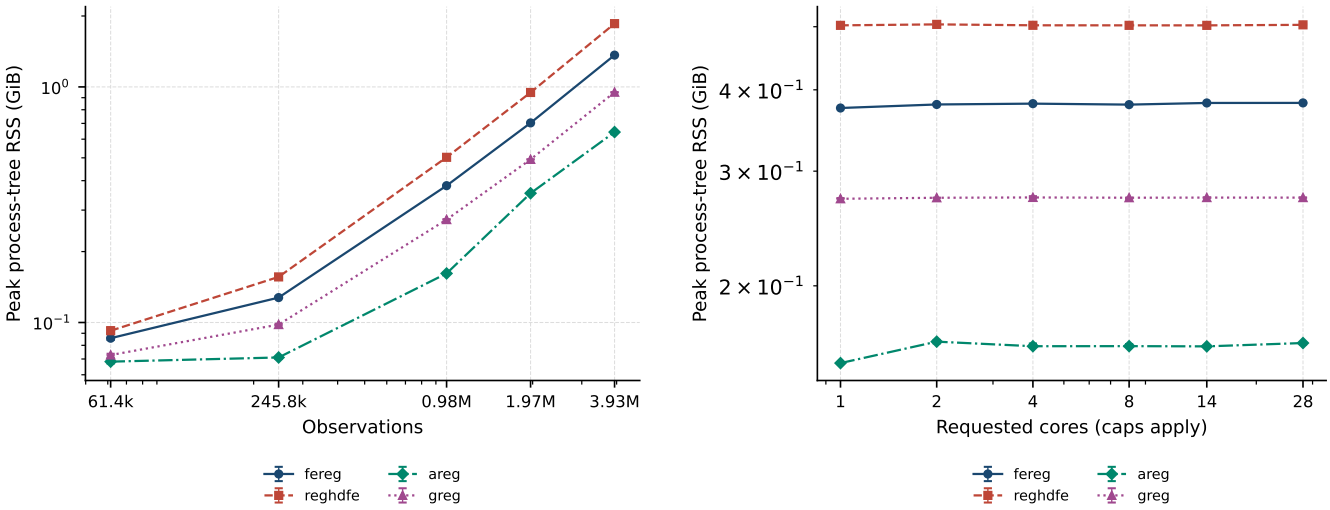


(c) RSS by observations


(d) RSS by requested cores

Partial campaign. Points require all six valid warm repetitions; bars show IQR, not confidence intervals. Crosses mark missing or unvalidated points. Both axes are logarithmic. Every task reserves 28 cores; Stata-controlled computation is capped at four. OLS IID inference, ten controls. See runs.csv for exclusions.


Figure 3: OLS Dense two FE: stata, maximum capacity

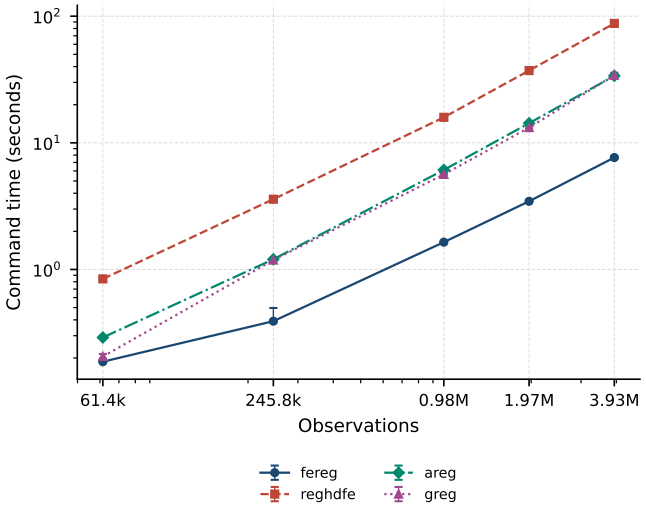


(a) Time by observations

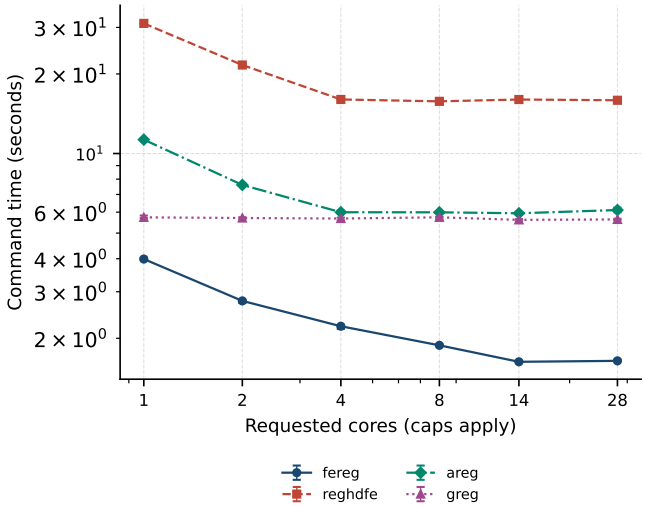

(b) Time by requested cores

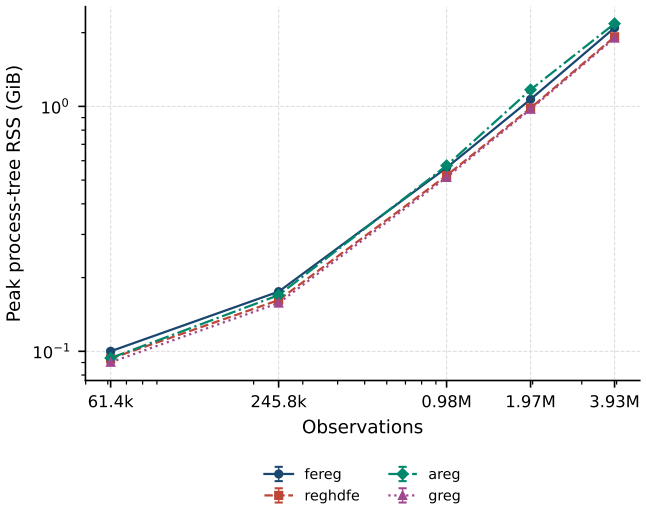


(c) RSS by observations

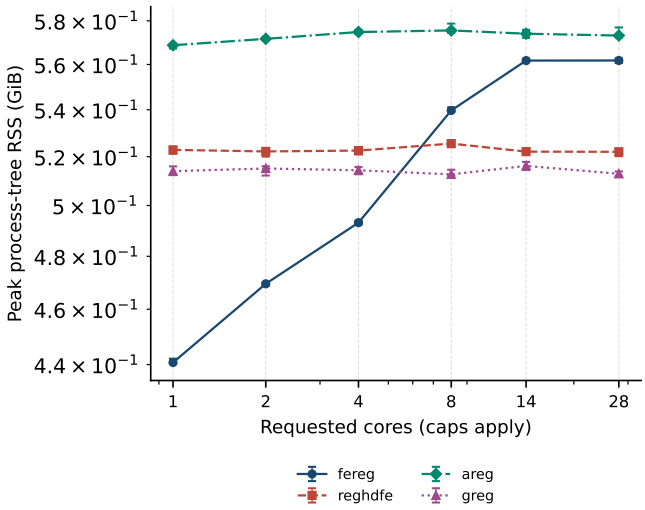

(d) RSS by requested cores


Partial campaign. Points require all six valid warm repetitions; bars show IQR, not confidence intervals. Crosses mark missing or unvalidated points. Both axes are logarithmic. Every task reserves 28 cores; Stata-controlled computation is capped at four. OLS IID inference, ten controls. See runs.csv for exclusions.

Figure 4: OLS Dense two FE: stata, fixed capacity

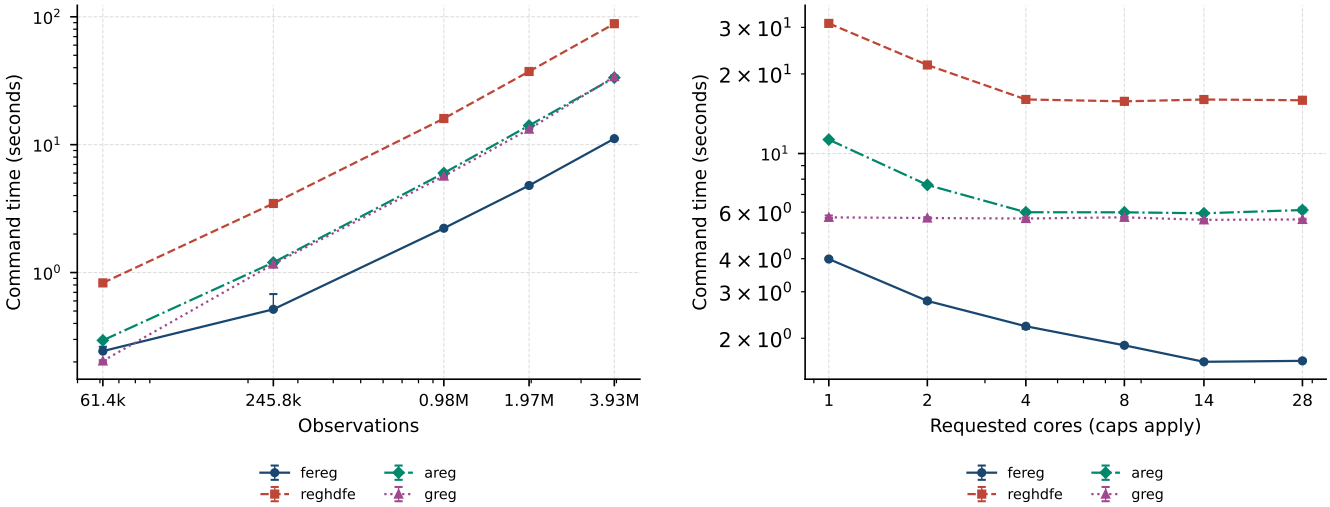

(a) Time by observations

(b) Time by requested cores

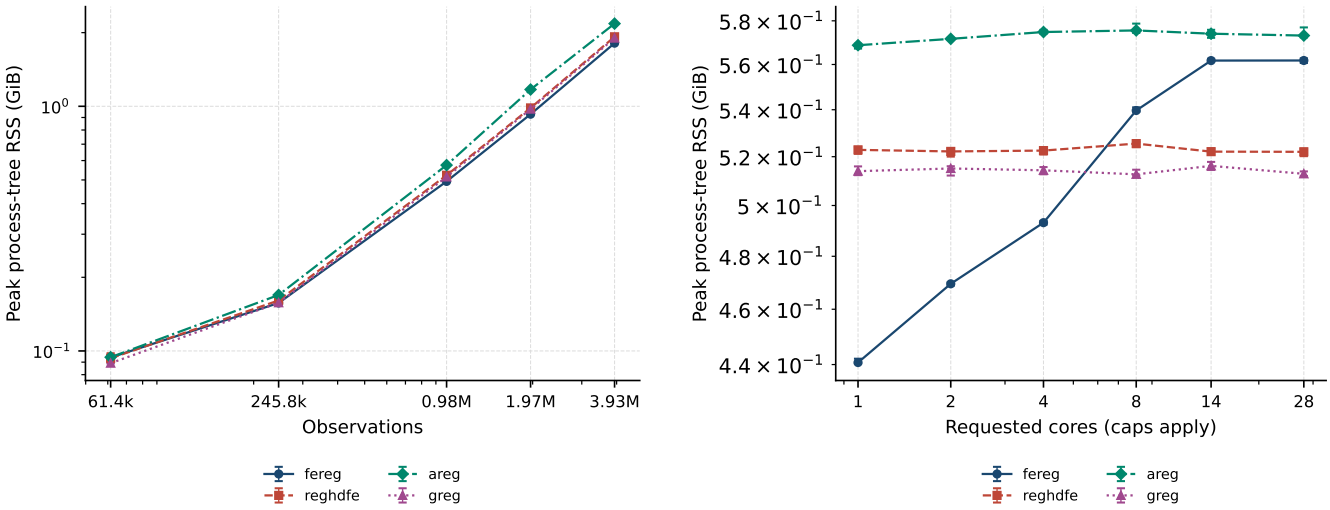


(c) RSS by observations

(d) RSS by requested cores


Partial campaign. Points require all six valid warm repetitions; bars show IQR, not confidence intervals. Crosses mark missing or unvalidated points. Both axes are logarithmic. Every task reserves 28 cores; Stata-controlled computation is capped at four. OLS IID inference, ten controls. See runs.csv for exclusions.

Figure 5: OLS Sparse three FE: stata, maximum capacity

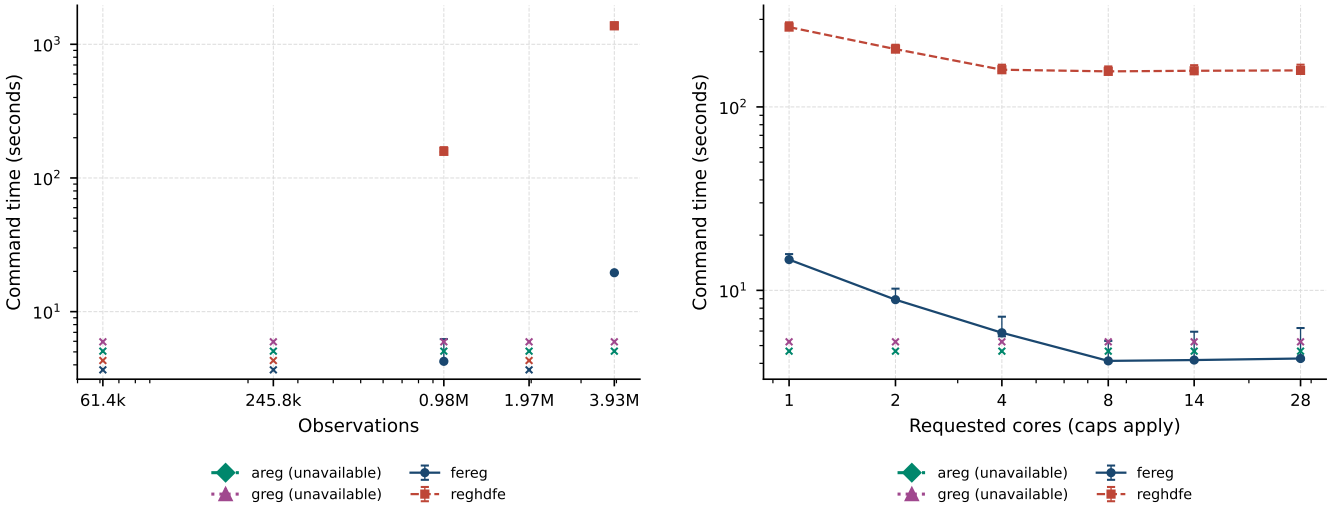


(a) Time by observations

(b) Time by requested cores

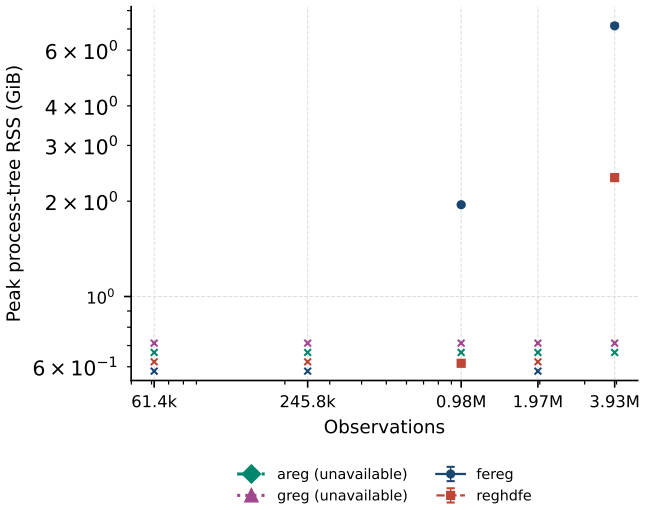


(c) RSS by observations

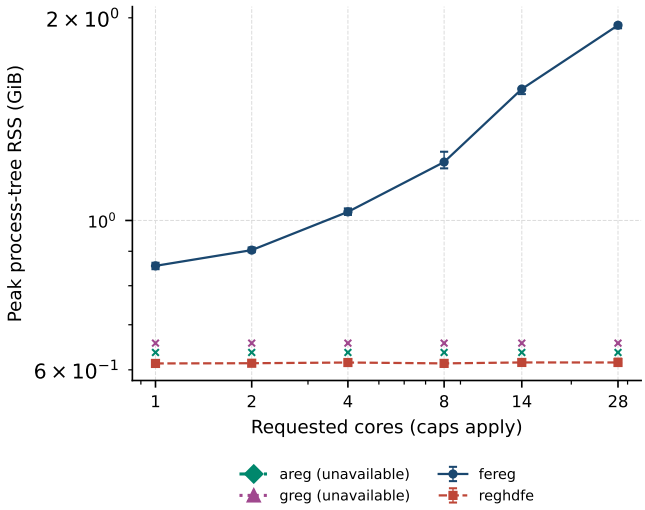

(d) RSS by requested cores


Partial campaign. Points require all six valid warm repetitions; bars show IQR, not confidence intervals. Crosses mark missing or unvalidated points. Both axes are logarithmic. Every task reserves 28 cores; Stata-controlled computation is capped at four. OLS IID inference, ten controls. See runs.csv for exclusions.

Figure 6: OLS Sparse three FE: stata, fixed capacity

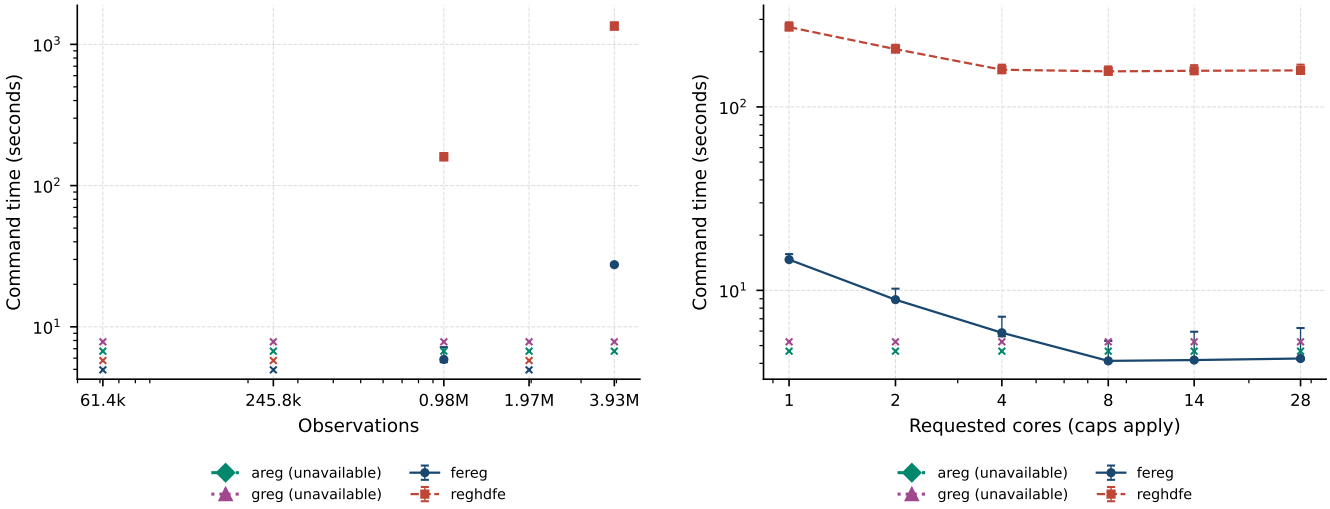


(a) Time by observations

(b) Time by requested cores

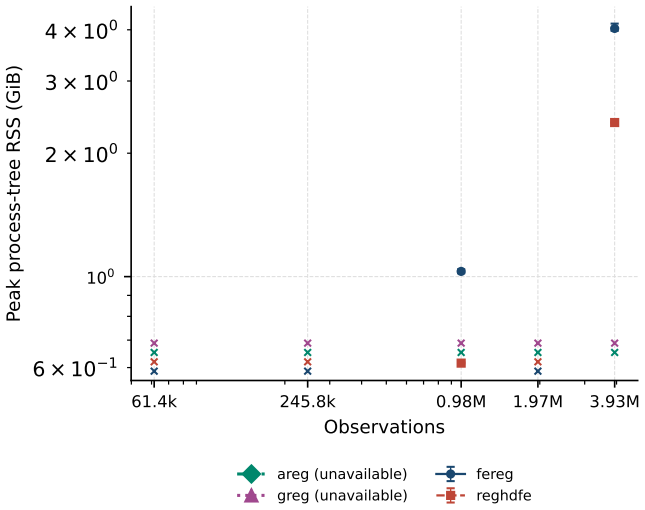


(c) RSS by observations

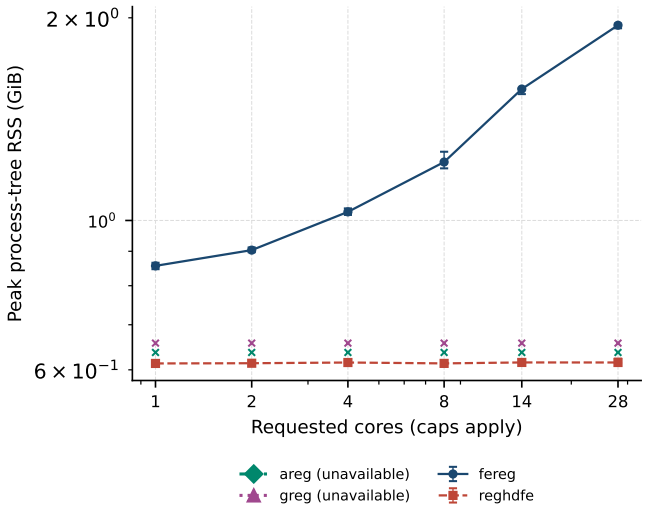


(d) RSS by requested cores

Partial campaign. Points require all six valid warm repetitions; bars show IQR, not confidence intervals. Crosses mark missing or unvalidated points. Both axes are logarithmic. Every task reserves 28 cores; Stata-controlled computation is capped at four. OLS IID inference, ten controls. See runs.csv for exclusions.


Figure 7: OLS Strong d=2: stata, maximum capacity

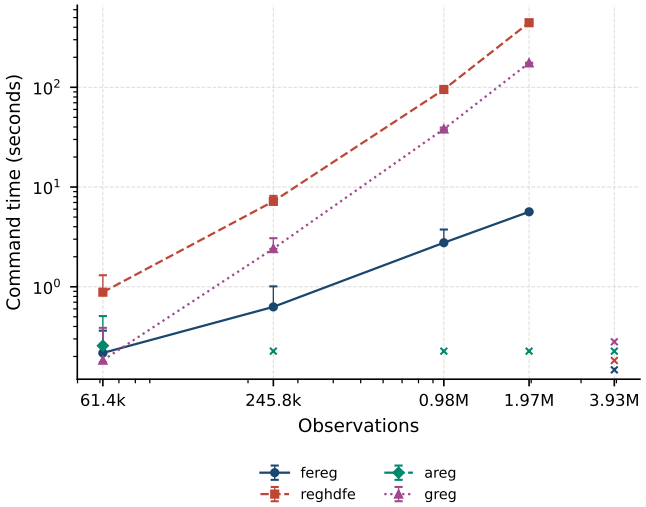


(a) Time by observations

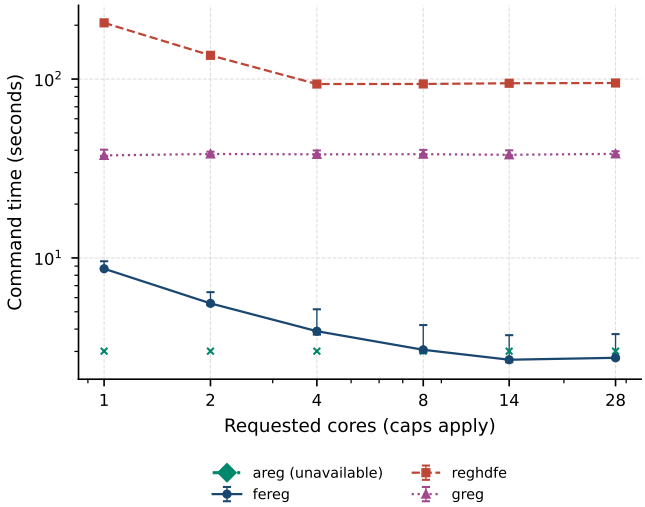

(b) Time by requested cores

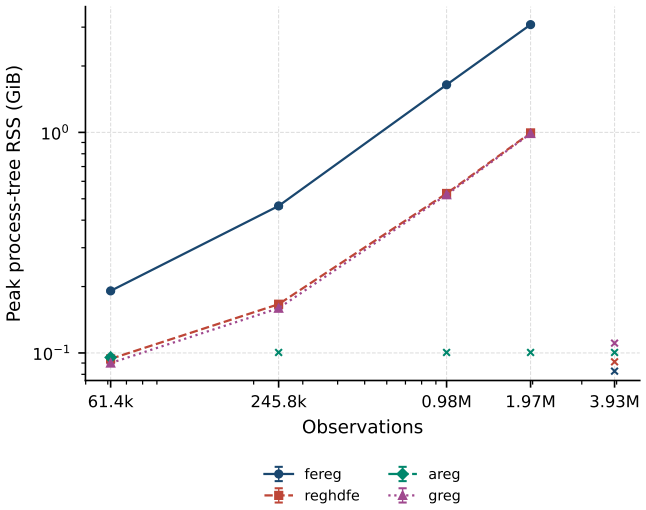


(c) RSS by observations

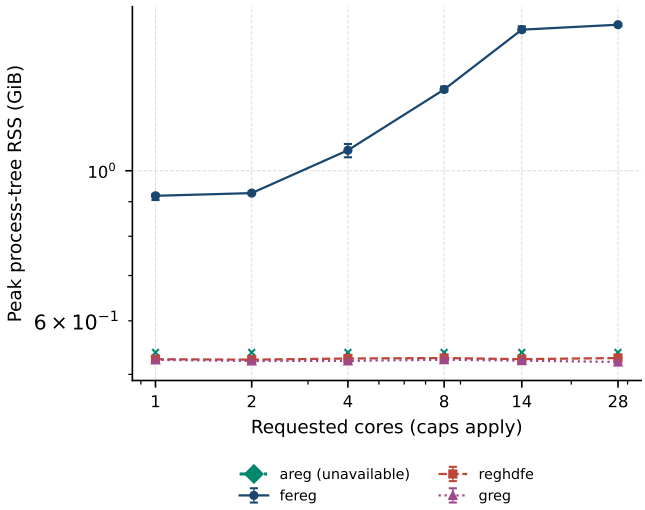


(d) RSS by requested cores

Partial campaign. Points require all six valid warm repetitions; bars show IQR, not confidence intervals. Crosses mark missing or unvalidated points. Both axes are logarithmic. Every task reserves 28 cores; Stata-controlled computation is capped at four. OLS IID inference, ten controls. See runs.csv for exclusions.


Figure 8: OLS Strong d=2: stata, fixed capacity

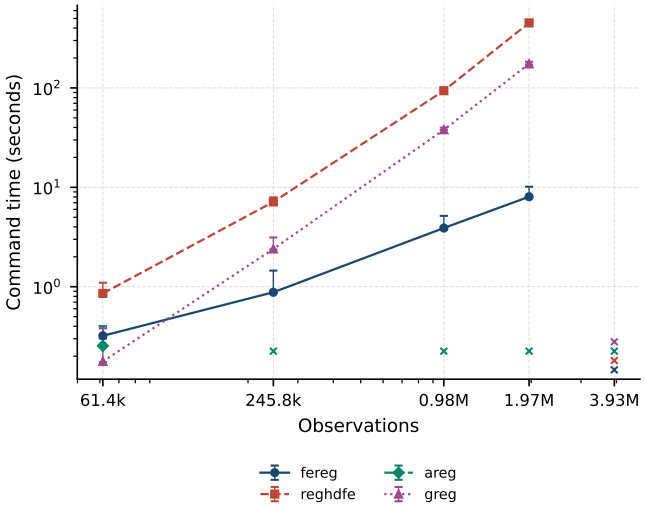


(a) Time by observations

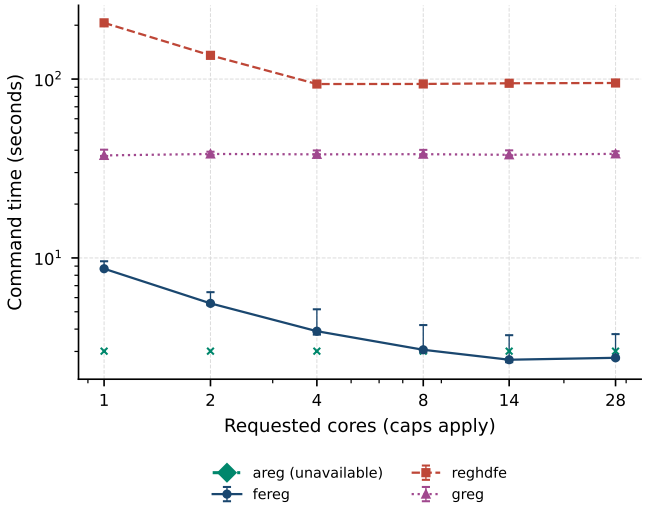

(b) Time by requested cores

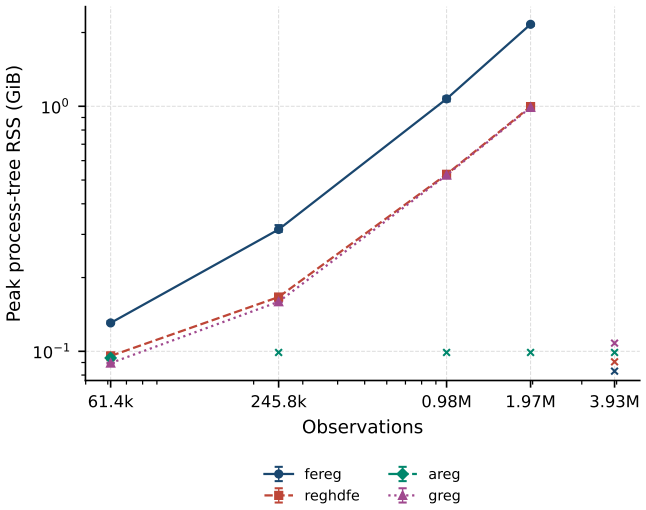


(c) RSS by observations

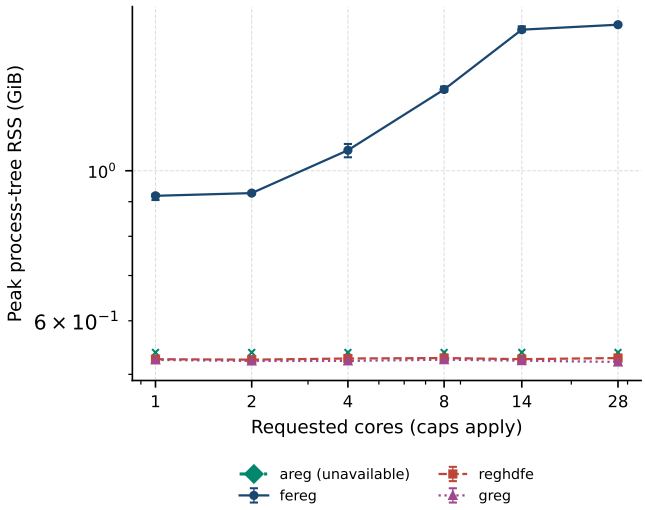

(d) RSS by requested cores

Partial campaign. Points require all six valid warm repetitions; bars show IQR, not confidence intervals. Crosses mark missing or unvalidated points. Both axes are logarithmic. Every task reserves 28 cores; Stata-controlled computation is capped at four. OLS IID inference, ten controls. See runs.csv for exclusions.

Figure 9: OLS Strong d=3: stata, maximum capacity

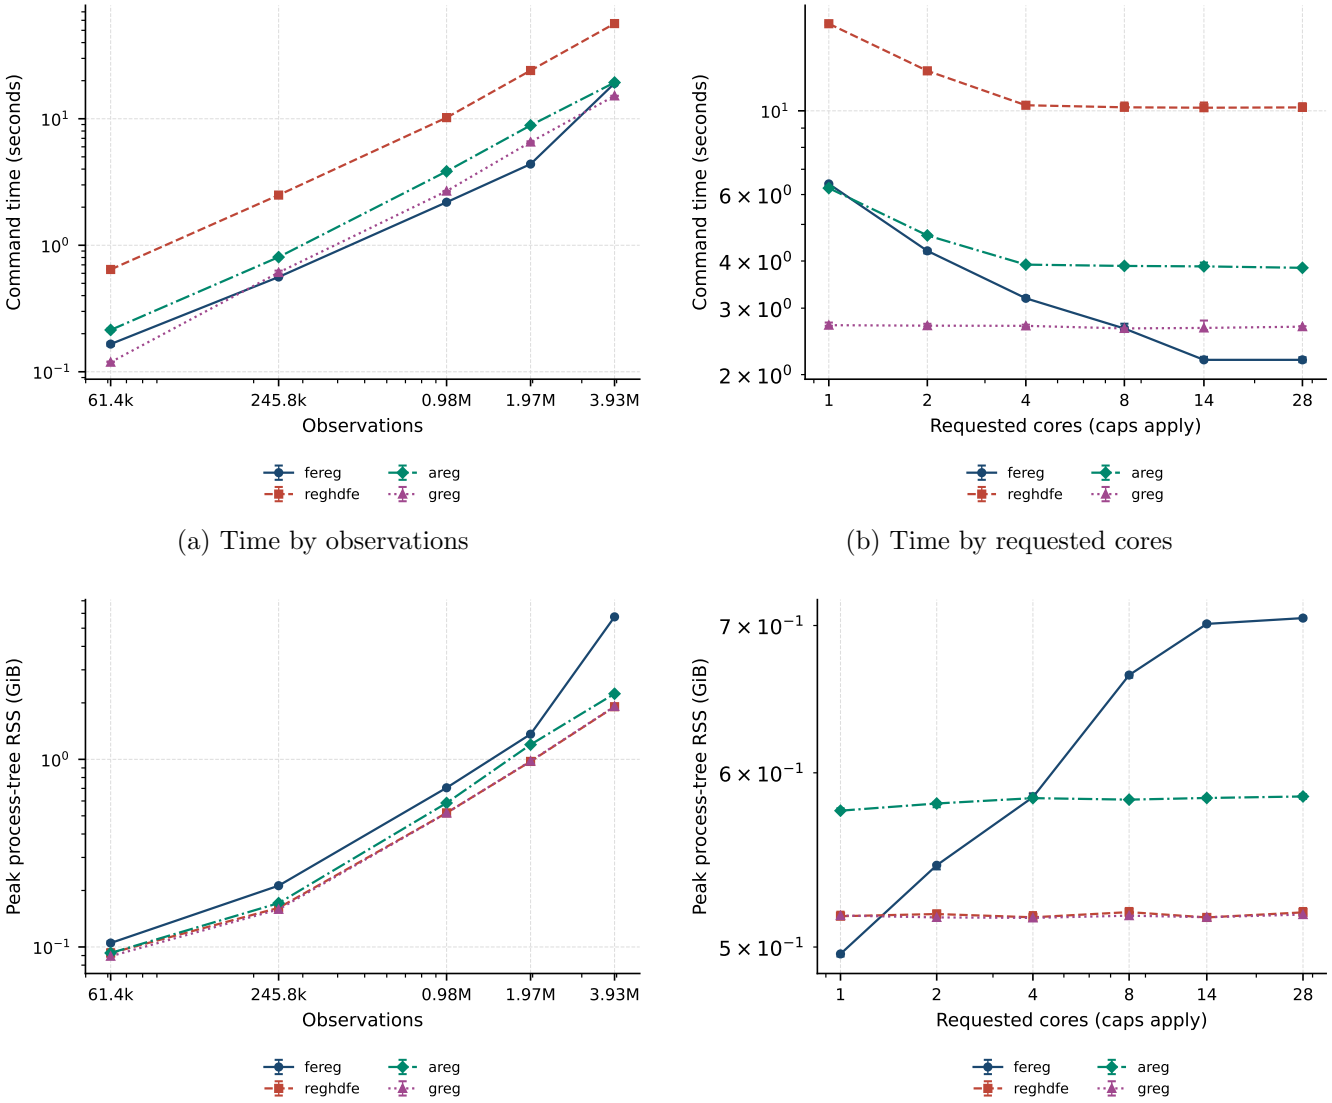

(a) Time by observations


(b) Time by requested cores

(c) RSS by observations

(d) RSS by requested cores

Partial campaign. Points require all six valid warm repetitions; bars show IQR, not confidence intervals. Crosses mark missing or unvalidated points. Both axes are logarithmic. Every task reserves 28 cores; Stata-controlled computation is capped at four. OLS IID inference, ten controls. See runs.csv for exclusions.

Figure 10: OLS Strong d=3: stata, fixed capacity

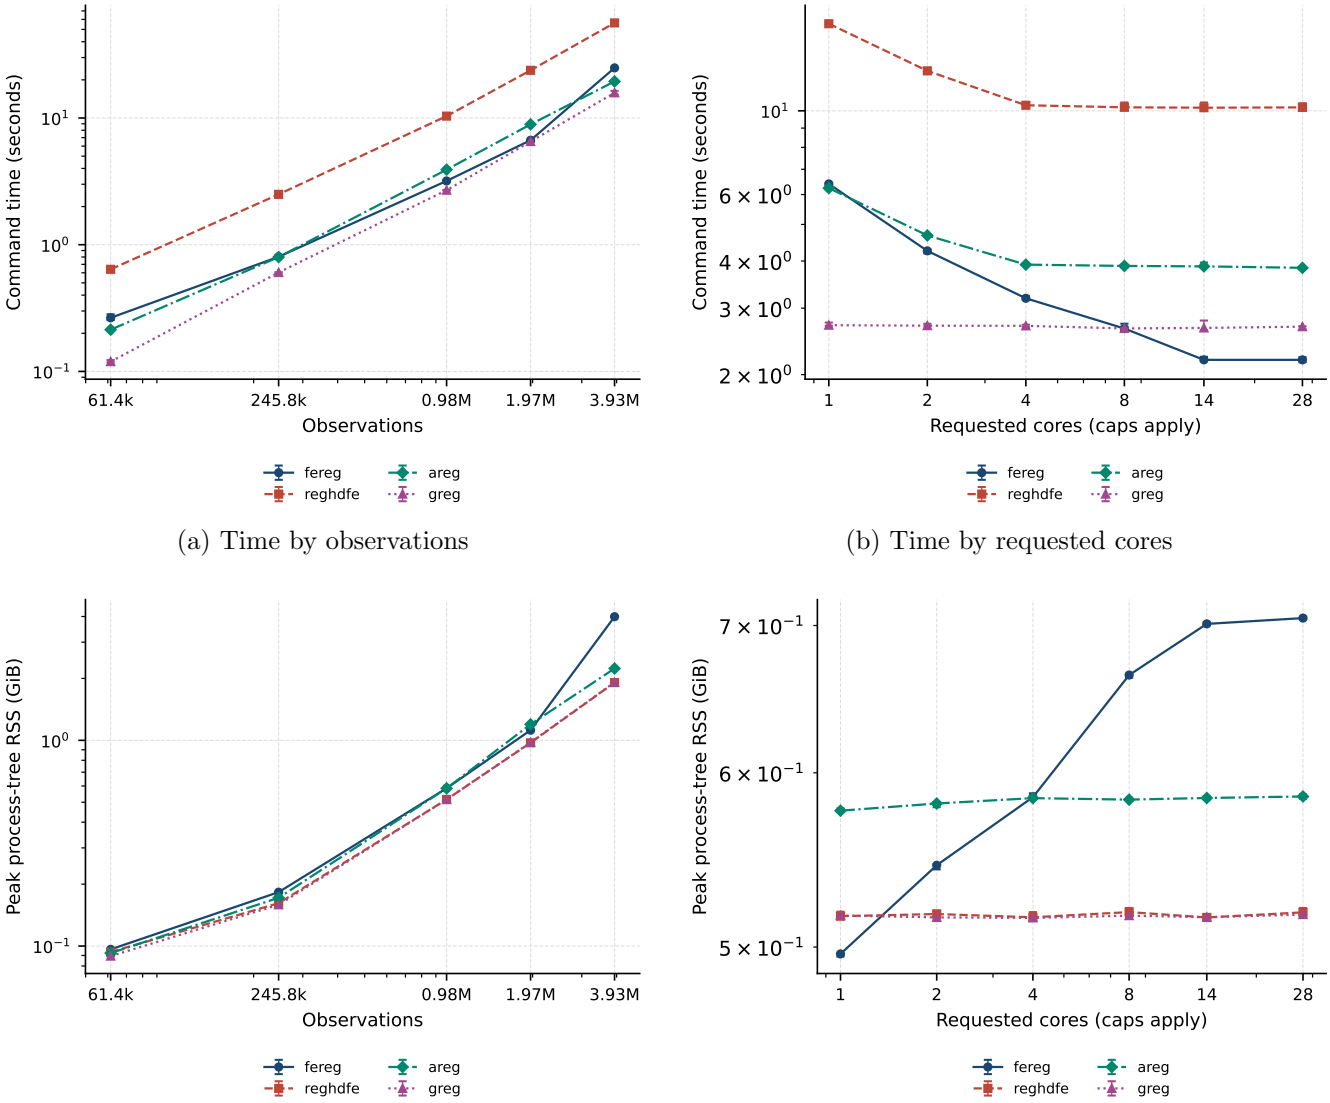

(a) Time by observations


(b) Time by requested cores

(c) RSS by observations

(d) RSS by requested cores


Partial campaign. Points require all six valid warm repetitions; bars show IQR, not confidence intervals. Crosses mark missing or unvalidated points. Both axes are logarithmic. Every task reserves 28 cores; Stata-controlled computation is capped at four. OLS IID inference, ten controls. See runs.csv for exclusions.

Figure 11: OLS Strong d=6: stata, maximum capacity

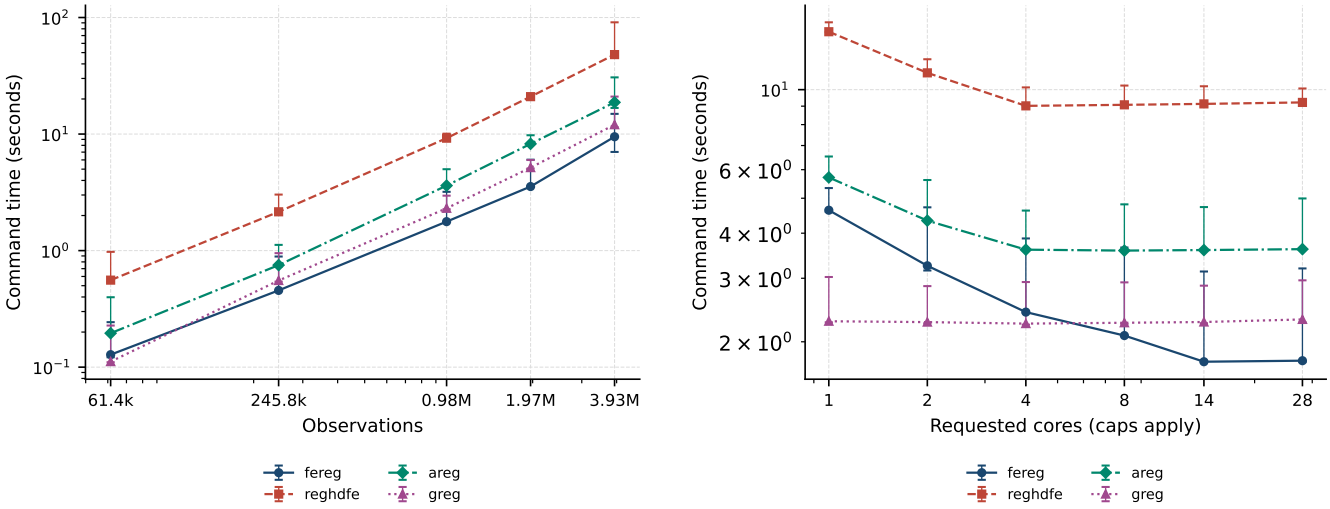


(a) Time by observations

(b) Time by requested cores

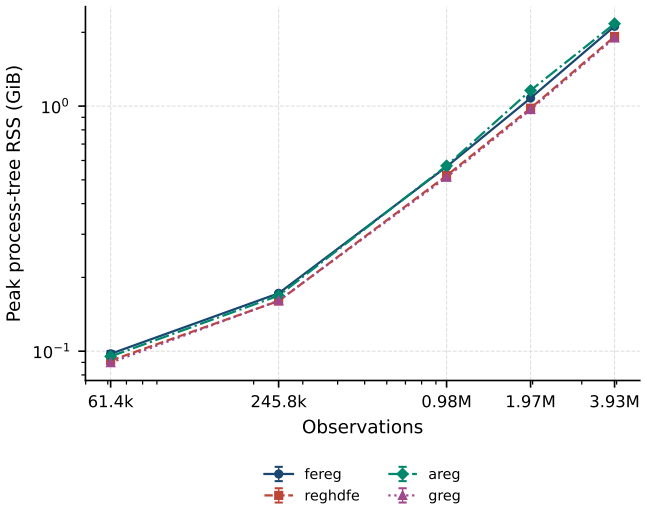


(c) RSS by observations

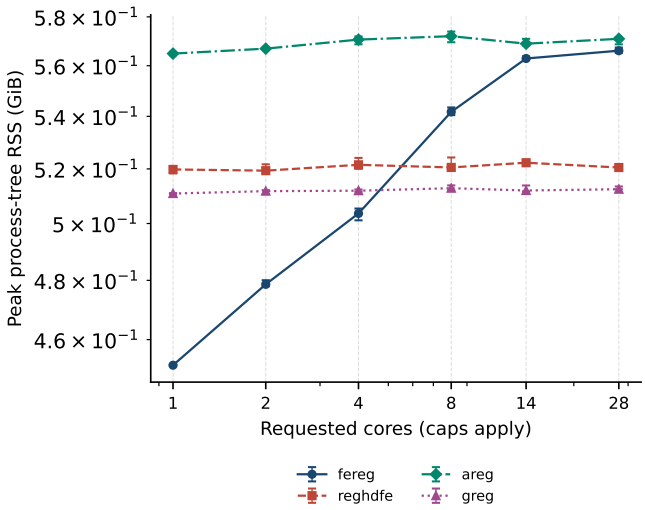

(d) RSS by requested cores

Partial campaign. Points require all six valid warm repetitions; bars show IQR, not confidence intervals. Crosses mark missing or unvalidated points. Both axes are logarithmic. Every task reserves 28 cores; Stata-controlled computation is capped at four. OLS IID inference, ten controls. See runs.csv for exclusions.

Figure 12: OLS Strong d=6: stata, fixed capacity

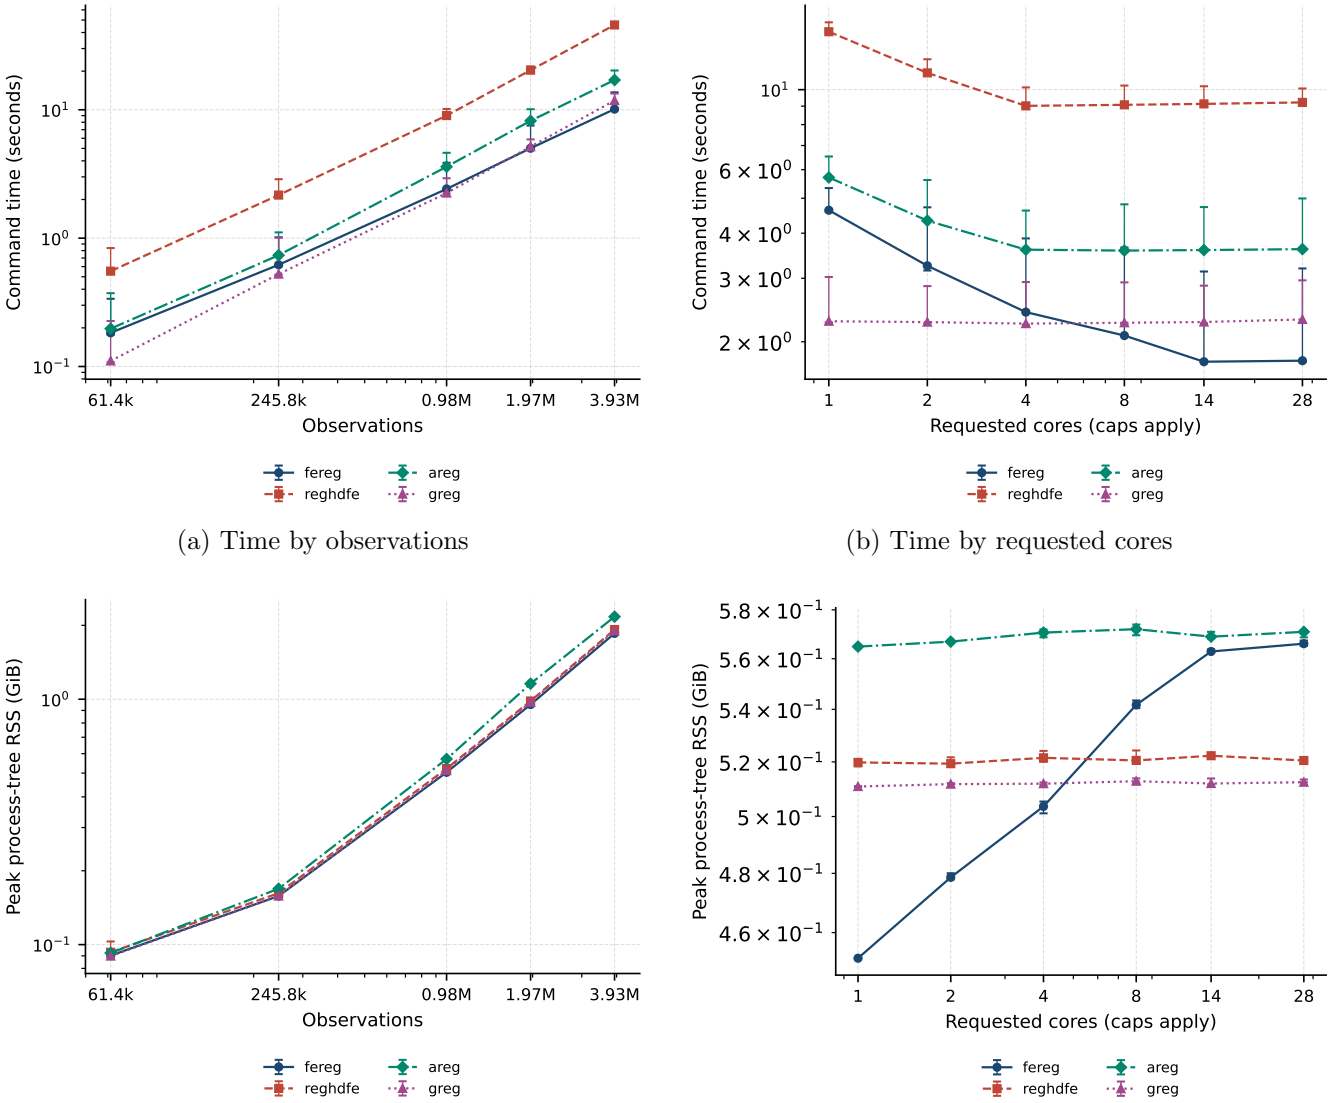

(a) Time by observations


(b) Time by requested cores

(c) RSS by observations


(d) RSS by requested cores

Partial campaign. Points require all six valid warm repetitions; bars show IQR, not confidence intervals. Crosses mark missing or unvalidated points. Both axes are logarithmic. Every task reserves 28 cores; Stata-controlled computation is capped at four. OLS IID inference, ten controls. See runs.csv for exclusions.


Figure 13: OLS One FE: expanded, maximum capacity

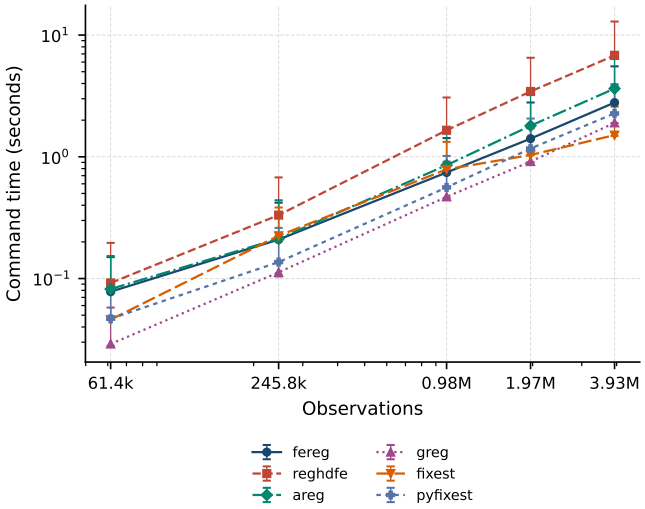


(a) Time by observations

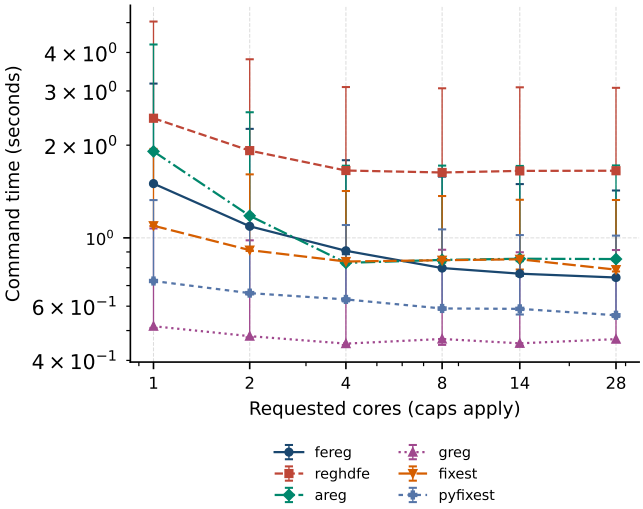

(b) Time by requested cores

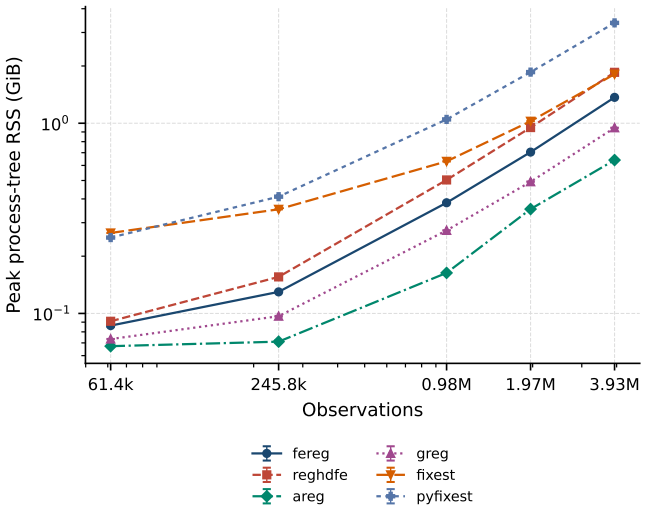


(c) RSS by observations

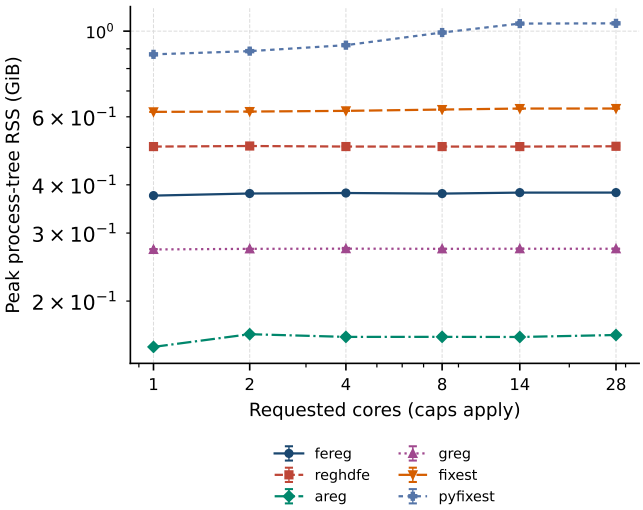

(d) RSS by requested cores


Partial campaign. Points require all six valid warm repetitions; bars show IQR, not confidence intervals. Crosses mark missing or unvalidated points. Both axes are logarithmic. Every task reserves 28 cores; Stata-controlled computation is capped at four. OLS IID inference, ten controls. See runs.csv for exclusions.

Figure 14: OLS One FE: expanded, fixed capacity

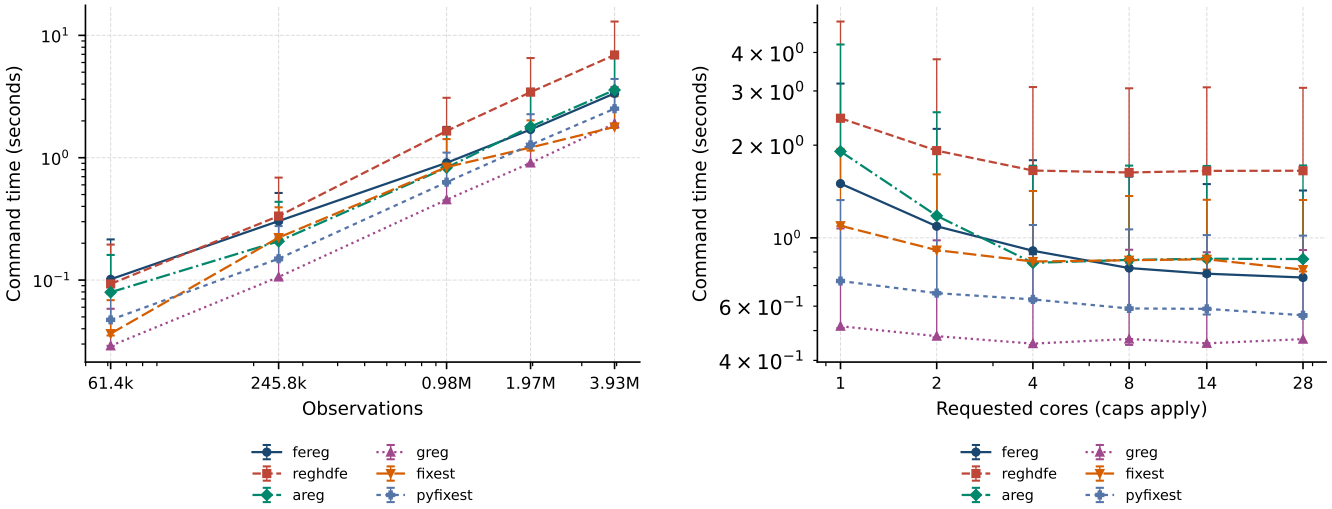

(a) Time by observations

(b) Time by requested cores

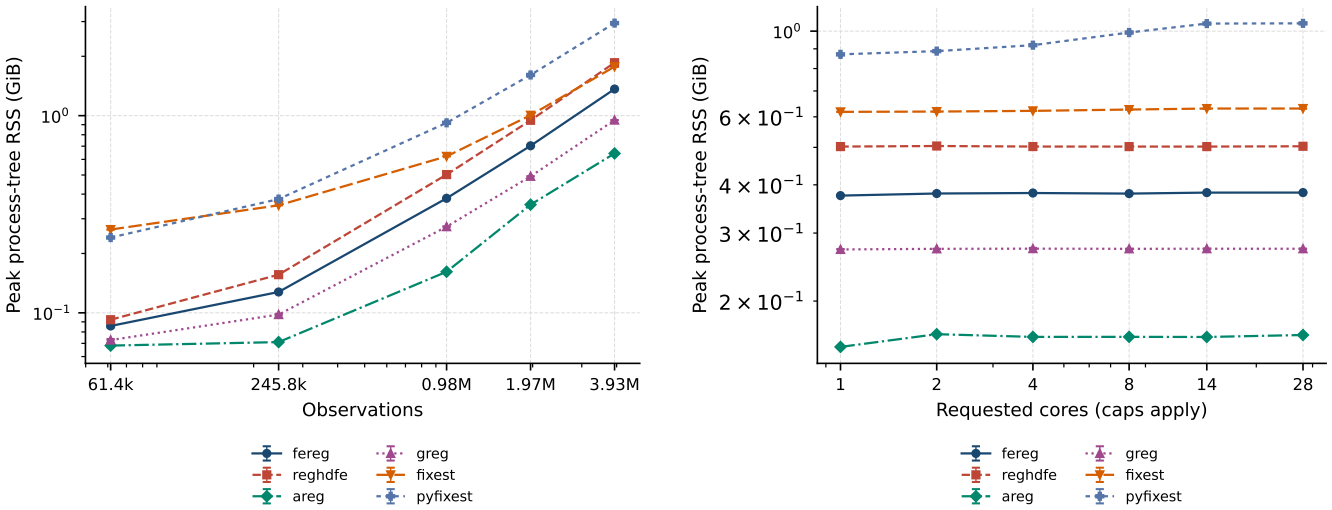


(c) RSS by observations

(d) RSS by requested cores


Partial campaign. Points require all six valid warm repetitions; bars show IQR, not confidence intervals. Crosses mark missing or unvalidated points. Both axes are logarithmic. Every task reserves 28 cores; Stata-controlled computation is capped at four. OLS IID inference, ten controls. See runs.csv for exclusions.

Figure 15: OLS Dense two FE: expanded, maximum capacity

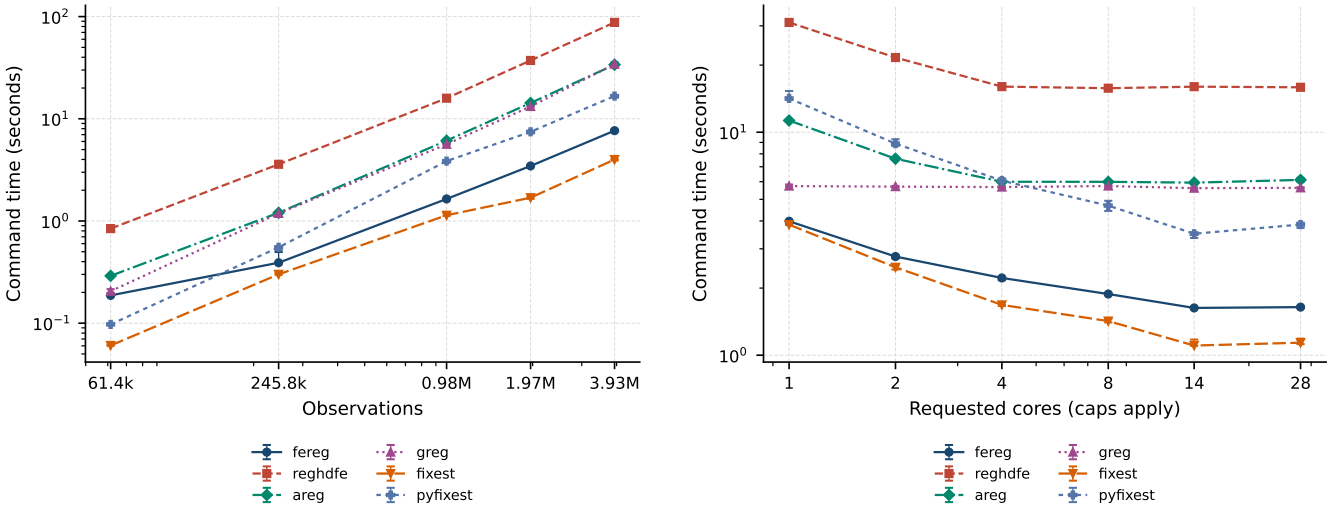

(a) Time by observations

(b) Time by requested cores

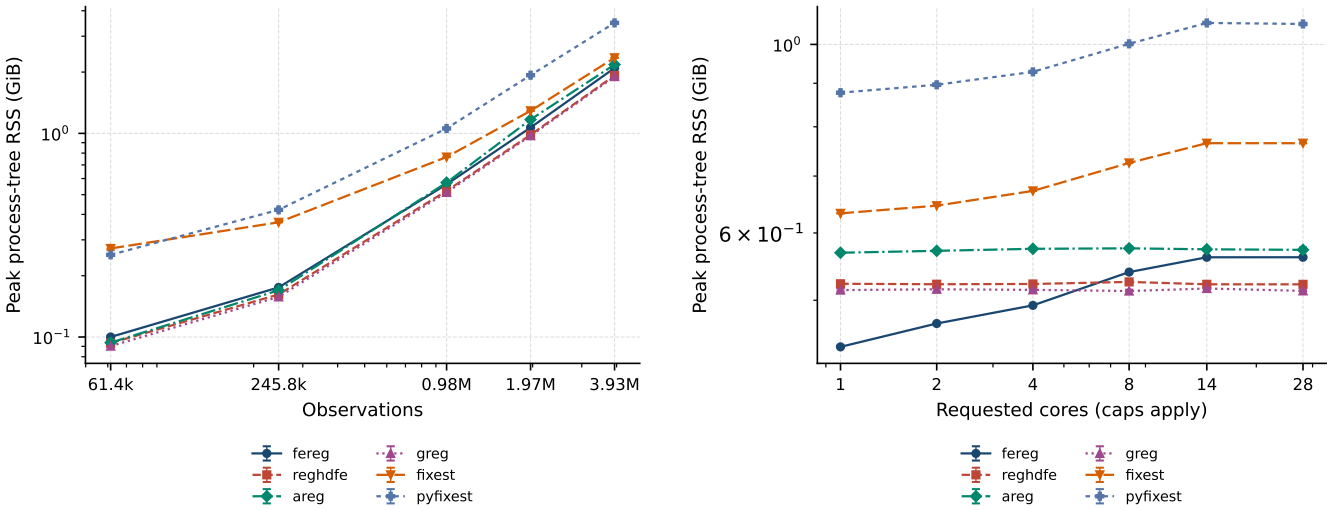


(c) RSS by observations

(d) RSS by requested cores


Partial campaign. Points require all six valid warm repetitions; bars show IQR, not confidence intervals. Crosses mark missing or unvalidated points. Both axes are logarithmic. Every task reserves 28 cores; Stata-controlled computation is capped at four. OLS IID inference, ten controls. See runs.csv for exclusions.

Figure 16: OLS Dense two FE: expanded, fixed capacity

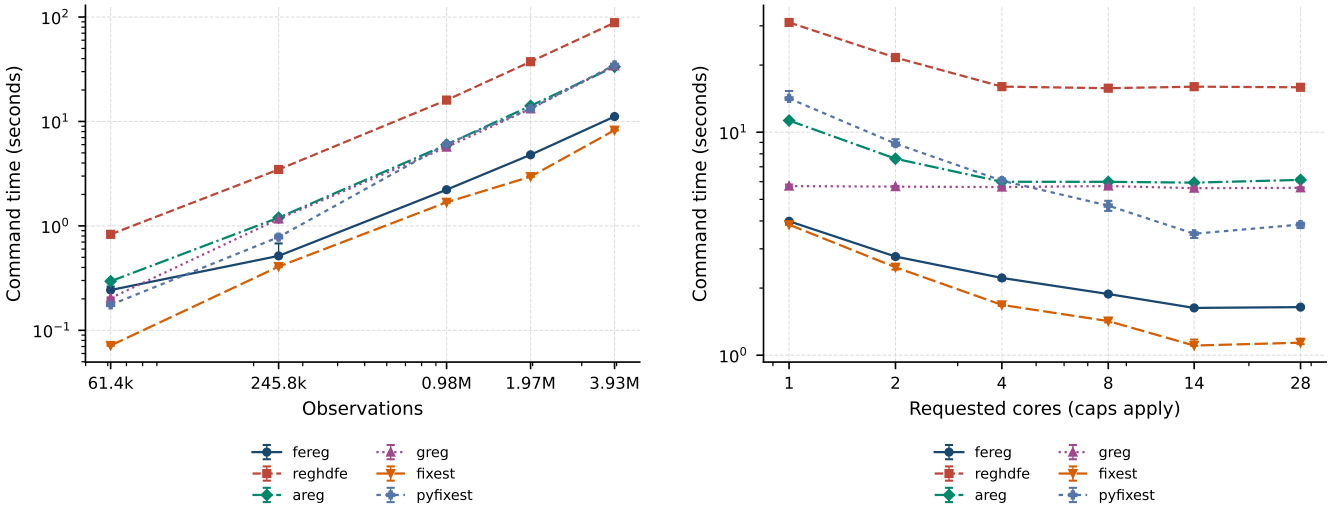

(a) Time by observations

(b) Time by requested cores

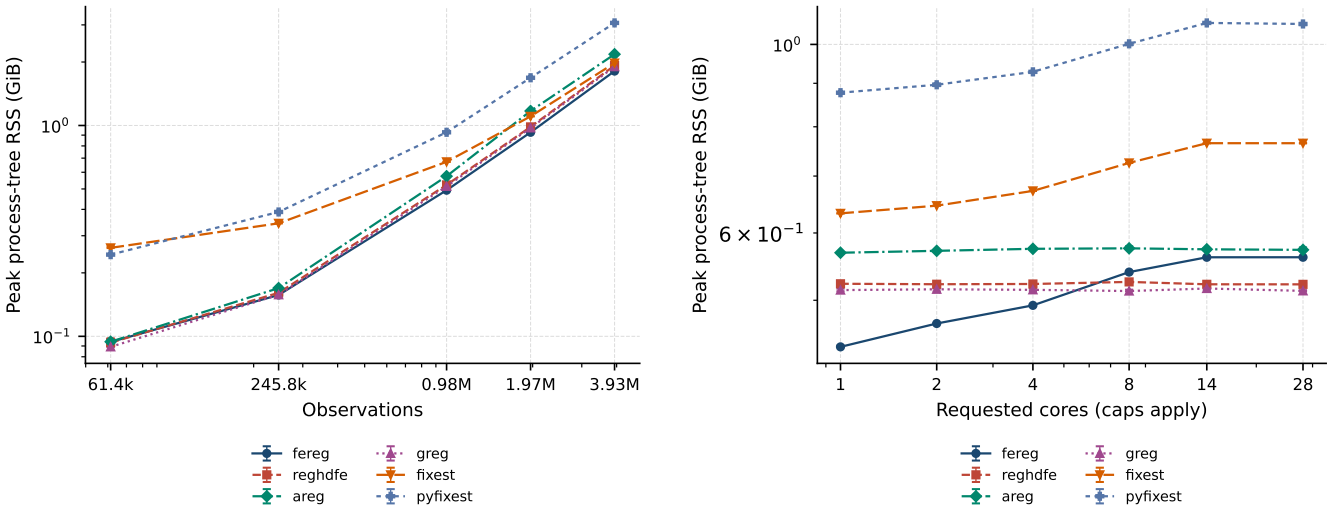


(c) RSS by observations

(d) RSS by requested cores


Partial campaign. Points require all six valid warm repetitions; bars show IQR, not confidence intervals. Crosses mark missing or unvalidated points. Both axes are logarithmic. Every task reserves 28 cores; Stata-controlled computation is capped at four. OLS IID inference, ten controls. See runs.csv for exclusions.

Figure 17: OLS Sparse three FE: expanded, maximum capacity

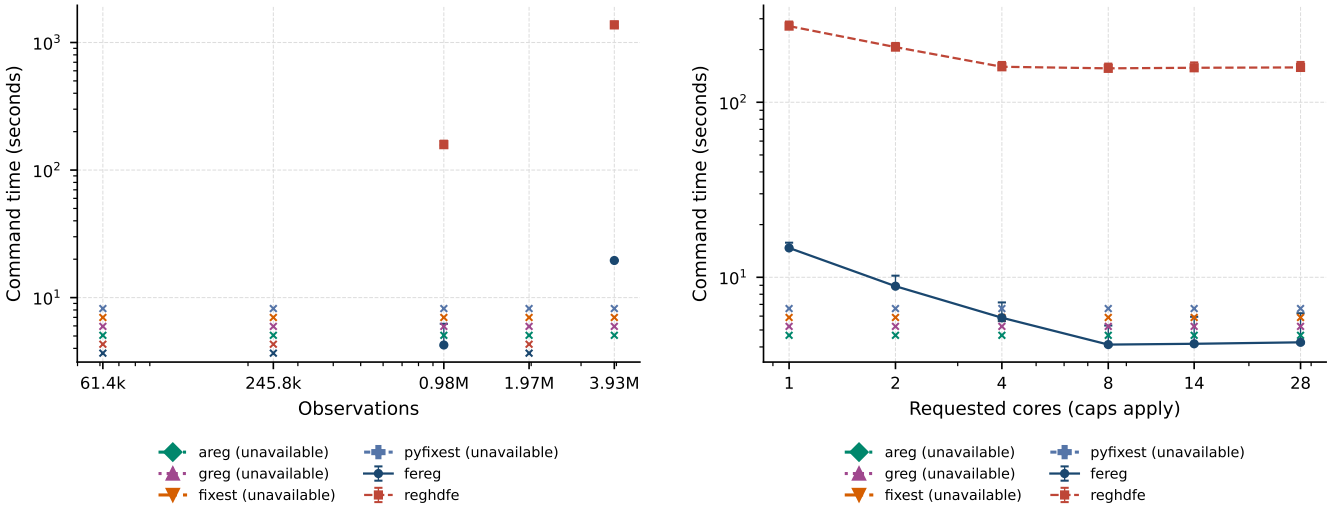


(a) Time by observations

(b) Time by requested cores

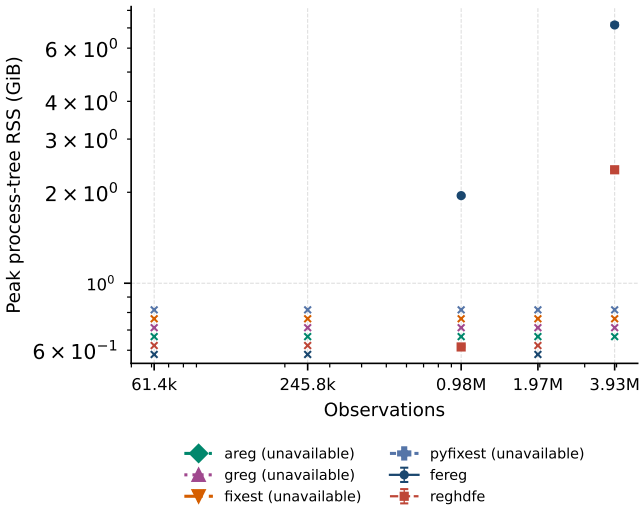


(c) RSS by observations

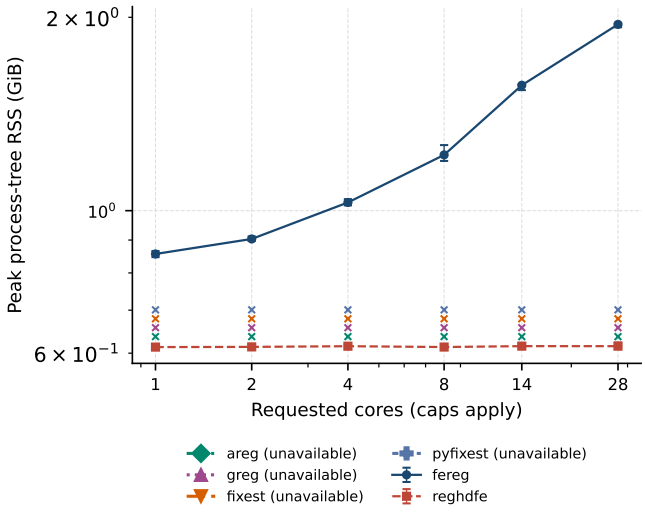


(d) RSS by requested cores

Partial campaign. Points require all six valid warm repetitions; bars show IQR, not confidence intervals. Crosses mark missing or unvalidated points. Both axes are logarithmic. Every task reserves 28 cores; Stata-controlled computation is capped at four. OLS IID inference, ten controls. See runs.csv for exclusions.


Figure 18: OLS Sparse three FE: expanded, fixed capacity

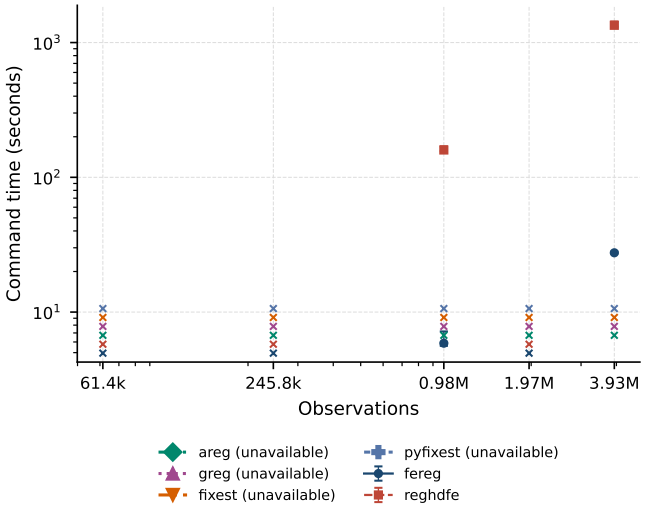


(a) Time by observations

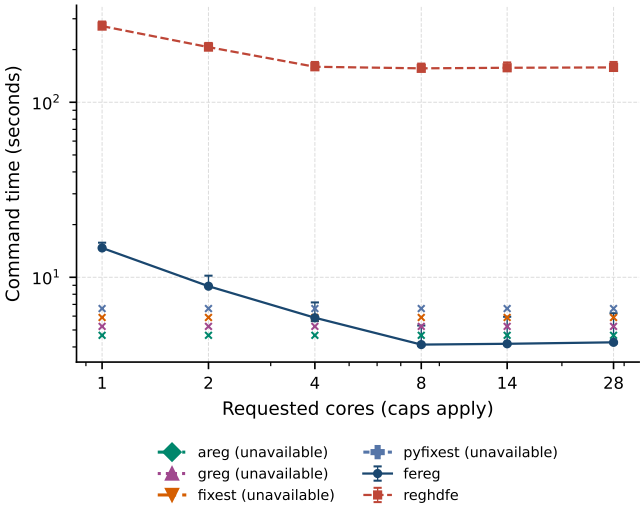

(b) Time by requested cores

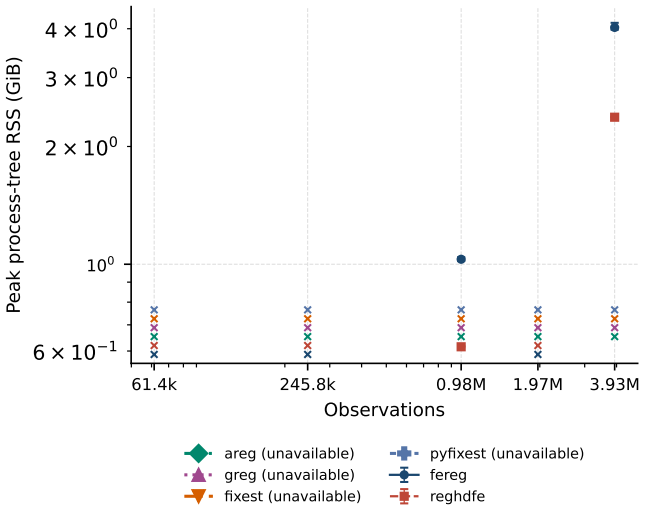


(c) RSS by observations

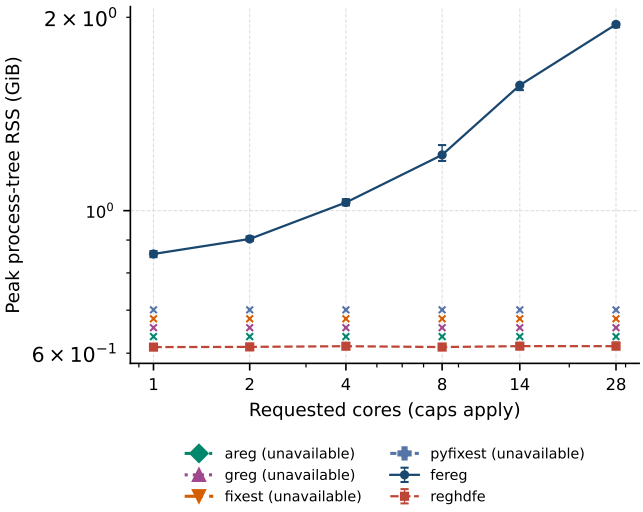

(d) RSS by requested cores


Partial campaign. Points require all six valid warm repetitions; bars show IQR, not confidence intervals. Crosses mark missing or unvalidated points. Both axes are logarithmic. Every task reserves 28 cores; Stata-controlled computation is capped at four. OLS IID inference, ten controls. See runs.csv for exclusions.

Figure 19: OLS Strong d=2: expanded, maximum capacity

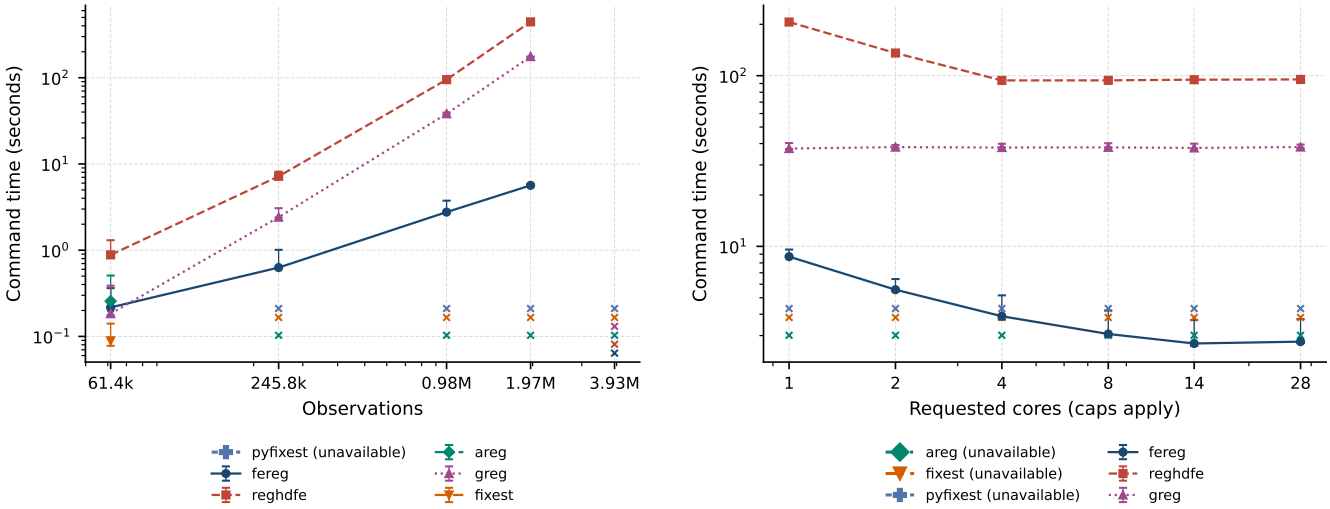


(a) Time by observations

(b) Time by requested cores

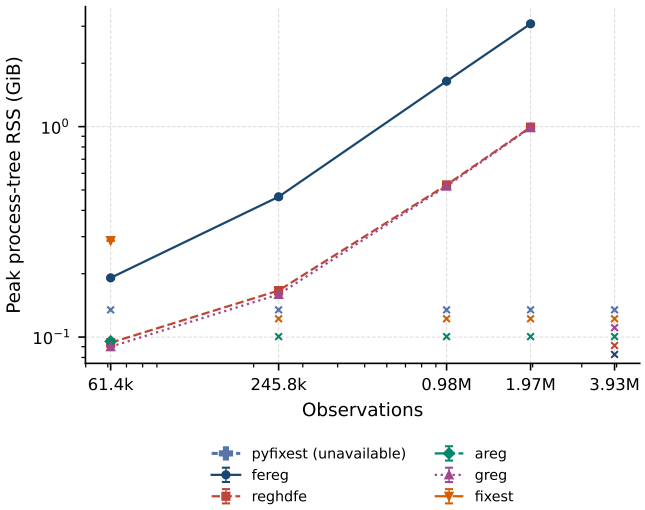


(c) RSS by observations

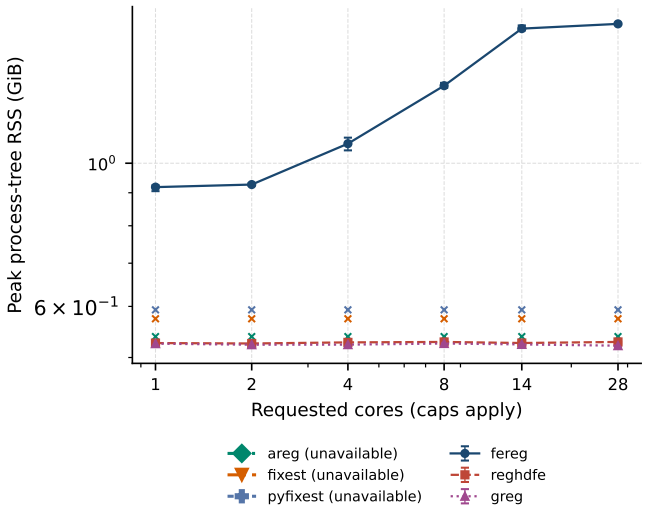

(d) RSS by requested cores


Partial campaign. Points require all six valid warm repetitions; bars show IQR, not confidence intervals. Crosses mark missing or unvalidated points. Both axes are logarithmic. Every task reserves 28 cores; Stata-controlled computation is capped at four. OLS IID inference, ten controls. See runs.csv for exclusions.

Figure 20: OLS Strong d=2: expanded, fixed capacity

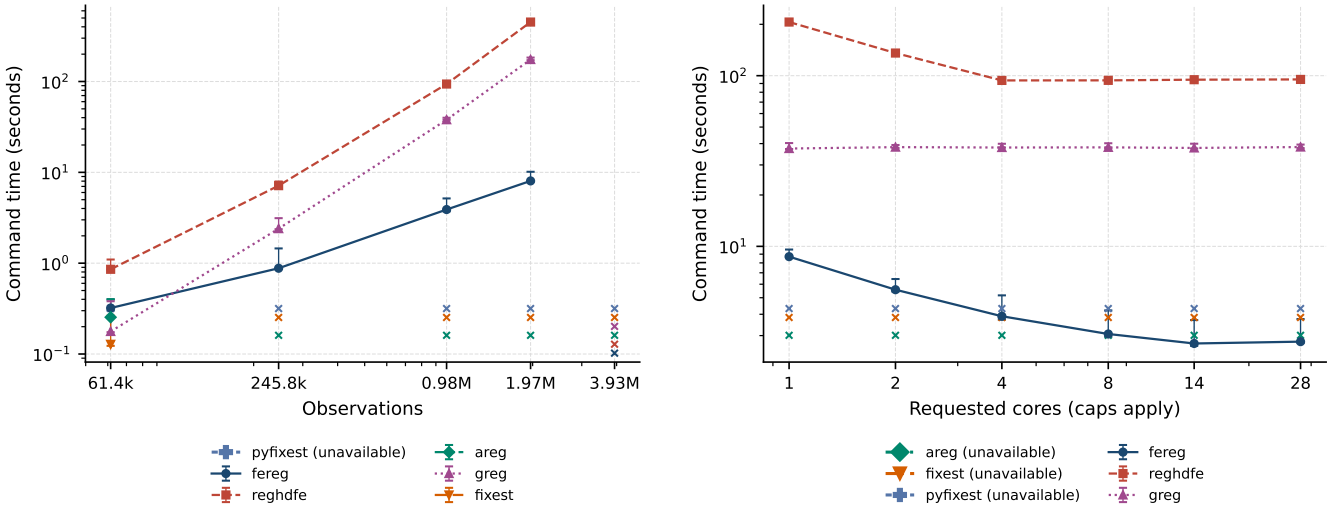

(a) Time by observations

(b) Time by requested cores

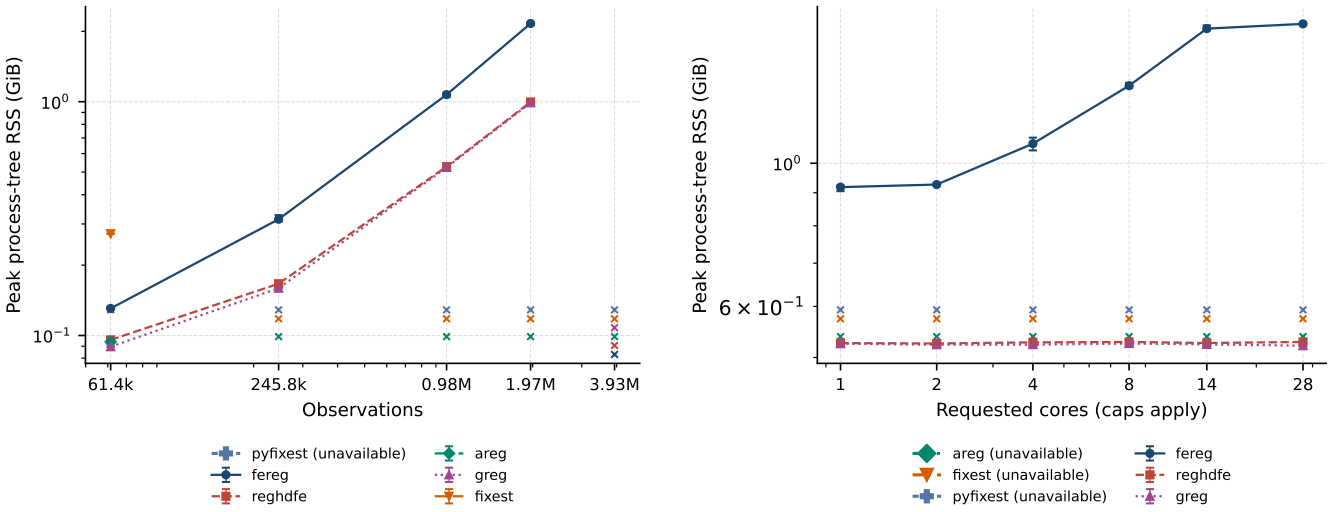


(c) RSS by observations


(d) RSS by requested cores

Partial campaign. Points require all six valid warm repetitions; bars show IQR, not confidence intervals. Crosses mark missing or unvalidated points. Both axes are logarithmic. Every task reserves 28 cores; Stata-controlled computation is capped at four. OLS IID inference, ten controls. See runs.csv for exclusions.


Figure 21: OLS Strong d=3: expanded, maximum capacity

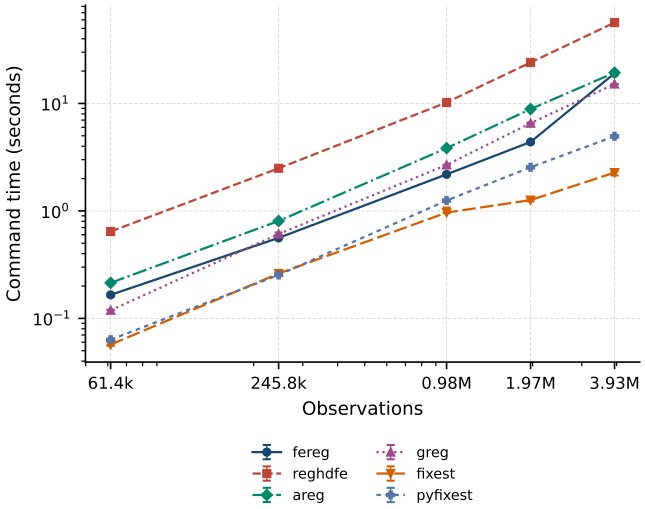


(a) Time by observations

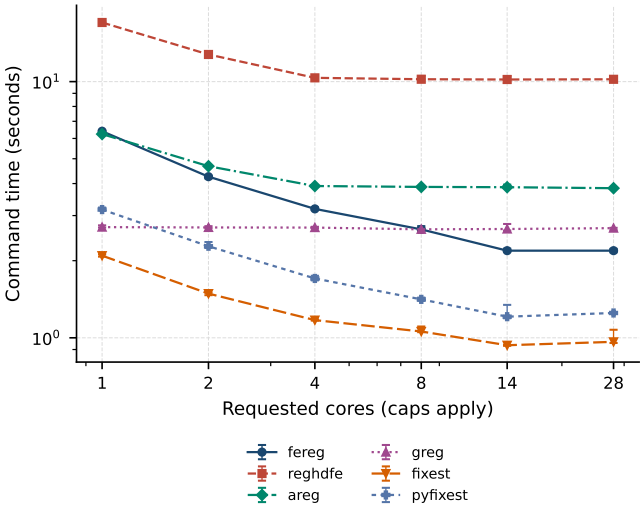

(b) Time by requested cores

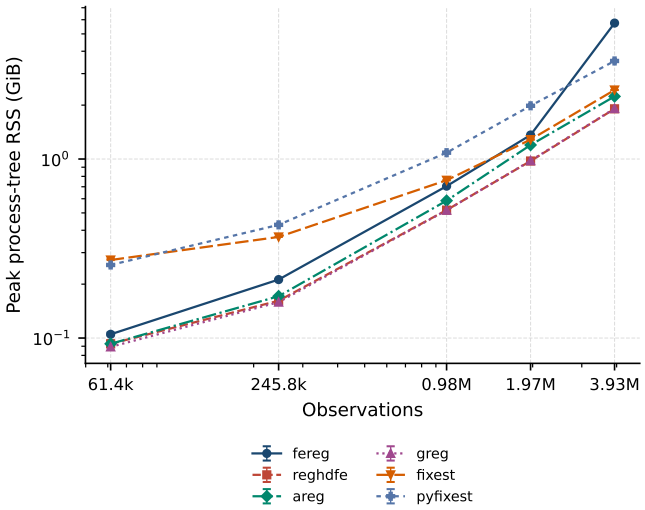


(c) RSS by observations

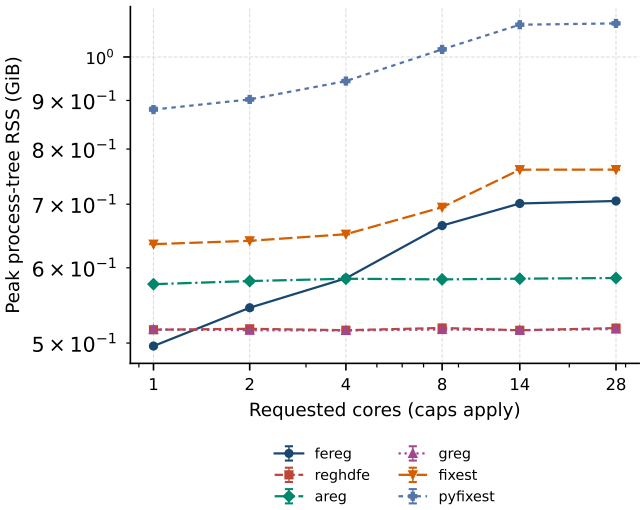


(d) RSS by requested cores

Partial campaign. Points require all six valid warm repetitions; bars show IQR, not confidence intervals. Crosses mark missing or unvalidated points. Both axes are logarithmic. Every task reserves 28 cores; Stata-controlled computation is capped at four. OLS IID inference, ten controls. See runs.csv for exclusions.


Figure 22: OLS Strong d=3: expanded, fixed capacity

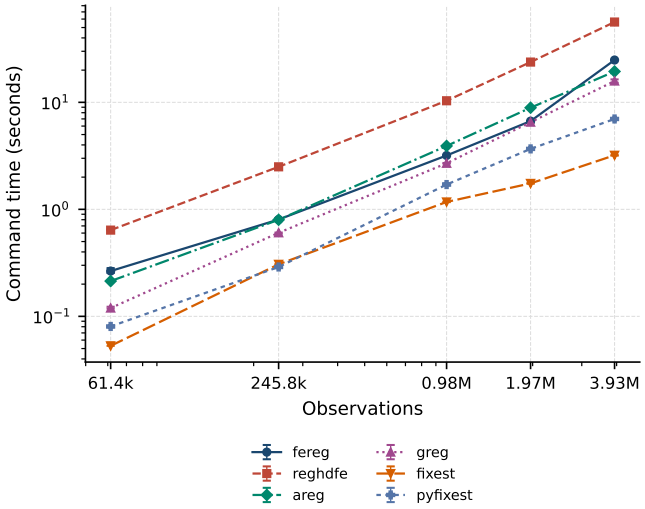


(a) Time by observations

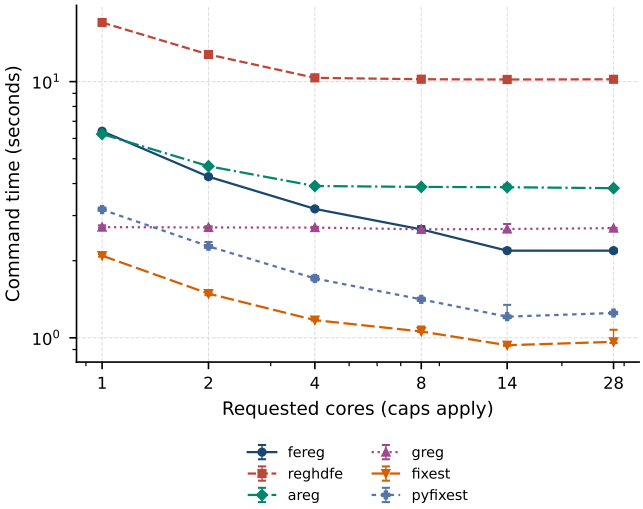

(b) Time by requested cores

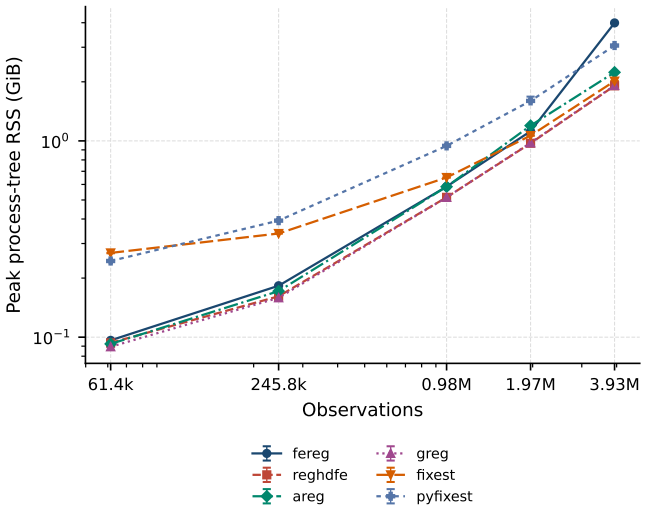


(c) RSS by observations

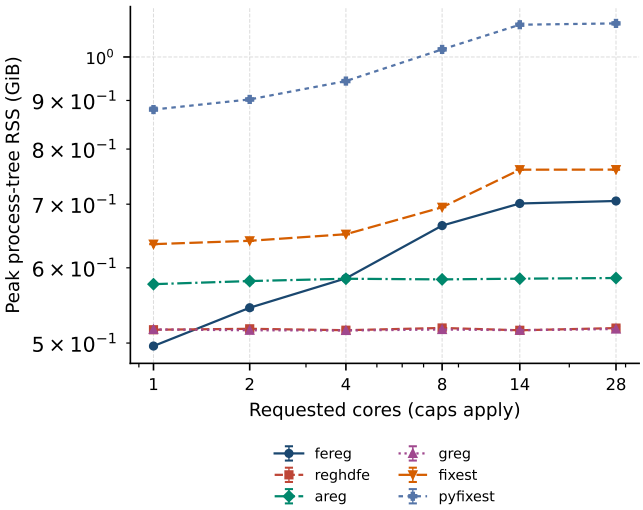

(d) RSS by requested cores


Partial campaign. Points require all six valid warm repetitions; bars show IQR, not confidence intervals. Crosses mark missing or unvalidated points. Both axes are logarithmic. Every task reserves 28 cores; Stata-controlled computation is capped at four. OLS IID inference, ten controls. See runs.csv for exclusions.

Figure 23: OLS Strong d=6: expanded, maximum capacity

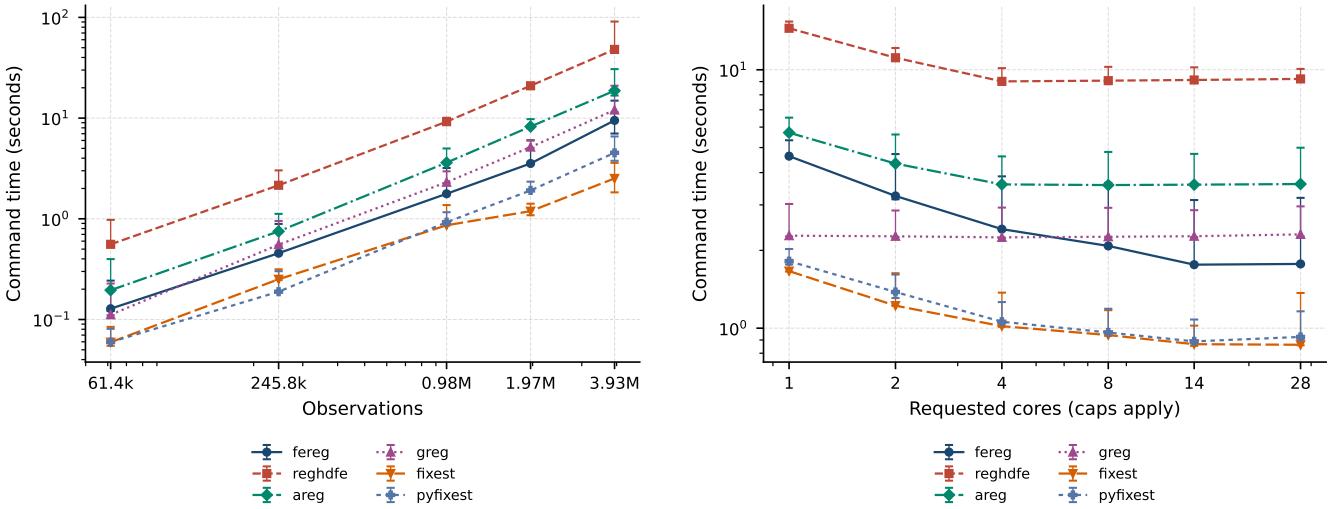

(a) Time by observations

(b) Time by requested cores

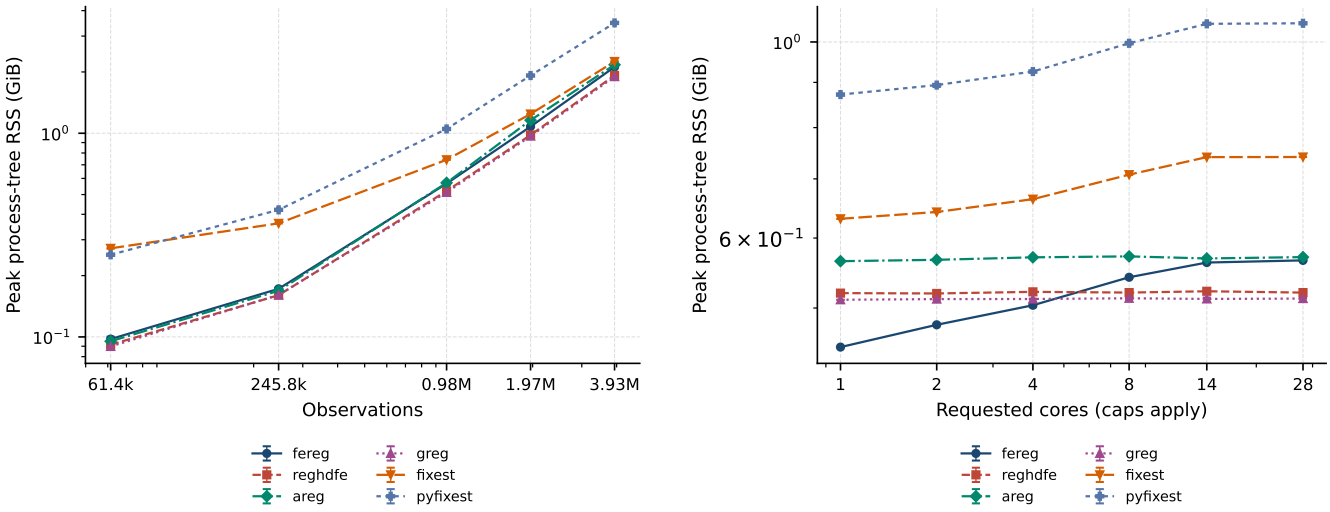


(c) RSS by observations

(d) RSS by requested cores

Partial campaign. Points require all six valid warm repetitions; bars show IQR, not confidence intervals. Crosses mark missing or unvalidated points. Both axes are logarithmic. Every task reserves 28 cores; Stata-controlled computation is capped at four. OLS IID inference, ten controls. See runs.csv for exclusions.

Figure 24: OLS Strong d=6: expanded, fixed capacity

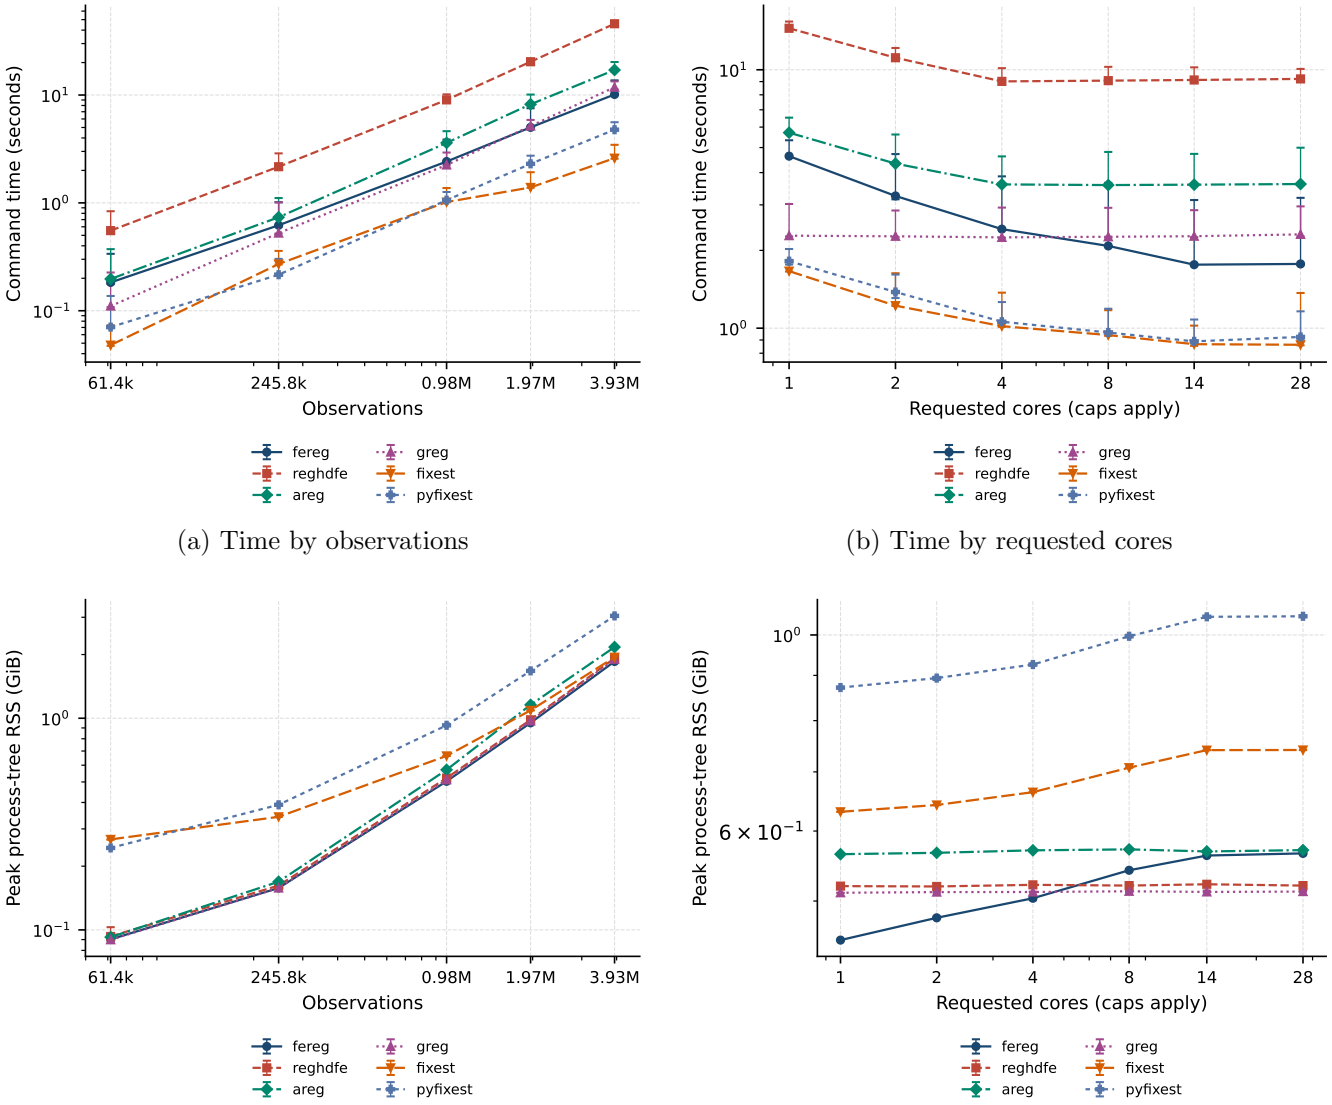

(a) Time by observations


(b) Time by requested cores

(c) RSS by observations


(d) RSS by requested cores

Partial campaign. Points require all six valid warm repetitions; bars show IQR, not confidence intervals. Crosses mark missing or unvalidated points. Both axes are logarithmic. Every task reserves 28 cores; Stata-controlled computation is capped at four. OLS IID inference, ten controls. See runs.csv for exclusions.


Figure 25: fereg/reghdfe: panels, maximum capacity

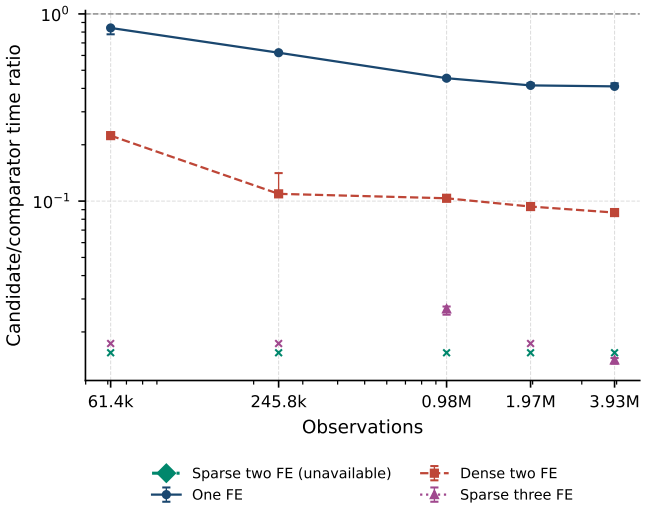


(a) Time ratios by observations

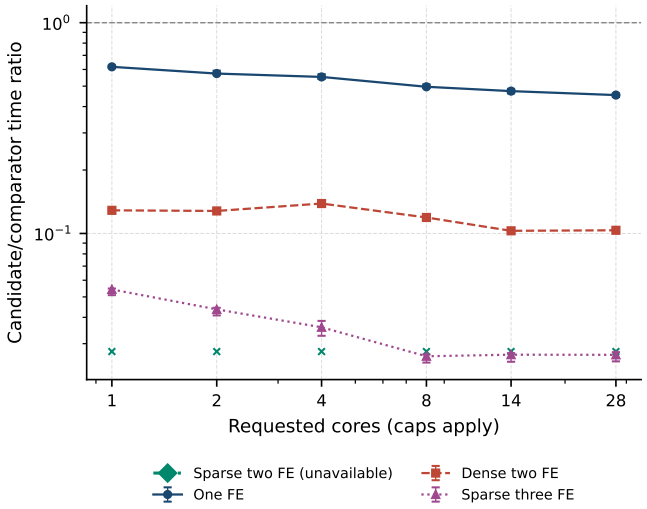

(b) Time ratios by requested cores

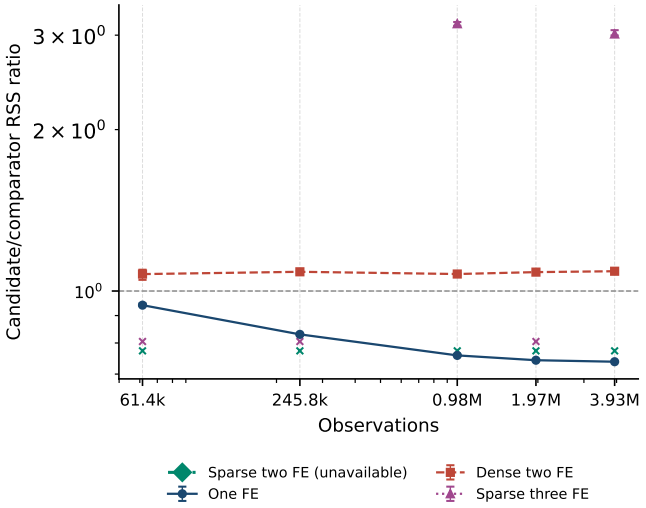


(c) RSS ratios by observations

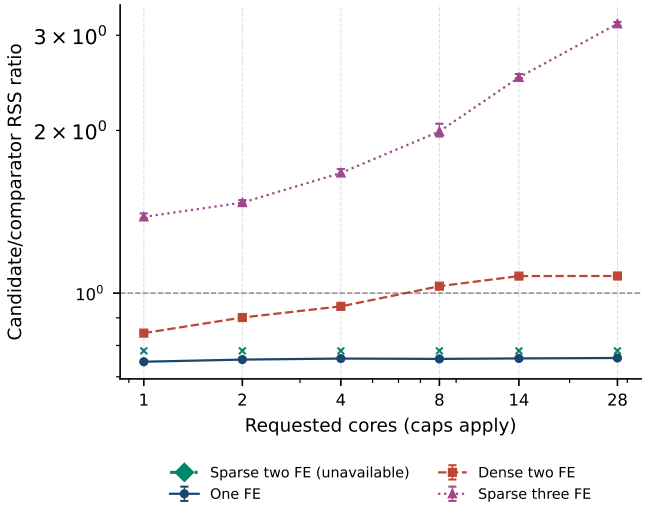


(d) RSS ratios by requested cores

Partial campaign. Points require all six valid warm repetitions; bars show IQR, not confidence intervals. Crosses mark missing or unvalidated points. Both axes are logarithmic. Every task reserves 28 cores; Stata-controlled computation is capped at four. OLS IID inference, ten controls. See runs.csv for exclusions. Ratios are computed within seed/node pairs. Values below one favor fereg.


Figure 26: fereg/reghdfe: panels, fixed capacity

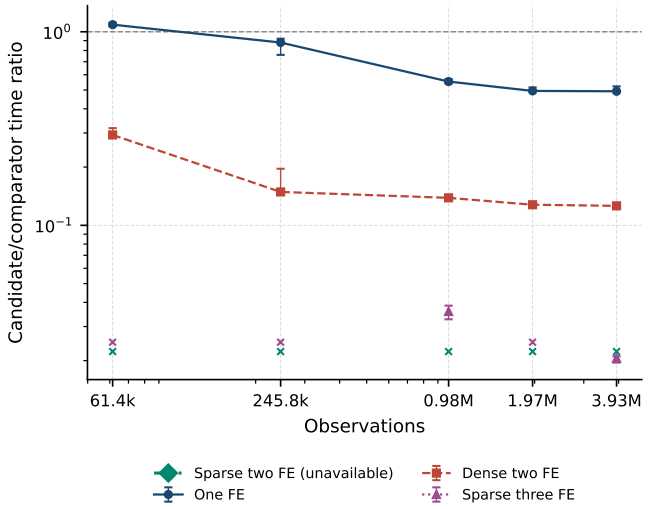


(a) Time ratios by observations

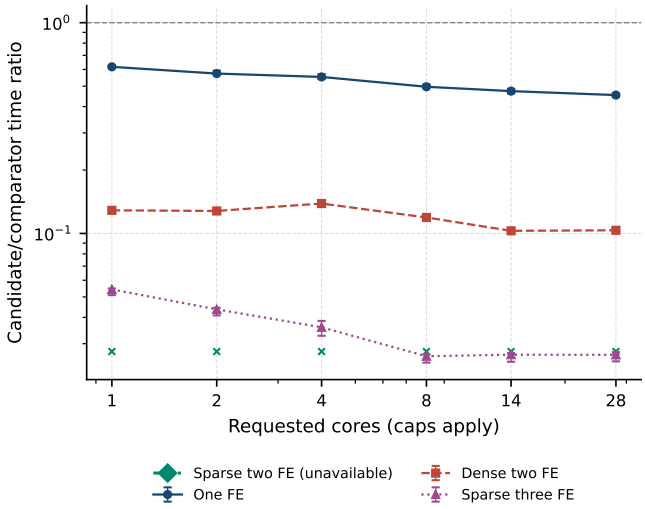

(b) Time ratios by requested cores

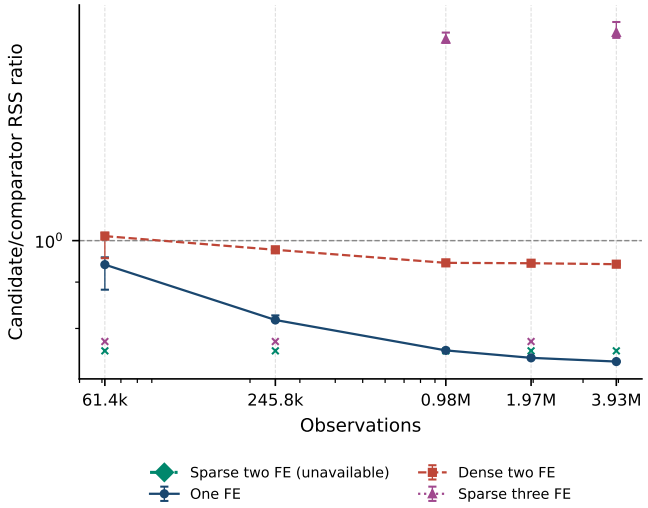


(c) RSS ratios by observations

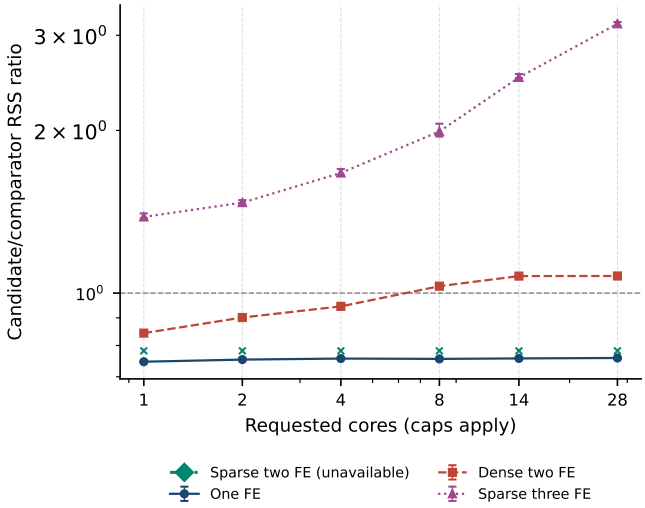

(d) RSS ratios by requested cores


Partial campaign. Points require all six valid warm repetitions; bars show IQR, not confidence intervals. Crosses mark missing or unvalidated points. Both axes are logarithmic. Every task reserves 28 cores; Stata-controlled computation is capped at four. OLS IID inference, ten controls. See runs.csv for exclusions. Ratios are computed within seed/node pairs. Values below one favor fereg.

Figure 27: fereg/areg: panels, maximum capacity

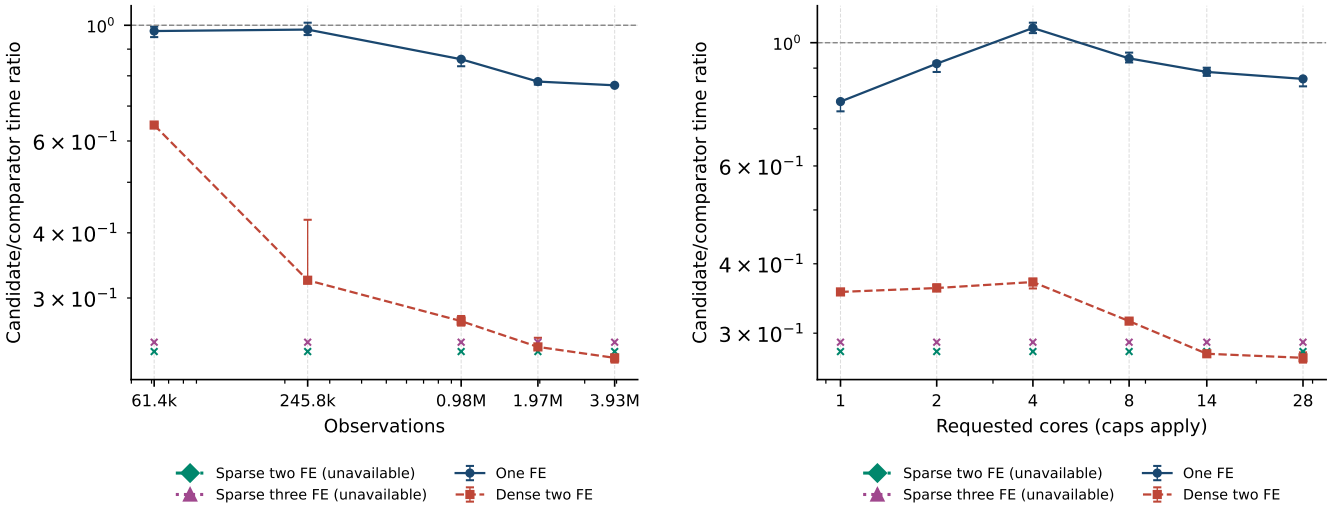

(a) Time ratios by observations

(b) Time ratios by requested cores

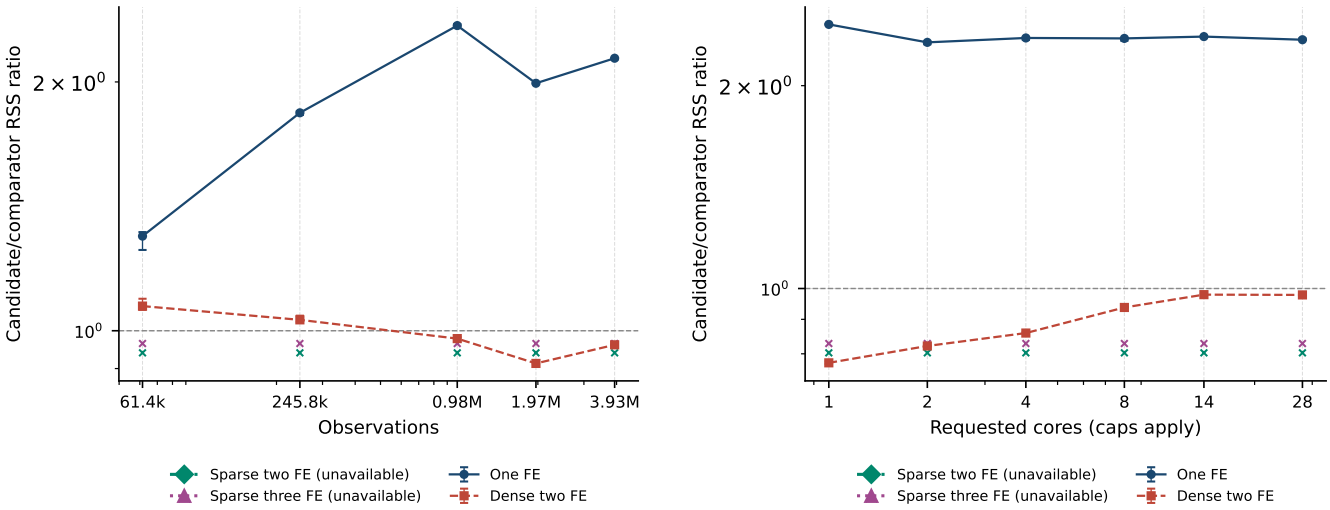


(c) RSS ratios by observations

(d) RSS ratios by requested cores


Partial campaign. Points require all six valid warm repetitions; bars show IQR, not confidence intervals. Crosses mark missing or unvalidated points. Both axes are logarithmic. Every task reserves 28 cores; Stata-controlled computation is capped at four. OLS IID inference, ten controls. See runs.csv for exclusions. Ratios are computed within seed/node pairs. Values below one favor fereg.

Figure 28: fereg/areg: panels, fixed capacity

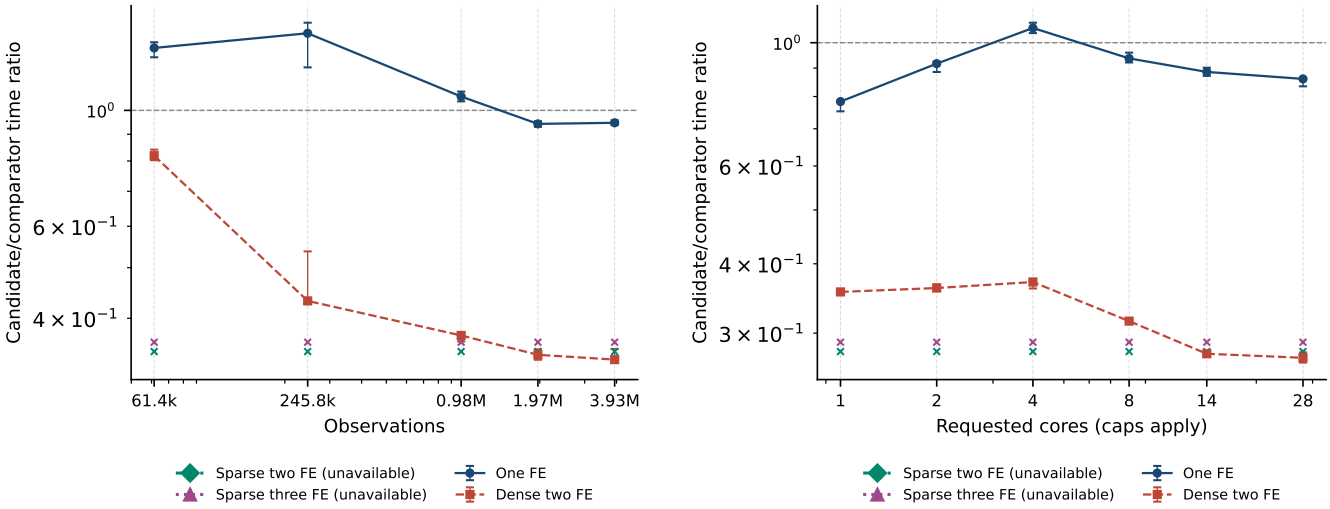


(a) Time ratios by observations

(b) Time ratios by requested cores

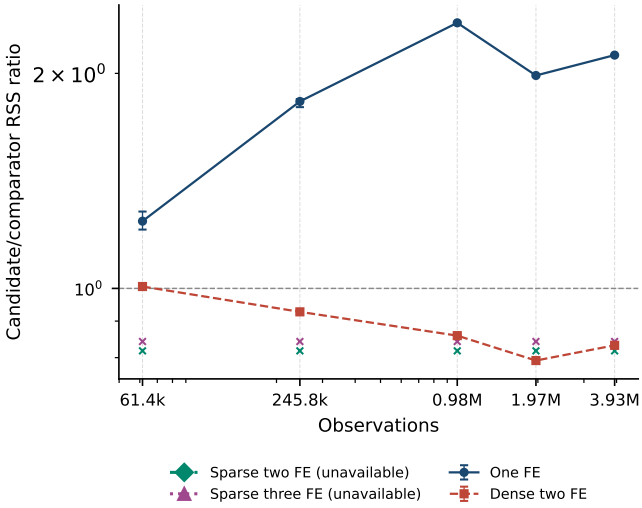


(c) RSS ratios by observations

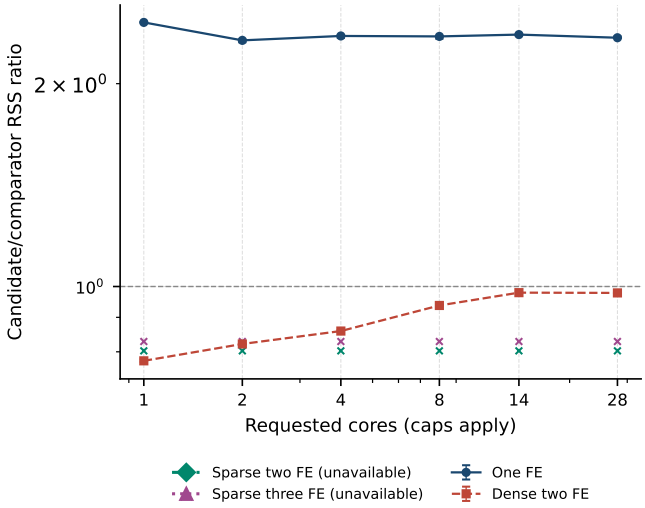


(d) RSS ratios by requested cores

Partial campaign. Points require all six valid warm repetitions; bars show IQR, not confidence intervals. Crosses mark missing or unvalidated points. Both axes are logarithmic. Every task reserves 28 cores; Stata-controlled computation is capped at four. OLS IID inference, ten controls. See runs.csv for exclusions. Ratios are computed within seed/node pairs. Values below one favor fereg.


Figure 29: fereg/greg: panels, maximum capacity

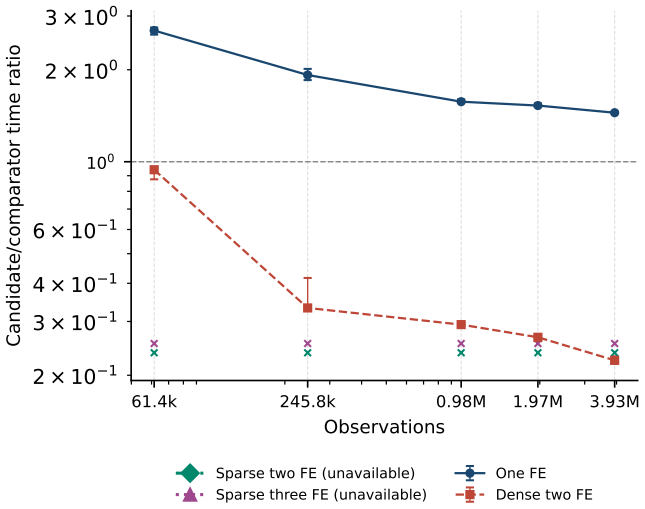


(a) Time ratios by observations

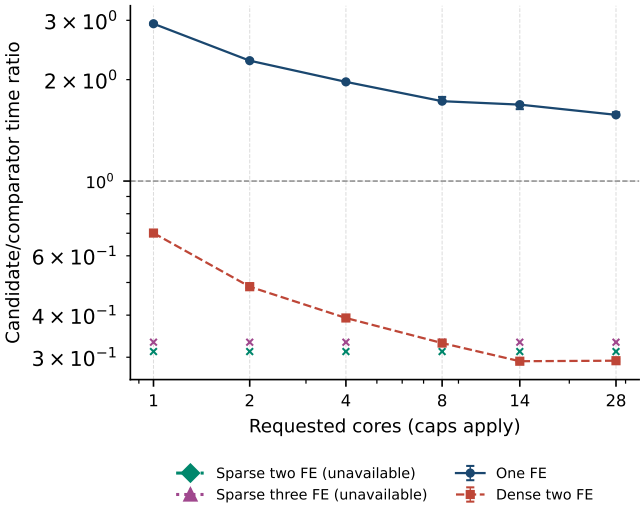

(b) Time ratios by requested cores

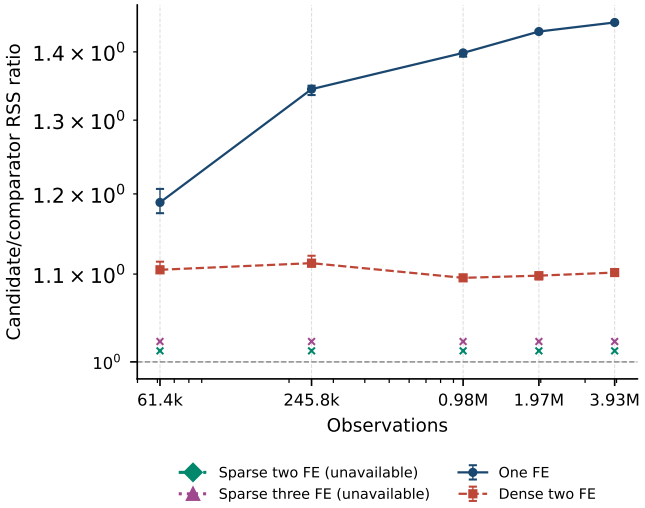


(c) RSS ratios by observations

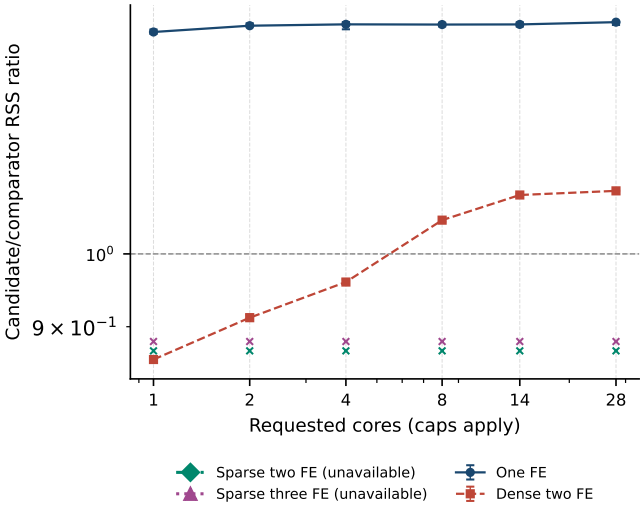

(d) RSS ratios by requested cores


Partial campaign. Points require all six valid warm repetitions; bars show IQR, not confidence intervals. Crosses mark missing or unvalidated points. Both axes are logarithmic. Every task reserves 28 cores; Stata-controlled computation is capped at four. OLS IID inference, ten controls. See runs.csv for exclusions. Ratios are computed within seed/node pairs. Values below one favor fereg.

Figure 30: fereg/greg: panels, fixed capacity

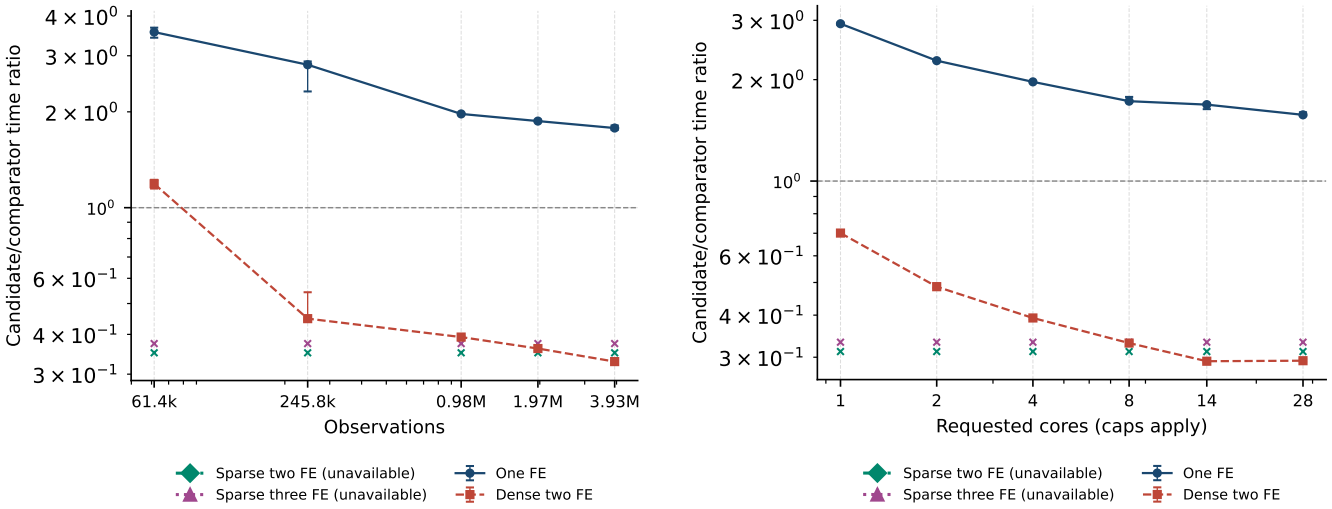

(a) Time ratios by observations

(b) Time ratios by requested cores

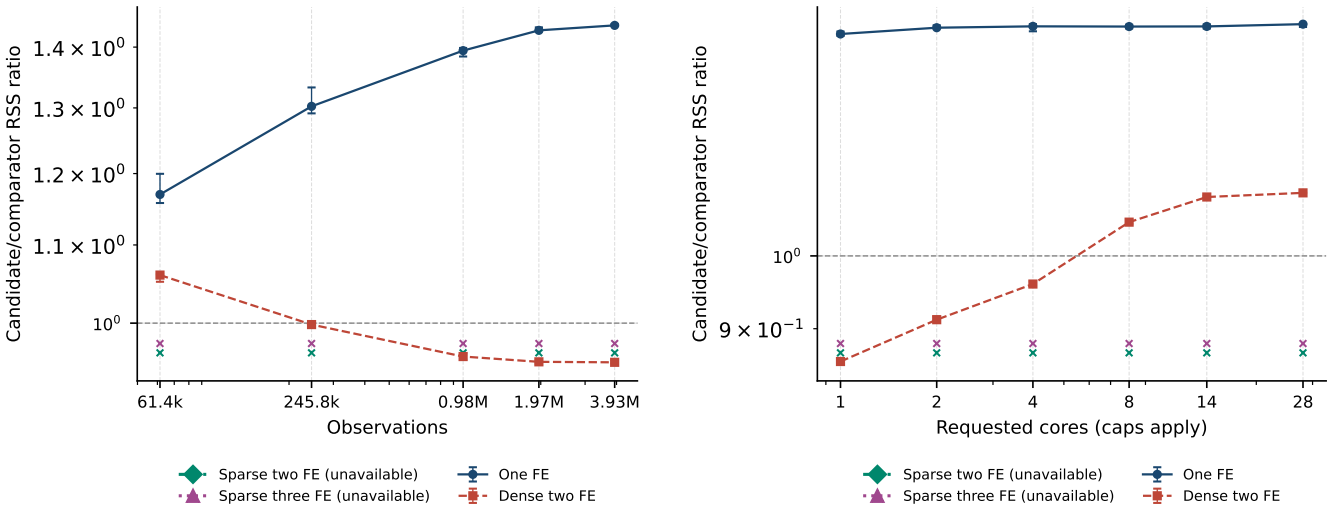


(c) RSS ratios by observations

(d) RSS ratios by requested cores


Partial campaign. Points require all six valid warm repetitions; bars show IQR, not confidence intervals. Crosses mark missing or unvalidated points. Both axes are logarithmic. Every task reserves 28 cores; Stata-controlled computation is capped at four. OLS IID inference, ten controls. See runs.csv for exclusions. Ratios are computed within seed/node pairs. Values below one favor fereg.

Figure 31: fereg/fixest: panels, maximum capacity

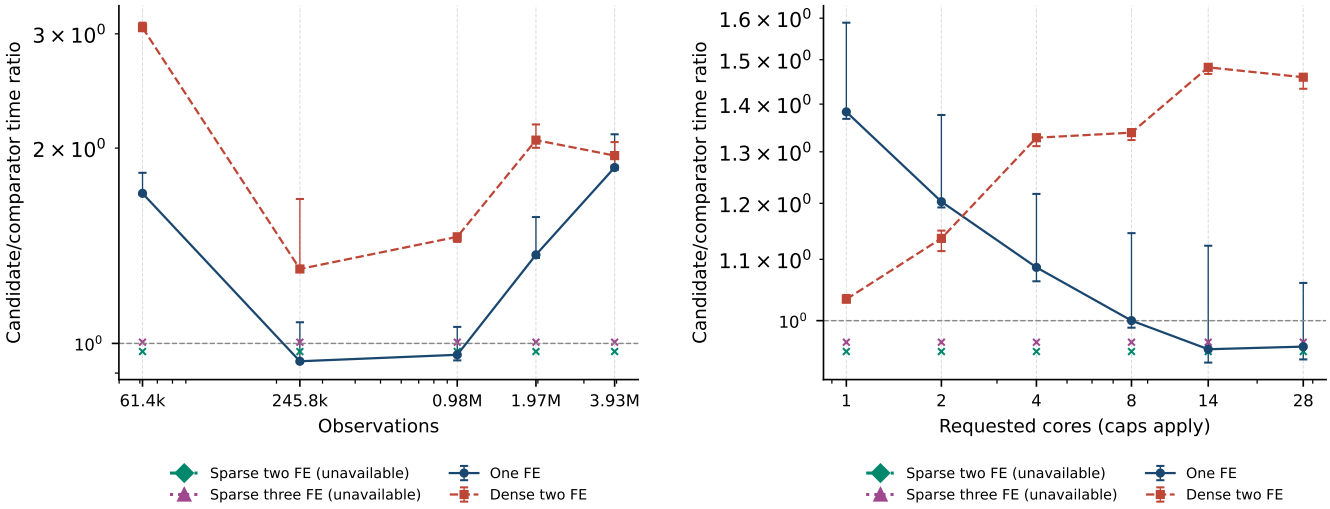


(a) Time ratios by observations

(b) Time ratios by requested cores

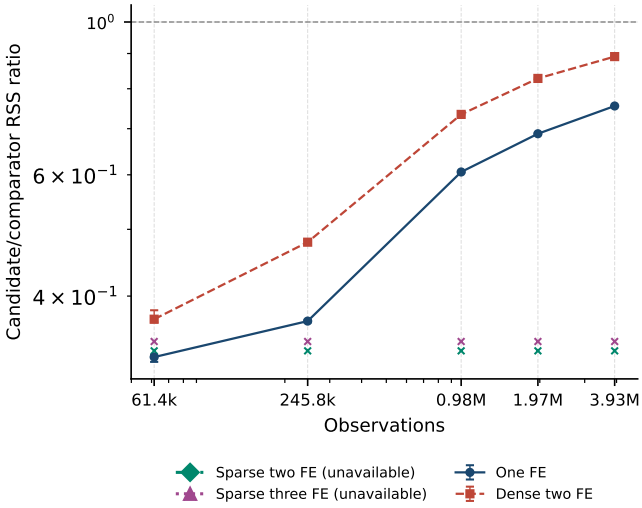


(c) RSS ratios by observations

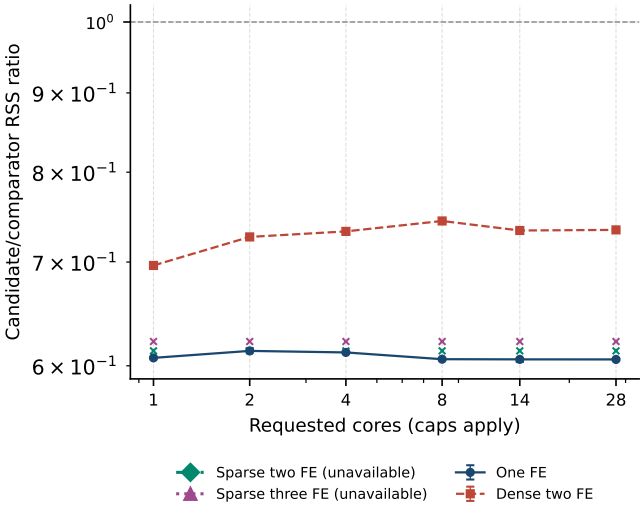

(d) RSS ratios by requested cores


Partial campaign. Points require all six valid warm repetitions; bars show IQR, not confidence intervals. Crosses mark missing or unvalidated points. Both axes are logarithmic. Every task reserves 28 cores; Stata-controlled computation is capped at four. OLS IID inference, ten controls. See runs.csv for exclusions. Ratios are computed within seed/node pairs. Values below one favor fereg.

Figure 32: fereg/fixest: panels, fixed capacity

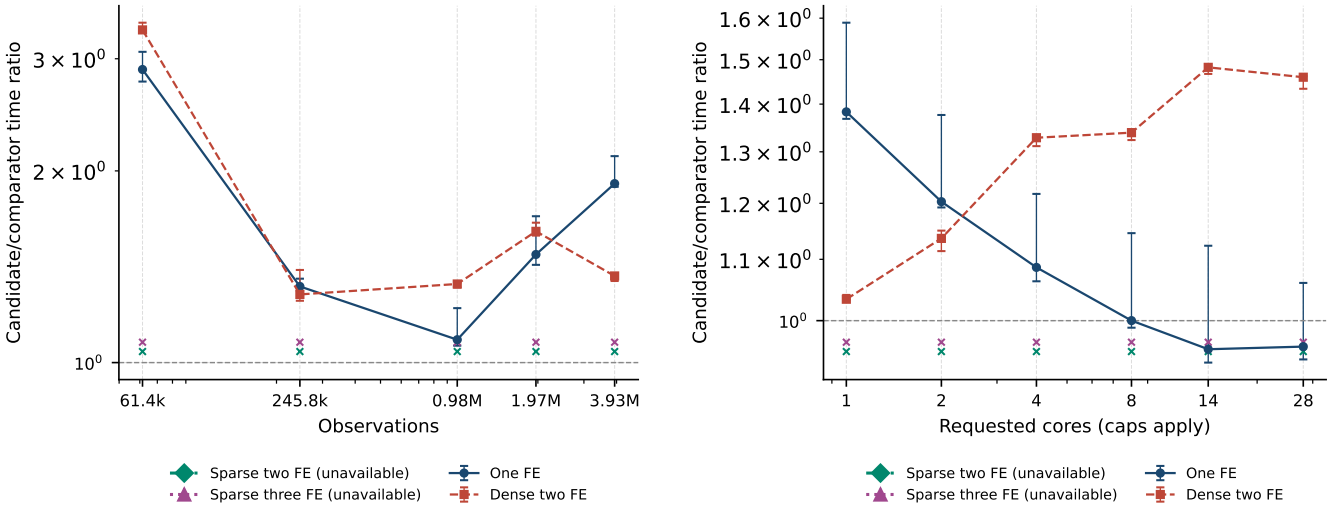


(a) Time ratios by observations

(b) Time ratios by requested cores

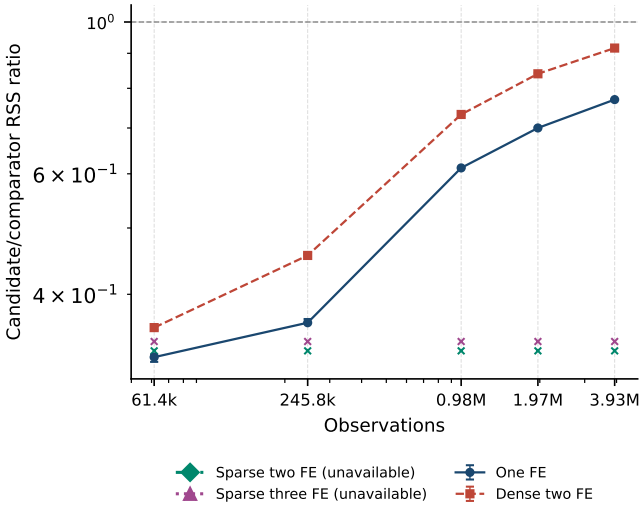


(c) RSS ratios by observations

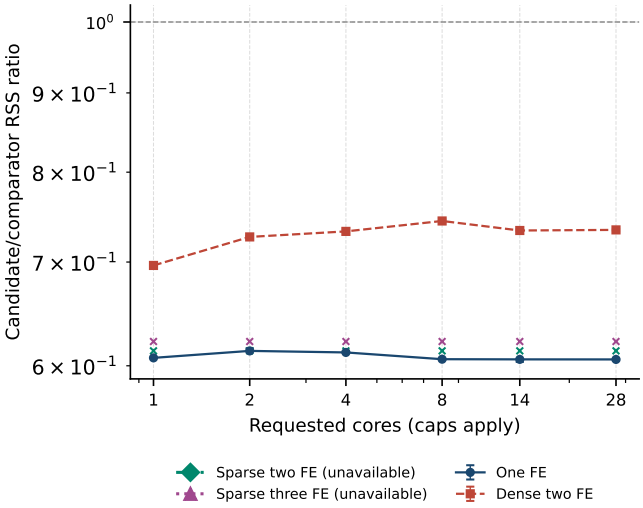

(d) RSS ratios by requested cores


Partial campaign. Points require all six valid warm repetitions; bars show IQR, not confidence intervals. Crosses mark missing or unvalidated points. Both axes are logarithmic. Every task reserves 28 cores; Stata-controlled computation is capped at four. OLS IID inference, ten controls. See runs.csv for exclusions. Ratios are computed within seed/node pairs. Values below one favor fereg.

Figure 33: fereg/pyfixest: panels, maximum capacity

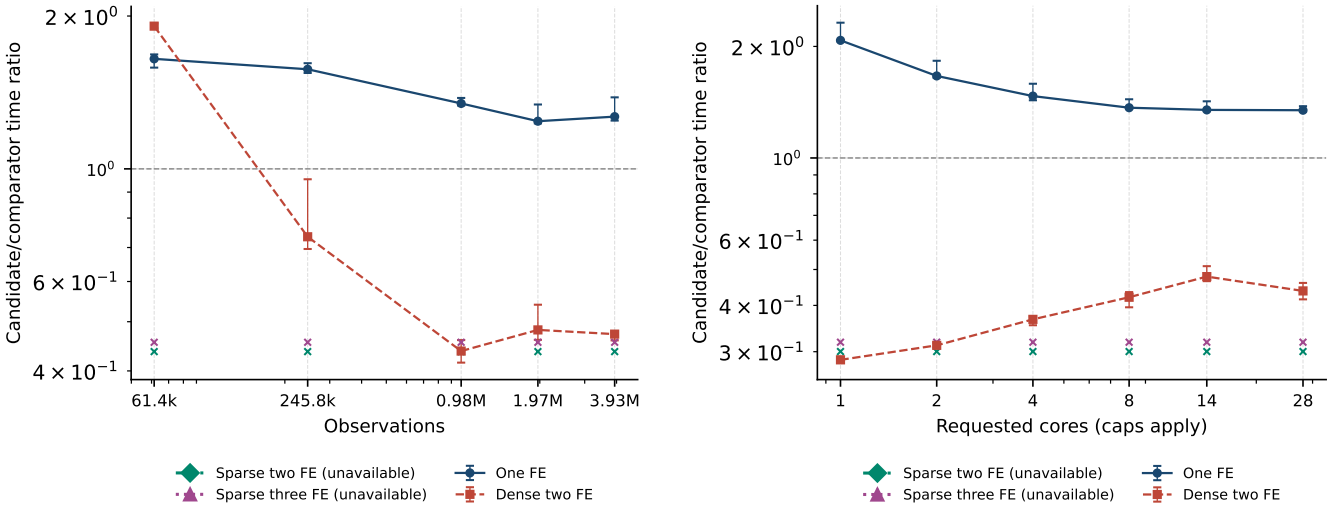


(a) Time ratios by observations

(b) Time ratios by requested cores

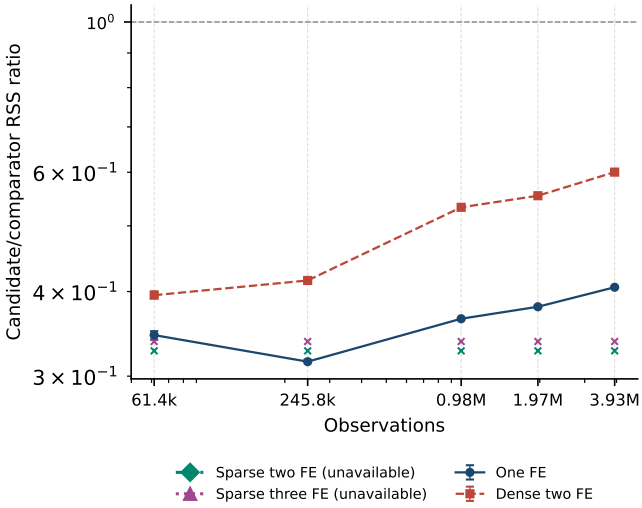


(c) RSS ratios by observations

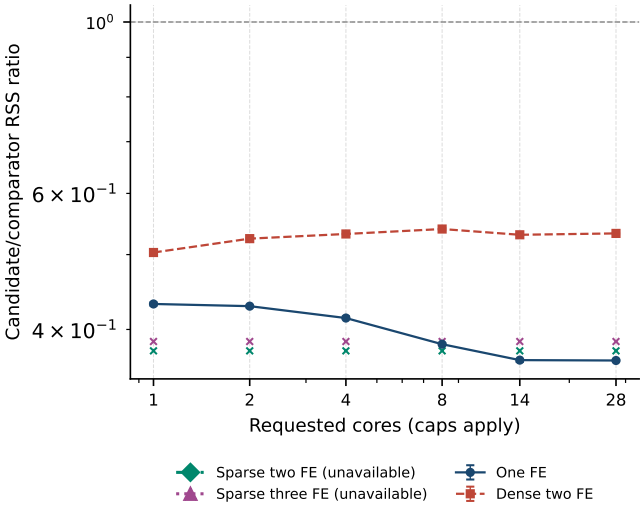

(d) RSS ratios by requested cores


Partial campaign. Points require all six valid warm repetitions; bars show IQR, not confidence intervals. Crosses mark missing or unvalidated points. Both axes are logarithmic. Every task reserves 28 cores; Stata-controlled computation is capped at four. OLS IID inference, ten controls. See runs.csv for exclusions. Ratios are computed within seed/node pairs. Values below one favor fereg.

Figure 34: fereg/pyfixest: panels, fixed capacity

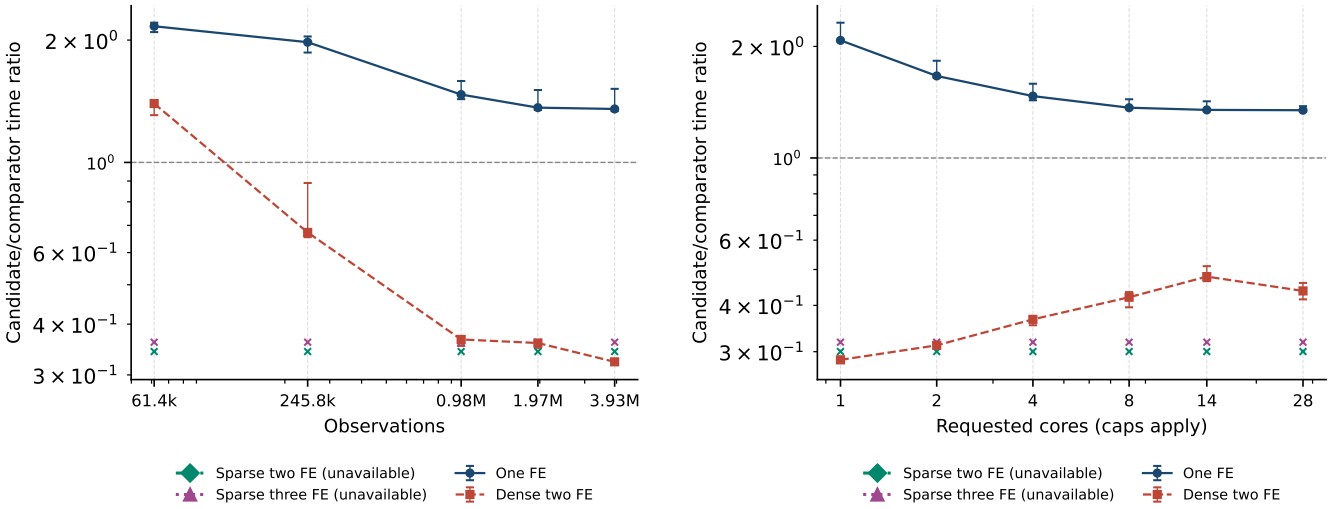


(a) Time ratios by observations

(b) Time ratios by requested cores

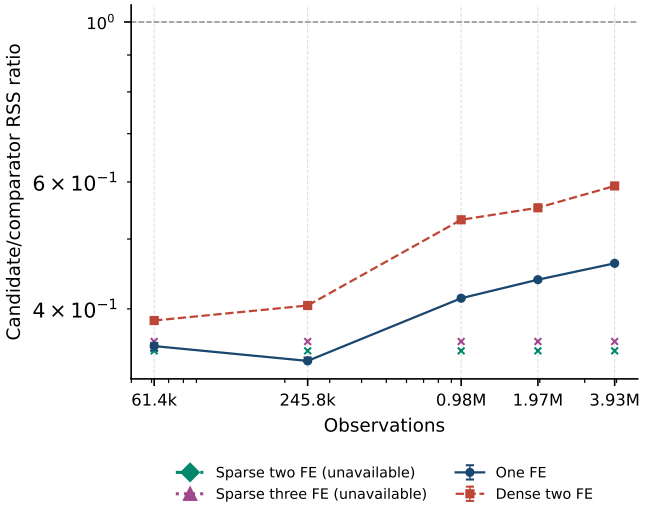


(c) RSS ratios by observations

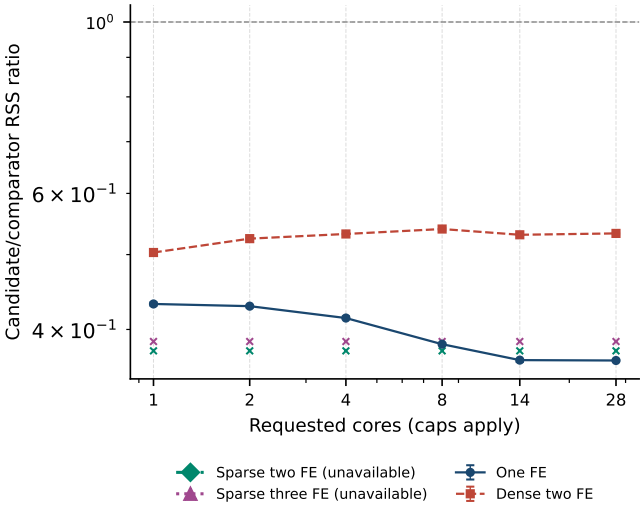

(d) RSS ratios by requested cores


Partial campaign. Points require all six valid warm repetitions; bars show IQR, not confidence intervals. Crosses mark missing or unvalidated points. Both axes are logarithmic. Every task reserves 28 cores; Stata-controlled computation is capped at four. OLS IID inference, ten controls. See runs.csv for exclusions. Ratios are computed within seed/node pairs. Values below one favor fereg.

Figure 35: fereg/reghdfe: paper, maximum capacity

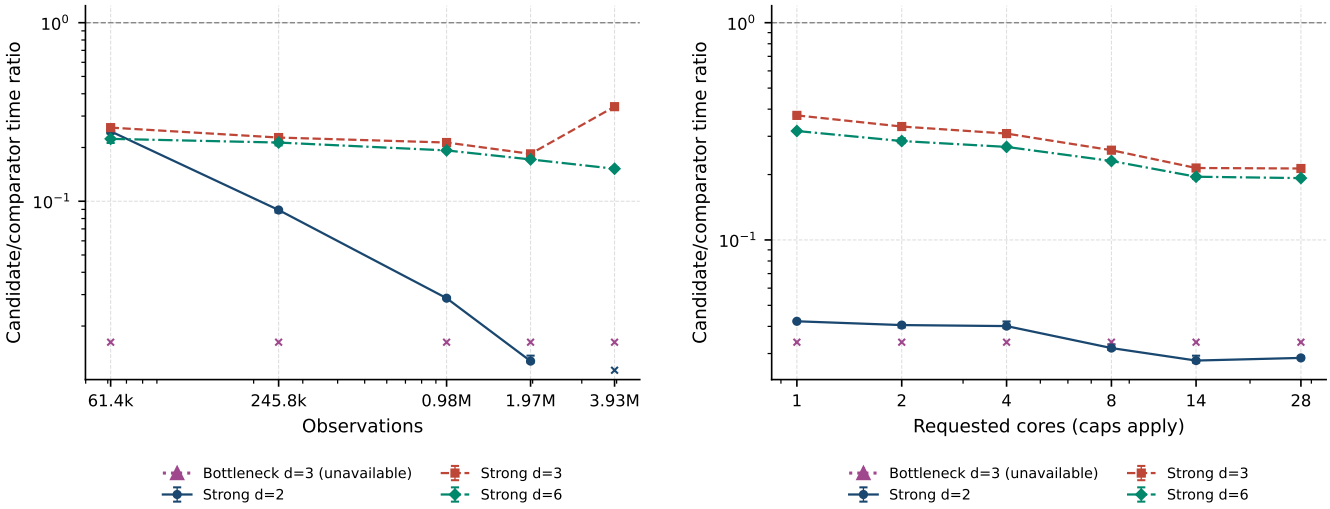


(a) Time ratios by observations

(b) Time ratios by requested cores

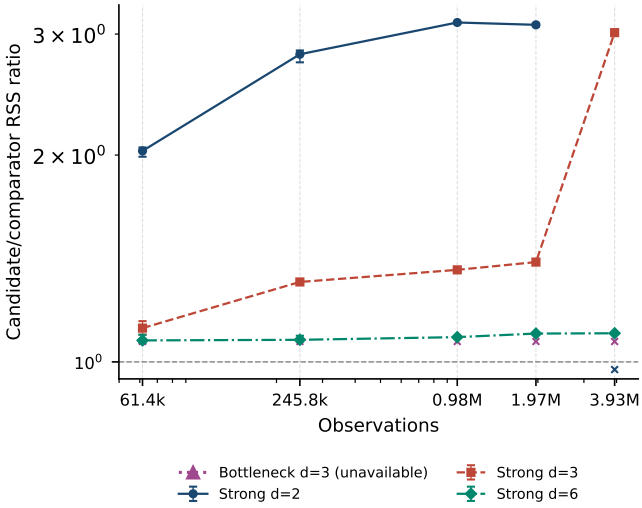


(c) RSS ratios by observations

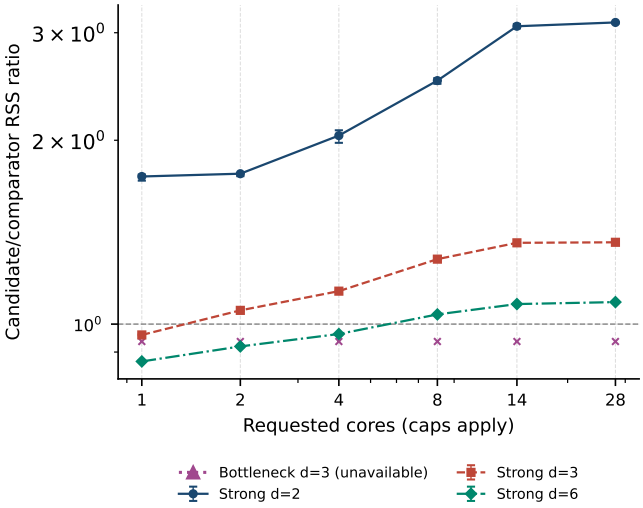

(d) RSS ratios by requested cores


Partial campaign. Points require all six valid warm repetitions; bars show IQR, not confidence intervals. Crosses mark missing or unvalidated points. Both axes are logarithmic. Every task reserves 28 cores; Stata-controlled computation is capped at four. OLS IID inference, ten controls. See runs.csv for exclusions. Ratios are computed within seed/node pairs. Values below one favor fereg.

Figure 36: fereg/reghdfe: paper, fixed capacity

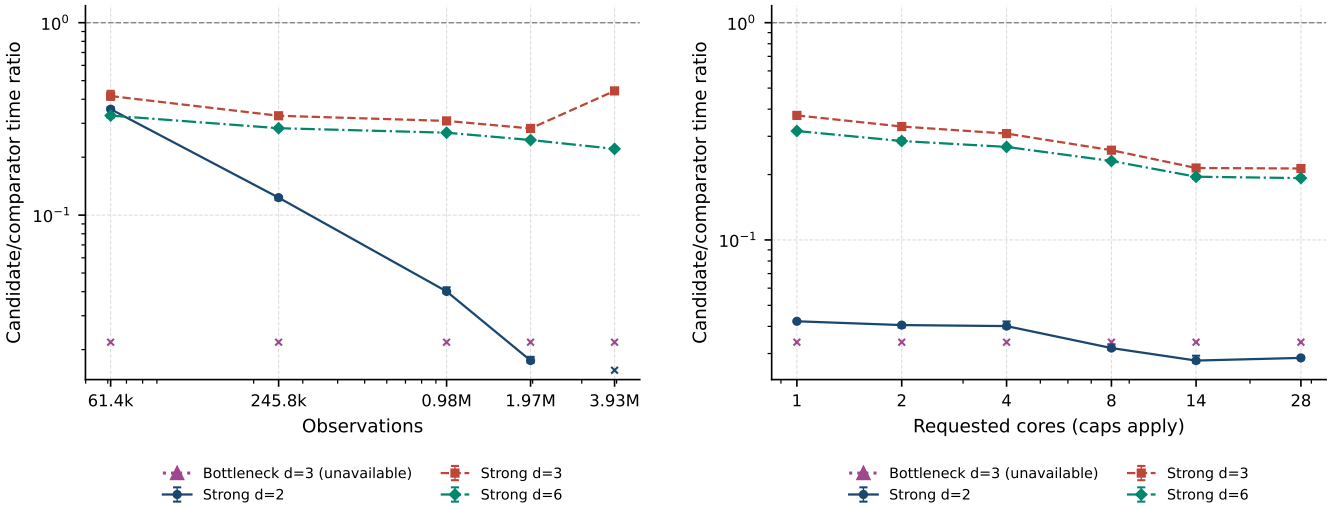

(a) Time ratios by observations

(b) Time ratios by requested cores

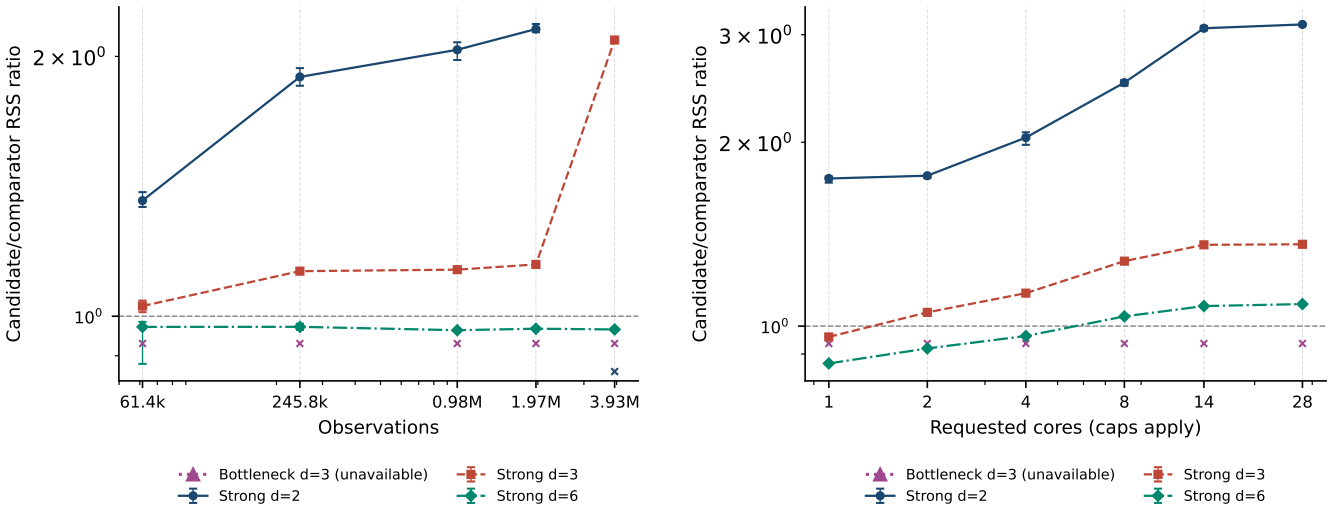


(c) RSS ratios by observations

(d) RSS ratios by requested cores


Partial campaign. Points require all six valid warm repetitions; bars show IQR, not confidence intervals. Crosses mark missing or unvalidated points. Both axes are logarithmic. Every task reserves 28 cores; Stata-controlled computation is capped at four. OLS IID inference, ten controls. See runs.csv for exclusions. Ratios are computed within seed/node pairs. Values below one favor fereg.

Figure 37: fereg/areg: paper, maximum capacity

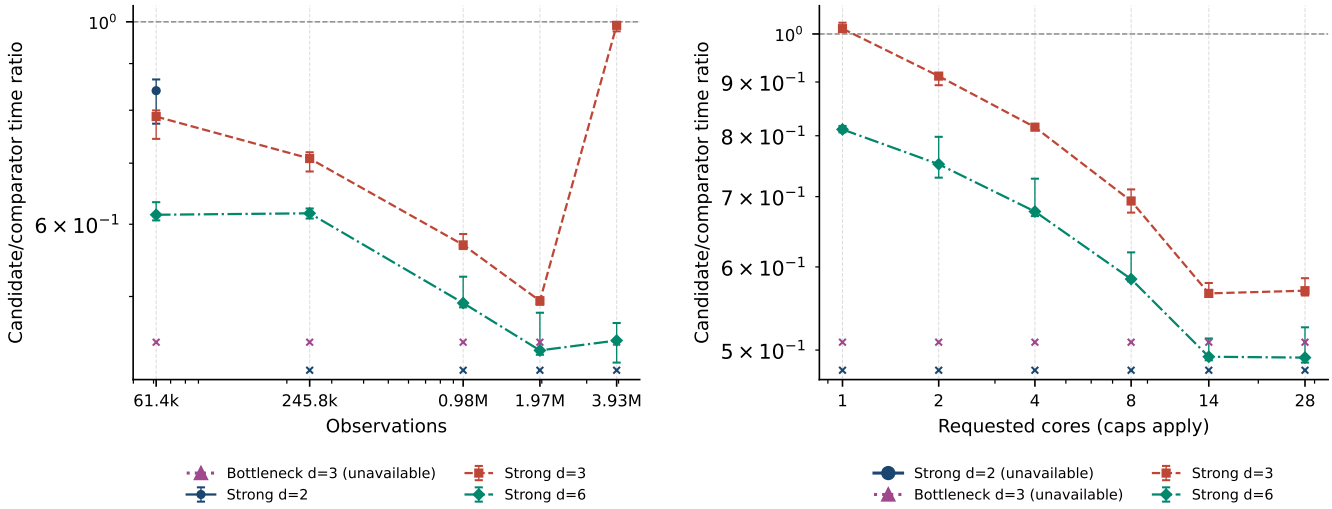


(a) Time ratios by observations

(b) Time ratios by requested cores

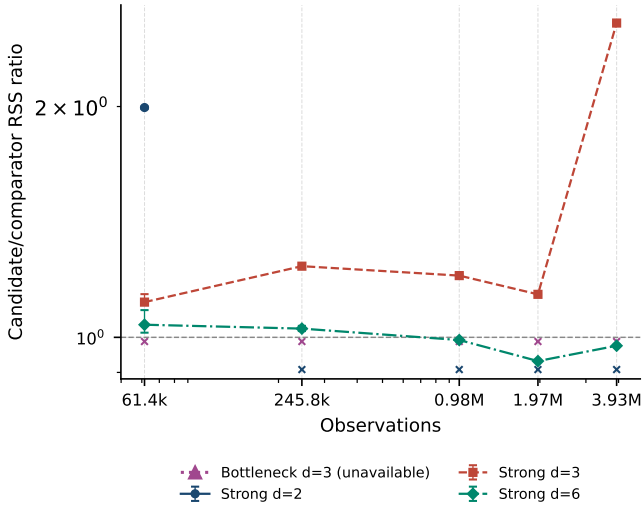


(c) RSS ratios by observations

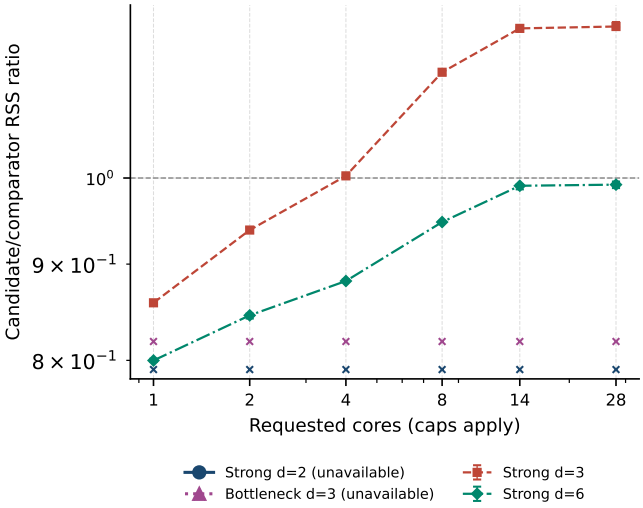

(d) RSS ratios by requested cores


Partial campaign. Points require all six valid warm repetitions; bars show IQR, not confidence intervals. Crosses mark missing or unvalidated points. Both axes are logarithmic. Every task reserves 28 cores; Stata-controlled computation is capped at four. OLS IID inference, ten controls. See runs.csv for exclusions. Ratios are computed within seed/node pairs. Values below one favor fereg.

Figure 38: fereg/areg: paper, fixed capacity

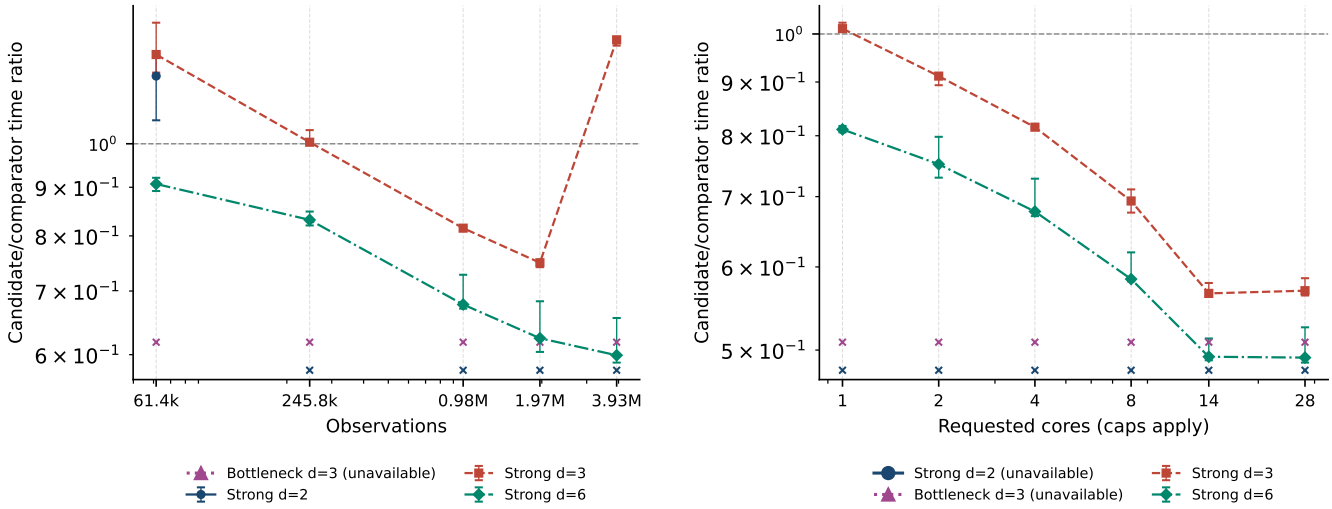


(a) Time ratios by observations

(b) Time ratios by requested cores

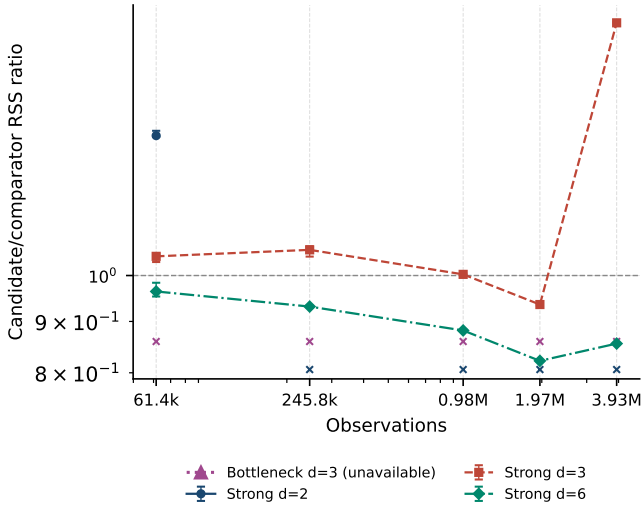


(c) RSS ratios by observations

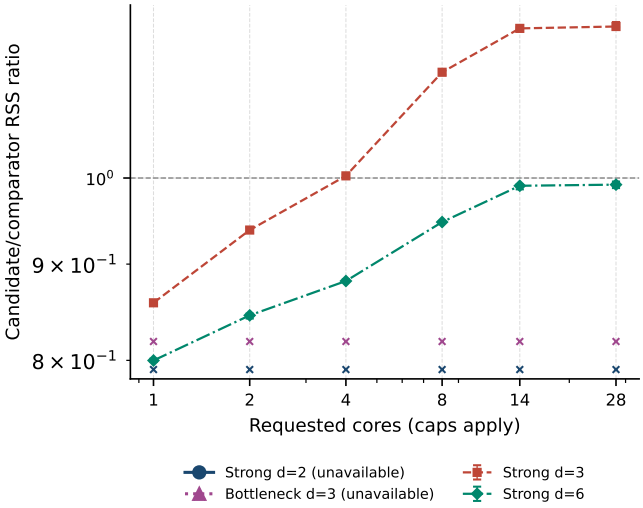

(d) RSS ratios by requested cores


Partial campaign. Points require all six valid warm repetitions; bars show IQR, not confidence intervals. Crosses mark missing or unvalidated points. Both axes are logarithmic. Every task reserves 28 cores; Stata-controlled computation is capped at four. OLS IID inference, ten controls. See runs.csv for exclusions. Ratios are computed within seed/node pairs. Values below one favor fereg.

Figure 39: fereg/greg: paper, maximum capacity

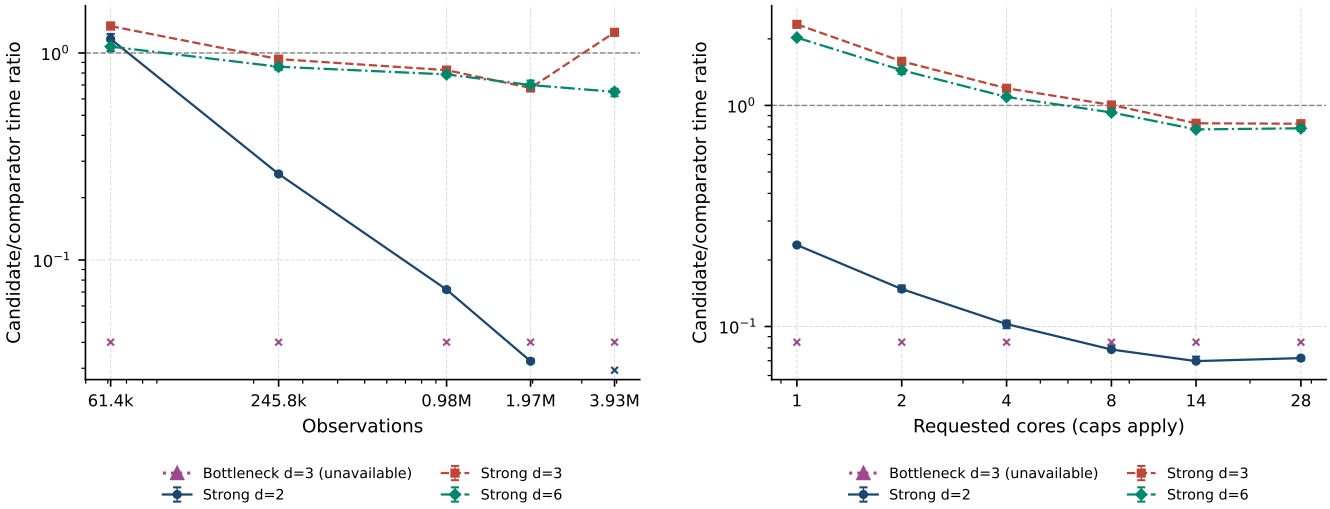


(a) Time ratios by observations

(b) Time ratios by requested cores

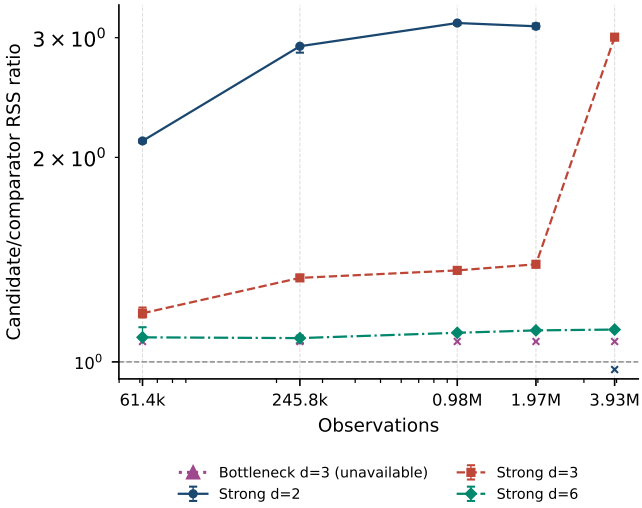


(c) RSS ratios by observations

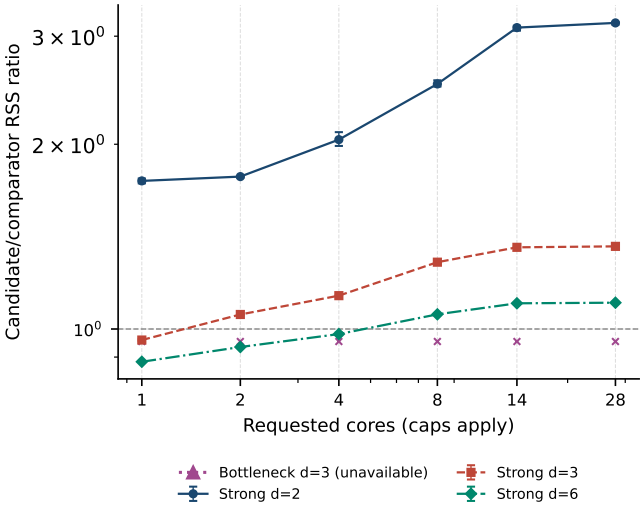

(d) RSS ratios by requested cores


Partial campaign. Points require all six valid warm repetitions; bars show IQR, not confidence intervals. Crosses mark missing or unvalidated points. Both axes are logarithmic. Every task reserves 28 cores; Stata-controlled computation is capped at four. OLS IID inference, ten controls. See runs.csv for exclusions. Ratios are computed within seed/node pairs. Values below one favor fereg.

Figure 40: fereg/greg: paper, fixed capacity

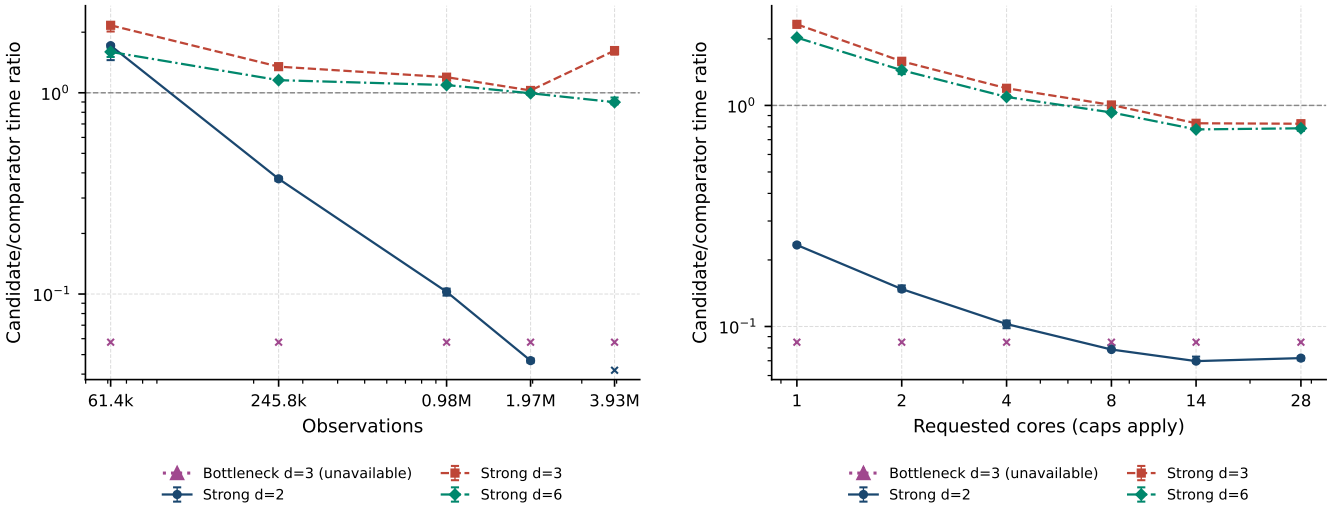


(a) Time ratios by observations

(b) Time ratios by requested cores

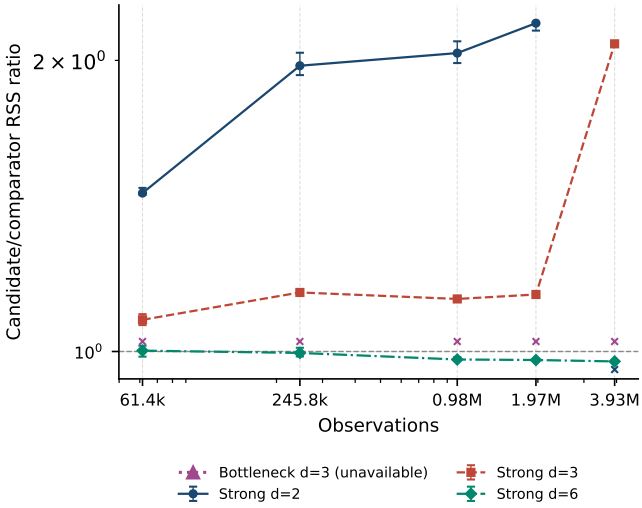


(c) RSS ratios by observations

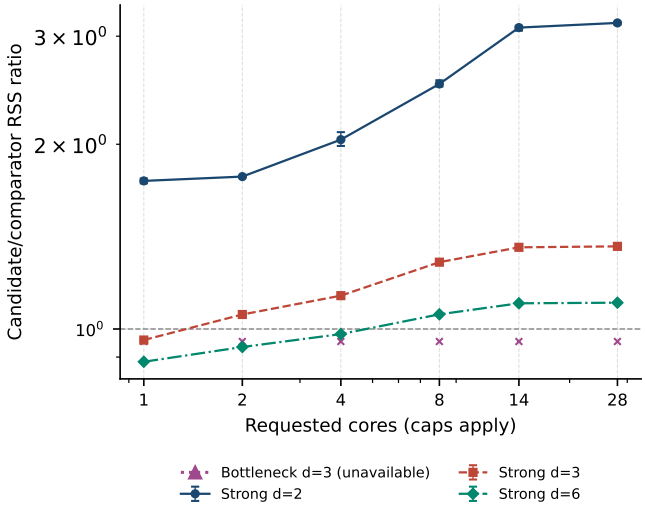

(d) RSS ratios by requested cores

Partial campaign. Points require all six valid warm repetitions; bars show IQR, not confidence intervals. Crosses mark missing or unvalidated points. Both axes are logarithmic. Every task reserves 28 cores; Stata-controlled computation is capped at four. OLS IID inference, ten controls. See runs.csv for exclusions. Ratios are computed within seed/node pairs. Values below one favor fereg.

Figure 41: fereg/fixest: paper, maximum capacity

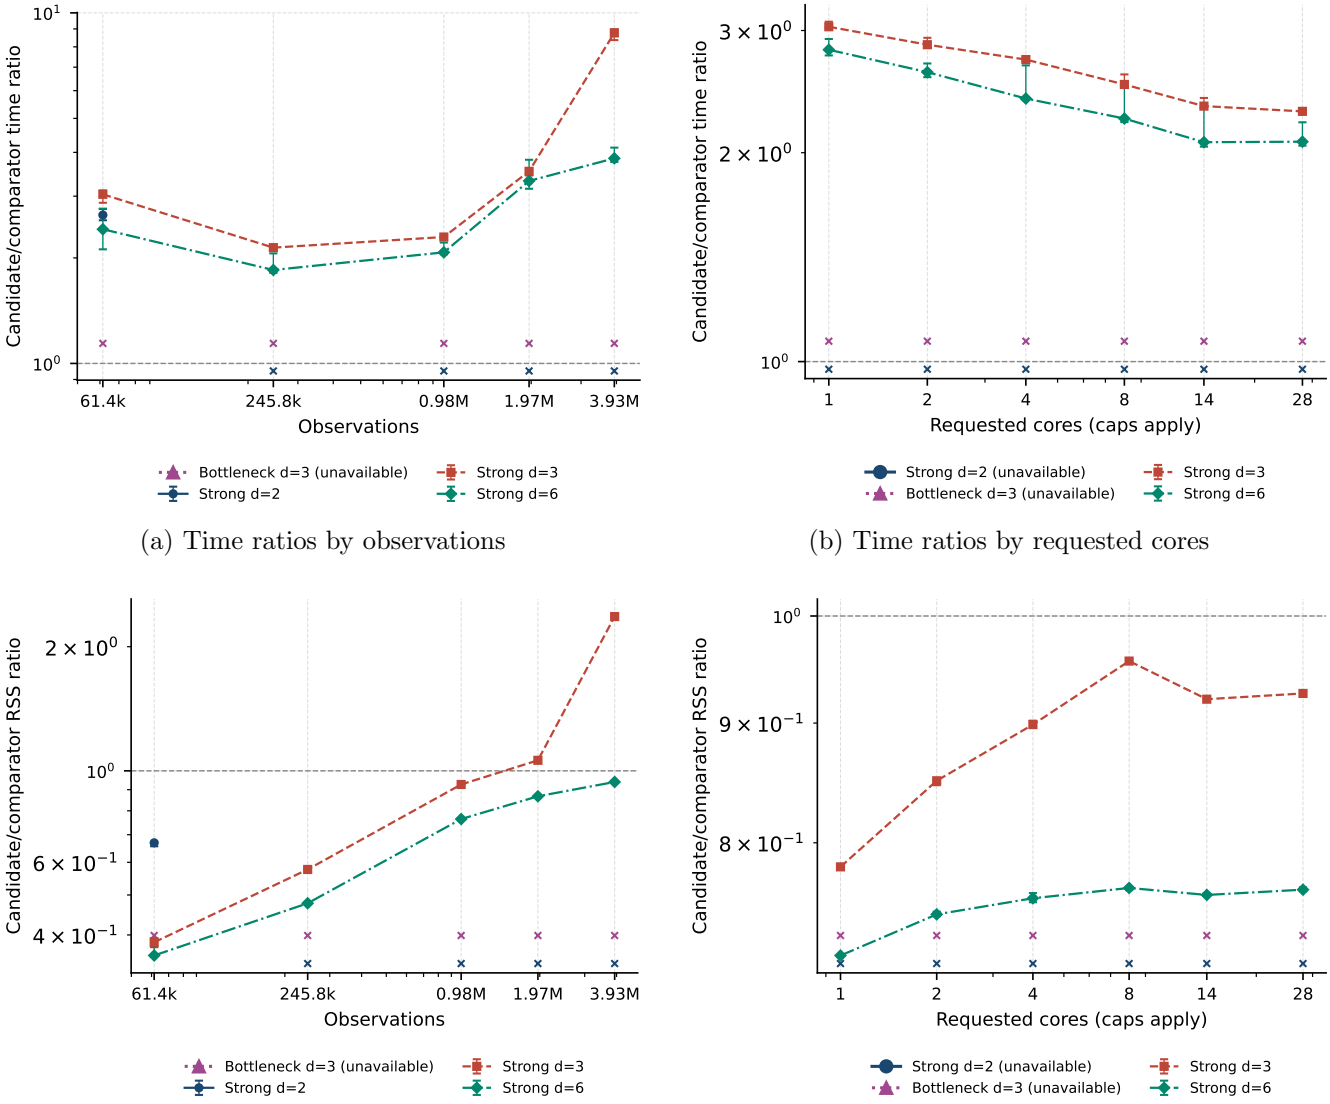

(a) Time ratios by observations


(b) Time ratios by requested cores

(c) RSS ratios by observations

(d) RSS ratios by requested cores


Partial campaign. Points require all six valid warm repetitions; bars show IQR, not confidence intervals. Crosses mark missing or unvalidated points. Both axes are logarithmic. Every task reserves 28 cores; Stata-controlled computation is capped at four. OLS IID inference, ten controls. See runs.csv for exclusions. Ratios are computed within seed/node pairs. Values below one favor fereg.

Figure 42: fereg/fixest: paper, fixed capacity

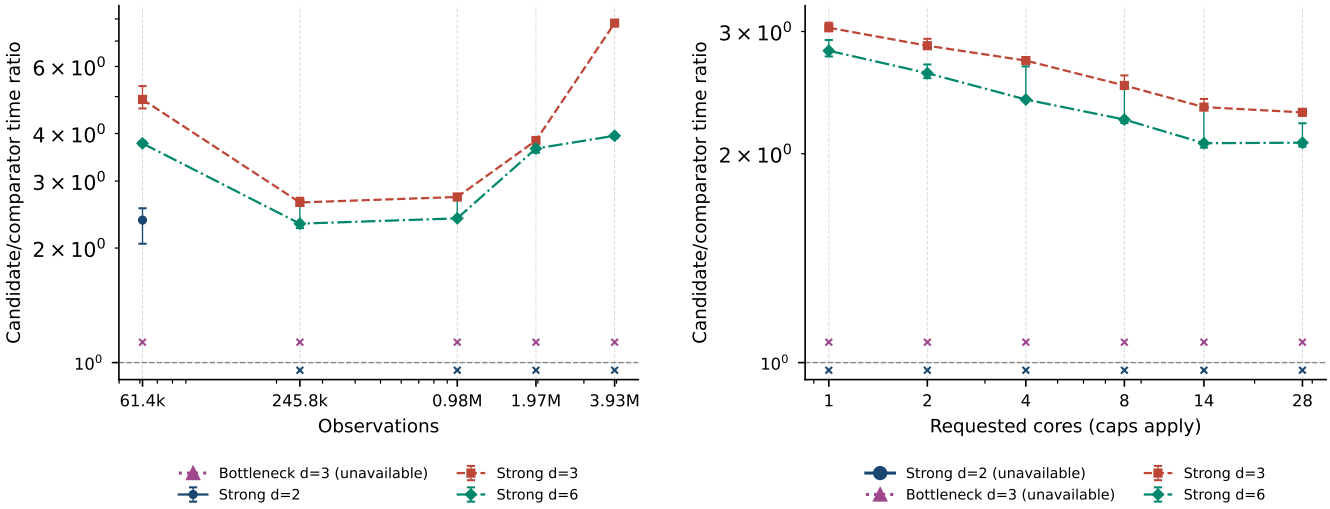


(a) Time ratios by observations

(b) Time ratios by requested cores

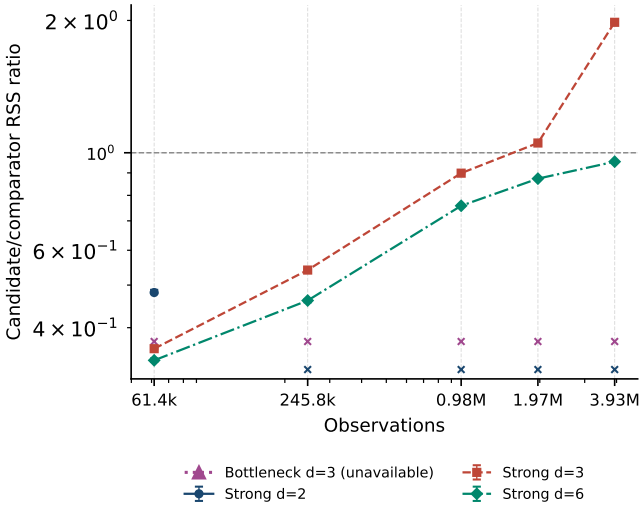


(c) RSS ratios by observations

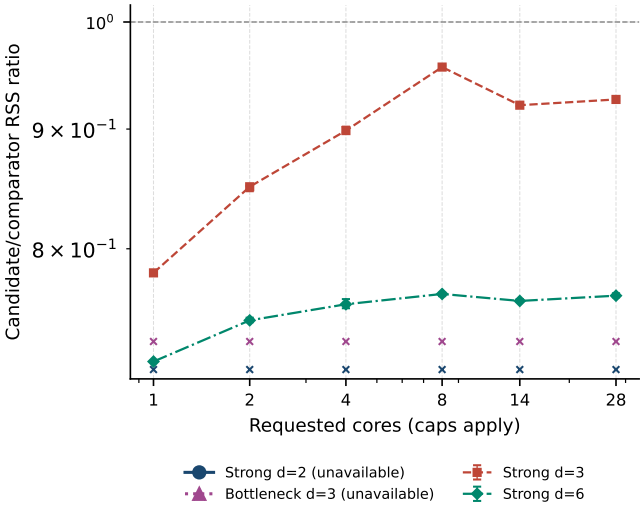

(d) RSS ratios by requested cores


Partial campaign. Points require all six valid warm repetitions; bars show IQR, not confidence intervals. Crosses mark missing or unvalidated points. Both axes are logarithmic. Every task reserves 28 cores; Stata-controlled computation is capped at four. OLS IID inference, ten controls. See runs.csv for exclusions. Ratios are computed within seed/node pairs. Values below one favor fereg.

Figure 43: fereg/pyfixest: paper, maximum capacity

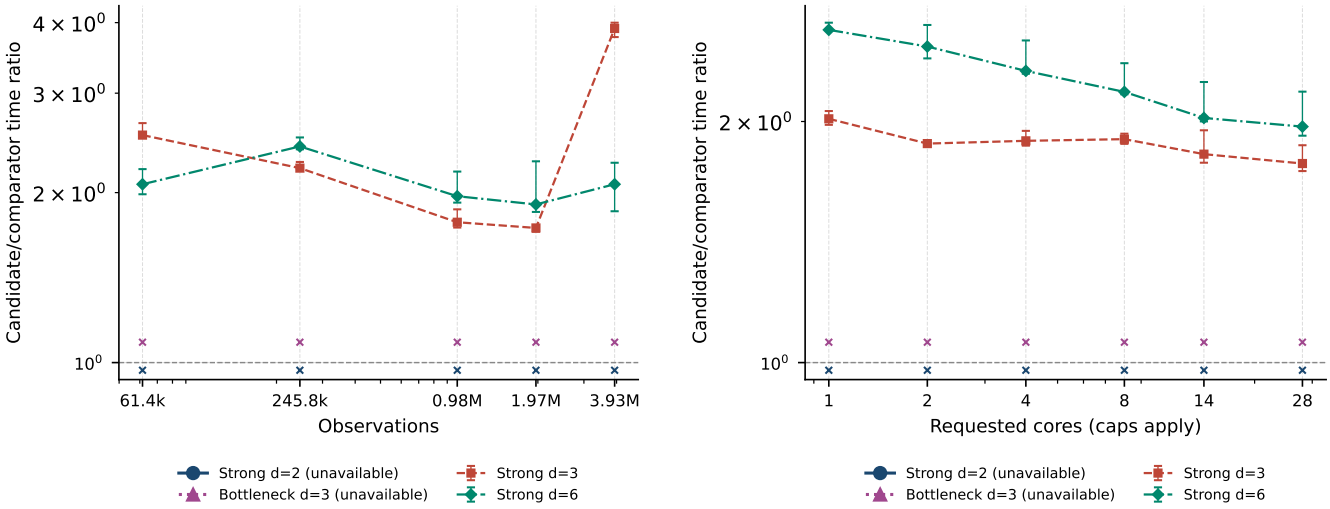


(a) Time ratios by observations

(b) Time ratios by requested cores

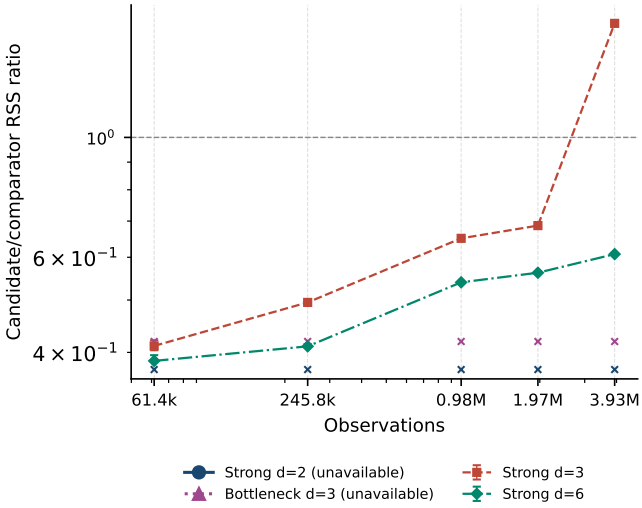


(c) RSS ratios by observations

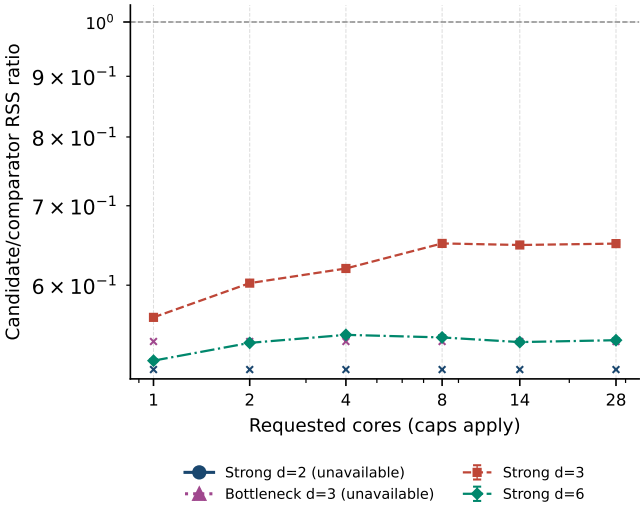

(d) RSS ratios by requested cores


Partial campaign. Points require all six valid warm repetitions; bars show IQR, not confidence intervals. Crosses mark missing or unvalidated points. Both axes are logarithmic. Every task reserves 28 cores; Stata-controlled computation is capped at four. OLS IID inference, ten controls. See runs.csv for exclusions. Ratios are computed within seed/node pairs. Values below one favor fereg.

Figure 44: fereg/pyfixest: paper, fixed capacity

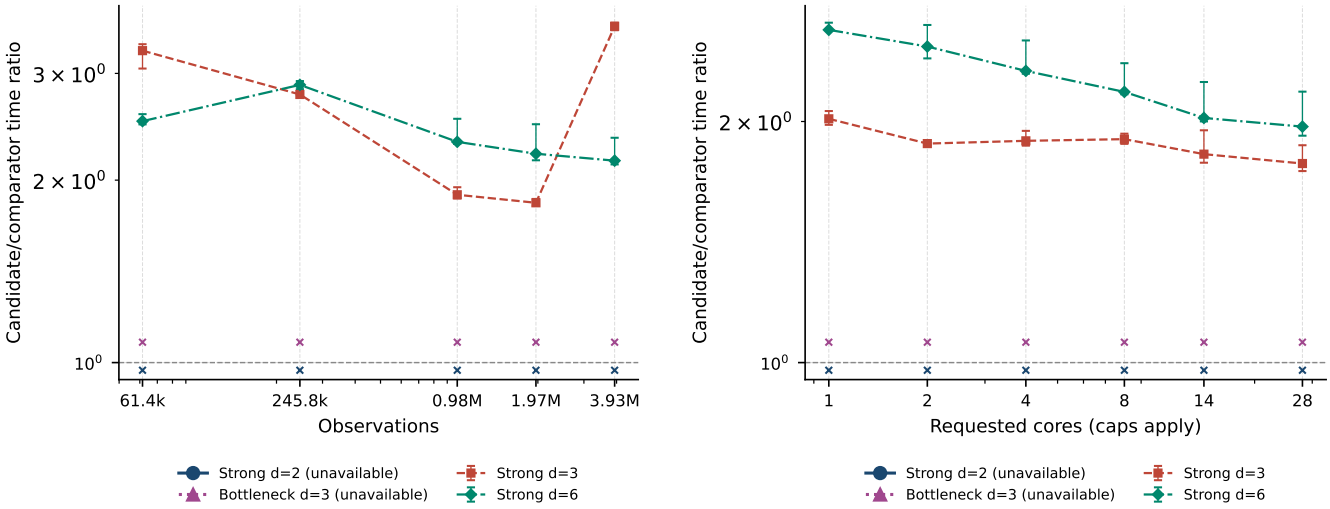


(a) Time ratios by observations

(b) Time ratios by requested cores

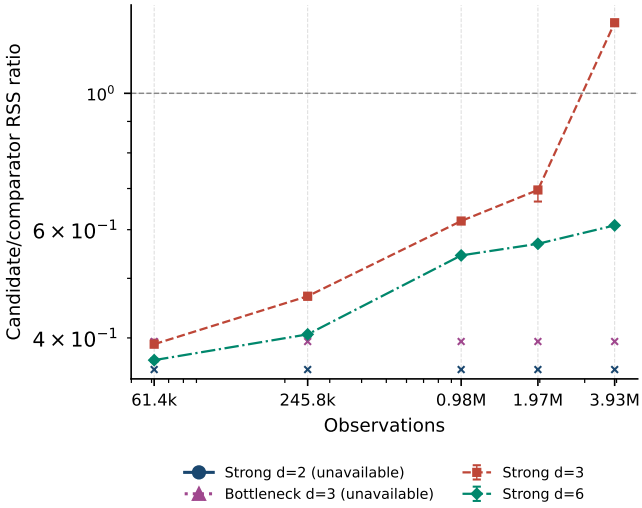

(c) RSS ratios by observations

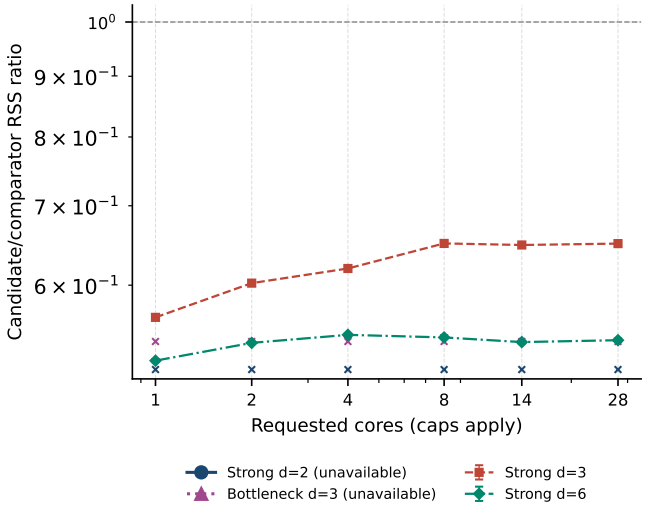

(d) RSS ratios by requested cores

Partial campaign. Points require all six valid warm repetitions; bars show IQR, not confidence intervals. Crosses mark missing or unvalidated points. Both axes are logarithmic. Every task reserves 28 cores; Stata-controlled computation is capped at four. OLS IID inference, ten controls. See runs.csv for exclusions. Ratios are computed within seed/node pairs. Values below one favor fereg.