

# M4: A Visualization-Oriented Time Series Data Aggregation

Uwe Jugel, Zbigniew Jerzak,  
Gregor Hackenbroich  
SAP AG  
Chemnitzer Str. 48, 01187 Dresden, Germany

Volker Markl  
Technische Universität Berlin  
Strasse des 17. Juni 135  
10623 Berlin, Germany  
volker.markl@tu-berlin.de

## I. INTRODUCTION

Visualization of large scale time series data is a crucial need of modern exploratory bigdata analysis [1]. But the huge size of the data is a barrier to visualization [2], [3], [4]. To address this challenge of bigdata different data reduction and sampling strategies are used to overcome the barrier [5], [6]. But for preserving the semantics of trend line of time series data these sampling strategies show huge limitations [7].

In this review paper we present a review of the paper [7] which address this issue of preserving the semantic of time series data and present some related works in the line. The paper appeared in the Proceedings of the VLDB Endowment, 2014.

The authors present M4, an aggregation based time series data reduction strategy that guarantees error free visualization of time series data as line chart as well as higher rate of data reduction. The approach is generic to any visualization system as long as the visualization systems uses RDBMS as data source.

## II. CONTRIBUTIONS OF THE PAPER

The authors of the paper rewrite visualization queries  $Q$  using data reduction operator  $M_R$  such that the visualization of the original data from query  $Q$  and the visualization from the query  $Q_R = M_R(Q)$  are similar and error free. As

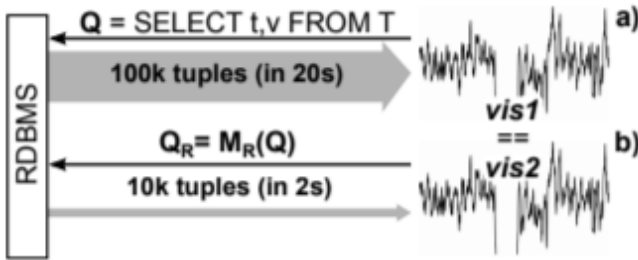


Figure 1. Time series visualization: a) based on original data; b) Using data reduction operator;

shown in Figure 1  $Q_R$  produced the same visualization as  $Q$  with almost 10 times less tuples and 10 times reduced time. The main contributions of the paper are following:

- Proposed a visualization driven query rewriting technique relying on relational operators and parameterized with width and height of the desired visualization
- Focusing on the detailed semantics of the line charts, they propose a visualization driven aggregation strategy that only select necessary points needed for visualization. For visualization, in every time interval which corresponds to a pixel column in the visualization they select four tuples. The starting tuple, ending tuple, max tuple and the min tuple.

### A. Query Rewriting

Most queries for time series visualization are of the form **SELECT time, value FROM SERIES WHERE time >  $t_1$  AND time <  $t_2$** . In addition to the query the visualization parameters like width and height are also passed for query rewriting. The rewritten query  $Q_R$  contains the following subqueries:

- 1) Original Query  $Q$
- 2) A cardinal query  $Q_C$  on  $Q$
- 3) a cardinality check (conditional execution)
- 4) to either use the result of  $Q$  directly or to execute an additional reduction  $Q_D$  on  $Q$ .

M4 system composes all those subqueries into single SQL query to avoid bandwidth consumption.

### B. M4 Aggregation

M4 is a value preserving aggregation strategy for time series data. It divides the entire time series dataset into  $w$  equal groups and thus each pixel column in the visualization takes only one group. For each group M4 select the aggregates  $\min(v)$ ,  $\max(v)$ ,  $\min(t)$ ,  $\max(t)$  and that is why it is called M4 aggregation and then it joins the aggregated data to the time series and add missing timestamps  $t_{bottom}, t_{top}$  and missing values  $v_{first}, v_{last}$ . In Figure 2 an example M4 query and the corresponding visualization is shown.

**Complexity of M4:** The grouping and computation of aggregated values can be done in  $O(n)$  time where  $n$  is the number of tuples in the original query  $Q$ . Then the subsequent joining of the  $4.w$  aggregated tuples with  $Q$  requires  $O(n + 4.w)$  using hash join.

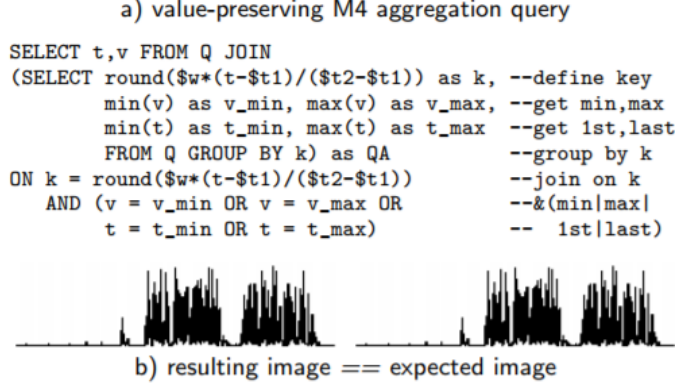


Figure 2. M4 query and visualization

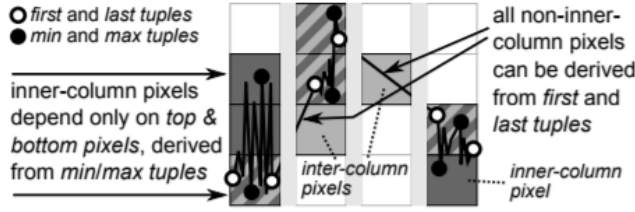


Figure 3. Illustration of Theorem 1

### C. M4 Upper Bound

The question is common to be asked, whether selecting only four extreme tuples from each group provide error free visualization. The authors of the paper provide some proofs on the upper bound on the number of tuples required for error free visualization. The authors prove two theorems to show that the four extreme tuples are sufficient enough for error free visualization of time series data.

**Theorem 1:** Any two-color line visualization of an arbitrary time series  $T$  is equal to the two-color line visualization of a time series  $T'$  that contains at least the four extrema of all groups of the width-based grouping of  $T$ , i.e.,  $vis_{wh}(G_{M4}(T)) = vis_{wh}(T')$ .

The illustration of theorem 1 is given Figure 3. The authors provide a detailed proof in the paper.

**Theorem 2:** There exists an error-free two-color line visualization of an arbitrary time series  $T$ , based on a subset  $T'$  of  $T$ , with  $|T'| \leq 4w$ .

## III. EVALUATION

The authors use three different real life time series data and evaluate their results with some existing state of the art data reduction approaches. The authors use the following datasets:

- 1) the price of a single share on the Frankfurt stock exchange over 6 weeks (700k tuples)

- 2) 71 minutes from a speed sensor of a soccer ball [8](ball number 8, 7M rows)
- 3) one week of sensor data from an electrical power sensor of a semiconductor manufacturing machine [9](sensor MF03, 55M rows)

The approaches compared are following: 1) a baseline query that selects all tuples to be visualized, 2) a PAA-query that computes up to 4w average tuples, 3) a two-dimensional rounding query that selects up to w.h rounded tuples, 4) a stratified random sampling query that selects 4w random tuples, 5) a systematic sampling query that selects 4w first tuples, 6) a MinMax query that selects the two min and max tuples from 2 w groups, and finally 7) M4 query selecting all four extrema from w groups.

### A. Query performance

The query performance of different approaches in terms of execution time of the queries is shown in Figure 4. It shows that aggregation based approaches perform better compared to baseline approaches. Figure 5 shows exemplary results of performance for varying row counts on soccer data. The aggregation based queries perform much better than baseline queries as the size of rows increase.

### B. Visualization quality and Data Efficiency

Authors in [10] have shown that for visualization quality  $MSE$  (Mean Square Error) doesn't perform well and they proposed  $SSIM$  (Structural Similarity Index) for the measurement of image quality. The  $SSIM$  yields a similarity value between 1 and 1. The authors use  $DSSIM$ , the normalized distance between two visualizations for measuring the visualization quality. The formula is given below:

$$DSSIM(V_1, V_2) = \frac{1 - SSIM}{2} \quad (1)$$

In Figure 6, the authors plotted the measured, resulting visualization quality ( $DSSIM$ ) over the resulting number of tuples of each different groupings  $n_h = 1$  to  $n_h = 2.5w$  of an applied data reduction technique. The lower the number of tuples and the higher the  $DSSIM$ , the more data efficient is the corresponding technique for the purpose of line visualization. The Figures 6aI and 6bI depict these measures for binary line visualizations and the Figures 6aII and 6bII for anti-aliased line visualizations. On average M4 provides a visualization quality of  $DSSIM > 0.9$ .

### C. Evaluation of pixel errors

The authors also show an evaluation of the pixel errors incurred due to data reduction. In a visualization of 100\*20 pixels, MinMax results in 30 false pixels, RDP in 39 false pixels, and PAA in over 100 false pixels. M4 stays error-free. Which shows that M4 was able to produce error free visualization even after reduction of data.

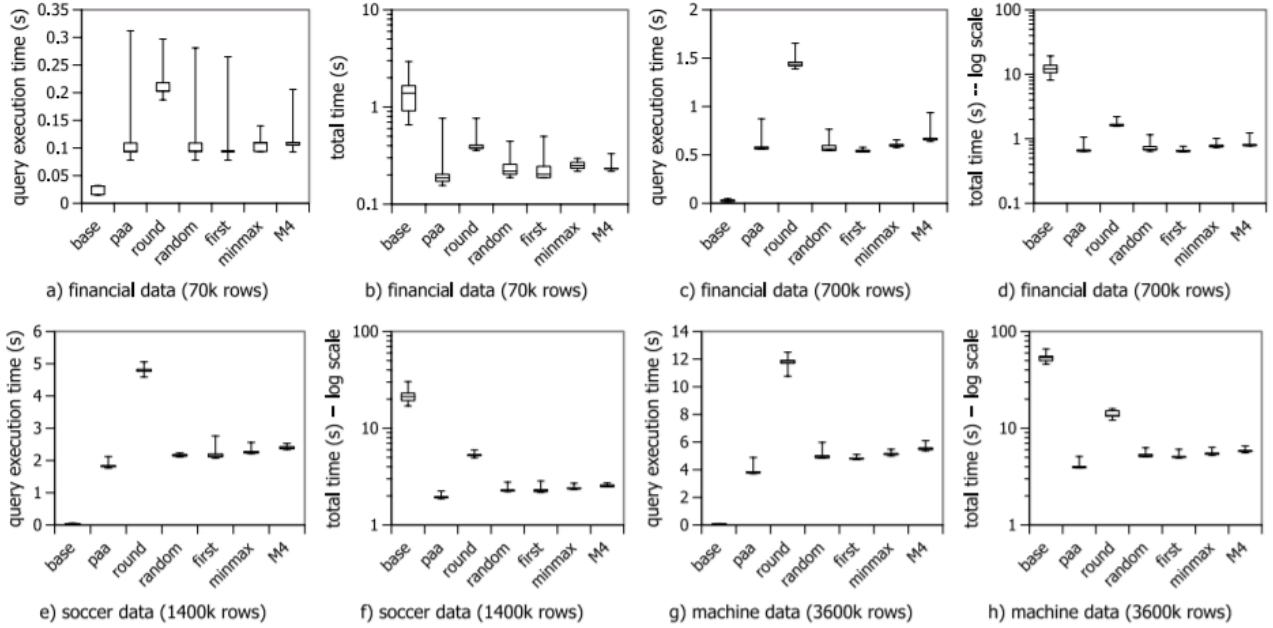


Figure 4. Query performance: (a,b,c,d) financial data, (e,f) soccer data, (g,h) machine data

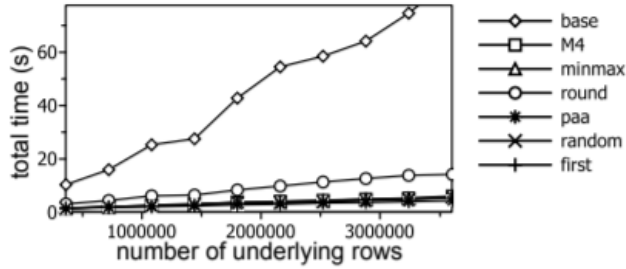


Figure 5. Performance of different queries with varying row counts

#### IV. RELATED WORKS

TODO

#### V. OUR PROPOSAL

Though the M4 aggregation provides an error free visualization it has the following limitations:

- 1) It doesn't work with other data sources besides RDBMS
- 2) It doesn't provide solution to map-reduce based big data frame works like Hadoop, spark etc.
- 3) and it doesn't handle the data file system like CSV, JSON and most visualization systems take data directly from these file systems [11].
- 4) It also doesn't provide solution for streaming data visualizations. But visualization of streaming time series data with appropriate reduction in data size is a crucial need of moder exploratory data analysis etc.

We propose some improvements and future works that can be done on top of this works.

- To cover the modern NoSQL databases like MongoDB and cluster based daat sources like Hadoop and spark we need to modify the M4 aggregation strategies and adapt those to MongoDB NoSQL queries and Hadoop Map-reduce queries [12]. It can be easily shown that the M4 query can be adapted to these platforms after slight modifications. For example if we write map-reduce queries using Apache Hive [13], [14] that comes with Hadoop stack the same SQL queries used by M4 can be used.
- For streaming data we can use incremental data processing techniques [15], [16] and apply the concepts of M4 and make some modifications to propose an incremental version of M4 for real time data visualization with reduced data.
- For processing file system data we can create an intermediate data operator that will convert the M4 queries into a query that can be applied on CSV, JSON or relevant file types.

#### VI. CONCLUSION

We presented a review of the paper [7]. The paper presents a technique of time series data reduction that provides error free visualization and higher time performance. The work is only suitable for visualization systems where the data source is a RDBMS.

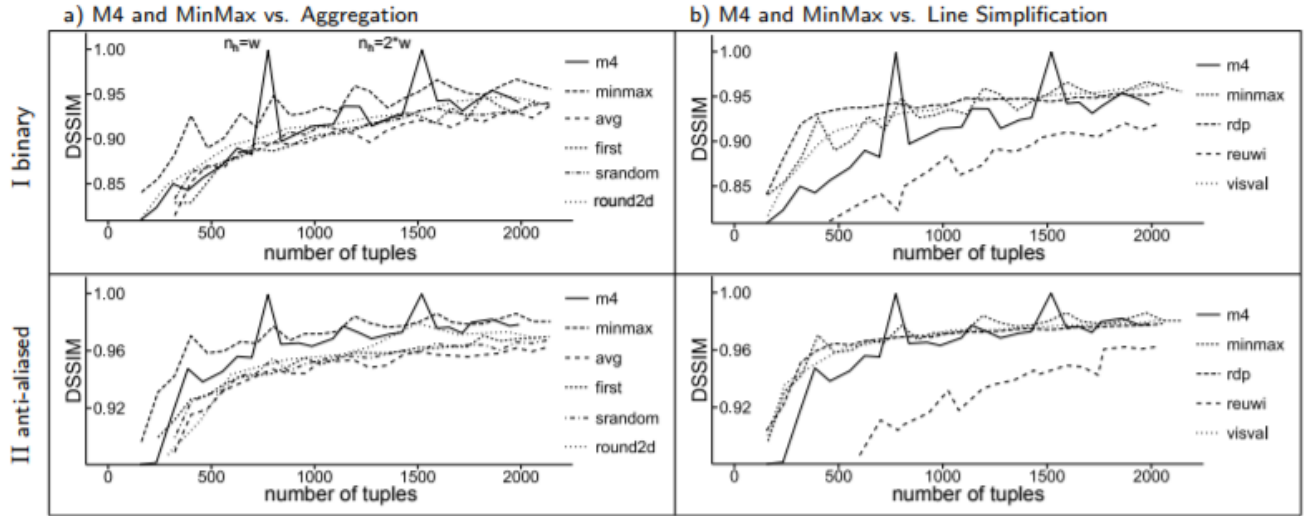


Figure 6. : Data efficiency of evaluated techniques, showing DSSIM over data volume

## REFERENCES

- [1] T.-c. Fu, "A review on time series data mining," *Engineering Applications of Artificial Intelligence*, vol. 24, no. 1, pp. 164–181, 2011.
- [2] A. Labrinidis and H. V. Jagadish, "Challenges and opportunities with big data," *Proceedings of the VLDB Endowment*, vol. 5, no. 12, pp. 2032–2033, 2012.
- [3] J. Fan, F. Han, and H. Liu, "Challenges of big data analysis," *National science review*, vol. 1, no. 2, pp. 293–314, 2014.
- [4] C. P. Chen and C.-Y. Zhang, "Data-intensive applications, challenges, techniques and technologies: A survey on big data," *Information Sciences*, vol. 275, pp. 314–347, 2014.
- [5] G. Cormode and N. Duffield, "Sampling for big data," 2014.
- [6] X. Wu, X. Zhu, G.-Q. Wu, and W. Ding, "Data mining with big data," *IEEE transactions on knowledge and data engineering*, vol. 26, no. 1, pp. 97–107, 2014.
- [7] U. Jugel, Z. Jerzak, G. Hackenbroich, and V. Markl, "M4: a visualization-oriented time series data aggregation," *Proceedings of the VLDB Endowment*, vol. 7, no. 10, pp. 797–808, 2014.
- [8] C. Mutschler, H. Ziekow, and Z. Jerzak, "The debts 2013 grand challenge," in *Proceedings of the 7th ACM international conference on Distributed event-based systems*. ACM, 2013, pp. 289–294.
- [9] Z. Jerzak, T. Heinze, M. Fehr, D. Gröber, R. Hartung, and N. Stojanovic, "The debts 2012 grand challenge," in *Proceedings of the 6th ACM International Conference on Distributed Event-Based Systems*. ACM, 2012, pp. 393–398.
- [10] Z. Wang, A. C. Bovik, H. R. Sheikh, and E. P. Simoncelli, "Image quality assessment: from error visibility to structural similarity," *IEEE transactions on image processing*, vol. 13, no. 4, pp. 600–612, 2004.
- [11] M. Bostock, V. Ogievetsky, and J. Heer, "D<sup>3</sup> data-driven documents," *IEEE transactions on visualization and computer graphics*, vol. 17, no. 12, pp. 2301–2309, 2011.
- [12] A. B. Patel, M. Birla, and U. Nair, "Addressing big data problem using hadoop and map reduce," in *Engineering (NUICONe), 2012 Nirma University International Conference on*. IEEE, 2012, pp. 1–5.
- [13] A. Thusoo, J. S. Sarma, N. Jain, Z. Shao, P. Chakka, S. Anthony, H. Liu, P. Wyckoff, and R. Murthy, "Hive: a warehousing solution over a map-reduce framework," *Proceedings of the VLDB Endowment*, vol. 2, no. 2, pp. 1626–1629, 2009.
- [14] E. Barbierato, M. Griboaud, and M. Iacono, "Modeling apache hive based applications in big data architectures," in *Proceedings of the 7th International Conference on Performance Evaluation Methodologies and Tools*. ICST (Institute for Computer Sciences, Social-Informatics and Telecommunications Engineering), 2013, pp. 30–38.
- [15] B. De Seabra and R. Ravindran, "Incremental data processing," May 22 2015, uS Patent App. 14/720,448.
- [16] C. Yan, X. Yang, Z. Yu, M. Li, and X. Li, "Incmr: Incremental data processing based on mapreduce," in *Cloud Computing (CLOUD), 2012 IEEE 5th International Conference on*. IEEE, 2012, pp. 534–541.