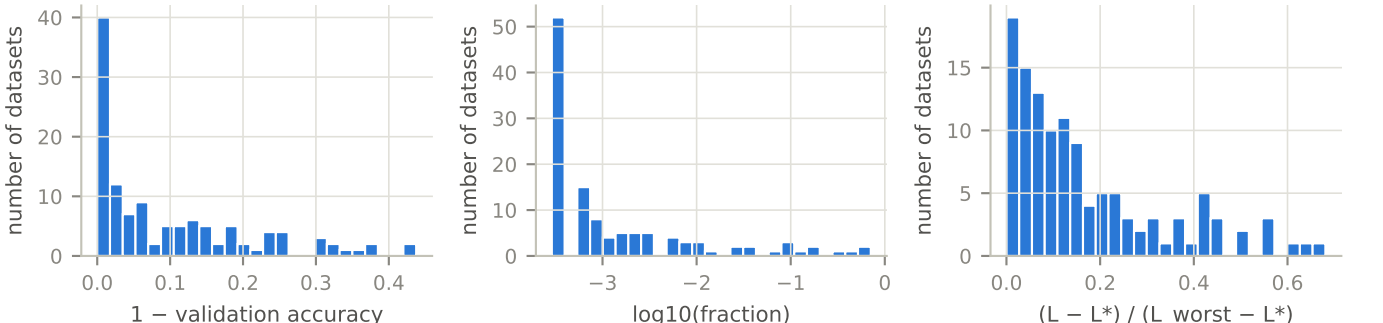
Optimal loss L* per dataset
number of datasets
1 − validation accuracy
Fraction of the K configs at the optimum
number of datasets
log10(fraction)
Normalized loss of the default config.
number of datasets
(L − L*) / (L_worst − L*)