
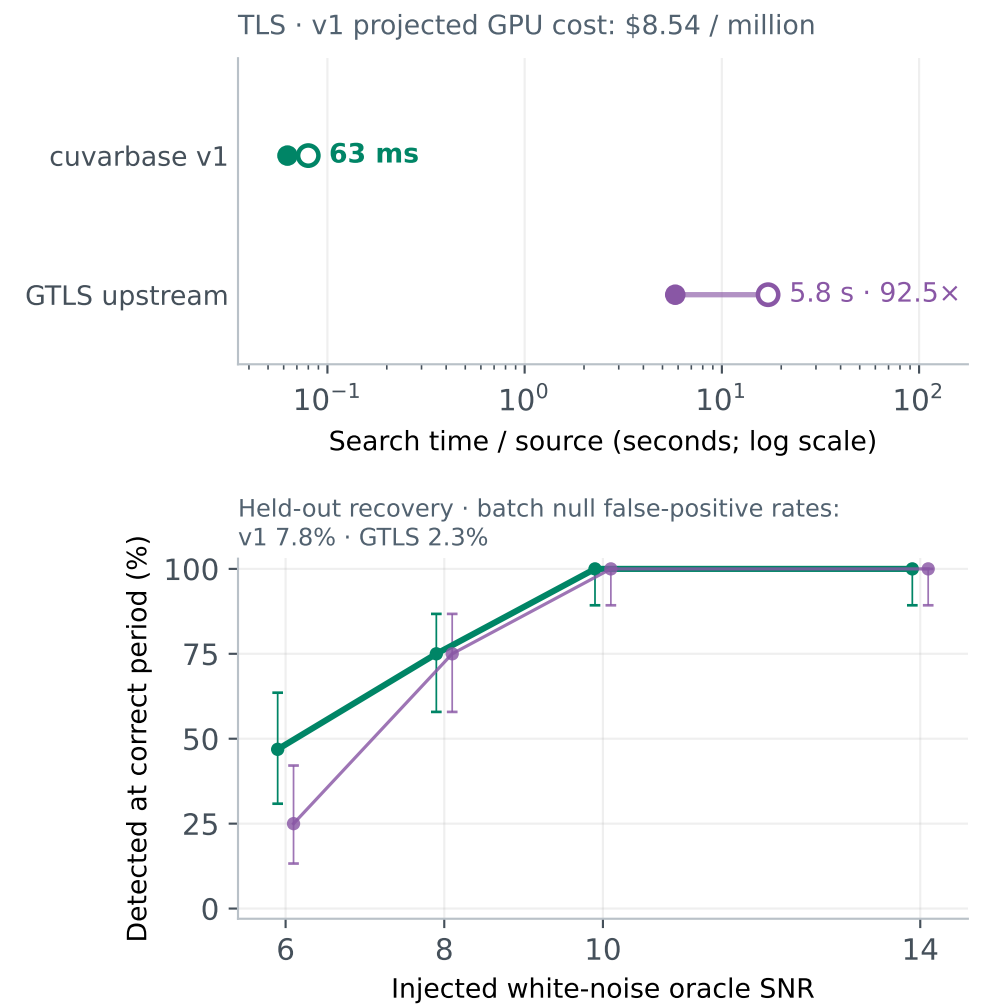
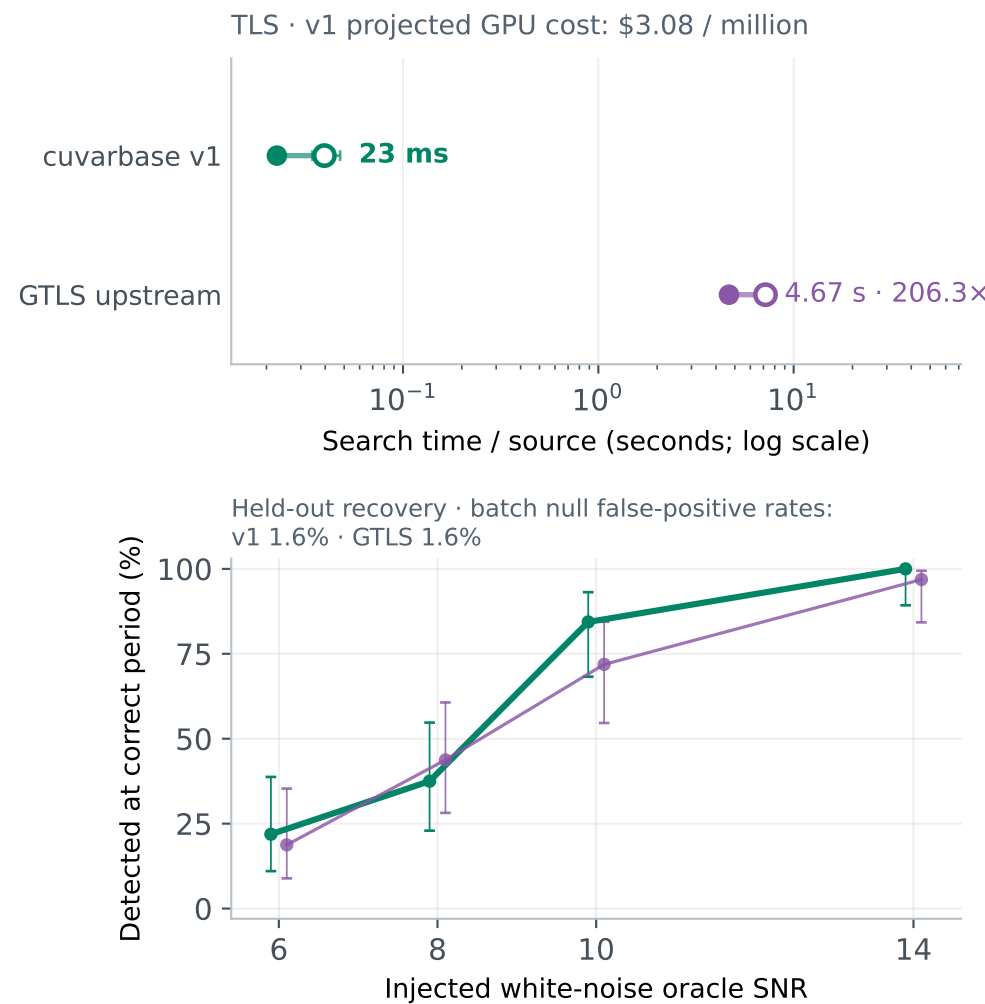
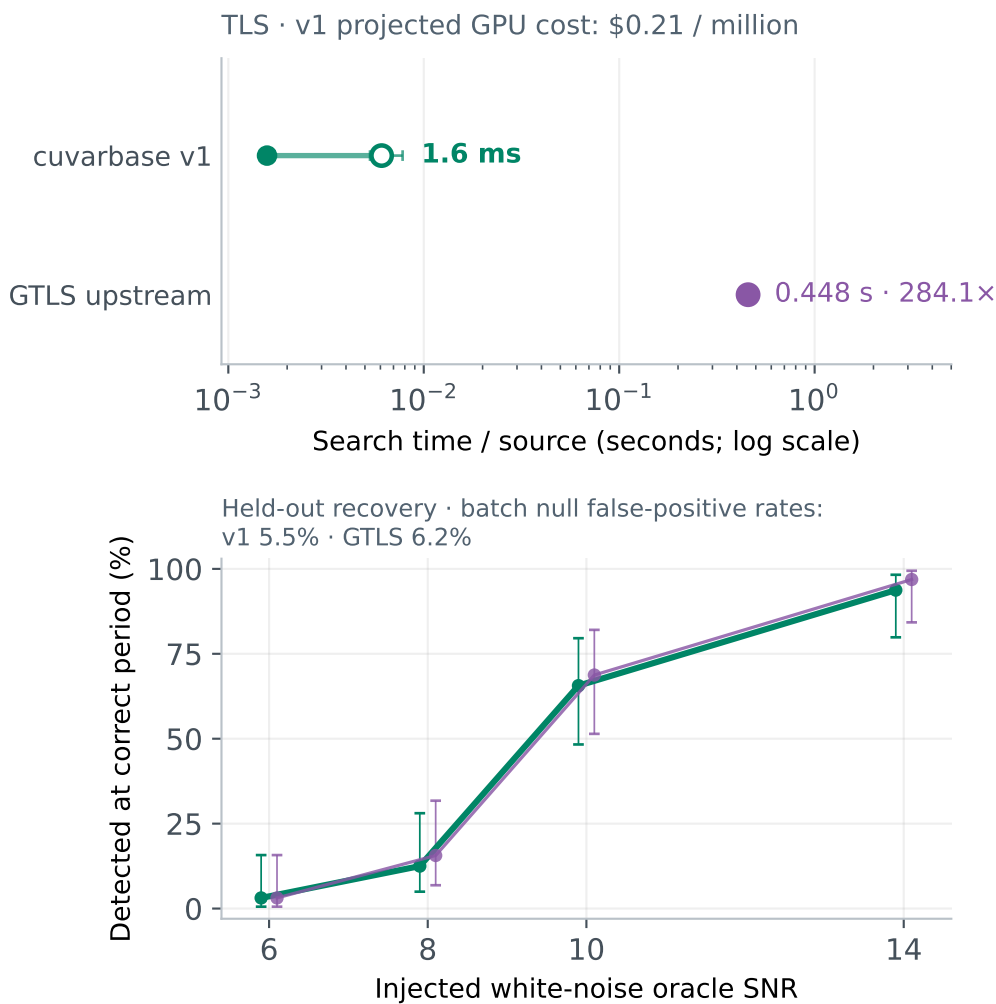
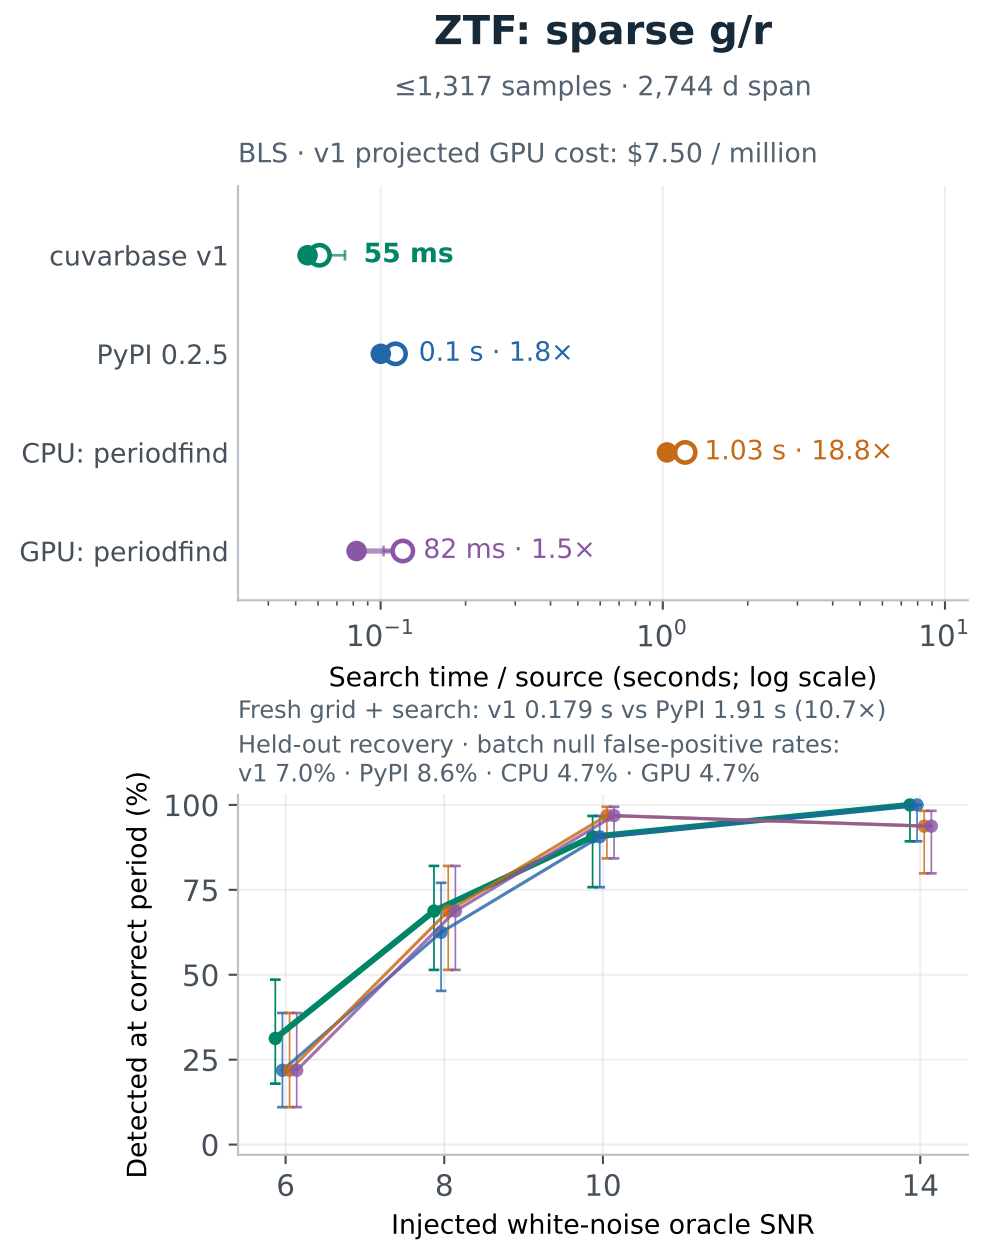
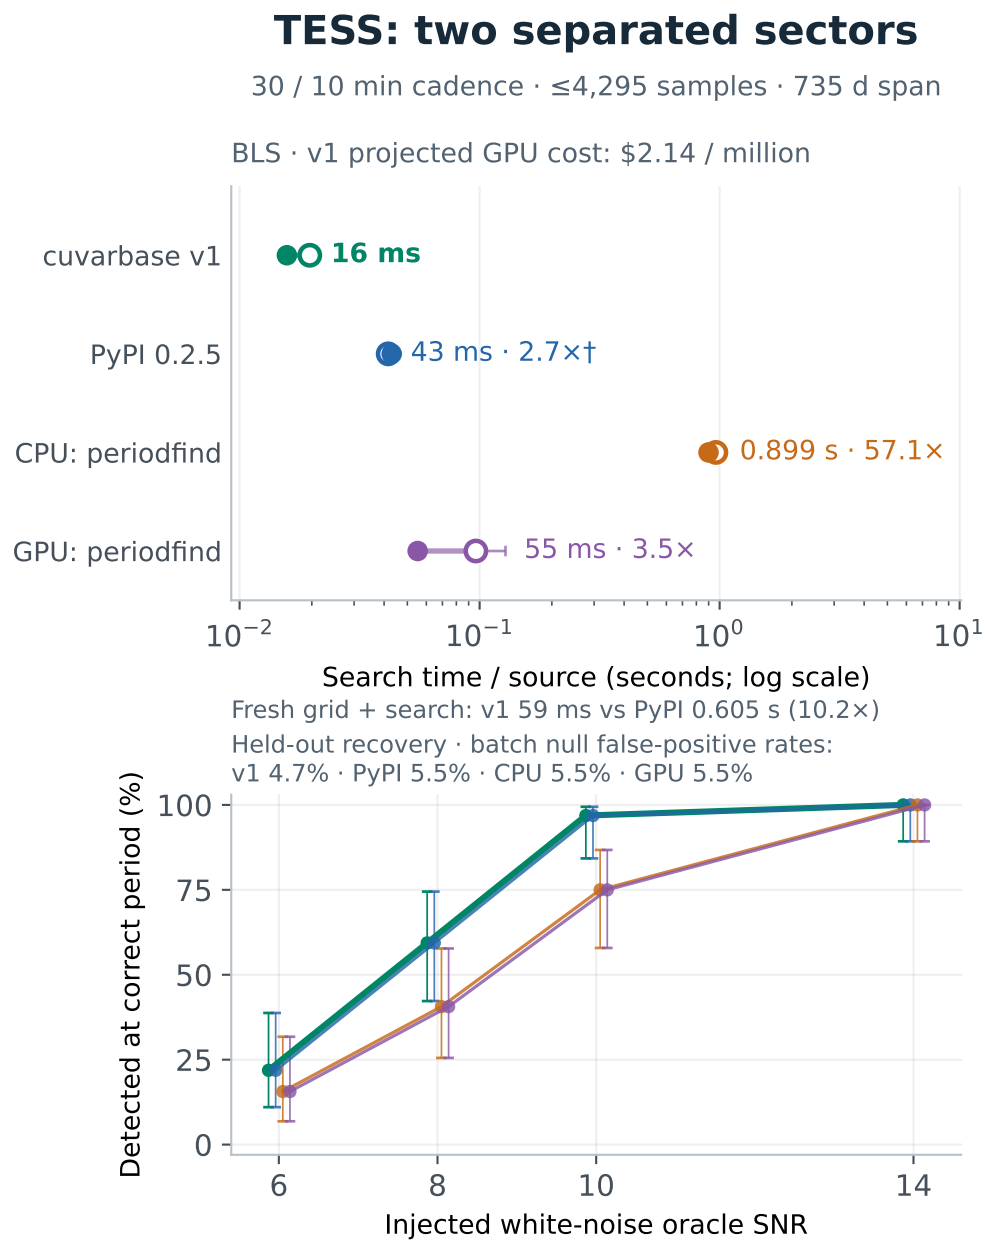


cuvarbase transit searches: speed and independently measured recovery

Measured warm search time, with sensitivity checked on independent transit injections

○ One source (warm) ● 16-source batch: time per source

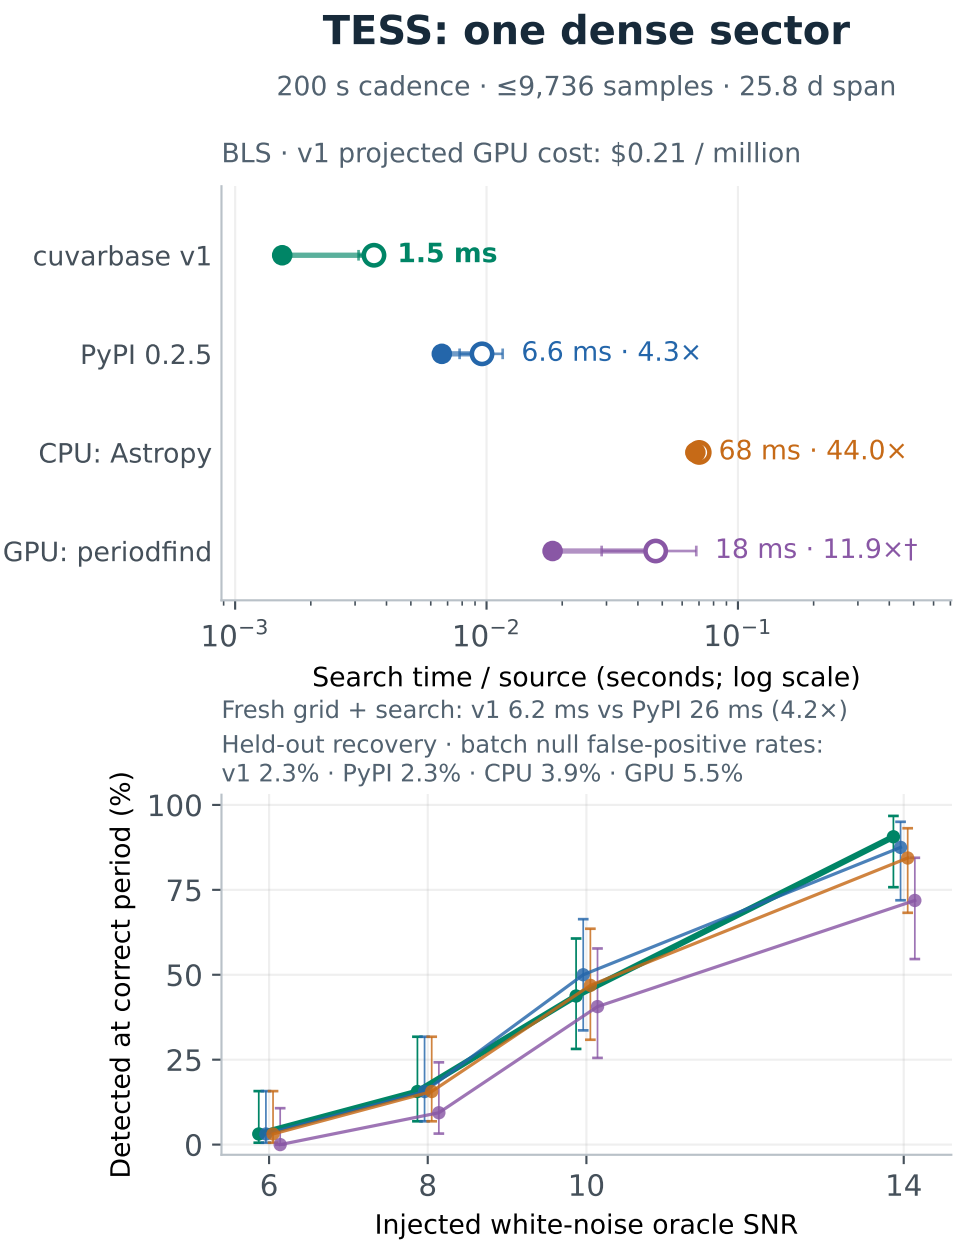

Timing: median (5 single / 3 batch calls); whiskers span repetitions. Ratios: batch time / v1. †: paired tests support <5-point recovery loss and <5-point FPR increase.

Unmarked ratios are timing comparisons with sensitivity differences or insufficient evidence of a match. Error bars: 95% Wilson intervals; 32 injections / SNR / survey. Solid curves: batch; dashed: single if different.

Real observing times; synthetic integrated transits and Gaussian + correlated noise. Each method: 128 calibration nulls, 128 held-out injections, 128 held-out nulls.

A40 + 7.65 CPU-equivalent allocation, \$0.49/hour. Prepared-array searches only; costs are linear projections. Shared grid within each algorithm; BLS / TLS search ranges differ.