

Understanding different Datasets for the Analysis of Traffic-Accidents-in-Kenya

```
In [1]: # importing necessary Libraries
import pandas as pd
import numpy as np
import matplotlib.pyplot as plt
import seaborn as sns
```

Exploring the road death 2019 dataset from kaggle by Kamau Munyori

```
In [ ]: # Load the road death data by Kamau Munyori in kaggle
road_death = pd.read_csv(r>Data\road_death_2019.csv")
road_death
```

Out[]:

	continent	code	country	year	road traffic death rate
0	Americas	ATG	Antigua and Barbuda	2019	0.00
1	Western Pacific	FSM	Micronesia (Federated States of)	2019	0.16
2	South-East Asia	MDV	Maldives	2019	1.63
3	Western Pacific	KIR	Kiribati	2019	1.92
4	Eastern Mediterranean	EGY	Egypt	2019	10.10
...
3655	Western Pacific	FJI	Fiji	2000	9.74
3656	Europe	UZB	Uzbekistan	2000	9.74
3657	Americas	CAN	Canada	2000	9.78
3658	Western Pacific	PHL	Philippines	2000	9.85
3659	Western Pacific	AUS	Australia	2000	9.86

3660 rows × 5 columns

In [17]: road_death.dtypes

```
Out[17]: continent      object
code                object
country             object
year                int64
road traffic death rate  float64
dtype: object
```

```
In [18]: # Convert 'year' to datetime (will default to YYYY-01-01 format)
road_death['year'] = pd.to_datetime(road_death['year'], format='%Y')

# Set 'year' as the index
road_death = road_death.set_index('year')
```

In [19]: `road_death.head()`

Out[19]:

	continent	code	country	road traffic death rate
year				
2019-01-01	Americas	ATG	Antigua and Barbuda	0.00
2019-01-01	Western Pacific	FSM	Micronesia (Federated States of)	0.16
2019-01-01	South-East Asia	MDV	Maldives	1.63
2019-01-01	Western Pacific	KIR	Kiribati	1.92
2019-01-01	Eastern Mediterranean	EGY	Egypt	10.10

In [137... `road_death.index`

Out[137... DatetimeIndex(['2019-01-01', '2019-01-01', '2019-01-01', '2019-01-01',
'2019-01-01', '2019-01-01', '2019-01-01', '2019-01-01',
'2019-01-01', '2019-01-01',
...
'2000-01-01', '2000-01-01', '2000-01-01', '2000-01-01',
'2000-01-01', '2000-01-01', '2000-01-01', '2000-01-01',
'2000-01-01', '2000-01-01'],
dtype='datetime64[ns]', name='year', length=3660, freq=None)

In [136... *# Calculate the percentage count of each continent*
continent_counts = road_death['continent'].value_counts(normalize=True) * 100

Create a new figure with specified size
plt.figure(figsize=(12, 8))

Create a bar plot with continent names on y-axis and percentages on x-axis
Use different colors for each continent bar
bars = plt.barh(continent_counts.index,
continent_counts.values,
color=['#003399', '#006239', '#B31942', '#f4a81d', '#006994', '#931314'])

Remove x-axis as instructed

```
plt.gca().axis.set_visible(False)

# Add data labels as percentages inside the bars
for bar in bars:
    width = bar.get_width()
    plt.text(width,                # x position (right end of bar)
             bar.get_y() + bar.get_height()/2, # y position (center of bar)
             f'{width:.0f}%',        # text (percentage with 0 decimal)
             ha='left',             # horizontal alignment
             va='center',           # vertical alignment
             color='#0f0101',       # white text for visibility
             fontweight='bold')     # bold text

# Remove spines (top, right, and bottom as x-axis is removed)
plt.gca().spines['top'].set_visible(False)
plt.gca().spines['right'].set_visible(False)
plt.gca().spines['bottom'].set_visible(False)


# Add a title
plt.title('Percentage Distribution of Road Deaths by Continent from 2000 to 2019', pad=20, fontsize=14)

# Set background colors (ADD THESE LINES)
plt.gca().set_facecolor('#f5f5f5') # Light gray axes background
plt.gcf().set_facecolor('#f5f5f5') # Light gray axes background

# Invert y-axis to show highest at top
plt.gca().invert_yaxis()

# Adjust layout to prevent clipping
plt.tight_layout()

# Display the plot
plt.show()
```

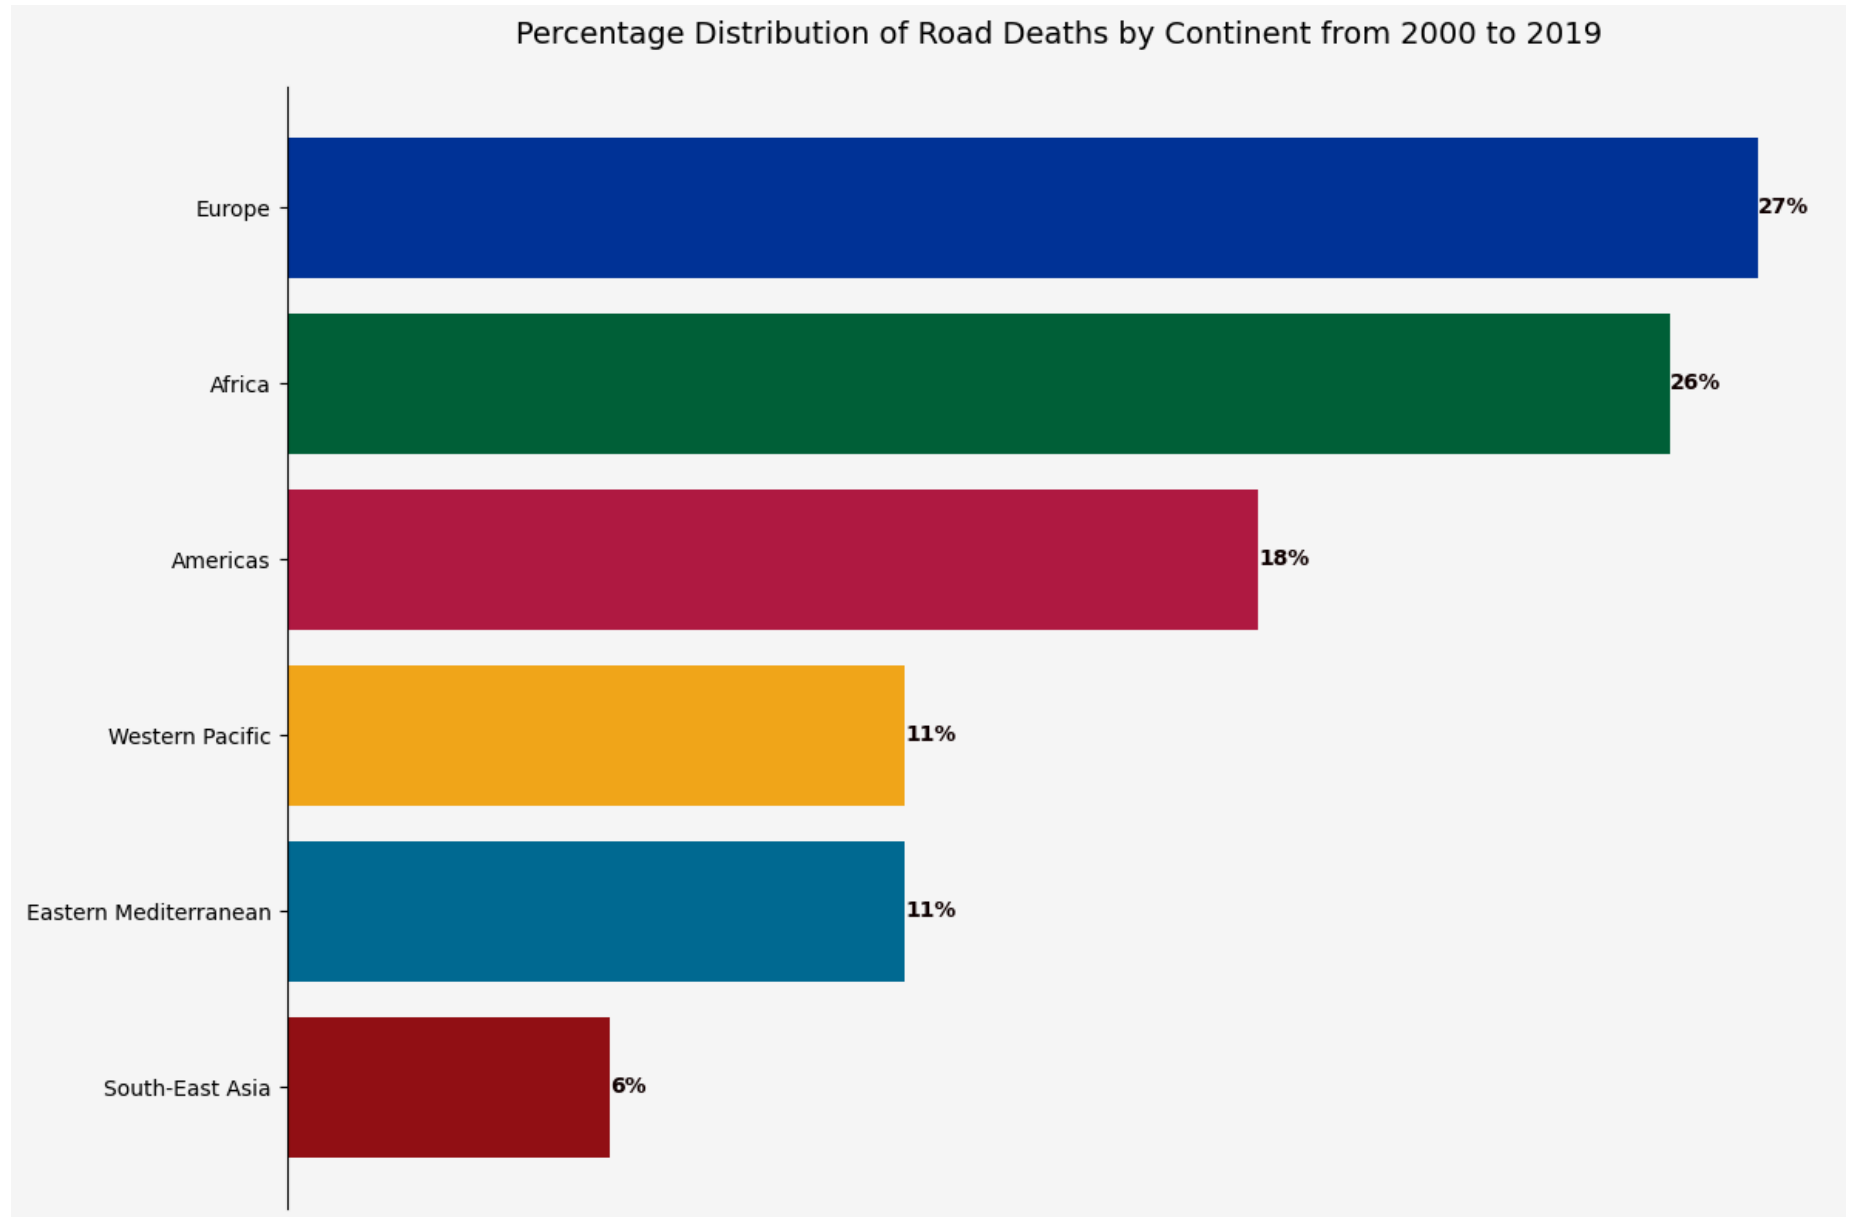

```
In [ ]: # Extracting the year from the road death
yearly_avg = road_death.groupby('year')['road traffic death rate'].mean()


# Plot directly using the index (years)
```

```
plt.figure(figsize=(12, 6))
plt.plot(yearly_avg.index, yearly_avg.values, # Explicitly use index for x-axis
         marker='o', linestyle='-', color='#B31942', linewidth=2, label='Death Rate')

# Formatting
plt.title('Global Average Road Traffic Death Rate (2000-2019)', pad=20, fontsize=14)
plt.xlabel('Year', fontsize=12)
plt.ylabel('Deaths per 100,000 Population', fontsize=12)
plt.grid(axis='y', linestyle='--', alpha=0.7)

# Ensure all years are shown as integers
plt.gca().xaxis.set_major_locator(plt.MaxNLocator(integer=True))

plt.tight_layout()
plt.show()
```

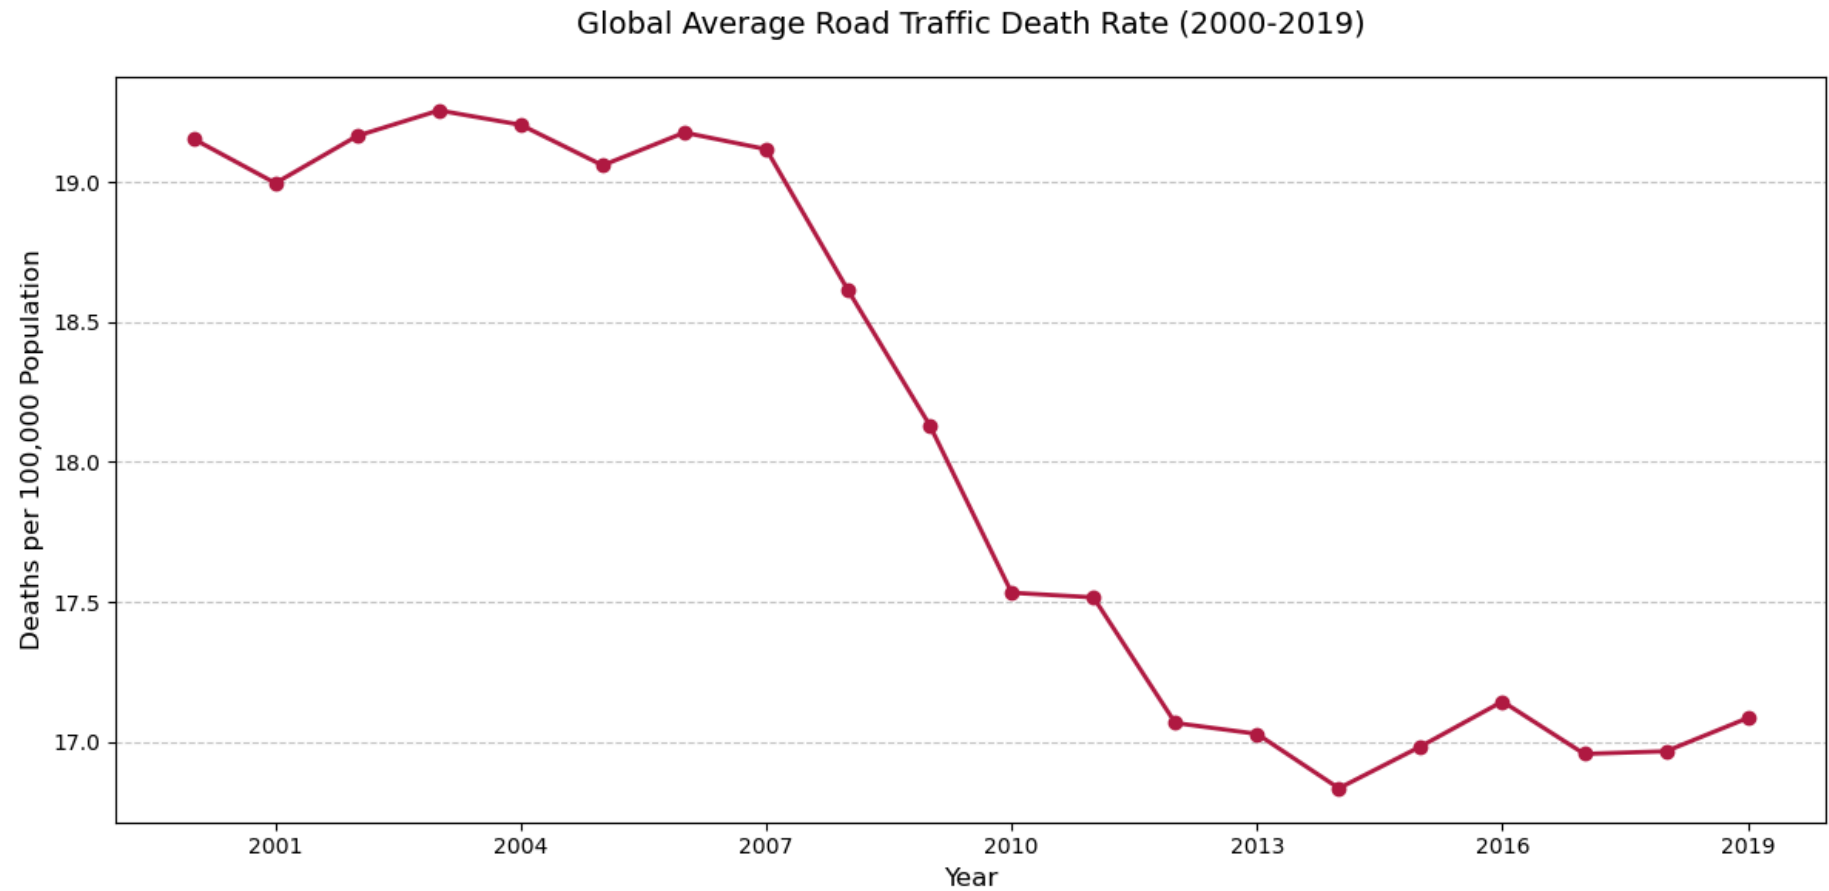

Analyzing the Road accidents and incidents data (Nairobi, Kenya) by worldbank

```
In [20]: # Load the road death data by Kamau Munyori in kaggle
Nairobi_Road_Crashes = pd.read_csv(r"Data\Nairobi-Road-crashes.csv")
Nairobi_Road_Crashes.head()
```

Out[20]:

	crash_id	crash_datetime	crash_date	latitude	longitude	n_crash_reports	contains_fatality_words	contains_pedestrian_words	contains...
0	1	06/06/2018 20:39	06/06/2018	-1.263030	36.764374	1	0	0	
1	2	17/08/2018 06:15	17/08/2018	-0.829710	37.037820	1	1	0	
2	3	25/05/2018 17:51	25/05/2018	-1.125301	37.003297	1	0	0	
3	4	25/05/2018 18:11	25/05/2018	-1.740958	37.129025	1	0	0	
4	5	25/05/2018 21:59	25/05/2018	-1.259392	36.842321	1	1	0	

In []: Nairobi_Road_Crashes.dtypes


```
Out[ ]: crash_id          int64
        crash_datetime    datetime64[ns]
        crash_date        datetime64[ns]
        latitude          float64
        longitude         float64
        n_crash_reports    int64
        contains_fatality_words    int64
        contains_pedestrian_words  int64
        contains_matatu_words      int64
        contains_motorcycle_words  int64
        location            object
        dtype: object
```

```
In [22]: Nairobi_Road_Crashes[['crash_datetime', 'crash_date']].head()
```

```
Out[22]:
```

	crash_datetime	crash_date
0	06/06/2018 20:39	06/06/2018
1	17/08/2018 06:15	17/08/2018
2	25/05/2018 17:51	25/05/2018
3	25/05/2018 18:11	25/05/2018
4	25/05/2018 21:59	25/05/2018

```
In [23]: # Convert crash_datetime (contains both date and time)
Nairobi_Road_Crashes['crash_datetime'] = pd.to_datetime(
    Nairobi_Road_Crashes['crash_datetime'],
    format='%d/%m/%Y %H:%M', # Matches "06/06/2018 20:39" format
    errors='coerce' # Converts invalid entries to NaT
)

# Convert crash_date (date only)
Nairobi_Road_Crashes['crash_date'] = pd.to_datetime(
    Nairobi_Road_Crashes['crash_date'],
    format='%d/%m/%Y', # Matches "06/06/2018" format
    errors='coerce'
)
```

```
# Verify the changes  
Nairobi_Road_Crashes.head()
```

Out[23]:

	crash_id	crash_datetime	crash_date	latitude	longitude	n_crash_reports	contains_fatality_words	contains_pedestrian_words	contains
0	1	2018-06-06 20:39:00	2018-06-06	-1.263030	36.764374	1	0	0	
1	2	2018-08-17 06:15:00	2018-08-17	-0.829710	37.037820	1	1	0	
2	3	2018-05-25 17:51:00	2018-05-25	-1.125301	37.003297	1	0	0	
3	4	2018-05-25 18:11:00	2018-05-25	-1.740958	37.129025	1	0	0	
4	5	2018-05-25 21:59:00	2018-05-25	-1.259392	36.842321	1	1	0	



```
In [ ]: # Extract year from crash_date  
Nairobi_Road_Crashes['year'] = Nairobi_Road_Crashes['crash_date'].dt.year
```

```
# Filter out 2012 and 2023 records
filtered_data = Nairobi_Road_Crashes[
    (Nairobi_Road_Crashes['year'] >= 2013) &
    (Nairobi_Road_Crashes['year'] <= 2022)
]

# Calculate yearly counts and convert to percentages (rounded to integers)
yearly_counts = filtered_data['year'].value_counts().sort_index()
percentages = ((yearly_counts / yearly_counts.sum()) * 100)

# Create the line plot
plt.figure(figsize=(12, 6))
plt.plot(percentages.index, percentages.values,
         marker='o', linestyle='-', color='#B31942', linewidth=2)

# Add data labels with custom positioning
for year, pct in zip(percentages.index, percentages.values):
    # Custom positioning based on year
    if year in [2013, 2014, 2019]:
        # Place to the left of the point
        plt.text(year-0.15, pct, f'{pct:.1f}%',
                 ha='right', va='center',
                 fontsize=9, fontweight='bold')
    elif year in [2016, 2017]:
        # Place below the point
        plt.text(year, pct-1, f'{pct:.1f}%',
                 ha='center', va='top',
                 fontsize=9, fontweight='bold')
    else:
        # Default position (above the point)
        plt.text(year, pct+0.5, f'{pct:.1f}%',
                 ha='center', va='bottom',
                 fontsize=9, fontweight='bold')

# Formatting
title = plt.title('Percentage Distribution of Road Crashes in Nairobi (2013-2022)',
                  pad=20, fontsize=13,
                  loc='center',
                  y=1.02,
                  fontweight='bold')
```


```
plt.xlabel('Year', fontsize=12)

# Custom x-axis styling
ax = plt.gca()
ax.spines['top'].set_visible(False)
ax.spines['right'].set_visible(False)
ax.spines['left'].set_visible(False)
ax.yaxis.set_visible(False)
plt.grid(False)

# Enhanced x-axis line
ax.spines['bottom'].set_linewidth(2) # Thicker baseline
ax.spines['bottom'].set_linestyle("-") # continuous line
ax.spines['bottom'].set_color("black") # Black color

# Set x-axis ticks for each year with equal spacing
plt.xticks(percentages.index)
ax.xaxis.set_minor_locator(plt.FixedLocator(percentages.index))
ax.tick_params(axis='x', which='both', length=0)
ax.set_xticklabels(percentages.index, ha='center') # Center aligned labels

plt.tight_layout()
plt.show()
```

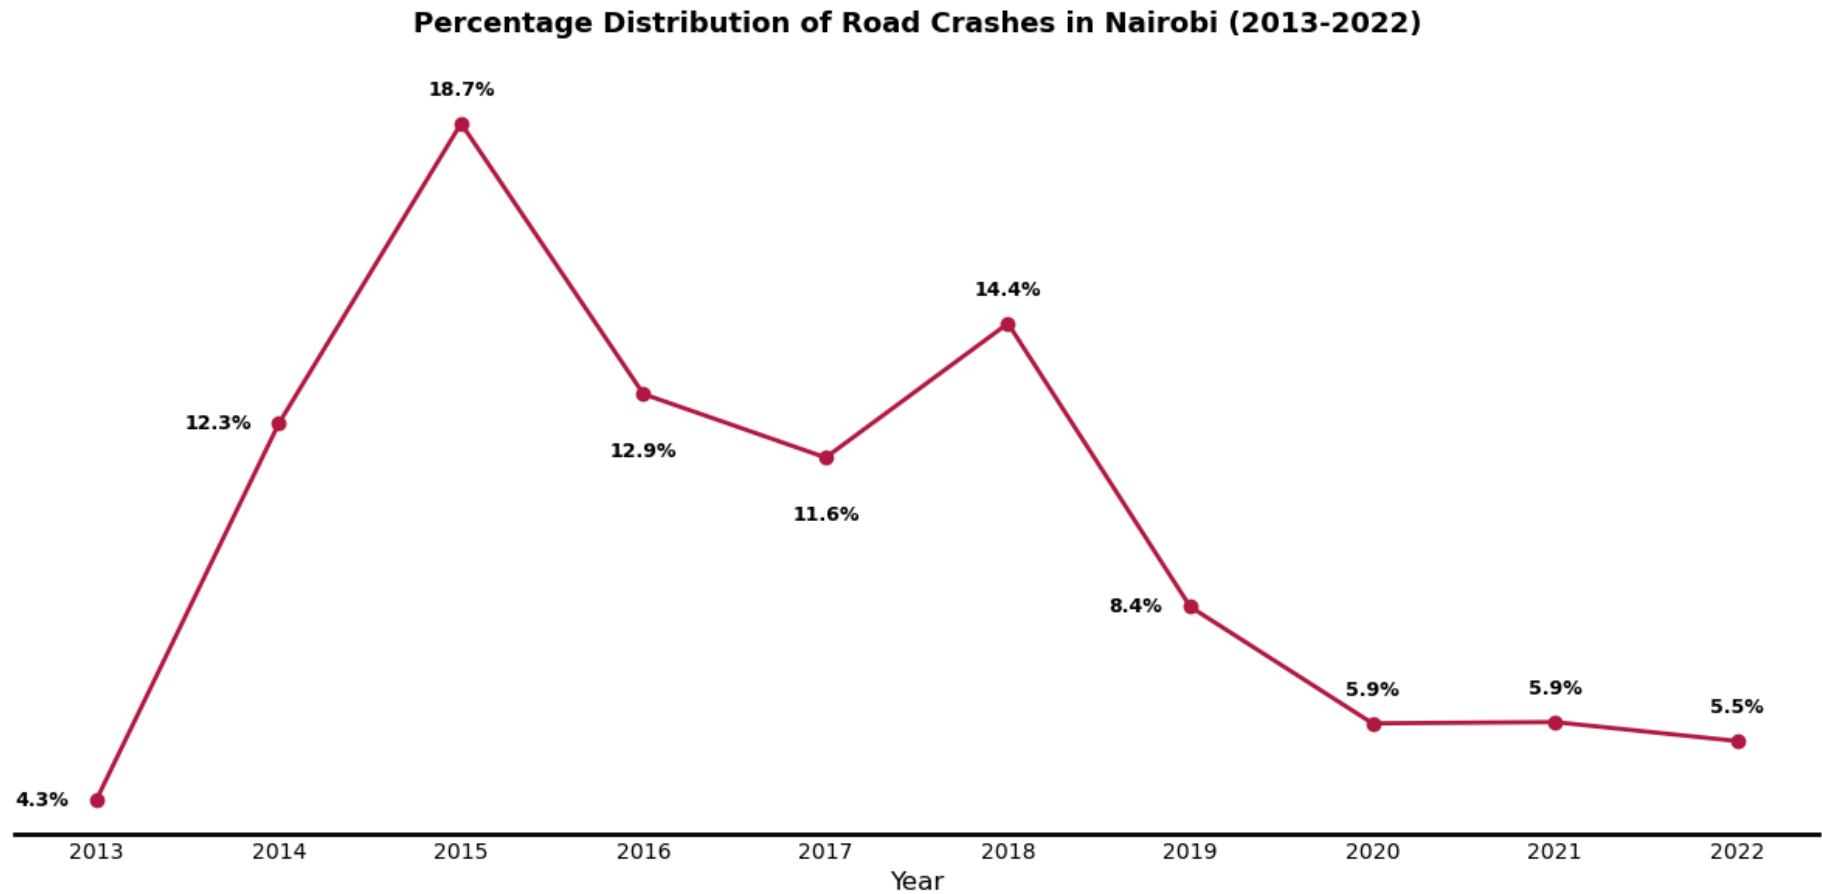

```
In [312... # Step 1: Extract quarter and Label
Nairobi_Road_Crashes['quarter'] = Nairobi_Road_Crashes['crash_datetime'].dt.quarter
Nairobi_Road_Crashes['quarter_label'] = Nairobi_Road_Crashes['quarter'].apply(lambda x: f'Q{x}')

# Step 2: Define detailed quarter labels
quarter_name_mapping = {
    'Q1': 'Q1 (Jan-Mar)',
    'Q2': 'Q2 (Apr-Jun)',
    'Q3': 'Q3 (Jul-Sep)',
    'Q4': 'Q4 (Oct-Dec)'
}
ordered_quarters = ['Q1', 'Q2', 'Q3', 'Q4']
```

```
Quarters = [quarter_name_mapping[q] for q in ordered_quarters]

# Step 3: Group by quarter and sum crash reports
total_crashes_by_quarter = (
    Nairobi_Road_Crashes
    .groupby('quarter_label')['n_crash_reports']
    .sum()
    .reindex(ordered_quarters)
    .reset_index()
)
total_crashes_by_quarter['Quarters'] = Quarters

# Step 4: Plot bar chart with specified modifications
plt.figure(figsize=(8, 5), facecolor='#f5f5f5')
constant_color = '#2a9d8f' # Set your preferred color here

ax = sns.barplot(
    data=total_crashes_by_quarter,
    x='Quarters',
    y='n_crash_reports',
    color=constant_color
)

# Set background color
ax.set_facecolor('#f5f5f5')

# Remove gridlines and spines
ax.grid(False)
sns.despine(top=True, right=True, left=True)


# Hide y-axis
ax.set_ylabel("")
ax.set_yticks([])

# Set custom y-axis limits
ax.set_ylim(11200, 12400)

# Add data labels on top of each bar with thousands separator
for index, row in total_crashes_by_quarter.iterrows():
    ax.text(index, row['n_crash_reports'] + 50, f"{int(row['n_crash_reports']):,}",
            ha='center', va='bottom', fontsize=10, weight='bold')
```

```
# Title
ax.set_title("Total Number of Crash Reports by Quarter in Nairobi", fontsize=12, weight='bold')

# Layout adjustment
plt.tight_layout()
plt.show()
```

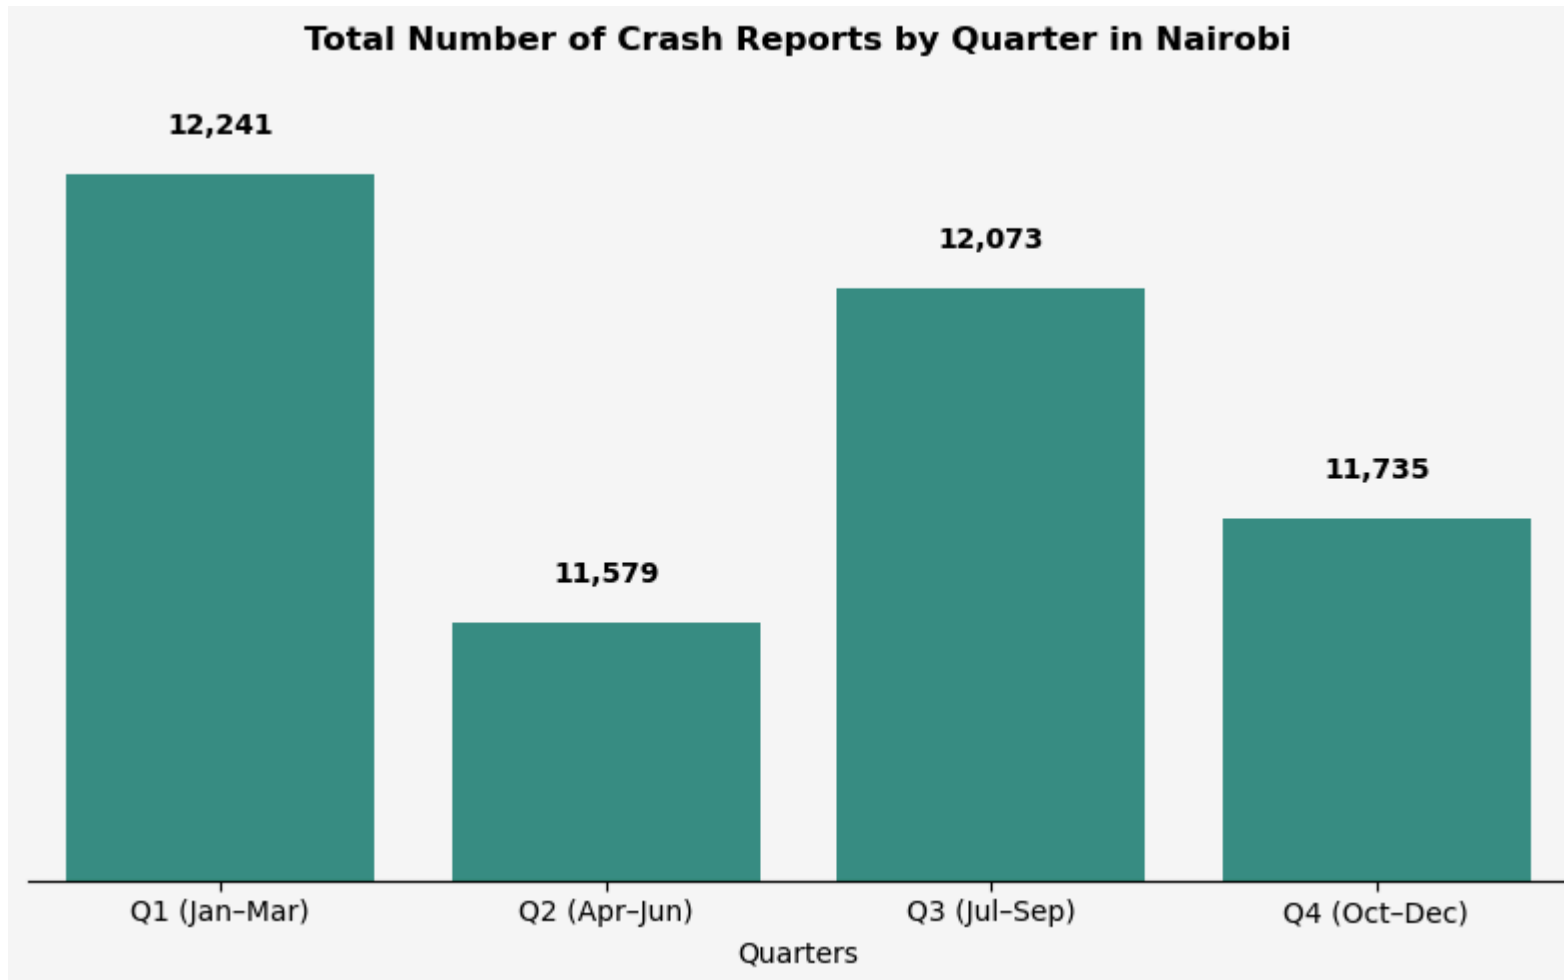

```
In [309... # Step 1: Extract month name
Nairobi_Road_Crashes['month'] = Nairobi_Road_Crashes['crash_datetime'].dt.month_name()
```

```
# Step 2: Define the order of months
ordered_months = [
    'January', 'February', 'March', 'April', 'May', 'June',
    'July', 'August', 'September', 'October', 'November', 'December'
]

# Step 3: Group by month and sum crash reports
total_crashes_by_month = (
    Nairobi_Road_Crashes
    .groupby('month')['n_crash_reports']
    .sum()
    .reindex(ordered_months)
    .reset_index()
)

# Step 4: Plot
plt.figure(figsize=(12, 6), facecolor='#f5f5f5')
ax = sns.lineplot(data=total_crashes_by_month, x='month', y='n_crash_reports',
                  marker='o', color='darkorange')

# Set background color
ax.set_facecolor('#f5f5f5')

# Remove gridlines
ax.grid(False)

# Set custom y-axis limits
ax.set_ylim(3000, 4600)


# Remove top and right spines
sns.despine(top=True, right=True)

# Set labels and title
ax.set_title("Total Number of Crash Reports by Month in Nairobi", fontsize=14, weight='bold')
ax.set_xlabel("") # No need to label x-axis explicitly
ax.set_ylabel("Total Crash Reports", fontsize=12)

# Layout adjustment
plt.tight_layout()
plt.show()
```



```
c:\Users\ADMIN\anaconda3\Lib\site-packages\seaborn\_oldcore.py:1119: FutureWarning:  
use_inf_as_na option is deprecated and will be removed in a future version. Convert inf values to NaN before operating instead.  
c:\Users\ADMIN\anaconda3\Lib\site-packages\seaborn\_oldcore.py:1119: FutureWarning:  
use_inf_as_na option is deprecated and will be removed in a future version. Convert inf values to NaN before operating instead.
```

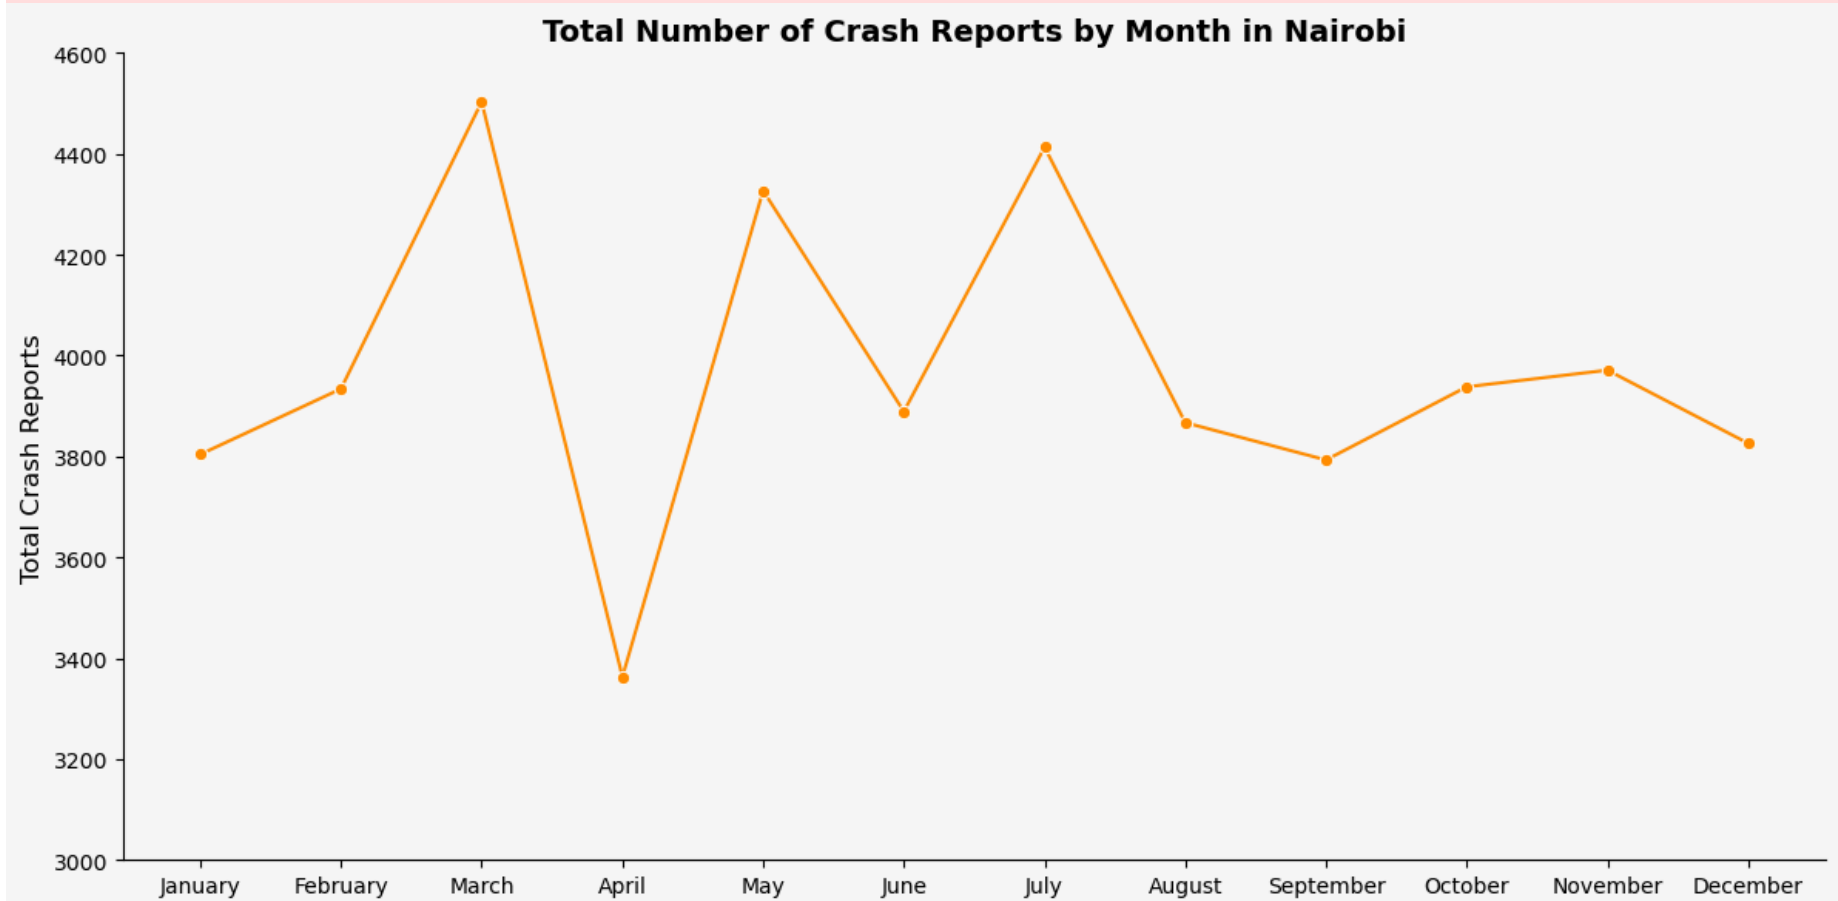

```
In [313... # Step 1: Extract day of the week  
Nairobi_Road_Crashes['day_of_week'] = Nairobi_Road_Crashes['crash_datetime'].dt.day_name()  
  
# Step 2: Define custom order of days
```

```
ordered_days = ['Monday', 'Tuesday', 'Wednesday', 'Thursday', 'Friday', 'Saturday', 'Sunday']

# Step 3: Group by day and sum crash reports
total_crashes_by_day = (
    Nairobi_Road_Crashes
    .groupby('day_of_week')['n_crash_reports']
    .sum()
    .reindex(ordered_days)
    .reset_index()
)

# Step 4: Plot
plt.figure(figsize=(10, 5), facecolor='#f5f5f5')
ax = sns.lineplot(data=total_crashes_by_day, x='day_of_week', y='n_crash_reports',
                  marker='o', color='#B31942')

# Set background color
ax.set_facecolor('#f5f5f5')

# Set custom y-axis limits
ax.set_ylim(4000, 8000)


# Remove gridlines
ax.grid(False)

# Remove top and right spines
sns.despine(top=True, right=True)

# Set labels and title
ax.set_title("Total Number of Crash Reports by Day of the Week in Nairobi", fontsize=12, weight='bold')
ax.set_xlabel("") # No need to label x-axis explicitly
ax.set_ylabel("Total Crash Reports", fontsize=12)

# Layout adjustment
plt.tight_layout()
plt.show()
```

```
c:\Users\ADMIN\anaconda3\Lib\site-packages\seaborn\_oldcore.py:1119: FutureWarning:  
use_inf_as_na option is deprecated and will be removed in a future version. Convert inf values to NaN before operating instead.  
c:\Users\ADMIN\anaconda3\Lib\site-packages\seaborn\_oldcore.py:1119: FutureWarning:  
use_inf_as_na option is deprecated and will be removed in a future version. Convert inf values to NaN before operating instead.
```

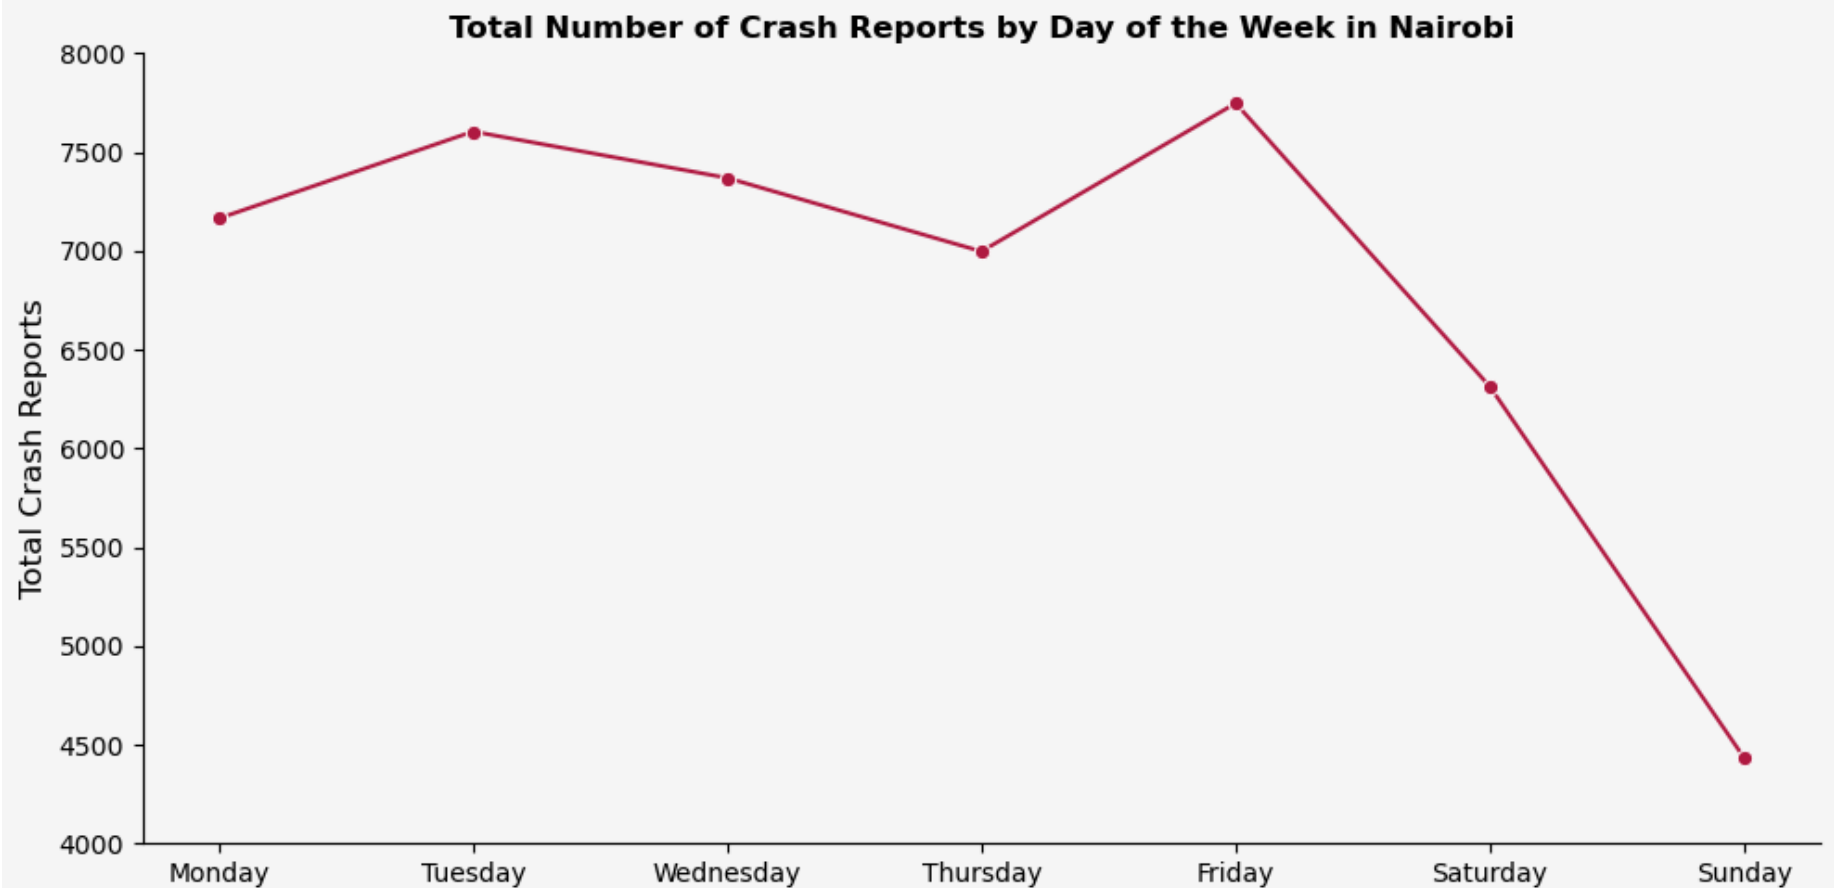

```
In [255... # Step 1: Extract hour  
Nairobi_Road_Crashes['hour'] = Nairobi_Road_Crashes['crash_datetime'].dt.hour  
  
# Step 2: Group by hour and average
```

```
# avg_crashes_by_hour = Nairobi_Road_Crashes.groupby('hour')['n_crash_reports'].mean().reset_index()
total_crashes_by_hour = Nairobi_Road_Crashes.groupby('hour')['n_crash_reports'].sum().reset_index()

# Step 3: Define custom x-tick labels
custom_ticks = list(range(1, 24, 2)) # 1, 3, 5, ..., 23
custom_labels = [f"{h}.00 a.m" if h < 12 else (f"{h-12}.00 p.m" if h > 12 else "12.00 p.m") for h in custom_ticks]

# Step 4: Plot
plt.figure(figsize=(12, 6), facecolor='#f5f5f5')
# ax = sns.lineplot(data=avg_crashes_by_hour, x='hour', y='n_crash_reports', marker='o', color='teal')
ax = sns.lineplot(data=total_crashes_by_hour, x='hour', y='n_crash_reports', marker='o', color='teal')

# Set background color
ax.set_facecolor('#f5f5f5')

# Remove gridlines
ax.grid(False)

# Set custom x-ticks and labels
ax.set_xticks(custom_ticks)
ax.set_xticklabels(custom_labels)


# Add padding to x-axis (left and right)
ax.set_xlim(0.5, 23.5)

# Remove top and right spines
sns.despine(top=True, right=True)

# Set labels and title
ax.set_title("Total Number of Crash Reports by Hour of the Day", fontsize=14, weight='bold')
ax.set_xlabel("Hour of Day (24hr)", fontsize=11)
ax.set_ylabel("Total Number of Crash Reports", fontsize=12)

# Layout adjustment
plt.tight_layout()
plt.show()
```

```
c:\Users\ADMIN\anaconda3\Lib\site-packages\seaborn\_oldcore.py:1119: FutureWarning: use_inf_as_na option is deprecated and will
be removed in a future version. Convert inf values to NaN before operating instead.
  with pd.option_context('mode.use_inf_as_na', True):
c:\Users\ADMIN\anaconda3\Lib\site-packages\seaborn\_oldcore.py:1119: FutureWarning: use_inf_as_na option is deprecated and will
be removed in a future version. Convert inf values to NaN before operating instead.
  with pd.option_context('mode.use_inf_as_na', True):
```

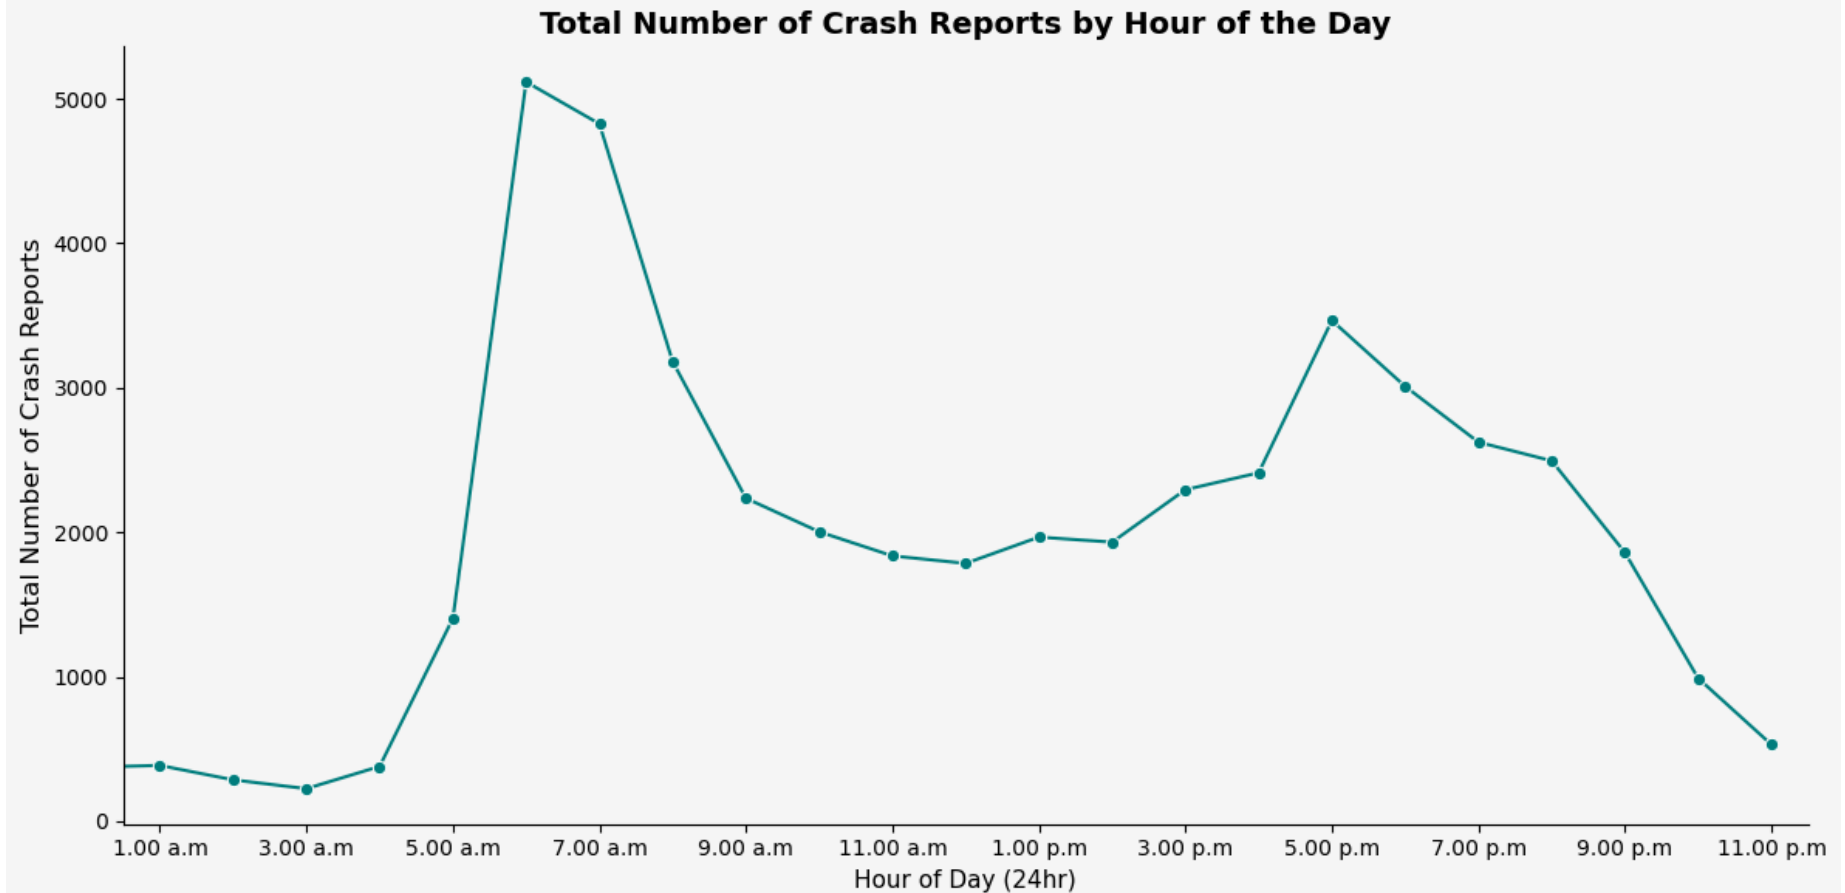

```
In [241... from extract_county import extract_county

# Apply the function to your DataFrame
Nairobi_Road_Crashes['county'] = Nairobi_Road_Crashes['location'].apply(extract_county)
```

```
In [314...] county_crashes = pd.DataFrame(Nairobi_Road_Crashes['county'].value_counts())
county_crashes.head(5)
```

```
Out[314...]
      count
county
Nairobi  26921
Kiambu   4222
Machakos  1225
Kajiado   560
Murang'a  279
```

```
In [245...] # Filter rows where county is 'Other'
other_county_locations = Nairobi_Road_Crashes[Nairobi_Road_Crashes['county'] == 'Other'][['location', 'county']]

# Set display options to show full content
pd.set_option('display.max_colwidth', None)

# Now display your DataFrame
other_county_locations.tail()
```

```
Out[245...]
      location  county
32954 Error retrieving location  Other
33020 Error retrieving location  Other
33298 Error retrieving location  Other
33430 Error retrieving location  Other
33589 Error retrieving location  Other
```

```
In [250...] # Step 1: Get the top 5 counties by count
county_counts = Nairobi_Road_Crashes['county'].value_counts().nlargest(5)
```

```
total = county_counts.sum()


# Step 2: Convert to percentages and round up
county_percentages = np.ceil((county_counts / total) * 100)

# Step 3: Plot
plt.figure(figsize=(10, 5), facecolor="#f5f5f5")
bars = plt.barh(county_percentages.index, county_percentages.values, color='teal')

# Step 4: Add data labels
for bar in bars:
    width = bar.get_width()
    plt.text(width + 0.5, bar.get_y() + bar.get_height() / 2,
             f"{int(width)}%", va='center', fontsize=12)

# Step 5: Formatting
ax = plt.gca()
ax.set_facecolor("#f5f5f5")
ax.spines['top'].set_visible(False)
ax.spines['right'].set_visible(False)
ax.spines['bottom'].set_visible(False)
ax.invert_yaxis() # Largest on top
ax.set_xticks([]) # Remove x-axis ticks

plt.title("Top 5 Counties in Kenya by Reported Road Crashes (%)", fontsize=12, weight='bold')
plt.tight_layout()
plt.show()
```

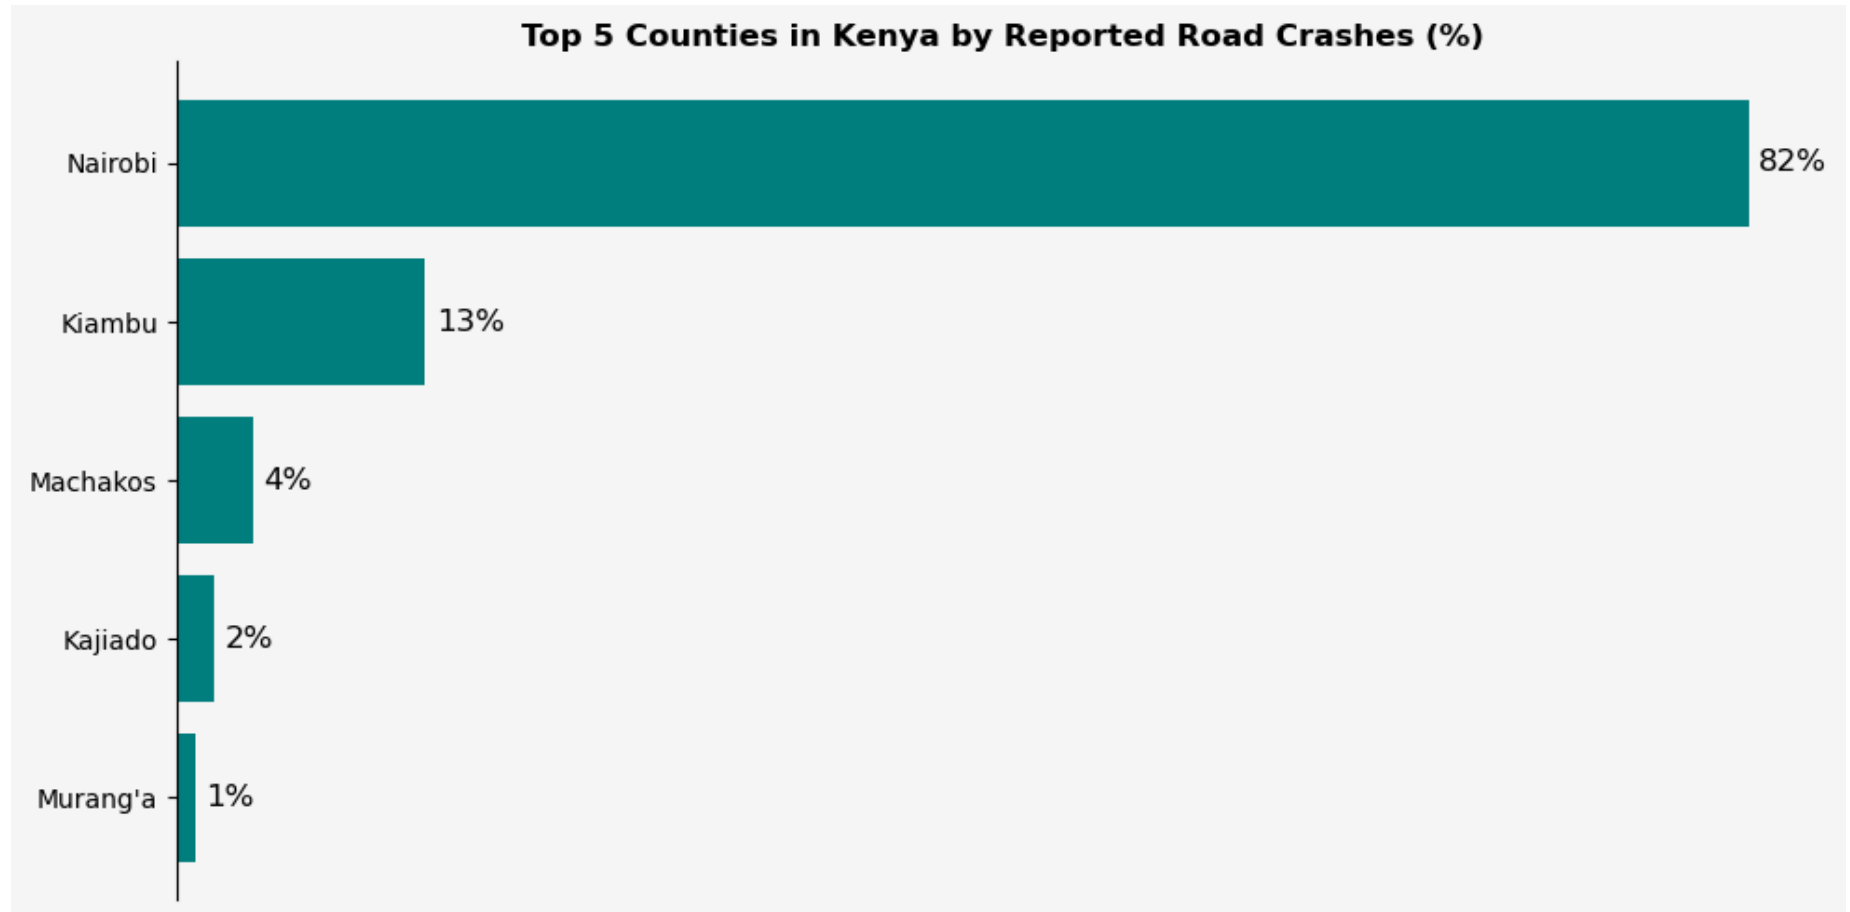

```
In [318... import matplotlib.pyplot as plt
import seaborn as sns
import pandas as pd

# Extract year from crash_date
Nairobi_Road_Crashes['year'] = Nairobi_Road_Crashes['crash_date'].dt.year

# Filter out 2012 and 2023 records
filtered_data = Nairobi_Road_Crashes[
    (Nairobi_Road_Crashes['year'] >= 2013) &
    (Nairobi_Road_Crashes['year'] <= 2022)
]
```



```

# Calculate yearly counts and convert to percentages
yearly_counts = filtered_data['year'].value_counts().sort_index()
percentages = ((yearly_counts / yearly_counts.sum()) * 100)

# Line plot
plt.figure(figsize=(12, 6))
plt.plot(percentages.index, percentages.values,
         marker='o', linestyle='-', color='#B31942', linewidth=2)

# Add data labels
for year, pct in zip(percentages.index, percentages.values):
    if year in [2013, 2014, 2019]:
        plt.text(year - 0.15, pct, f'{pct:.1f}%',
                 ha='right', va='center',
                 fontsize=9, fontweight='bold')
    elif year in [2016, 2017]:
        plt.text(year, pct - 1, f'{pct:.1f}%',
                 ha='center', va='top',
                 fontsize=9, fontweight='bold')
    else:
        plt.text(year, pct + 0.5, f'{pct:.1f}%',
                 ha='center', va='bottom',
                 fontsize=9, fontweight='bold')

# Formatting
plt.title('Percentage Distribution of Road Crashes in Nairobi (2013-2022)',
         pad=20, fontsize=13, loc='center', y=1.02, fontweight='bold')
plt.xlabel('Year', fontsize=12)

ax = plt.gca()
ax.spines['top'].set_visible(False)
ax.spines['right'].set_visible(False)
ax.spines['left'].set_visible(False)
ax.yaxis.set_visible(False)
plt.grid(False)

ax.spines['bottom'].set_linewidth(2)
ax.spines['bottom'].set_linestyle("-")
ax.spines['bottom'].set_color("black")

plt.xticks(percentages.index)

```

```

ax.xaxis.set_minor_locator(plt.FixedLocator(percentages.index))
ax.tick_params(axis='x', which='both', length=0)
ax.set_xticklabels(percentages.index, ha='center')

plt.tight_layout()
plt.show()

# ==== QUARTERLY CRASH REPORTS ====
Nairobi_Road_Crashes['quarter'] = Nairobi_Road_Crashes['crash_datetime'].dt.quarter
Nairobi_Road_Crashes['quarter_label'] = Nairobi_Road_Crashes['quarter'].apply(lambda x: f'Q{x}')

quarter_name_mapping = {
    'Q1': 'Q1 (Jan-Mar)',
    'Q2': 'Q2 (Apr-Jun)',
    'Q3': 'Q3 (Jul-Sep)',
    'Q4': 'Q4 (Oct-Dec)'
}
ordered_quarters = ['Q1', 'Q2', 'Q3', 'Q4']
Quarters = [quarter_name_mapping[q] for q in ordered_quarters]

total_crashes_by_quarter = (
    Nairobi_Road_Crashes
    .groupby('quarter_label')['n_crash_reports']
    .sum()
    .reindex(ordered_quarters)
    .reset_index()
)
total_crashes_by_quarter['Quarters'] = Quarters

plt.figure(figsize=(8, 5), facecolor='#f5f5f5')
constant_color = '#2a9d8f'

ax = sns.barplot(data=total_crashes_by_quarter,
                 x='Quarters', y='n_crash_reports',
                 color=constant_color)

ax.set_facecolor('#f5f5f5')
ax.grid(False)
sns.despine(top=True, right=True, left=True)
ax.set_ylabel("")
ax.set_yticks([])

```

```

ax.set_ylim(11200, 12400)

for index, row in total_crashes_by_quarter.iterrows():
    ax.text(index, row['n_crash_reports'] + 50, f"{int(row['n_crash_reports']):,}",
            ha='center', va='bottom', fontsize=10, weight='bold')

ax.set_title("Total Number of Crash Reports by Quarter in Nairobi", fontsize=12, weight='bold')
plt.tight_layout()
plt.show()

# ==== MONTHLY CRASH REPORTS ====
Nairobi_Road_Crashes['month'] = Nairobi_Road_Crashes['crash_datetime'].dt.month_name()
ordered_months = [
    'January', 'February', 'March', 'April', 'May', 'June',
    'July', 'August', 'September', 'October', 'November', 'December'
]

total_crashes_by_month = (
    Nairobi_Road_Crashes
    .groupby('month')['n_crash_reports']
    .sum()
    .reindex(ordered_months)
    .reset_index()
)

plt.figure(figsize=(12, 6), facecolor='#f5f5f5')
ax = sns.lineplot(data=total_crashes_by_month,
                  x='month', y='n_crash_reports',
                  marker='o', color='darkorange')

ax.set_facecolor('#f5f5f5')
ax.grid(False)
ax.set_ylim(3000, 4600)
sns.despine(top=True, right=True)

ax.set_title("Total Number of Crash Reports by Month in Nairobi", fontsize=14, weight='bold')
ax.set_xlabel("")
ax.set_ylabel("Total Crash Reports", fontsize=12)
plt.tight_layout()
plt.show()

```

```

# ==== WEEKDAY CRASH REPORTS ====
Nairobi_Road_Crashes['day_of_week'] = Nairobi_Road_Crashes['crash_datetime'].dt.day_name()
ordered_days = ['Monday', 'Tuesday', 'Wednesday', 'Thursday', 'Friday', 'Saturday', 'Sunday']

total_crashes_by_day = (
    Nairobi_Road_Crashes
    .groupby('day_of_week')['n_crash_reports']
    .sum()
    .reindex(ordered_days)
    .reset_index()
)

plt.figure(figsize=(10, 5), facecolor='#f5f5f5')
ax = sns.lineplot(data=total_crashes_by_day,
                  x='day_of_week', y='n_crash_reports',
                  marker='o', color='#B31942')

ax.set_facecolor('#f5f5f5')
ax.set_ylim(4000, 8000)
ax.grid(False)
sns.despine(top=True, right=True)

ax.set_title("Total Number of Crash Reports by Day of the Week in Nairobi", fontsize=12, weight='bold')
ax.set_xlabel("")
ax.set_ylabel("Total Crash Reports", fontsize=12)
plt.tight_layout()
plt.show()

# ==== HOURLY CRASH REPORTS ====
Nairobi_Road_Crashes['hour'] = Nairobi_Road_Crashes['crash_datetime'].dt.hour
total_crashes_by_hour = Nairobi_Road_Crashes.groupby('hour')['n_crash_reports'].sum().reset_index()

custom_ticks = list(range(1, 24, 2))
custom_labels = [
    f"{h}.00 a.m" if h < 12 else
    ("12.00 p.m" if h == 12 else f"{h - 12}.00 p.m")
    for h in custom_ticks
]


plt.figure(figsize=(12, 6), facecolor='#f5f5f5')
ax = sns.lineplot(data=total_crashes_by_hour, x='hour', y='n_crash_reports',


```

```
        marker='o', color='teal')

ax.set_facecolor('#f5f5f5')
ax.grid(False)
ax.set_xticks(custom_ticks)
ax.set_xticklabels(custom_labels)
ax.set_xlim(0.5, 23.5)
sns.despine(top=True, right=True)

ax.set_title("Total Number of Crash Reports by Hour of the Day", fontsize=14, weight='bold')
ax.set_xlabel("Hour of Day", fontsize=12)
ax.set_ylabel("Total Crash Reports", fontsize=12)
plt.tight_layout()
plt.show()
```

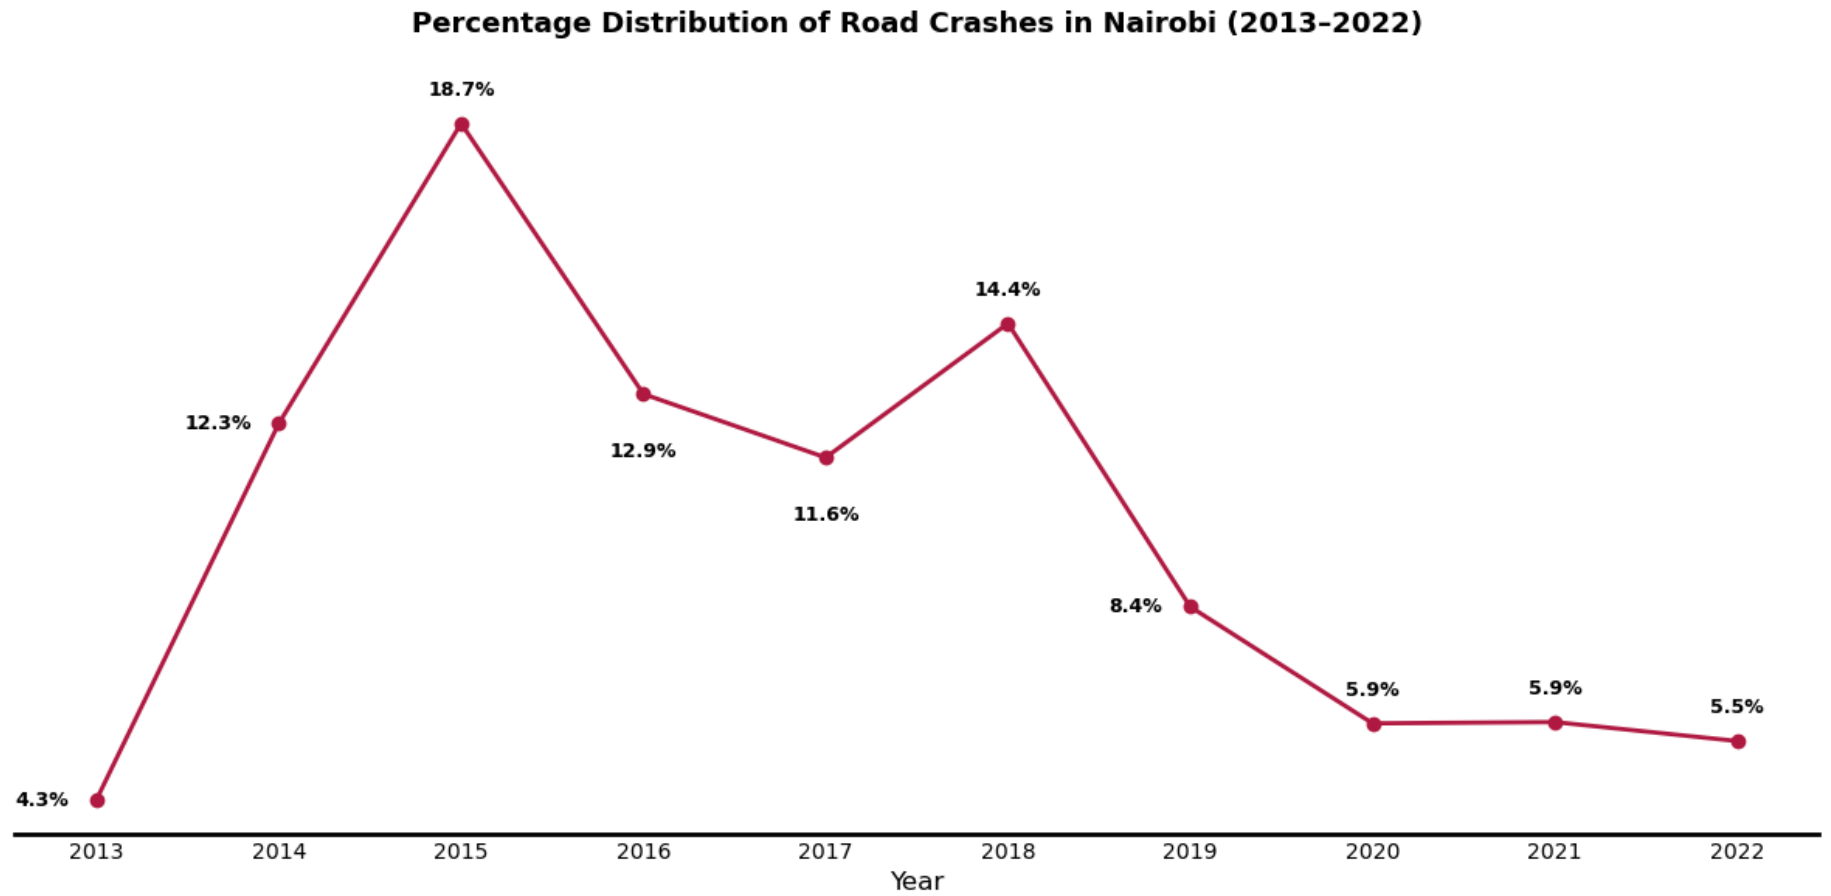

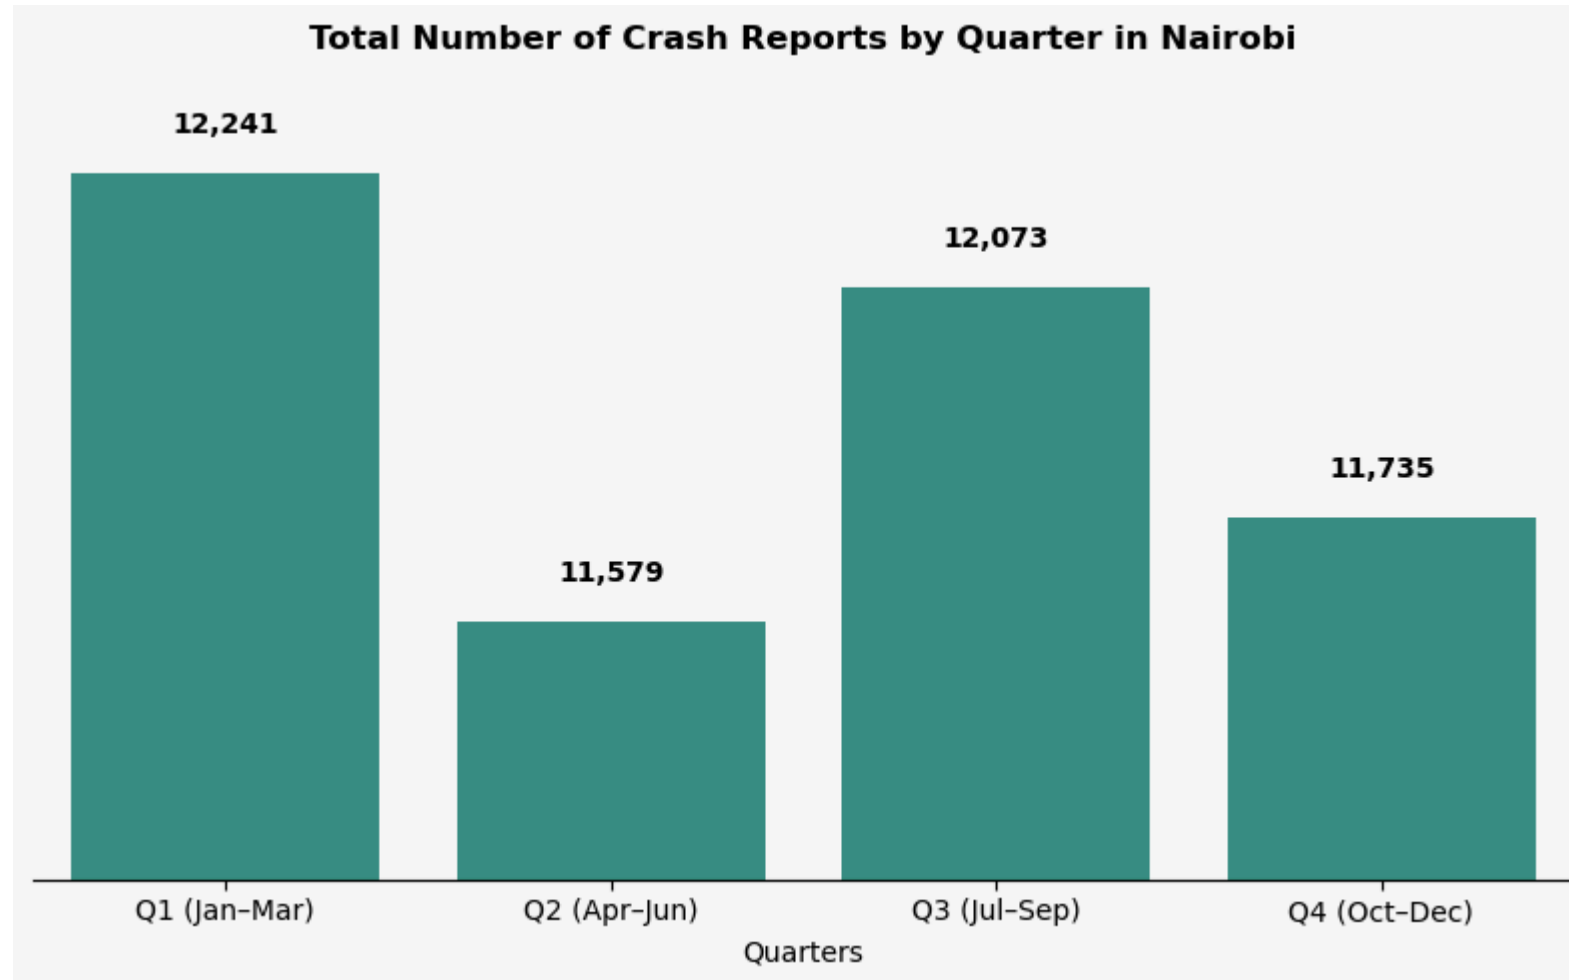


```
c:\Users\ADMIN\anaconda3\Lib\site-packages\seaborn\_oldcore.py:1119: FutureWarning:
```

```
use_inf_as_na option is deprecated and will be removed in a future version. Convert inf values to NaN before operating instead.
```

```
c:\Users\ADMIN\anaconda3\Lib\site-packages\seaborn\_oldcore.py:1119: FutureWarning:
```

```
use_inf_as_na option is deprecated and will be removed in a future version. Convert inf values to NaN before operating instead.
```

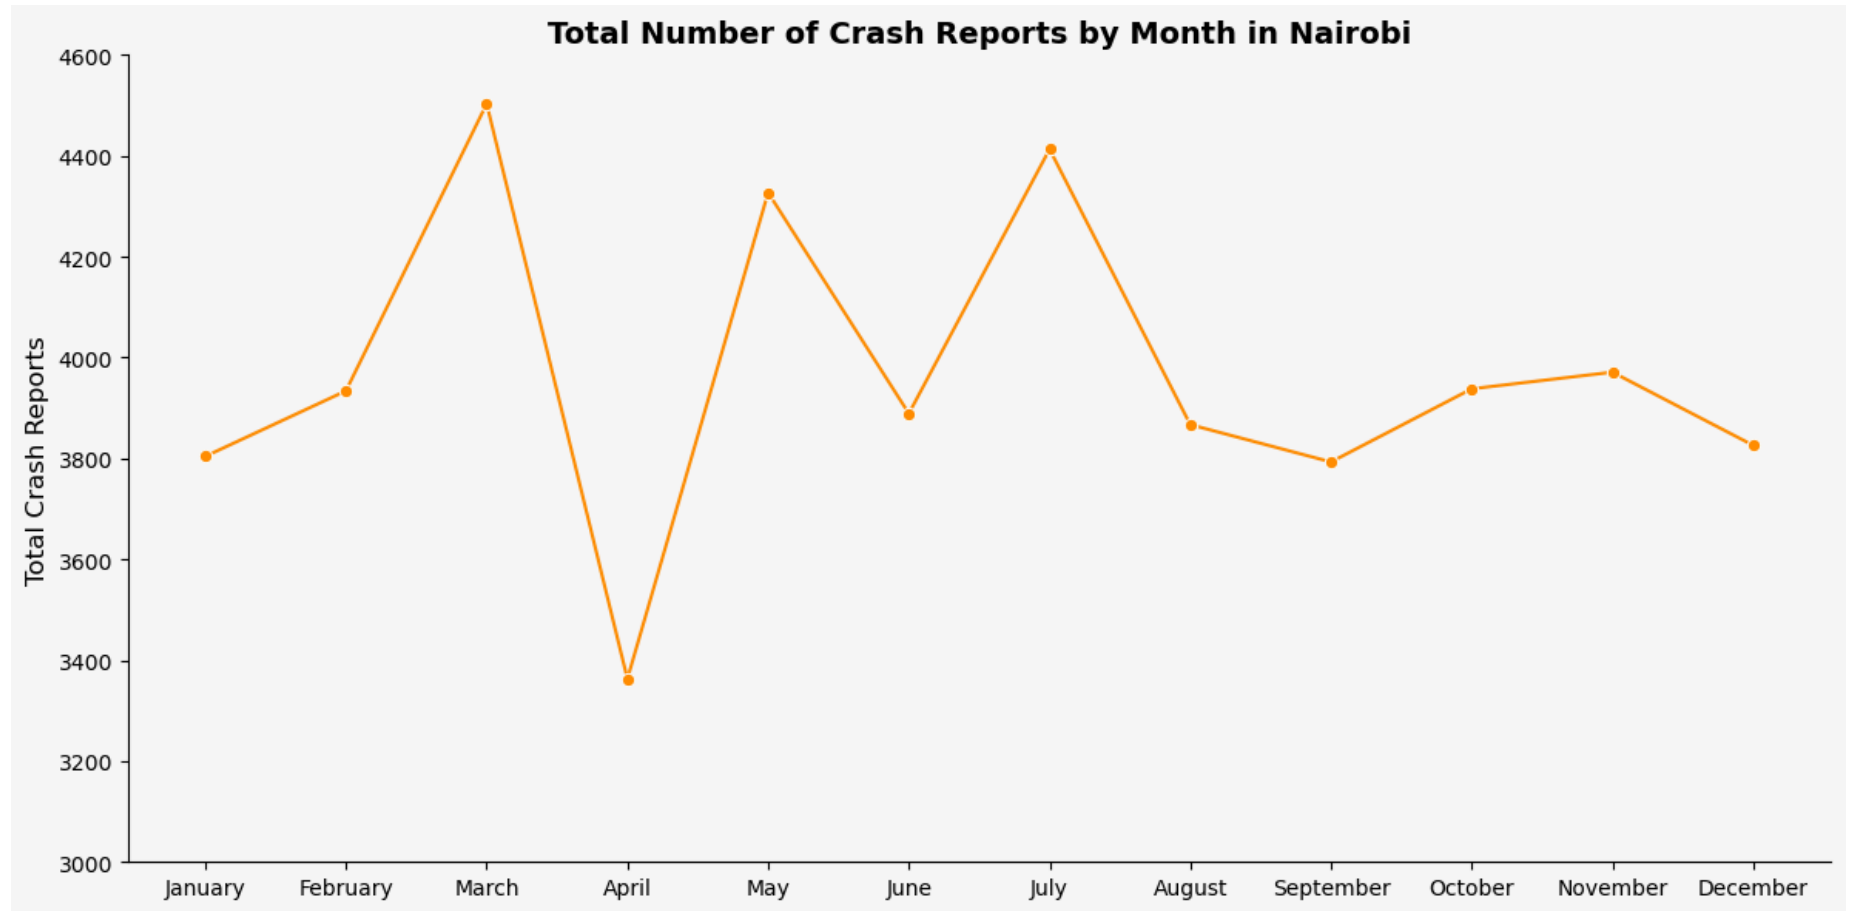


c:\Users\ADMIN\anaconda3\Lib\site-packages\seaborn_oldcore.py:1119: FutureWarning:

use_inf_as_na option is deprecated and will be removed in a future version. Convert inf values to NaN before operating instead.

c:\Users\ADMIN\anaconda3\Lib\site-packages\seaborn_oldcore.py:1119: FutureWarning:

use_inf_as_na option is deprecated and will be removed in a future version. Convert inf values to NaN before operating instead.

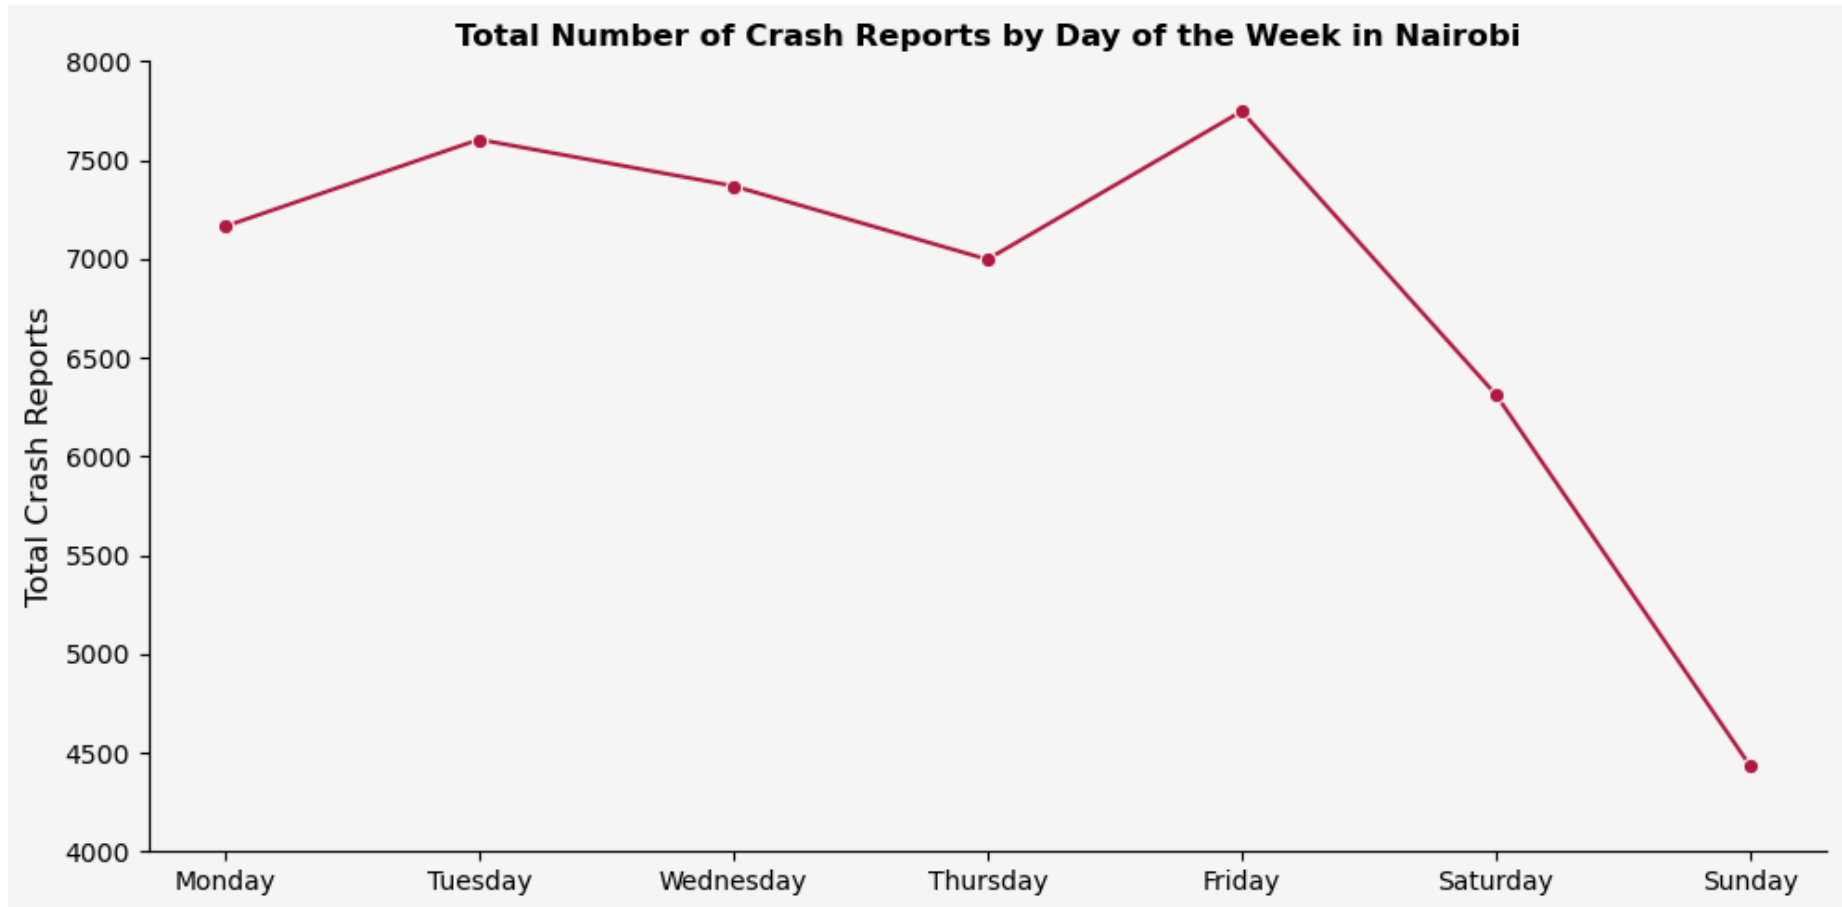

c:\Users\ADMIN\anaconda3\Lib\site-packages\seaborn_oldcore.py:1119: FutureWarning:

use_inf_as_na option is deprecated and will be removed in a future version. Convert inf values to NaN before operating instead.

c:\Users\ADMIN\anaconda3\Lib\site-packages\seaborn_oldcore.py:1119: FutureWarning:

use_inf_as_na option is deprecated and will be removed in a future version. Convert inf values to NaN before operating instead.

