


C PROGRAMMING :

OUTPUT :

SHELL PROGRAMMING :

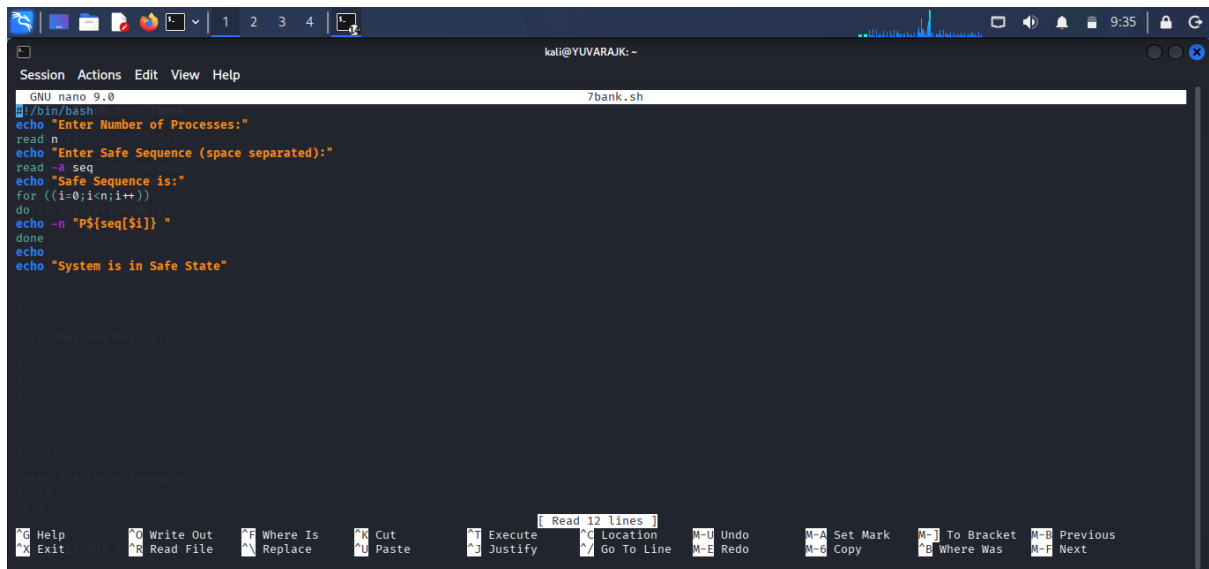


The screenshot shows a terminal window with the nano text editor open. The editor is editing a file named 7bank.sh. The script content is as follows:

```
#!/bin/bash
echo "Enter Number of Processes:"
read n
echo "Enter Safe Sequence (space separated):"
read -a seq
echo "Safe Sequence is:"
for ((i=0;i<n;i++))
do
echo -n "${seq[$i]} "
done
echo
echo "System is in Safe State"
```

The nano editor interface includes a menu bar (Session, Actions, Edit, View, Help) and a status bar at the bottom with various shortcuts like G Help, X Exit, O Write Out, R Read File, W Where Is, N Replace, C Cut, P Paste, E Execute, J Justify, L Location, G Go To Line, U Undo, R Redo, A Set Mark, C Copy,] To Bracket, B Previous, and _ Next.

OUTPUT :

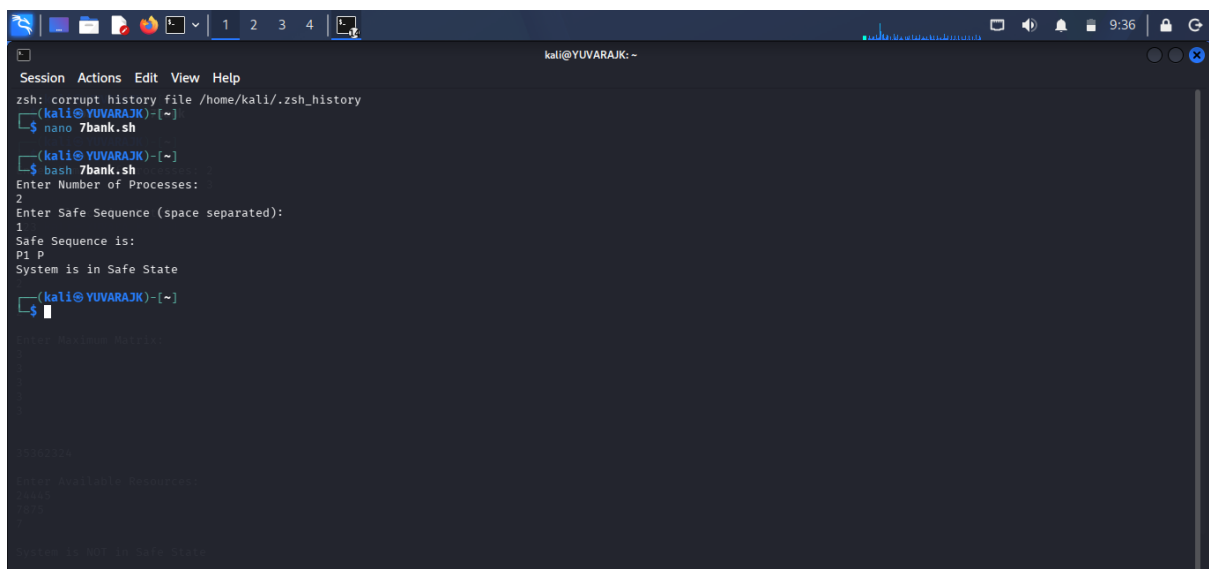

The screenshot shows a terminal window where the script 7bank.sh has been executed. The output is as follows:

```
zsh: corrupt history file /home/kali/.zsh_history
(kali@YUVARAJK)-[~]
$ nano 7bank.sh
(kali@YUVARAJK)-[~]
$ bash 7bank.sh
Enter Number of Processes:
2
Enter Safe Sequence (space separated):
1
Safe Sequence is:
P1 P
System is in Safe State
(kali@YUVARAJK)-[~]
$
```

The terminal window shows the user navigating to the script file, running it with 'bash 7bank.sh', and providing input for the number of processes (2) and the safe sequence (P1 P). The script then prints 'System is in Safe State'.